

CHATHAM BRASS, LLC

Distributor
Price Schedule #1052
Effective May 1, 2015

Toll Free
Customer Service Number
(800) 526- 7553

Chatham Brass, LLC

Mailing address

Box 1274, Linden New Jersey 07036

Shipping Address

1253 New Market Avenue, Unit D, South Plainfield, NJ 07080

(908) 668-0500 • Fax (908) 668-0507

www.ChathamBrass.com

INDEX

Page 1	Shower Heads
Page 2	Plumbing Brass and Flow Controls
Page 3	Rinse-Quik, Ballcocks, T&P Valves, Washing Machine Valves
Page 4	Chrome Nipples, Flip-It Tub Stopper, Flip-It Conversion Kit
Page 5	Electric Heat Controls
Page 6	Digital Thermostats
Page 7	Low Voltage Thermostats, Ignitor Kit, Transformers, Humidistat
Page 8	Low Voltage Controls, Honeywell Thermostat Guards
Page 9	Electrical Heat Controls, Transformers, Specialty Controls, Hydronic Switching Relays, Pilot Burner
Page 10	Line Voltage Digital Thermostats, Electric Relays, Line Voltage Thermostats Heat/Cool, Attic Fan Controls
Page 11	Line Voltage Locked Case, Definite Purpose Contractor, General Purpose Relays
Page 12	Aube Thermostats, Aube Programmable Wall Switches
Page 13	Honeywell Contactors
Page 14	Locking Thermostat Guards, Roof & Gutter De-Icing Systems, Water Pipe Cable
Page 15	Chromalox Electric Water Heater Elements - High & Low Watt Density, Water Wizard, Therm-O-Disc Water Heater Controls
Page 16	Chromalox Electric Water Heater Elements - Flat Flange / High & Low Density, ARGO Switching Relay
Page 17	Chromalox Universal Flat Flange - High & Low Watt Density, Slip-X Safety Treads, Thermocouple Replacement Kits
Page 18	Silicone Caulkers, Firestopping Products, Metacaulk

ORDERING INSTRUCTIONS

Please Fax orders to: 908-688-0507

e-mail: orders@chathambrass.com

Terms - 2% 10th, NET 30 Days

1. Remittances must be received at CHATHAM BRASS on or before the 10th of each month to qualify for 2% cash discount.
2. Invoices not paid within the discount period are immediately due on net terms.
3. Terms begin with date of invoice - not receipt of merchandise

Freight - Minimum Orders \$50.00

Prepaid Freight on \$700.00 + Shipments to points in the Continental U.S.A.

CONDITIONS OF SALE

1. No merchandise may be returned for credit.
2. Prices subject to change without notice.

CONDITIONS WARRANTY

Chatham Brass, LLC does not issue consumer warranties

DISTRIBUTOR WARRANTY

All other Chatham products are warranted to the distributor who purchases the product from Chatham. The distributor warranty reads as follows: Chatham warrants its products to be free from defects due to workmanship or materials, under normal use and service, for one year from date of installation. If defective due to workmanship or materials and if removed by the installer within twelve (12) months of installation and returned to Chatham by the distributor prepaid at the distributor's expense, Chatham will, at its options, repair or replace the product and pay return freight only. Under no circumstances may merchandise be returned collect, at Chatham's expense or a priced debit. This warranty extends only to persons or organizations who purchase Chatham products for resale.

PRODUCTS OF OTHERS

Chatham distributes products of other manufacturers for use in conjunction with Chatham products. These products bear the name of the manufacturer, i.e.: General Electric, Emerson Electric, and the warranty, if any, is published by the manufacturer whose name appears on the products. Generally these products are all covered by distributor, NOT CONSUMER WARRANTY.

DEFECTIVE MERCHANDISE – RETURN POLICY

No Specific Authorization is Required

Wrap each piece carefully tagging with the name of purchaser, date installed and removed, and defect. Return prepaid on memo billing to our shipping address:

Chatham Brass, LLC
1253 New Market Avenue Unit D
South Plainfield, New Jersey 07080

Warranty is for one year's use only. It covers only factory defects. Please do not return merchandise that has been burned out or damaged by the user or installer, or merchandise that is worn and obviously has seen more than one year's use, or was not purchased from us.




NON-DEFECTIVE MERCHANDISE – RETURN PROCEDURE

Upon CHATHAM'S APPROVAL all returned merchandise other than defectives are subject to a minimum 20% restocking charge.

Merchandise must be returned in saleable condition. All transportation costs must be freight prepaid.

SPECIFICATION SHOWER HEADS-FORGED BRASS C.P. with PRECISE FLOW CONTROL

2 Variable Orifices Maintain Constant Flow Rate at All Pressures - Individually Boxed
All Specification Showerheads are Available in 1.5 GPM Upon Request





MEET ALL FEDERAL AND STATE SPECIFICATIONS				DISTRIBUTOR COST		
Model	Description	Carton Quantity	Weight	Each	Each in Shelf Ctn. Prepaid	Each in Master ctn. Prepaid
10-25	Solid Brass 2 GPM @ 10-80 PSI	12 pcs 40 pcs	6# 18#	15.45	14.45 (12)	13.80 (40)
10-25V	Pilfer-Proof, Solid Brass 2 GPM @ 10-80 PSI	12 pcs 40 pcs	6# 18#	17.45	16.45 (12)	15.80 (40)
26-3S	Solid Brass Adjustable Spray 2.5 GPM @ 10-80 PSI (or 2 GPM)	12 pcs 30 pcs	9# 22#	18.80	17.70 (12)	17.00 (30)
26-3SV	Pilfer-Proof, Solid Brass Adjustable Spray 2.5 GPM @ 10-80 PSI (or 2 GPM)	12 pcs 30 pcs	9# 22#	20.80	19.70 (12)	19.00 (30)
44-3S	Large Size, Solid Brass Adjustable Spray 2.5 GPM @ 10-80 PSI	12 pcs 24 pcs	19# 38#	34.30	32.30 (12)	30.30 (24)
44-3SV	Pilfer-Proof, Large 2.5 GPM @ 10-80 PSI	12 pcs 24 pcs	19# 38#	36.80	35.00 (12)	33.00 (24)
47-4S	Large Size, Solid Brass Adjustable Spray 4 GPM @ 10-80 PSI for Decontamination	12 pcs 24 pcs	19# 38#	34.30	32.30 (12)	30.30 (24)
2ISA	Institutional, w/Anchor Plate, 2 GPM	6 pcs 36 pcs	11# 66#	65.50	63.00 (6)	60.00 (36)
3ISA	Institutional, w/Anchor Plate, 2.5 GPM	6 pcs 36 pcs	11# 66#	65.50	63.00 (6)	60.00 (36)
T130	Spray Cylinder w/Gasket & Set Screw for 10-25/V, 2ISA, 3ISA					10.95 (1)

2ISA, 3ISA are Pilfer Proof. ONE WAY SCREWS: Available for mounting 2ISA and 3ISA to anchor plate

RESIDENTIAL FORGED BRASS SHOWER HEADS CHROME PLATED

With 2.5 GPM Fixed Orifice Flow Control - Individually Boxed



Model	Description	Carton Quantity	Weight	Each	Each in Shelf Ctn. Prepaid	Each in Master ctn. Prepaid
C2	Solid Brass, Adjustable Spray, Lever Handle 2.5 GPM @ 80 PSI	24 pcs 96 pcs	15# 67#	13.70	13.10 (24)	12.65 (96)
202	Same w/Canopy Handle 2.5 GPM @ 80 PSI	24 pcs 96 pcs	15# 67#	13.70	13.10 (24)	12.65 (96)
303A	Large Size, Solid Brass, w/Heavy Duty Commercial Ball Joint, 2.5 GPM @ 80 PSI	12 pcs 48 pcs	15# 61#	20.25	19.60 (12)	19.10 (48)
359	Large Size, Solid Brass, Residential w/Positive-off, 2.5 GPM @ 80 PSI	12 pcs 48 pcs	15# 61#	20.25	19.60 (12)	19.10 (48)
L3-CCPB	Large POLISHED BRASS Shower Head Solid Forged Brass 2.5 GPM	6 pcs	7#	29.95	26.95 (6)	

RAIN SHOWER HEADS – CHROME



Model	Description	Carton Quantity	Carton Weight	Each	Dist. Cost Each in Full Carton
6RS	6" Rain Showerhead, Chrome Plated, 2.0 GPM	10 pcs	18#	43.00	
8RS	8" Rain Showerhead, Chrome Plated, 2.0 GPM	10 pcs	19#	57.00	
10RS	10" Rain Showerhead, Chrome Plated, 2.0 GPM	5 pcs	22#	86.00	
12RS	12" Rain Showerhead, Chrome Plated, 2.0 GPM	5 pcs	19#	119.00	

ECONOMY & INDUSTRIAL SHOWER HEADS



Model	Description	Carton Quantity	Carton Weight	Each	Dist. Cost Each in Full Ctn.
2CP	Economy -- 2" Chrome on Plastic Boxed 2.5GPM, CP Brass Ball	24 pcs 96 pcs	4# 16#	3.75	3.60 (24) 3.45 (96)
2CP Bulk	Economy -- 2" Chrome on Plastic SAME, BULK IN EGG CRATE	100 pcs	13#		3.00 (100)
101	Industrial Jet-- Solid Brass, 5 GPM Will not accept flow control	24 pcs 144 pcs	14# 76#	11.50	11.20 (24) 10.60 (144)
175PS	1.75 GPM Oxygen Suction Water Control Showerhead with Brass Ball Joint Material: Plastic, Finish: Chrome	50 pcs	26#	6.85	6.55 (24)

FLOW CONTROL


Constant Flow Rate with 3 Variable Orifices

As pressure increases, size of hole decreases, allowing full flow rate at 15 to 80 PSI.


Slips into threaded collar of shower head, cone pointing up.



FLOW CONTROL



E8



**6F
8F
12F**



**25712
25734**



25001



4010



**519
71Z**



**237
2010**

Model	Description	Master Quantity	Carton Weight	Distributor Cost		
				Each	Each in Shelf Ctn	Each in Master Ctn
150	1.5 GPM	1000 pcs	4#	0.55	.48 (24)	.40 (100)
250	2.5 GPM Standard Model	1000 pcs	4#	0.55	.48 (24)	.40 (100)
200	2 GPM	1000 pcs	4#	0.55	.48 (24)	.40 (100)
E8	Shower Cut-off Valve (Water Saver)	24 or 48 pcs	8# / 16#	7.95	7.75 (12)	7.55 (48)
SOLID BRASS C.P. SHOWER ARMS (Full Weight, Full Thread) .064 wall, polished before plating, tapered thread, chamfered ends, individually paper wrapped.						
6F	6" Rigid Shower Arm & Flange	100 pcs	26#	3.99 (1)	3.85 (24)	3.70 (50)
8F	7 1/2" Rigid Shower Arm & Flange	100 pcs	33#	4.25 (1)	4.00 (24)	3.90 (50)
12F	12" Arm & Flange 45°	50 pcs	28#	5.60 (1)	5.40 (24)	5.20 (50)
Deduct 9¢ each if flange is not required						
DUO STRAINERS AND REPLACEMENT BASKETS						
DDS	Stainless Steel Body & Basket, Neoprene Seat, DUO STRAINER	24 pcs	20#	5.70 (1)	5.50 (24)	5.30 (96)
700	Replacement Basket, Heavy Pattern, Adjustable Post, All Stainless	24 pcs Bulk Packed	4#	4.00 (1)	3.85 (12)	3.65 (24)
720	Replacement Basket, Heavy Pattern, Fixed Post, All Stainless	24 pcs Bulk Packed	4.5#	4.00 (1)	3.85 (12)	3.65 (24)
649	Replacement Basket for DDS Spring Post, All Stainless	24 pcs	3.5#	2.15 (1)	1.95 (12)	1.85 (24)
BRASS SPOUTS – CHROME PLATED – HEAVY PATTERN						
25712 Bxd	Diverter Spout Brass 1/2" Boxed	24 pcs	37#	34.85 (1)	34.35 (12)	33.50 (24)
25734 Bxd	Diverter Spout Brass 3/4" Boxed	24 pcs	37#	34.85 (1)	34.35 (12)	33.50 (24)
25712 Bulk	Diverter Spout Brass 1/2" Bulk in eggcrate	25 pcs	37#	Sold only in carton of 25		32.00 (25)
25734 Bulk	Diverter Spout Brass 3/4" Bulk in eggcrate	25 pcs	37#	Sold only in carton of 25		32.00 (25)
25001 Bxd	Diverter Spout with 1/2" Thread in Nose, Brass	24 pcs	48#	29.50 (1)	29.00 (12)	28.50 (24)
258 Bxd	Filler w/ 1/2" Thread in Nose, Brass Boxed	24 pcs	37#	27.00 (1)	26.50 (12)	26.00 (24)
258 Bulk	Filler, Brass, Bulk in eggcrate	25 pcs	37#	Sold only in carton of 25		25.50 (25)
*260 Bxd	Filler w/ 1/2" Thread in Base, Brass Boxed	24 pcs	25#	27.00 (1)	26.50 (12)	26.00 (24)
260 Bulk	Filler, Brass, Bulk in eggcrate	25 pcs	25#	Sold only in carton of 25		25.50 (25)
Twin-Ell	Brass Twin-ell	24 pcs	11#	4.50 (1)	4.25 (12)	4.00 (24)
3412	3/4" x 1/2" Brass, Dry Seal Face Bushing	24 pcs	2#	1.25 (1)	1.00 (12)	.90 (24)
*Model 260 Also stocked with 3/4" thread at same price						
DIE CAST DIVERTER SPOUTS – CHROME PLATED – HEAVY PATTERN – CSA						
4010 Bxd	Die cast Diverter Spout with 1/2" Adapter	24 pcs	19#	6.95 (1)	6.70 (12)	6.50 (24)
4010 Bulk	Bulk Packed	25/50 pcs	19#/38#		5.85 (25)	5.60 (50)
519 Bxd	Die cast Diverter Spout with 1/2" Threads in Nose	24 pcs	16#	6.60 (1)	6.35 (12)	6.10 (24)
519 Bulk	Bulk Packed	25/50 pcs	16#/30#		5.75 (25)	5.50 (50)
71Z Bxd	Die cast Div. Spout for 1/2" copper tubing. Installs with Allen wrench	24 pcs	19#	7.35 (1)	7.10 (12)	6.85 (24)
71Z Bulk	Bulk Packed	25/50 pcs	19#/37#		6.50 (25)	6.20 (50)
DIE CAST TUB FILLER – CHROME PLATED – HEAVY PATTERN – CSA						
237 Bxd	Filler, Die Cast, Boxed, 1/2" Thread in Nose	24 pcs	13#	5.25 (1)	5.00 (12)	4.75 (24)
237 Bulk	Same, Die cast, Bulk in eggcrate	25/50 pcs	13#/25#		4.20 (25)	3.95 (50)
2010 Bxd	Die cast Tub Filler for 1/2" copper tubing. Installs with Allen wrench	24 pcs	13#	6.20 (1)	5.95 (12)	5.70 (24)
2010 Bulk	Bulk Packed	25/50 pcs	13#/25#		5.35 (25)	5.10 (50)

Rinse-Quik™ REPLACEMENT SPRAYS



RINSE-QUIK HEAD

Model	Description	Master Quantity	Carton Weight	Dist. Cost Each	In Shelf Carton	Master Ctn. Prepaid
MR-422-4	RINSE-QUIK Spray with Adapter	8/24 pcs	5#/15#	7.40	7.10 (8)	6.90 (24)
MR-422-4C	RINSE-QUIK Spray w/Union Nut	8/24 pcs	5#/15#	7.40	7.10 (8)	6.90 (24)
MR-422	Head only	24/72 pcs	4.5#/14#	3.80	3.60 (24)	3.50 (72)
MR-4	Hose only - 48" with Adapter	USE CB-4				
MR-4C	Hose only - 48" Union Nut	USE CB-4C				
MR-457	Chrome Head only	24/72 pcs	5#/15#	7.90	7.80 (24)	7.50 (72)
MR-421	Shampoo Rinsing Spray Head	24/72 pcs	5.5#/17#	8.00		
MR-422-6	RINSE-QUIK Spray with 6 ft. Hose	1 pc	1#	USE CB-422-6		
MR-200	Hose Guide	USE CB-200				
MR-427-4WH	WHITE Rinse-Quik Spray with Adapter	8/24 pcs	5#/15#	7.40	7.10 (8)	6.90 (24)
MR-427-WH	WHITE Rinse-Quik Head only	24/72 pcs	5#/15#	4.00	3.80 (24)	3.70 (72)
MR-200-WH	WHITE Rinse Quik Hose Guide	USE CB-200-WH				
MR-427-BW	BONE Rinse-Quik Head only	24/72 pcs	4#/12#	4.80	4.50 (24)	4.30 (72)


Chatham™ REPLACEMENT SPRAYS



CB427-WH

Model	Description	Master Quantity	Carton Weight	Dist. Cost Each	In Shelf Carton	Master Ctn. Prepaid
CB-422-4	Complete Spray w/48" Hose	48 pcs	33#	5.50	5.25 (12)	4.95 (48)
CB-422-4C	Complete Spray w/48" Hose/Union Nut	48 pcs	32#	5.50	5.25 (12)	4.95 (48)
CB-422	Black Head Only	96 pcs	20#	3.00	2.80 (24)	2.65 (96)
CB-4	Hose Only - 48" with Adapter	96 pcs	47#	2.95	2.75 (12)	2.55 (96)
CB-4C	Hose Only - 48" Union Nut	96 pcs	47#	2.95	2.75 (12)	2.55 (96)
CB-200	Hose Guide	24 pcs	4#	1.40	1.15 (24)	
CB-422-6	Complete Spray with 72" Hose	1 pc	1#	6.50		
CB-427-4WH	WHITE Complete Spray with Adapter	48 pcs	32#	5.50	5.25 (12)	5.00 (48)
CB-427-WH	WHITE Head Only	96 pcs	20#	2.90	2.80 (24)	2.60 (96)
CB-200-WH	WHITE Hose Guide	24 pcs	24#	1.40	1.15 (24)	
CB-457	Chrome Head	24 pcs	5#	6.95	6.85 (24)	6.70 (72)

Burlington Ballcocks BRASS - Made in USA

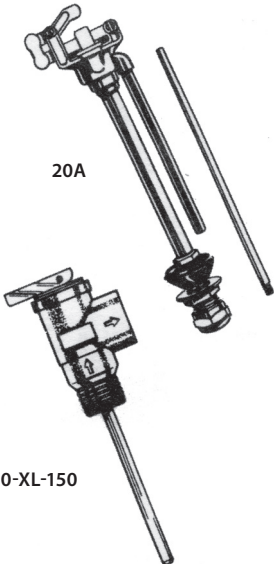

20A

Model	Description	Master Qty.	Carton Wt.	Each	Each Per Ctn. Prepaid
#20A	ANTI-SIPHON w/Flow Regulator. Heavy brass construction; pressure regulator/silencer; deluxe plunger with cup washer; 8" rod; 10 3/8" high	25 pcs	36#	23.75	22.00 (25)


WATTS™ COMBINATION TEMPERATURE & PRESSURE RELIEF VALVE

Solid Brass – A.S.M.E. Rating 450,000 BTU/Hour, A.G.A. Temp. HUD/FHA
Steam Rating – 100,000 BTU/Hour, FHA ANSI Z21-22, Temp Relief 210° F

Model	Description	Master Qty.	Carton Wt.	Each	Master Ctn. Prepaid	Each 100 Prepaid
100-XL-150	3/4"-4" Coated element 150 PSI setting	50 pcs	31#	10.30	10.00 (50)	9.80 (100)

Chatham™ WASHING MACHINE VALVES

Controls Both Hot and Cold Water Simultaneously – Bronze Body with 1/2" Copper Adapters, 2-3/8" on Center



REPLACES WATTS #2 & #2T

Model	Description	Master Qty.	Carton Wt.	Each	12 Units Prepaid	24 Units Prepaid
4	With 1/2" Copper Sweat Ell Connections	24 pcs	32#	15.00	14.50 (12)	14.00 (24)
4T	With Comb 1/2" Male Thread/Sweat Connections	24 pcs	32#	15.00	14.50 (12)	14.00 (24)
3	Repair Kit for Symmons W400 or 4900			1.00		

CHROME NIPPLES MADE IN USA

Prices vary according to
market price of brass material

CALL FOR PRICING

- Polished Before Plating
- Tapered Thread
- Chamfered Ends
- Individually Paper Wrapped



WE ALSO CARRY A FULL LINE OF
RED BRASS PIPE NIPPLES AND
CHROME PLATED BRASS FITTINGS.



Model	Tub Stopper	Each
10-100	Chrome Plated	2.99
20-150	Polished Brass	4.50
30-200	Antique Brass	5.20
50-200	PVD Polished Brass	5.20
50-300	PVD Polished Nickel	5.20

Model	Conversion Kit with Fit-All Overflow Plate Assembly	Each
10-300	Chrome Plated	6.80
20-350	Polished Brass	10.50
30-400	Antique Brass	10.50
90-350	PVD Polished Brass	10.50
90-325	PVD Polished Nickel	10.50





10-100

Description	Each	12 - Lot Price
3/8" x 1"		
3/8" x 1-1/2"		
3/8" x 2"		
3/8" x 2-1/2"		
3/8" x 3"		
3/8" x 3-1/2"		
3/8" x 4"		
3/8" x 4-1/2"		
3/8" x 5"		
3/8" x 5-1/2"		
3/8" x 6"		
3/8" Flange		
1/2" x 1"		
1/2" x 1-1/2"		
1/2" x 2"		
1/2" x 2-1/2"		
1/2" x 3"		
1/2" x 3-1/2"		
1/2" x 4"		
1/2" x 4-1/2"		
1/2" x 5"		
1/2" x 5-1/2"		
1/2" x 6"		
1/2" Flange		


Additional Sizes Available Upon Request

MEARS ELECTRIC HEAT CONTROLS

Line Voltage Wall Mounted (AC Only)  - CSA
 22a. @120, 208, or 240 Volts – 18a. @277 Volts Range 45°-75° Calibrated in Degrees, Pigtail Leads – Ivory/ Beige or White





M600 SERIES

Model	Description	Master Quantity	Ctn. Wt	Each	Each in Full Ctn	Each 100 Assorted	Each 300 Assorted
M601	Single Pole	25 pcs	15#	9.25	8.95	8.45	7.80
M601W	Single pole, WHITE	25 pcs	15#	9.25	8.95	8.45	7.80
M601WT	Single Pole w/thermometer	25 pcs	15#	10.80	10.50	10.10	9.90
M601W-WT	Single Pole, WHITE w/thermometer	25 pcs	15#	10.80	10.50	10.10	9.90
M602	Double Pole	25 pcs	17#	11.90	11.40	11.15	10.65
M602W	Double Pole, WHITE	25 pcs	15#	11.90	11.40	11.15	10.65
M602WT	Double Pole w/thermometer	25 pcs	18#	13.20	12.95	12.70	12.55
M602W-WT	Double Pole, WHITE w/thermometer	25 pcs	18#	13.20	12.95	12.70	12.55
M611	Single Pole w/antic	25 pcs	15#	11.35	10.95	10.70	10.50
M611W	Single pole, WHITE w/antic	25 pcs	15#	11.35	10.95	10.70	10.50
M611WT	Single Pole w/thermometer	25 pcs	16#	14.10	13.75	13.30	13.00
M611W-WT	Single Pole, WHITE w/thermometer	25 pcs	16#	14.10	13.75	13.30	13.00
M612	Double Pole w/antic	25 pcs	17#	14.05	13.55	13.25	12.90
M612W	Double Pole, WHITE w/antic	25 pcs	17#	14.05	13.55	13.25	12.90
M612WT	Double Pole w/thermometer	25 pcs	18#	15.65	15.25	14.85	14.45
M612W-WT	Double Pole, WHITE w/thermometer	25 pcs	18#	15.65	15.25	14.85	14.45
LOW RANGE CONTROLS – CONFORMS TO D.O.D. #4270.1-M –  - CSA							
M601-72	Single Pole - 42-72°	25 pcs	15#	13.10	12.85	12.55	12.30
M602-72	Double Pole - 42-72°	25 pcs	17#	16.15	15.75	15.45	15.20



M21 SERIES

MEARS SPECIALTY CONTROLS –  - CSA							
M600M	Two Stage each 22 amp.	25 pcs	15#	17.70	17.20 (25)		
M600S	Two Circuit each 22 amp M600S W White	25 pcs	15#	17.70	17.20 (25)		
M601TP	Single Pole Tamper Proof	25 pcs	15#	15.20	14.20 (25)		
M602TP	Double Pole Tamper Proof	25 pcs	15#	21.30	20.30 (25)		
M601-25	Single Pole 25 amp	DISCONTINUED USE M602-25					
M602-25	Double Pole 25 amp	25 pcs	15#	37.65	36.65 (25)		

Range 45-75° Calibrated in Degrees, Pigtail Leads  CSA -- Also stocked in 50-90° Range, Same Price							
MEARS DELUXE	M21SP	Deluxe S.P. w/antic. (3 wire)	25	13#	18.30	17.70 (50)	
	M21DP	Deluxe D.P. w/antic.	25	15#	24.20	23.60 (50)	

High or low temperature stops for field installation in Mears. M21SP-DP are available at 5¢ each.



White Rodgers



1A65-641



1G66-641

ELECTRIC HEAT CONTROLS 40-85° RANGE -  - CSA							
1A65-641	Single Pole -Slow Make and Break	50	28#	18.75	17.45 (25)	17.15 (50)	
1A65W-641	White						
1A66-641	Double Pole -Slow Make and Break	50	30#	22.70	22.00 (25)	21.40 (50)	
1A66W-641	White						
BIMETAL WALL THERMOSTATS Replaces S22, S22W, D22, D22W Thermostats 22 Amp. at 120-208-240-277 Volts  - CSA							
1G65-641	40 - 80°F White / 2° F Differential	50	10.10	9.80 (50)	9.60 (100)	9.25 (300)	
1G66-641	40 - 80°F White / 2° F Differential	50	11.75	11.50 (50)	11.40 (100)	11.20 (300)	

White Rodgers DIGITAL THERMOSTATS



1F78-151



1E78-140



1F97-277



1F95EZ-0671



1F86U-42WF

COMPACT DIGITAL THERMOSTAT (5 1/8" X 3 3/4") Program Features of More Expensive Models – Temp. Range 45°-90°F

Model	Description	Master Quantity	1-5	6/Model Prepaid
1F78-151	Heat/Cool Model with switches, 5 and 2 day programs for 24 volt use - Millivolt includes O/B Terminals.	6 pcs	29.95	28.45 (6)
1F78-144	Heat/Cool Non-Programmable	6 pcs	26.00	25.20 (6)
1E78-140	Vertical HEAT ONLY	6 pcs	23.75	22.25 (6)



DIGITAL FULL SIZE (6" X 3 3/4") – WHITE For 24 Volt & Millivolt – Temp. Range 45°-90°F

1F80-0224	Heat/Cool Model, w/up to four separate time & temperature settings each. For single stage heat/cool or heat only systems, single stage heat pumps, electric furnaces.	6 pcs	39.25	35.00 (6)
1F80-0261	WEEKDAY/WEEKEND Model, Dual Power	6 pcs	48.75	43.75 (6)
1F86-0244	NON-PROGRAMMABLE Digital	6 pcs	34.40	32.15 (6)
1F82-0261	HEAT PUMP Model - 2 Heat/1 Cool	6 pcs	50.50	48.50 (6)
1F87-361	7 DAY Model, up to 7 programs	6 pcs	59.25	55.25 (6)

COMFORT-SET DIGITAL Beautiful, Versatile, User-Friendly for Fine Homes and Commercial Use Temp. Range 45°-90°F

1F97-1277	90 SERIES BLUE TOUCH SCREEN THERMOSTAT - Up to 7 programs for 2-3-4 & 5 wire units, for electric, gas or oil heat; millivolt, 2 wire zone & 5 wire (2 transformer) systems. Custom filter indicator, diagnostics, custom menu, keypad lockout.	6 pcs	126.00	117.75 (6)
1F95-1277	Heat Pump Model, up to 3 stages heat/2 stages cool, 7 individual daily programs with keypad lockout.	6 pcs	140.95	136.95 (6)

BLUE EASY READER THERMOSTAT For 24 Volt & Millivolt – Temp. Range 45°-90°F

1F95-EZ-0671	Universal 4 Heat/2 Cool, non-programmable or selectable 7 Day programmable thermostat hardwired or battery powered with power stealing assist, 6-square inch back lit display	6 pcs	89.50	86.50
--------------	---	-------	-------	-------



SENSI WI-FI THERMOSTAT

1F86U-42WF	Heat/Cool Remote System Access from Smartphone, Tablet or PC	6 pcs	121.00	117.50 (6)
------------	--	-------	--------	------------

Honeywell



TH4110D1007

DIGITAL THERMOSTATS For Single Stage Heat/Cool – Gas, Oil, Electric, Single Stage Heat Pump Hot Water, Steam, Millivolt – Dual Power (Battery and Hardware)

Model	Description	Each	Each Full Carton
TH3110D1008	Non-Programmable, 1-Heat / 1-Cool	28.80	27.75 (12)
TH4110D1007	Weekday / Weekend Model, 1-Heat / 1-Cool	33.00	32.45 (12)
TH5110D1006	Focus Pro5000; Non-Programmable	36.35	35.65 (12)
TH6110D1005	Focus Pro6000; 5-1-1 Programming	53.00	52.00 (12)

LOW VOLTAGE MECHANICAL THERMOSTATS Snap-Action 50°-90°F



1E30N-910

Model	Description	Each	20 Prepaid	100 Assorted
1E30N-910	Vertical Heat Only	22.85	21.85 (20)	21.00 (100)
1E56N-444	Universal Vertical Heat/Cool with heating or cooling 3-wire zone Mounting plate included	24.25	23.40 (20)	22.55 (100)
1E50N-301	Vertical Heat Only with On/Off Subbase and Limited Range Stop Kit	25.40	24.75 (20)	24.10 (100)
1F56N-444	Universal Horizontal Heat/Cool with heating or cooling 3-wire zone Mounting plate included	25.40	24.75(20)	24.10 (100)



1F56N-444



21D64-2

UNIVERSAL IGNITOR KIT For Gas Fired Forced-Air Furnaces, Water Heaters and Boilers Replaces Hundreds of Silicone Carbide Ignitors

Model	Description	Cost
21D64-2	Input 102-132 VAC, 60 Hz. Max Load Current 3.0A@132 VAC	26.75



40-120

TRANSFORMER 40 VA @ 24V Combination Foot, Conduit, Plate Mount (4 1/4"x 4 1/4")					
Model	Description	Master Qty.	Carton Wt.	Each	15 Lot Price
40-120	40VA. 120V., NOW 3-WAY MOUNT CROSS REFERENCE # 90-T40M1	15	47#	10.40	9.80 (15)
40-240	40VA. 240V. with 120 V-208V Taps CROSS REFERENCE # 90-T40M3	15	47#	11.40	10.45 (15)
HUMIDISTAT & DEHUMIDISTAT					
W42AA1	WALL SPDT HUMIDISTAT	20		62.75	
H46C1166	DEHUMIDISTAT	20		34.95	

Honeywell

LOW VOLTAGE THERMOSTATS

Vertical Snap-Action – (3 1/8"x3 1/8") 50°-90°F



T812A1002



T812C1000

Model	Description	Replaces	Each	25 Prepaid	100 Assorted
T812A1002	Heat Only	E30-822D C30-5090 F30-4075 D30-819	10.95	10.65 (25)	10.30 (100)
T812A1010	Heat Only with Positive Off	E30-1834B	11.10	10.80 (25)	10.45 (100)
TS812A1007	Heat Only with Positive Off - Millivolt	C30-86 E30-86	11.30	10.95 (25)	10.60 (100)
T812C1000	Heat / Cool / Off	E56-834C F56-834C	11.95	11.55 (25)	11.30 (100)

LOW VOLTAGE CONTROLS



T87K1007



TH1110DV1009

Model	Description	Each	12 Lot Price	25 Lot Price
T822K1018	Heat Only, 50° - 90°	23.30	22.85 (12)	22.30 (25)
T822K1000	Heat Only, 50° - 90° Positive Off	23.60	23.40 (12)	23.15 (25)
T834N1002	Heat/Cool, 50° - 90°	23.25	23.05 (12)	22.90 (25)
T834L1004	Cooling Only, 50° - 90°	23.25	23.05 (12)	22.90 (25)
T8775A1009	White Digital Heat Only	38.20	38.05 (12)	37.50 (25)
T8775C1005	White Digital, Heat/Cool	44.50	44.00 (12)	43.60 (25)
T87K1007	Heat Only, Round	26.75	26.55 (12)	26.25 (25)
T87N1000	Heat/Cool, Round	38.95	38.30 (12)	37.65 (25)
50000066-001	6" Wall Plate for T87K & T8775 Series	8.70	8.65 (12)	8.35 (25)
50010944-001	Range Stops for T87K & T87N	3.65	3.50 (12)	3.35 (25)
T827K1009	Heat Only, Millivolt or 12VDC 50° - 90°	22.15	21.85 (12)	21.50 (25)
T87N1026	Easy to See T87N 1-Heat / 1-Cool	47.50	47.00 (12)	46.10 (25)
TH1110DV1009	Heat/Cool, Non-Programmable	23.70	23.45 (12)	23.25 (25)

LOCKING THERMOSTAT GUARDS

All Keyed Alike



TG511A1000

Model	Description	Master Qty.	Ctn. Wt.	Distributor Cost	
				Each	Each in Full Carton/10
TG510A1001	Small, Clear Plastic Guard. Inside Dimensions = 4 7/16" x 4 7/16" x 2 1/2"	10 pcs	5#	18.95	18.65 (10)
TG511A1000	Medium, Clear Plastic Guard. Inside Dimensions = 5 1/16" x 6 1/16" x 2 15/16"	10 pcs	10#	18.75	18.55 (10)
TG512A1009	Large, Clear Plastic Guard. Inside Dimensions = 5 7/8" x 8 3/8" x 3 3/8"	10 pcs	20#	19.40	19.25 (10)
TG511D1004	Medium, Metal Guard. Inside Dimensions = 5 1/16" x 6 1/16" x 2 15/16"	10 pcs	15#	27.40	26.90 (10)
TG512D1003	Large, Metal Guard. Inside Dimensions = 5 7/8" x 8 3/8" x 3 3/8"	10 pcs	25#	31.00	30.50 (10)

Honeywell

ELECTRIC HEAT CONTROLS

Line Voltage Wall Mounted  - CSA

22a. @120, 208, or 240 Volts – 19a. @277 Volts Range 40°-80° with Heat Anticipation



T498B1512



T410B1004

Model	Description	Price Each	10 Lot Price	25 Lot Price
T498B1553	Double Pole	25.15	24.85 (10)	24.65 (25)
T498B1512	Double Pole w/thermometer	30.10	29.80 (10)	29.50 (25)
T498A1778	Single Pole w/thermometer	25.35	25.20 (10)	24.95 (25)
T498A1810	Single Pole	20.45	20.15 (10)	19.95 (25)
T4398A1021	Single Pole 50° - 80° no heat anticipator	18.95	18.70 (10)	18.40 (25)
T4398B1029	Double Pole 50° - 80° no heat anticipator 2° Diff.	24.10	23.90 (10)	23.40 (25)
T410B1004	Double Pole 40° - 80° no heat anticipator 3° Diff.	13.75	13.45 (10)	13.30 (25)
T410A1013	Single Pole 40° - 80° no heat anticipator 3° Diff.	10.55	10.30 (10)	10.15 (25)



AT140A1000



T651A3018



RA832A1066



Q314A4586

TRANSFORMERS

Model	Description	Price Each	10 Lot Price
AT140A1000	40VA. 120V., Universal Mount	11.95	11.20 (10)
AT72D1683	40V. 120V., Universal Mount NEMA	20.25	19.90 (10)
AT87A1106	48VA. 120-208-240V., Plate or Foot Mount NEMA	27.40	26.95 (10)
AT150B1252	50VA. 277V., Foot Mount with plastic end caps	19.95	19.60 (10)
AT175A1008	75VA. 120-208-240V., Universal Mount	30.75	30.45 (10)

SPECIALTY CONTROLS

Model	Description	Price Each	10 Lot Price
T651A3018	Medium Line Voltage, 44° - 86°	55.35	53.85 (10)
T6051A1016	Heavy Duty, Line Voltage, 50° - 80°	90.65	88.95 (10)
S483B1002	Winter Watchman	25.10	24.80 (10)

HYDRONIC HEATING SWITCHING RELAY

120 Volts, 50Hz, 60Hz

Model	Description	Price Each	10 Lot Price
R8845U1003	DPST, plus Powerpile rated voltage SPST relay	52.40	51.30 (10)
R845A1030	DPST, 1 pole line voltage - other pole line voltage or low voltage	68.00	66.55 (10)
RA832A1066	DPST, 1 pole line voltage - other pole low or millivolt	70.50	68.50 (10)
RA832A1074	DPST, Same as RA832A1066 except 240v, 50Hz, 60Hz	90.70	88.10 (10)
RA89A1074	SPST	54.35	53.25 (10)

PILOT BURNER


Model	Description	Price Each	10 Lot Price
Q314A4586	Pilot Burner for natural LP gas with a BCR-18 orifice, front single tip style, 'B' mounting bracket and non-primary aeration.	24.15	

Honeywell




TL8230A1003

LINE VOLTAGE DIGITAL THERMOSTATS					
3600W @ 240 Volts – 40°-86° 3120W @ 208 Volts					
Model	Description	Master Quantity	Master Wt.	Each	Each/Full Ctn.
TL8230A1003	7 - Day, Double Pole Replaces T4700 Series	12	11#	48.50	47.00 (12)
TL7235A1003	Non-Programmable	12	11#	41.50	40.10 (12)




25-240


ELECTRIC HEAT RELAYS							
Model	Description	Cross Reference	Master Qty.	Ctn. Wt.	Each	Each/Full Ctn.	
25-240	25a. 240 volts	R841C-1227	24A01G3	20	29#	50.25	45.00 (10)
25-120	25a. 120 volts	R841C-1193	24A05A1	20	29#	52.50	47.00 (10)
25-208	25a. 208 volts	R841C-1201	24A05E1	20	29#	52.50	47.00 (10)
25-277	22a. 277 volts	R841C-1219	24A05Z1	20	29#	52.50	47.00 (10)
DOUBLE RELAYS (2 Switches x 25 amp.)							
50-240	50a. 240 volts	R841E-1068	24A06G1	10	20#	83.00	77.50 (10)
50-208	USE 2 MODEL #25-208		24A06E1	DISCONTINUED			
50-277	44a. 277 volts	R841E-1076	24A06Z1	10	20#	50.00	45.00 (10)



M600C
M600C25



M6051



M77007

LINE VOLTAGE THERMOSTATS SPDT (HEAT OR COOL)							
Model	Description	Cross Reference	Master Quantity	Carton Weight	Each	Each/ Full Ctn. Prepaid	
M600C	MEARS, Light Duty Heat or Cool, Vertical SPDT, 1/4 HP @120 VAC, 1/2 HP @240 VAC, 55°-85° w/Thermometer, 2° DIFF. WHITE	T451A/B T651 M400C	25	16#	17.50	16.50 (10) 16.00 (25)	
M600C25	MEARS, Heavy Duty Heat or Cool, SPDT, 1 HP @120 VAC, 2 HP @240 VAC, 2° Differential w/Thermometer, 55°-85° WHITE	T4051A/B T6051 M400C25 77042	25	15#	21.50	20.40 (10) 19.90 (25)	
M651	Light Duty Heat or Cool SPDT. Mounts Horiz. or Vert.. 6a.@120 VAC 3a.@240 VAC, Tamper Proof with temperature stops, 40° - 90°. Also can be used as a tamper proof low-voltage control.	T451A/B T651A T26518	10	10#	58.75	57.00 (10)	
M6051	Heavy Duty, Heat 16a.@120 VAC-8a.@240 VAC, Cool 8a.@120 VAC or 240 VAC, 40°-90°. Also can be used as a 22 Amp. Elec. Heat Tamper Proof Control. Mounts Horiz. or Vert..	T6051A T26T3	10	10#	94.00	90.95 (10)	
MA24	REMOTE BULB, SPDT - 30° to + 100° 6' cap, 16a.@120 V. 8a.@240 V.	A19ABC74	10	10#	62.75	60.60 (10)	
M19DP	DUST PROOF, SPDT, Ventilating 30°-110° - 16a.@ 120V. Coiled Cap	A19BAC15	10	10#	73.50	71.50 (10)	
M19RT	RAINTIGHT, SPDT - 0°-150° 16a.@ 120 VAC - 8a.@240 VAC. 10 foot cap.	A19ANC-1	10	29#	95.00	88.50 (10)	

ATTIC FAN CONTROL					
M77007	ATTIC FAN CONTROL, 95° - 125° SPST 15° differential-cuts in 15° above setting 1 HP@120V 2 HP @240V. Less Thermometer WHITE	25	15#	24.00	23.70 (10) 23.00 (25)

M77042 Replaced by M600C25


White Rodgers




176-6

LINE VOLTAGE LOCKED CASE / LIMITED SPST (6" x 2 3/4" x 2 1/2")			
Model	Description	Each	20 Lot
176-6	Heating Only, Open on Rise ON-No Heat., Position Dial / Fixed 30 Differential 40° - 80° Ideal for Control of infrared Heaters.	124.25	118.00(20)

DEFINITE PURPOSE CONTRACTOR FOR AIR CONDITION AND HEATING EQUIPMENT		
Model	Description	Each
90-244	2 Pole, 24 Volt, 30 Amp	7.90
90-245	2 Pole, 120 Volt, 30 Amp	7.90
90-163	3 Pole, 24 Volt, 30 Amp	19.95
90-164	3 Pole, 120 Volt, 30 Amp	19.95
90-170	3 Pole, 24 Volt, 40 Amp	19.95
90-171	3 Pole, 120 Volt, 40 Amp	19.95
GENERAL PURPOSE RELAYS Use in Vending Machines, Appliances, Heating & Air Conditioning Equipment		
90-340	2 Pole, DPDT 17.5 OHMS DC Resistance	7.25
90-293Q	FAN RELAY 90 OHMS SC Resistance	6.50



90-340



90-244

Honeywell



R841C1227



R822D1014

RELAYS		
Model	Description	Each
R822D1014	24V General Purpose Relay with DPDT Switching	14.50
R841C1227	24V Electric Heater Relay with SPST Switching	59.25
R841E1068	24V Electric Heater Relay with SPST Switching	118.15



AUBE THERMOSTATS

Model	Description	Each	10 Lot
TH114-A-120S	Line Voltage Non-Programmable Thermostat; 2000 watts at 120 volts	44.95	44.10 (10)
TH114-A-240D	Line Voltage Non-Programmable Thermostat; 3600 watts at 240 volts	44.50	43.65 (10)
TH115-A-120S	7-Day Programmable Thermostat; 2000 watts at 120 volts	50.50	49.55 (10)
TH115-A-240D	7-Day Programmable Thermostat; 3600 watts at 240 volts	49.95	48.45 (10)
TH135-01-B	Low Voltage Electronic Thermostat for Central Heating Millivolt Compatible; Saves three temperature settings	32.90	31.80 (10)
TH141HC-28-B	7-Day Programmable Low Voltage Thermostat; Heating / Cooling Automatic Changeover	48.75	47.15 (10)



TH114-A-240D



TH115-A-240D



TH141HC-28-B



TH135-01-B

AUBE PROGRAMMABLE WALL SWITCHES

Model	Description	Each
PLS530A1008	White, 500 watts, 120 volts, Programmable CSP or Three-Way	24.95
PLS531A1006	Almond, 500 watts, 120 volts, Programmable CSP or Three-Way	24.95
PLS730B1003	White, Programmable Wall Switch, 2400 Watts, Single Pole or Three-Way	24.95
PLS750C1000	White, Programmable Wall Switch, 1800 Watts, Max NO Min., 15 amp, 1 HP for lights and motors, Single Pole or Three-Way	32.70
PLS550A1006	White, Programmable Wall Switch Timer, 500 Watts, Max 40W Min., for lights only, Single Pole or Three-Way	29.40
PLS731B1001	Almond, Programmable Wall Switch, 2400 Watts, Single Pole or Three-Way	24.95
PLS751C1008	Almond, Programmable Wall Switch, 1800 Watts, Max NO Min., 15 amp, 1 HP for lights and motors, Single Pole or Three-Way	32.70



PLS750C1000



PLS531A1006



PLS530A1008

Honeywell CONTACTORS

Honeywell offers definitive purpose contactors for heating, cooling, and refrigeration applications

- Available in 1, 2, 3 and 4 pole configurations.
- Multiple input voltage range from 24/120/208/240 configurations.
- Available in 25, 30, 40, 50, 60, 75 and 90 Amp configurations.
- Meet ARI 780 and UL/CSA/CUR standards.
- Quick connects for coil termination.



DP3030B5003


Model	Description	Each
DP1025A5006/U	Tradeline Power Pro Model - 1 pole with Buss Bar - 25A-24V	9.80
DP1030A1001/U	Economy Model - 1 pole, 30A-24V	5.95
DP1030A5014/U	Tradeline Power Pro Model - 1 pole with Buss Bar - 30A-24V	9.50
DP1040A5005/U	Tradeline Power Pro Model - 1 pole with Buss Bar - 40A-24V	10.60
DP2020A5022/U	Tradeline Power Pro Model - 2 pole, 20A-24V	9.80
DP2020B5039/U	Tradeline Power Pro Model - 2 pole, 20A-120V	10.10
DP2030A1004/U	Economy Model - 2 pole, 30A-24V / Does NOT meet ARI 780 Standard	6.30
DP2030A5013/U	Super Tradeline Power Pro Model - 2 pole, 30A-24V Includes Accessories	13.20
DP2030B5004/U	Tradeline Power Pro Model - 2 pole, 30A-24V	7.75
DP2030C1002/U	Economy Model - 2 pole, 30A-208/240V / Does NOT meet ARI 780 Standard	6.10
DP2030C5003/U	Tradeline Power Pro Model - 2 pole, 30A-208/240V	7.75
DP2030C5011/U	Super Tradeline Power Pro Model - 2 pole, 30A-208/240V Includes Accessories	13.70
DP2030D5002/U	Tradeline Power Pro Model - 2 pole, 30A-277V	10.60
DP2040A1003/U	Economy Model - 2 pole, 40A-24V	11.25
DP2040A5004/U	Tradeline Power Pro Model - 2 pole, 40A-24V	20.95
DP2040B1002/U	Economy Model - 2 pole, 40A-120V	19.30
DP2040B5003/U	Tradeline Power Pro Model - 2 pole, 40A-120V	20.95
DP2040C1001/U	Economy Model - 2 pole, 40A-208/240V	15.45
DP2040C5002/U	Tradeline Power Pro Model - 2 pole, 40A-208/240V	23.95
DP3030A5004/U	Tradeline Power Pro Model - 3 pole, 30A-24V	20.75
DP3030B5003/U	Tradeline Power Pro Model - 3 pole, 30A-120V	20.75
DP3030C5002/U	Tradeline Power Pro Model - 3 pole, 30A-208/240V	20.75
DP3040A5003/U	Tradeline Power Pro Model - 3 pole, 40A-24V	21.70
DP3040B5002/U	Tradeline Power Pro Model - 3 pole, 40A-120V	21.70
DP3040C5001/U	Tradeline Power Pro Model - 3 pole, 40A-208/240V	21.70
DP3050A5002/U	Tradeline Power Pro Model - 3 pole, 50A-24V	57.50
DP3050B5001/U	Tradeline Power Pro Model - 3 pole, 50A-120V	59.20
DP3050C5010/U	Tradeline Power Pro Model - 3 pole, 50A-208/240V	59.20
DP3060A5001/U	Tradeline Power Pro Model - 3 pole, 60A-24V	66.10
DP3060B5010/U	Tradeline Power Pro Model - 3 pole, 60A-120V	66.10
DP3060C5009/U	Tradeline Power Pro Model - 3 pole, 60A-208/240V	66.10
DP3075A5017/U	Tradeline Power Pro Model - 3 pole 75 AMP CONTACTOR - 24V	127.75
DP3075B5016/U	Tradeline Power Pro Model - 3 pole 75 AMP CONTACTOR - 120V	127.75
DP3075C5015/U	Tradeline Power Pro Model - 3 pole 75 AMP CONTACTOR - 208/240V Coil	127.75
DP3090B5007/U	Tradeline Power Pro Model - 3 pole 90 AMP CONTACTOR -120V Coil	206.75
DP3090B5006/U	Tradeline Power Pro Model - 3 pole 90 AMP CONTACTOR - 208/240V Coil	206.75
DP4040A5002/U	Tradeline Power Pro Model - 4 pole 40 AMP CONTACTOR - 24V Coil	40.25
DP4040B5001/U	Tradeline Power Pro Model - 4 pole 40 AMP CONTACTOR - 120V Coil	37.65
DP4040C5010/U	Tradeline Power Pro Model - 4 pole 40 AMP CONTACTOR - 208/240V Coil	40.25
DP3AUX-INO	Snap-on auxillary switch normally closed, rating 10 amp	15.50
DP3AUX-INC	Snap-on auxillary switch normally open, rating 10 amp	15.50
DP3AUX-INO-INC	Snap-on auxillary switch 1 close, 1 open, rating 10 amp	25.20

LOCKING THERMOSTAT GUARDS


ALL KEYED ALIKE

Model	DESCRIPTION WITH INSIDE DIMENSIONS	Master Qty	Carton Wt.	Price Each	Distributor Cost	
					Each/Full Ctn Prepaid	Each 48 Assorted Prepaid
443	Small Clear Plastic Guard (3 7/8 x 3 1/2 x 2 1/2)	12	8 1/4#	10.50	10.00 (12)	9.75 (48)
853	Large Clear Plastic Guard (6 3/8 x 3 1/2 x 3 1/4) Dual Mount with Solid/Ring Base	12	12#	11.20	10.80 (12)	10.55 (48)
864	Larger Clear Plastic Guard (8 1/4 x 5 3/8 x 3 1/2) Dual Mount with Solid/Ring Base	12	18 1/2#	12.85	12.65 (12)	12.40 (48)
BTG-54VL	Metal Guard with Solid Metal Base (6 1/4 x 4 3/4 x 3)	12	17#	16.95	15.95 (12)	15.70 (48)
BTG-UM2	DISCONTINUED - USE TG512D1003 (PAGE 8)	NOTE: HONEYWELL AND CHATHAM GUARDS ARE NOT KEYED ALIKE				
F336	Key for All Guards - All Chatham guards keyed alike			1.95 ea		

PREPAID SPECIAL: GUARDS ARE ALWAYS PREPAID IN FULL CARTONS OF 12 OF A MODEL.




443



BTG-54VL

ROOF & GUTTER DE-ICING SYSTEMS

Complete with Roof Clips & Cable Spacers -
6 foot Cold Lead with 3 wire Grounded Plug
UL - CSA Approved




ADKS SERIES

PREPAID SPECIAL:
20 ASSORTED De-Icing
Kits at Full Carton Price
Freight Prepaid.

MODEL	Length Ft.	Watts	Std. Pkg. Qty.	Std/ Pkg. Wt.	Distributor Cost	
					Each	Each in Full Carton
ADKS-100	20	100	5	7#	38.75	37.75
ADKS-150	30	150	5	9#	44.00	42.50
ADKS-300	60	300	5	13#	55.25	53.80
ADKS-400	80	400	5	16#	66.00	63.95
ADKS-500	100	500	5	17#	69.85	67.50
ADKS-600	120	600	2	10#	92.30	89.10
ADKS-800	160	800	2	12#	106.30	103.00
ADKS-1000	200	1000	2	15#	131.75	126.75
ADKS-1200	240	1200	2	17#	143.75	138.70
RS2 ROOF SENTRY CONTROL WEATHER RESISTANT - 1200 Watts@120 Volts			5	10#	90.00	87.75
CSK-12	CLIPS and SPACERS (19 clips/16 spacers)				8.20	

AUTOMATIC SAFE WATER PIPE CABLE - 120 VOLT, AUTOMATIC THERMOSTAT, COPPER SHIELDED, GROUNDDED

2 Foot Cold Lead with 3 Wire Plug
UL - CSA Approved




AHB SERIES

PREPAID SPECIAL:
20 ASSORTED Pipe Cables
at Full Carton Price
Freight Prepaid.

MODEL	Length Ft.	Watts	Std. Pkg. Qty.	Std/ Pkg. Wt.	Each	Each in Full Carton
AHB-013	3	21	10	6#	25.00	24.00
AHB-016	6	42	10	7#	27.00	26.00
AHB-019	9	63	10	9#	27.75	26.80
AHB-112	12	84	10	10#	30.20	29.15
AHB-115	15	105	10	11#	31.50	29.30
AHB-118	18	126	5	7#	33.30	32.15
AHB-124	24	168	5	8#	35.75	34.55
AHB-130	30	210	5	9#	38.10	36.70
AHB-140	40	280	5	12#	45.50	43.90
AHB-160	60	420	5	15#	58.50	57.40
AHB-180	80	560	5	20#	74.00	72.00

**ELECTRIC WATER HEATER
ELEMENTS SCREW FLANGE –
TYPE AH or SG
(INCLUDES AG-1 GASKET)**

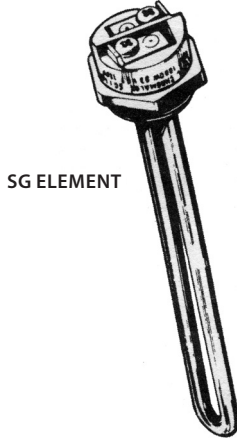


SG ELEMENT


WATER WIZARD –

Alloy Sheath – Much more surface, lasts longest.
Can operate for long periods of time in free air
and is less likely to overheat when immersed
in mineral deposits.

Model	Watts	Volts	Length In Tank	Each	Each in Full Ctn
SGW2257	2500	240v	10-13/16	14.90	14.40 (10)
SGW2457X1	4500	240v	16-3/8	16.00	15.50 (10)



59T4090

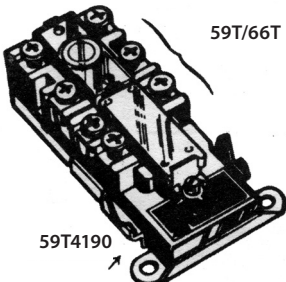

59T/66T

59T4190

MODEL	WATTS	VOLTS	LENGTH INSIDE TANK	Each	Each/ Carton 12	25 or 50 of a Model
HIGH WATT DENSITY – Less Surface, Runs Hotter						
SG1153	1500	240v	7-5/8	6.50	6.15	6.15
SG1203	2000	240v	7-5/8	6.50	6.15	
SG1253	2500	240v	9-3/8	6.80	6.40	
SG1303	3000	240v	10-9/16	6.80	6.40	
SG1353	3500	240v	12-9/16	6.90	6.50	
SG1403	4000	240v	13-9/16	7.00	6.60	
SG1453	4500	240v	13-9/16	6.55	6.25	6.00
SG2453	4500	240v	7-13/16	8.00	7.40	7.00
SG2503	5000	240v	9-13/16	8.50	7.90	
SG2553	5500	240v	8	9.45	8.95	
SG2603	6000	240v	11-11/16	9.20	8.60	
SG1153L	1500	120v	7-5/8	6.40	6.10	5.80
SG1203L	2000	120v	7-5/8	6.40	6.10	5.80
SG1253L	2500	120v	9-3/8	6.50	6.20	
SG1153-208	1500	208V	7-5/8	7.50	7.10	
SG1253-208	2500	208V	9-1/2	7.80	7.30	
SG1453-208	4500	208V	13-11/16	8.30	7.80	
SG2503-208	5000	208V	9-15/16	9.75	9.15	
SG2603-208	6000	208V	11-11/16	12.50	11.90	
SG1453-480	4500	480V	13-11/16	8.25	7.65	
SG2503-480	5000	480V	9-15/16	9.95	9.35	
SG2603-480	6000	480V	11-3/4	12.35	11.85	
LOW WATT DENSITY – More Surface, Runs Cooler, Lasts Longer						
SG1077	750	240v	7-3/4	7.30	6.80	
SG1107	1000	240v	7-3/4	7.30	6.80	
SG1157	1500	240v	7-3/4	Use SG1153 - Same Density		
SG2257	2500	240v	7-7/16	8.40	7.90	
SG2307	3000	240v	9	8.60	8.00	
SG2357	3500	240v	9-15/16	9.10	8.75	
SG2407	4000	240v	11-3/4	9.70	9.30	
SG2457	4500	240v	11-3/4	9.60	9.10	8.65
SG2507	5000	240v	13-7/16	10.30	9.70	
SG2607	6000	240v	15-1/8	11.80	11.40	
SG1107L	1000	120v	7-3/4	7.30	6.80	
SG1157L	1500	120v	7-3/4	Use SG1153L - Same Density		
SG1207L	2000	120v	10-11/16	7.70	7.10	


THERM-O-DISC ELECTRIC WATER HEATER CONTROLS - Bulk Packed

RESIDENTIAL	DESCRIPTION 90°-150°	Each	Each/Full Ctn.	100 Assorted
66T4490	Limit (Manual Reset), 1 OR 2 ELEMENTS	7.85	7.45 (10)	7.00
59T4090	Thermostat, Lower or 1 Element	9.15	8.85 (10)	8.55
59T4090/66T	Thermostat, w/limit, Single Upper	17.30	16.70 (10)	16.45
59T4190	Upper Thermostat, 2 Element	11.60	11.20 (10)	10.70
59T/66T	Upper Thermostat w/limit	17.45	16.95 (10)	16.50
COMMERCIAL	DESCRIPTION 120°-180°	Each	Each/Full Ctn.	100 Assorted
59T4200	Thermostat, Lower	10.30	10.15 (10)	10.00
59T4300/66T	Upper Thermostat w/limit	20.70	20.20 (10)	19.90

CHROMALOX® ELECTRIC WATER HEATER ELEMENTS FLAT FLANGE – TYPE TG or TGA

Includes FG-1A Square Gasket, (TG27T Round Gasket for recessed flange also included with unit packed units)

Chromalox®
PRECISION HEAT AND CONTROL

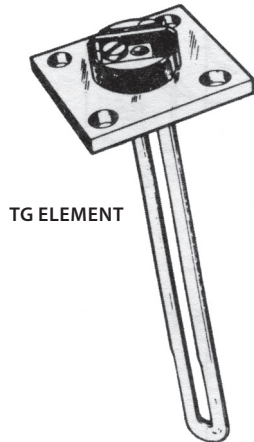

TG ELEMENT

MODEL	WATTS	VOLTS	LENGTH INSIDE TANK	Each	Each/Full Cts.	25/50 of a Model
HIGH WATT DENSITY – Less Surface, Runs Hotter						
TG1153	1500	240v	7-5/8	6.20	5.80	
TG1203	2000	240v	7-5/8	6.20	5.80	
TG1253	2500	240v	9-3/8	6.40	6.00	
TG1303	3000	240v	10-9/16	6.50	6.10	
TG1353	3500	240v	12-9/16	6.60	6.40	
TG1403	4000	240v	13-9/16	6.90	6.50	
TG1453	4500	240v	13-9/16	6.90	6.50	6.40
TG2453	4500	240v	7-13/16	8.10	7.70	
TG2503	5000	240v	9-13/16	8.20	7.80	
TG2603	6000	240v	11-11/16	8.90	8.40	
TG1153L	1500	120v	7-5/8	6.20	5.85	
TG1203L	2000	120v	7-5/8	6.20	5.85	
TG1253L	2500	120v	9-3/8	7.25	6.90	
TG1153-208	1500	208V	7-5/8	8.00	7.40	
TG1253-208	2500	208V	9-3/8	8.00	7.40	
TG1453-208	4500	208V	13-9/16	8.75	8.15	
TG2503-208	5000	208V	9-13/16	9.40	8.70	
TG2603-208	6000	208V	11-11/16	12.10	11.50	
TG1303-480	3000	480V	10-9/16	8.10	7.60	
TG1453-480	4500	480V	13-9/16	8.50	8.10	
TG2503-480	5000	480V	9-13/16	10.00	9.40	
TG2603-480	6000	480V	11-5/8	12.00	11.50	
TG2907BX-480	9000	480V	12-3/4	18.00	16.00	
LOW WATT DENSITY – More Surface, Runs Cooler, Lasts Longer						
TG1077	750	240v	7-11/16	8.30	7.90	
TG1107	1000	240v	7-11/16	8.30	7.90	
TG1157	1500	240v	7-11/16	Use TG1153 - Same Density		
TG1207	2000	240v	7-3/8	8.30	7.90	
TG2257	2500	240v	7-3/8	10.30	9.80	
TG2307	3000	240v	8-15/16	10.65	10.15	
TG2407	4000	240v	11-11/16	11.30	10.80	
TG2457	4500	240v	11-11/16	9.60	9.00	
TG1107L	1000	120v	7-11/16	8.30	7.90	
TG1157L	1500	120v	7-11/16	Use TG1153L - Same Density		
TG1207L	2000	120v	10-5/8	8.30	7.90	



ARM SERIES Switching Relay with Window
Built in Priority Safety Timer, Electric Fuse,
Aquastat Protection, Data Port, Field Replacement
Transformer and Premium Plug-In Relays




ARM-4P

MODEL	DESCRIPTION	TRANSFORMER VOLTAGE	EACH
AR82211	Single Zone	120 vac, 60 Hz, 15VA	39.95
ARM-2P	2 Zone	120 vac, 60 Hz, 20VA	115.00
ARM-3P	3 Zone	120 vac, 60 Hz, 30VA	143.00
ARM-4P	4 Zone	120 vac, 60 Hz, 30VA	175.00
ARM -6P	6 Zone	120 vac, 60 Hz, 30VA	205.00
AD1	Expansion model adds 1 Zone		50.55
AD4	Expansion model adds up to 4 Zones		134.00

CHROMALOX® UNIVERSAL FLAT FLANGE – TYPE FTG

For tanks with recessed square tank flanges having four mounting holes on 2 1/2 bolt circles.
Includes round number gaskets (3/8" thick). Will not take a square gasket.

Chromalox®
PRECISION HEAT AND CONTROL

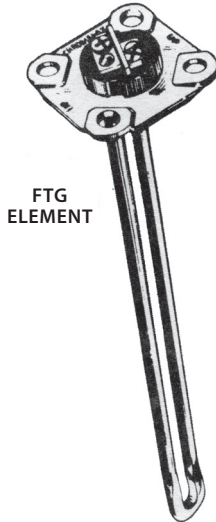

Model	ACCESSORIES	Dist. Cost Each
ADF-1	Flange-Sq.,- Std. 2 1/2" Bolt Circle (w/FG-1A&B)	9.40
045934-6	Gasket for FTG (Round 3/8" Thick)	0.50
AG-1	Gasket for SG - AH - (thin)	0.50
FG-1A	Gasket for TG or ADF-1 (Sq.) Replaces GTRF	0.50
FG-1B	Gasket for ADF-1 (Rd. Slotted) (RLS17B)	0.45
FG-24	Gasket for ADF-2, ADF-4	0.70
FG-35	Gasket for ADF-3, ADF-5	0.90
GTRF	Use FG-1A	0.40
TG8TA	Gasket to TG (Round) Twist Lock	0.45
TG27TA	Gasket to TG (Round) 1/2" Thick	0.90
RLS KIT		1.50
SWI	Wrench for SG (AH)	3.10

Model	Watts	Volts	Length Inside Tank	Each	Each/Ctn of 12	25/50 of a Model
HIGH WATT DENSITY – Less Surface, Runs Hotter						
FTG1153	1500	240v	7-5/8	6.15	5.75	
FTG1203	2000	240v	7-5/8	6.15	5.75	
FTG1253	2500	240v	9-3/8	6.45	6.05	
FTG1303	3000	240v	10-9/16	6.65	6.35	
FTG1403	4000	240v	13-9/16	6.85	6.45	
FTG1453	4500	240v	13-9/16	6.85	6.45	6.50
FTG2453	4500	240v	7-13/16	8.20	7.70	
FTG2553	5500	240v	10-3/4	9.40	8.90	
FG2603	6000	240v	11-11/16	9.65	9.15	
FTG1153L	1500	120v	7-5/8	6.25	5.85	
FTG1203L	2000	120v	7-5/8	6.65	6.25	
FTG1253L	2500	120v	9-3/8	6.65	6.25	
LOW WATT DENSITY – More Surface, Runs Cooler, Lasts Longer						
FTG1107	1000	240v	7-11/16	7.00	6.60	
FTG1157	1500	240v	7-11/16	Use FTG1153 - Same Density		
FTG2257	2500	240v	7-3/8	10.50	9.50	
FTG2307	3000	240v	8-15/16	10.50	9.50	
FTG2457	4500	240v	11-11/16	10.00	9.50	
FTG1107L	1000	120V	7-11/16	6.90	6.40	
FTG1157L	1500	120V	7-11/16	Use FTG1153L - Same Density		




3620

SLIP-X BATH SAFETY TREADS					
Model	Description	Carton Qty	Carton Wt	Each Shelf Carton	Each Master Carton
3620	White Non-Slip – 7-1/2x3/4 Display Pack - 6 Strips Resilient, Mildew Resistant	12 48	2.2# 9#	3.95 (12)	3.65 (48)

Prepaid Special - 48 Units

**THERMOCOUPLE
REPLACEMENT KITS**
ALL COPPER (No Aluminum)
Stainless Steel Tip with
Fittings - Carded



233
SERIES

MODEL	LENGTH	STD. QTY.	STD. WT.	EACH	10 OF A MODEL	100 UNITS PREPAID
233-12	12"	10/100	1.2# 13.5#	3.98	3.68 (10)	3.28
233-18	18"	10/100	1.4# 16#	4.10	3.80 (10)	3.40
233-24	24"	10/100	1.5# 15.5#	4.30	3.95 (10)	3.55
233-30	30"	10/100	1.7# 18#	4.70	4.20 (10)	3.70
233-36	36"	10/100	1.8# 20#	4.85	4.45 (10)	3.95
233-48	48"	10/100	2# 22#	5.60	4.90(10)	4.35
233-72	72"	10/100	2.6# 27#	7.60	7.10 (10)	6.80
233-MV	600/750 millivolt W/PG9 adapter	10/100	1.7# 17.5#	20.45	19.50 (10)	18.75

CHATHAM CAULKERS

For Indoor or Outdoor Use – Permanently Flexible -60°F TO +400°F
 Waterproof, Weatherproof, Insulates Electrically and Thermally – Room Temperature Vulcanizing.
 Meets Federal Specification TT-S-00230C/ASTMC-920 and TT-S-001543A



CHATHAM SILICONE CONSTRUCTION CAULKERS - 10.3 FL. OZ.					
12 to a Carton - 24 to a Master					
Model	Description	Master Qty.	Ctn. Wt.	Special Features	Distributor Cost in Master Cartons
12W	White	24	21#	Mildew Resistant Non-Yellowing Indoor/Outdoor FDA – NSF	3.90 (12) Shelf Carton 3.70 (24) PREPAID 3.50 (96) PREPAID 3.29 (240) PREPAID 3.19 (600) PREPAID
12C	Clear (Translucent)	24	21#	USDA – FDA – NSF	
12A	Aluminum	24	21#	USDA – FDA – NSF	
CHATHAM HIGH TEMPERATURE - RED SILICONE CAULKERS - 10.3 FL. OZ.					
12 to a Carton - 24 to a Master					
Equivalent to Dow 736 - GE RTV 106 - Boss 326					
12RED	Red - High Temperature	24	21#	NSF Approved for 500°F	5.95 (12) PREPAID 5.55 (24) PREPAID



CHATHAM SILICONE SEAL (Carded) – 2.8 FL. OZ.				
12 to a Carton - 48 to a Master				
Same Specifications as Chatham Caulkers – USDA/FDA/NSF				
Model	Description	Distributor Cost Each	Distributor Cost in Cartons	Distributor Cost Each 432 Assorted Prepaid
3W	White Mildew Resistant FDA/NSF	2.50 (12)	2.35 (48) PREPAID	2.20
3C	Clear USDA/FDA/NSF	2.50 (12)	2.35 (48) PREPAID	2.20

GE SILICONE CONSTRUCTION CAULKERS – 10.3 FL. OZ.

Meets Federal Specification TT-S-00230C/ASTMC-920 and TT-S-001543A
 Now USDA – FDA – NSF Listed



24 to a Carton - Minimum Shipment 24 of a Color



Model	Description	Master Qty.	Ctn. Wt.	Distributor Cost Each in Carton
GE1702	White Mildew	24	21#	3.90 (12) Shelf Carton 3.65 (24) PREPAID 3.50 (96) PREPAID 3.30 (240) PREPAID
GE1701	Clear (Translucent)	24	21#	
GE1097	BRONZE	24	21#	
GE1003	BLACK	24	21#	
GE1705	Bisque / Almond	24	21#	



RECTORSEAL metacaulk® FIRESTOPPING PRODUCTS

RECTORSEAL FIRESTOP CAULKERS – 10.3 FL. OZ.

24 to a Master

Model	Description	Distributor Cost Each in Master Carton (QTY)
METACAULK 1000	COMMERCIAL Red Firestop	8.95 (24) PREPAID 8.70 (144) PREPAID
Rectorseal RS-136	RESIDENTIAL Red Firestop	5.55 (24) PREPAID