










D 6/8.ADO.1	D 6/8.ADO.2	D 6/8.ADO.4	D 6/8.ADO.C
Spacing 8 mm +0,05 .315"	Spacing 8 mm +0,05 .315"	Spacing 8 mm +0,05 .315"	Spacing 8 mm +0,05 .315"
			
Grey  0199 046.21	Grey  0199 155.23	Grey  0199 157.25	Grey  0199 156.24
D 6/8.ADO with partition	D 6/8.ADO.1 equipped with DIA. 2 mm test socket for test	D 6/8.ADO.1 equipped with DIA. 4 mm test socket for test	D 6/8.ADO.1 equipped with DIA. 2,5 mm flexible test socket for connector - (2)

Part numbers	Part numbers	Part numbers	Part numbers	Part numbers
	0199 336.20 0199 338.02 0199 339.02	0199 336.20 0199 338.02 0199 339.02	0199 336.20 0199 338.02 0199 339.02	0199 336.20 0199 338.02 0199 339.02
	0163 043.21 0163 261.00 0163 240.17 0173 060.00 0007 865.26 0167 860.01	0173 060.00 0007 865.26	0173 060.00 0007 865.26 0167 860.01	0173 060.00 0007 865.26
(3)	0168 520.05 0168 521.22 0168 522.23 0168 523.24 0168 974.00 0176 669.11 0176 670.13 0176 671.00 0176 672.01 0176 673.02 0174 789.05 0168 604.16 0299 694.04 0299 695.05 0299 696.06 0299 697.07 0299 698.10 0299 699.11 0299 700.26 0299 701.13 0299 702.14 0199 466.23			
(3)	0174 448.07			
(2)(3)	0179 623.03			
(2)(3)	0179 625.05			
(2)(3)	0174 782.26			
(3)	0173 627.21	0116 538.17	0116 538.17	0116 538.17
	0116 538.17 0116 539.10 0116 540.25 0116 540.25 0163 313.24 0163 427.17 0163 428.20 0163 433.15 0114 205.20 0114 205.20 0179 466.06 0178 944.04 0178 944.04 0205 710.11 0205 710.11 0205 284.03 0205 284.03 0205 721.00	0116 539.10 0116 540.25 0163 313.24 0114 205.20 0179 466.06 0178 944.04 0205 710.11 0205 284.03 0205 721.00	0116 539.10 0116 540.25 0163 313.24 0114 205.20 0179 466.06 0178 944.04 0205 710.11 0205 284.03 0205 721.00	0116 539.10 0116 540.25 0163 313.24 0114 205.20 0179 466.06 0178 944.04 0205 710.11 0205 284.03 0205 721.00

Various applications

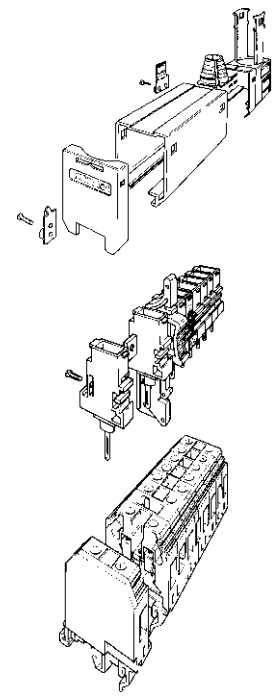

D 6/8.ADO.C terminal blocks, equipped with DIA. 2,5 mm test socket, receive a connector. See Accessories section .

BJDP1 is used for the interconnection with terminal block series "M": spacing 16 mm.

BJDP3 is used for the interconnection with terminal block series "M": spacing 12 mm.

BJDP5 is used for the interconnection with terminal block series "M": spacing 10 mm.

(12) RTM7 (17) RC810 (25) RCAL85 (12) RTM7 (17) RC810 (25) RCAL85 (12) RTM7 (17) RC810 (25) RCAL85 (12) RTM7 (17) RC810 (25) RCAL85 (12) RTM7 (17) RC810 (25) RCAL85

(2) See column : "Various applications".
(3) Use of these accessories requires the user to cut out the partition.