


Suspension Clamp

By ANDERSON
Catalog # [TSCHT200](#)

"Tees Bolted, Connecting Cable Main to Cable Tap, Cable Main- AAC-600-900 MCM, ACSR-556.5-795 MCM, Cable Tap- AAC-350-600 MCM, ACSR- 336.4-477 MCM, Material: Castings- Aluminum Alloy Hardware- Aluminum Alloy"

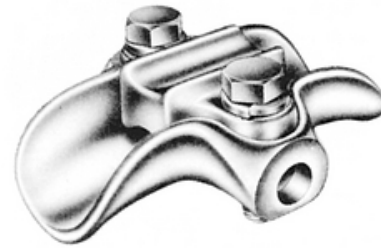

*Representative Image

Features

- "Keeper is reversible for proper fit on different size conductors
- Anti-static spring can be supplied by adding "ARIC" to catalog number. Example, TSCHT200ARIV
- Permanent marks include the IEC standard symbol for HOT surface"

General

Bolt Installation Torque (Recommended)	300 in-lbs
EU RoHS Indicator	No
Material - Clamp	High Temperature Aluminum Alloy
Material - Hardware	Galvanized Steel
Product Category	Trunnion Clamp
Strength Rating - Ultimate Body	2800 lb
Type	Standard Voltage Suspension Clamps
UPC	096359363378
With Anti-Static Springs	No

Dimensions

Angle - Take-Off Maximum	20 °
Bolt Diameter	0.500 in
Clamping - Maximum	2 in
Clamping - Minimum	1.5 in
Diameter - Insulator Attachment Holes	0.59375 in
Length	5.25 in
Weight	1.54 lb
Width	3.875 in

Electrical Ratings

Voltage Application	Standard
---------------------	----------

Conductor Related

Clamping Range	1.5- 2
Conductor Compatibility	ACSR-Cuckoo-795-24/7;ACSS-Teal-605-30/19;ACSS-Rook-636-24/7;ACSS-Grosbeak-636-26/7;ACSS-Egret-636-30/19;ACSS-Flamingo-666.6-24/7;ACSS-Gannet-666.6-26/7;ACSS-Stilt-715.5-24/7;ACSS-Starling-715.5-26/7;ACSS-Redwing-715.5-30/19;ACSS-Drake-795-26/7;ACSS-Tern-795-45/7;ACSS-Condor-795-54/7;ACSS-Mallard-795-30/19;ACSS-Ruddy-900-45/7;ACSS-Canary-900-54/7;ACSS-Rail-954-45/7;ACSS-Canvasback-954-30/19;ACSS-Ortolan-1033.5-45/7;ACSS-Bluejay-1113-45/7;ACSS-Cardinal-954-54/7

Product Assets

[Catalogs - Transmission Connectors Catalog - Full \(CA05063E\)](#)

[Literature - Ropes Course Industry Letter \(April 2021\)](#)

[Sales Drawings - TSC and TSCHT Product Family](#)

