

Connectors

PRODUCT CATALOG
2015 EDITION



More than 70 years of high-quality products and unmatched customer service

Richards Manufacturing Company has been a trusted supplier of electrical and natural gas distribution products since 1944. Our philosophy has remained the same to this day—we demand excellence in every product we design, test and manufacture. We are dedicated to providing outstanding customer support to satisfy every inquiry, no matter how small.

Within this catalog, you will find a wide selection of electrical distribution products that make up our Connector Product Line. These products represent many decades of engineering and manufacturing excellence. As a family owned and operated business, we have the flexibility to offer solutions to address the special requirements of our diverse customer base. If you do not find what you're looking for in this catalog, please contact the factory to discuss your specific requirements.

Also, from the Richards Manufacturing family:

Network Protectors

Richards is the largest supplier of Network Protectors in the world. We manufacture several designs of Network Protectors from 800 through 5100 Amperes. In addition, we recondition utility-owned units and provide a complete array of replacement components.

Medium Voltage

Richards designs, tests, and manufactures medium voltage power cable accessories for use through 35kV. Our facility utilizes advanced injection molding processes and a state-of-the-art high voltage test lab to make a product that is both cost-competitive and reliable. In addition to "standard" products, our selection includes a number of innovative solutions that were designed to solve specific industry issues.

Natural Gas

Richards Manufacturing Company supplies natural gas utilities with a wide variety of Meter Connections and Accessories, Manifold Assemblies, and Prefabricated Meter Assemblies.

Electronic Technology, Inc. (ETI)

ETI is our sister company with extensive engineering and manufacturing capabilities. ETI's products include Microprocessor Network Protector Relays (MNPR®), Microprocessor Capacitor Bank Controls, and power line carrier communication equipment. More than 20 major utilities worldwide depend on ETI's MNPR® to automate their underground networks.

ETI also designs custom solutions for automating entire underground network distribution systems. These custom solutions incorporate information from sensors and MNPR® relays, and provide a means of transmitting, reporting, storing and displaying that data.

TABLE OF CONTENTS

ALUMINUM COMPRESSION LUGS	SERIES	PAGE
Short-Barrel Aluminum Lugs (One- & Two-Hole)	SAL Series	3
Short-Barrel Aluminum Lugs	SAL Series (continued)	4
One-Hole Aluminum Lugs	AL Series	5
One-Hole Aluminum Lugs	AL Series (continued)	6
Straight & Stacking One-Hole Aluminum Lugs – Common Die	ALCD & ASLCD Series	7
Straight & Stacking Two-Hole Aluminum NEMA Lugs	AL-N Series	8
Straight & Stacking Two-Hole Aluminum NEMA Lugs	AL-N Series (continued)	9
Straight & Stacking Two-Hole Aluminum NEMA Lugs – Common Die	ALCD-N Series	10
Tapered Aluminum Lugs	TAL Series	11
Tapered Aluminum Lugs	TAL Series (continued)	12
Pin Terminals	APT Series	13
Four-Hole Aluminum NEMA Lugs	AL-4N Series	14
COPPER COMPRESSION LUGS	SERIES	PAGE
Short-Barrel Copper Lugs	SCL Series	17
Short-Barrel Copper Lugs	SCL Series (continued)	18
One-Hole Copper Lugs	CL Series	19
One-Hole Copper Lugs	CL Series (continued)	20
Straight & Stacking Two-Hole Copper NEMA Lugs	CL-2N & CSL-2N Series	21
Straight & Stacking Two-Hole Copper NEMA Lugs	CL-2N & CSL-2N Series (continued)	22
Four-Hole Copper Lugs	CL-4N Series	23
Heavy-Duty Copper Lugs	HDCL Series	24
Tapered Copper Lugs	TCL Series	25
Tapered Copper Lugs	TCL Series (continued)	26
One-Hole Peephole Copper Lugs	CL-P Series	27
One-Hole Peephole Copper Lugs	CL-P Series (continued)	28
Two- & Four-Hole Peephole Copper NEMA Lugs	CL-N-P Series	29
Mechanical Copper Lugs	ML Series	30
Angled Copper Lugs	CL-2N-90 Series	31
Shrouded Copper Lugs	CL-66 Series	32
Copper Pin Terminals	CPT Series	33
Ring Bus Copper Lugs Assembly	MT Series	34
ALUMINUM COMPRESSION CONNECTORS	SERIES	PAGE
Short Aluminum Splices	SALC Series	37
Aluminum Splices	ALC Series	38
Aluminum Splices – Common Die	ALCCD Series	39
Tapered Aluminum Splices	OATC Series	40
Tapered Aluminum Splices – Common Die	OATCCD Series	41
Aluminum Tees	ALT Series	42
Aluminum Tapered Tees	ALTT Series	43
Aluminum Tapered Tees	ALTT Series (continued)	44
Aluminum Reducers	ALCR Series	45
Tapered Aluminum Reducers	OATCR Series	46
Aluminum Reducers – Common Die	ALCRCD Series	47
COPPER COMPRESSION CONNECTORS	SERIES	PAGE
Short Copper Splices	SCC Series	51
Copper Splices	CC Series	52
Tapered Copper Splices	TCC Series	53
Straight Oil-Stop Copper Splices	OCC Series	54
Tapered Oil-Stop Copper Splices	OTCC Series	55
Copper Compression Tees	CCT Series	56
Tapered Copper Compression Tees	TCCT Series	57
Copper Compression Reducers	CCR Series	58
Tapered Copper Compression Reducers	TCCR Series	59
Oil-Stop Copper Compression Reducers	OCCR Series	60
Oil-Stop Tapered Copper Compression Reducers	OTCCR Series	61
Corrugated Copper Reducing Adapters	CRA Series	62

SPLIT TINNED CONNECTORS	SERIES	PAGE
Split Tinned Straight Connectors	.RSS Series	65
Split Tinned Concentric Reducing Connectors	.CR Series	66
Split Tinned Branch Connectors – Full Duplex	.FD Series	67
Split Tinned Branch Connectors – Half Duplex	.HD Series	68
Split Tinned Tee Connectors	.ST Series	69
Lead Splicing Sleeves	.LS Series	70

DISTRIBUTION EQUIPMENT	SERIES	PAGE
Bronze Vise Connectors – Jaws Overlap	.VC Series	73
Aluminum Hot-Line Clamps	.AHLC Series	74
Bronze Hot-Line Clamps	.BHLC Series	75
Aluminum Hot-Line Clamps	.AHLC-397 Series	76
Aluminum Parallel Clamps With Plastic Covers	.APC Series	77
Aluminum & Bronze Stirrup Connectors	.ASC & BSC Series	78
Aluminum Clamshell Stirrups	.BCASC Series	79
Bronze Vise Connectors – Jaws Meet	.VC-H Series	80
Tank Ground Connectors	.RTG Series	81
Service Drop Connectors	.RSD Series	82
Mid-Span Clamps	.SDC & SEC Series	83
Neutral Dead Ends	.RDE Series	84
Stirrups	.RST Series	85
Overhead Bail Clamps	.RB Series	86
Bolted Wedge Connectors	.RBWC Series	87
Bronze Parallel Vise Connectors	.VC-80XX Series	88
Pedestal Connectors	.PC371105 Series	89
Acorn Ground Clamps	.ACRN Series	90
Neutral-Span Clamps	.R07-1285 Series	91
Underground Residential Distribution Multi-Splice	.URD Series	92
Fiber Optic Clamp	.RAFOB Series	93
Fiber Optic Offset Bracket	.RFB Series	94

UNDERGROUND EQUIPMENT	SERIES	PAGE
Bare Crab Joints For Joining Bare Neutral Cables	.FJB Series	97
Insulated Crab Joints	.FJI Series	98
Insulated Crab Joints – No Tape Type	.FJINT Series	99
Fusible Crab Joints – Tower Joints	.TWJ Series	100
Tower Joint Accessories – Cable End Caps & Shells	.TWJA Series	101
High-Temperature Filler Shell	.TWJA Series	101
Tower Joint Accessories – Insulating Sleeves & Caps	.TWJS Series	102
Insulating Sleeves For Use With “TWJ” Series Fusible Crab Joints	.TWJS Series	102
Fusible Crab Joints With Pigtails	.CJLP Series	103
Crab Joints With Pigtails	.SJ Series	104
Mole Limiter Assembly	.RMLA Series	105
Cable-To-Cable IN-LINE Limiter	.CCLA Series	106
Cable-To-Cable Limiter Assembly	.CCLA Series	107
Cable-To-Cable Limiters	.CCL Series	108
Two-Piece Cable-To-Cable Limiter Insulating Sleeves	.LS Series	109
High-Temperature Filler Shell For Cable-To-Cable Limiters	.ALS Series	109
Limiter Lug Assembly	.CLLA Series	110
Limiter Lugs	.CLL Series	111
Limiter Lug Accessories – Insulating Sleeves & Shells	.LLS Series	112
High-Temperature Filler Shells For Limiter Lugs	.ALLS Series	112
Ring bus Limiter Lug Assembly	.CLLA Series	113
Network Protector Terminals	.NPT Series	114
Network Protector Terminals	.NPT Series (continued)	115
Accessories For Network Protector Terminals		115
Disconnect Network Protector Terminals	.NPT-DISC Series	116
Disconnect Legs For Disconnect Network Protector Terminals	.RDL Series	117
Protector Fuses – Low-Loss “S” Fuse	.LLF Series	118
Network Protector Fuses – “Z” Fuse	.NPF-Q Series	119
Network Protector Fuses – “Y” Fuse	.NPF-L Series	120
Lead Alloy Network Protector Fuses – Laminated Type – Standard Speed	.Alloy Fuse Series	121
Lead Alloy Network Protector Fuses – Laminated Type – Time Lag	.Alloy Fuse Series (continued)	122

Lead Alloy Network Protector Fuses – Non-Laminated Type (Single Layer)	.NF Series	123
Copper Link Fuses	.NWP Series	124
Copper Braids	.CB Series	125
Secondary Spades	.TRSS Series	126
Set Screw Connectors	.SSCRW Series	127
Joint Casings	.JC Series	128
Cable Rack Arms	.RA Series	129
Stanchions	.RA Series	130
Standard Cable Rack Arms	.SRA Series	131
Pigtail Plug	.PTP Series	132
Secondary Cold-Shrink Splice	.PSCS Series	133
Lifting Hooks	.RLH Series	134
Insulated T-Wrench		135

POLE LINE HARDWARE	SERIES	PAGE
Eyelets	.RENUT Series	139
“J” Hooks	.RJH Series	140
Single-Position Equipment Brackets	.LPB Series	141
Grid Gains & Crossarm Gains	.RGG & RCG Series	142
Crossarm Support Gains	.RCSG Series	143
Pole-Eye Plates	.RPEP Series	144
Guy Hooks	.RGH Series	145
Aerial Clamps	.RAC Series	146
Turnbuckles	.RTB Series	147
Pole-Top Extensions	.RPTA Series	148
Three-Hole Messenger Clamps	.RSC1204 Series	149
Heavy-Duty Messenger Clamps	.RHDC Series	150

RUBBER PRODUCTS	SERIES	PAGE
Cable End Caps	.CCAP Series	153
Insulated Connector Covers	.348 Series	154
Wildlife Protectors – Plastic	.RWP Series	155
Wildlife Protectors – Rubber	.BG Series	156

REFERENCE	SERIES	PAGE
Index		158

Aluminum Compression Lugs




ALUMINUM COMPRESSION LUGS	SERIES	PAGE
Short-Barrel Aluminum Lugs (One- & Two-Hole)	SAL Series	3
Short-Barrel Aluminum Lugs	SAL Series (continued)	4
One-Hole Aluminum Lugs	AL Series	5
One-Hole Aluminum Lugs	AL Series (continued)	6
Straight & Stacking One-Hole Aluminum Lugs – Common Die	ALCD & ASLCD Series	7
Straight & Stacking Two-Hole Aluminum NEMA Lugs	AL-N Series	8
Straight & Stacking Two-Hole Aluminum NEMA Lugs	AL-N Series (continued)	9
Straight & Stacking Two-Hole Aluminum NEMA Lugs – Common Die	ALCD-N Series	10
Tapered Aluminum Lugs	TAL Series	11
Tapered Aluminum Lugs	TAL Series (continued)	12
Pin Terminals	APT Series	13
Four-Hole Aluminum NEMA Lugs	AL-4N Series	14

SHORT-BARREL ALUMINUM LUGS (ONE- & TWO-HOLE)

SAL Series

- Made of high-conductivity aluminum – tin plated.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- For NEMA standards or any other special size requirements.

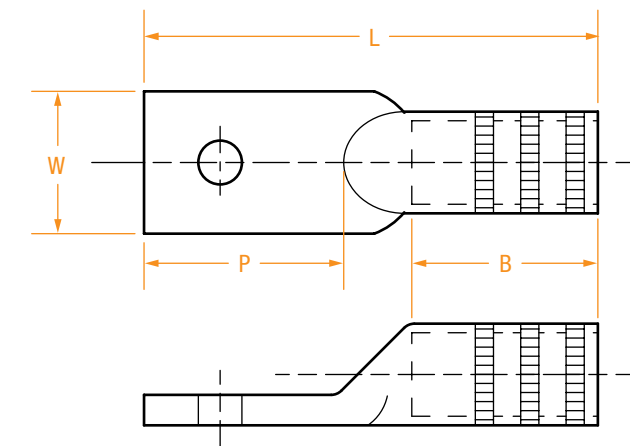

PART NUMBER*	WIRE SIZE	# OF HOLES	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES			
					B	L	P	W
SAL3	#6	1	1/4	5/16, 346, TP	3/4	1-3/4	5/8	5/8
SAL5	#4	1	5/16	TB, 375	7/8	2-3/16	13/16	13/16
SAL7	#2	1	3/8	TQ, 348, 1/2	1-1/8	2-1/2	7/8	7/8
SAL8	#1	1	3/8	TQ, 348, 1/2	15/16	2-9/16	1-1/8	3/4
SAL9	1/0	1	3/8	TU, BG, 5/8	1	2-9/16	1-1/8	13/16
SAL9-2N	1/0	2	3/8	TU, BG, 5/8	1	3-5/8	2-3/16	13/16
SAL10	2/0	1	1/2	TWTY, 297, 5/8-1	1-1/8	2-15/16	1-5/16	15/16
SAL10-2N	2/0	2	1/2	TWTY, 297, 5/8-1	1-1/8	4-11/16	3-1/16	15/16
SAL11	3/0	1	1/2	TV, 467, 781	1-1/4	3-3/16	1-5/16	1-1/16
SAL11-2N	3/0	2	1/2	TV, 467, 781	1-1/4	4-15/16	3-1/16	1-1/16
SAL12	4/0	1	1/2	TX, 298, 840	1-5/16	3-5/16	1-5/16	1-3/16
SAL12-2N	4/0	2	1/2	TX, 298, 840	1-5/16	5-1/16	3-1/16	1-3/16
SAL13	250	1	1/2	TX, 840, 324	1-7/16	3-7/16	1-5/16	1-1/4
SAL13-2N	250	2	1/2	TX, 840, 324	1-7/16	3-5/8	3-3/4	1-3/16
SAL14	300	1	1/2	TH, 470, 1	1-1/2	3-7/8	1-5/16	1-3/8
SAL14-2N	300	2	1/2	TH, 470, 1	1-1/2	5-5/16	3-1/16	1-3/8
SAL15	350	1	5/8	96, 299, 1-1/8	1-5/8	4-1/8	1-5/16	1-1/2
SAL15-2N	350	2	5/8	96, 299, 1-1/8	1-5/8	4-7/8	3-1/16	1-1/2
SAL16	400	1	5/8	96, 472, 1-1/8	1-13/16	4-7/8	1-9/16	1-5/8
SAL16-2N	400	2	5/8	96, 472, 1-1/8	1-13/16	6-1/4	3-9/16	1-5/8
SAL18	500	1	5/8	106A, 300, 1-5/16	1-7/8	5-1/16	1-13/16	1-13/16
SAL18-2N	500	2	5/8	106A, 300, 1-5/16	1-7/8	6-7/16	3-9/16	1-13/16

(continued)

SHORT-BARREL ALUMINUM LUGS


SAL Series (continued)

PART NUMBER*	WIRE SIZE	# OF HOLES	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES			
					B	L	P	W
SAL20	600	1	5/8	115H, 473, 1-5/16	2	5-5/16	1-13/16	2
SAL20-2N	600	2	5/8	115H, 473, 1-5/16	2	6-5/8	3-9/16	2
SAL22	700	1	5/8	125H, 936, 1-1/2	2-1/4	5-3/4	1-13/16	2-3/16
SAL23-2N	750	2	5/8	125H, 936, 1-1/2	2-1/4	7-1/16	3-9/16	2-3/16
SAL24	800	1	5/8	140H, 474, 1-1/2	2-5/16	5-7/8	1-13/16	2-1/4
SAL24-2N	800	2	5/8	140H, 474, 1-1/2	2-5/16	7-1/8	3-9/16	2-1/4
SAL28	1000	1	5/8	150H, 302, 1-3/4	2-9/16	6-5/16	1-13/16	2-9/16
SAL28-2N	1000	2	5/8	150H, 302, 1-3/4	2-9/16	7-7/16	3-9/16	2-9/16
SAL30	1500	1	3/4	478, 189	3-3/16	7-9/16	2-1/16	3-1/16
SAL30-2N	1500	2	3/4	478, 189	3-3/16	8-7/16	3-9/16	3-1/16
SAL32	2000	1	3/4	479, 225	3-11/16	8-3/8	2-1/16	3-1/2
SAL32-2N	2000	2	3/4	479, 225	3-11/16	9-1/4	3-9/16	3-1/2

ONE-HOLE ALUMINUM LUGS

AL Series

- Made of high-conductivity aluminum – tin plated.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- For NEMA standards or any other special size requirements.

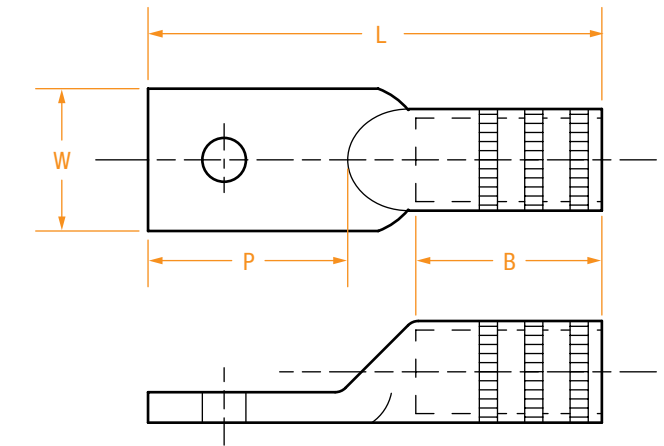

PART NUMBER*	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES			
				B	L	P	W
AL3-1/4	6	1/4	5/16, 346, TP	13/16	2-5/32	7/8	9/16
AL5-1/4	4	1/4	TB, 375	1	2-1/2	23/32	21/32
AL7-1/4	2	1/4	TQ, 348, 1/2	1	2-1/2	23/32	21/32
AL9-3/8	1/0	3/8	TU, BG, 5/8	1-1/4	3-3/16	1-1/4	7/8
AL9	1/0	1/2	TU, BG, 5/8	1-1/4	3-3/16	1-1/4	7/8
AL10-3/8	2/0	3/8	TWTY, 297, 5/8-1	1-3/8	3-3/16	1-1/4	15/16
AL10	2/0	1/2	TWTY, 297, 5/8-1	1-3/8	3-3/16	1-1/4	15/16
AL11-3/8	3/0	3/8	TV, 467, 781	1-1/2	3-7/16	1-5/16	1-1/16
AL11	3/0	1/2	TV, 467, 781	1-1/2	3-7/16	1-5/16	1-1/16
AL12-3/8	4/0	3/8	TX, 298, 840	1-1/2	3-9/16	1-5/16	1-3/16
AL12	4/0	1/2	TX, 298, 840	1-1/2	3-9/16	1-5/16	1-3/16
AL13	250	1/2	TX, 840, 324	1-5/8	3-5/8	1-5/16	1-1/4
AL14	300	1/2	TH, 470, 1	2-1/4	4	1-5/16	1-3/8
AL15	350	1/2	96, 299, 1-1/8	2-1/4	4-1/4	1-5/16	1-1/2
AL16	400	1/2	96, 472, 1-1/8	2-1/2	4-7/8	1-1/4	1-5/8
AL16-5/8	400	5/8	96, 472, 1-1/8	2-1/2	4-7/8	1-1/4	1-5/8
AL18	500	1/2	106A, 300, 1-5/16	3	5-7/16	1-1/2	1-3/4
AL18-5/8	500	5/8	106A, 300, 1-5/16	3	5-7/16	1-1/2	1-3/4
AL20	600	1/2	115H, 473, 1-5/16	3	5-7/16	1-1/2	1-15/16
AL20-5/8	600	5/8	115H, 473, 1-5/16	3-1/16	5-11/16	1-9/16	1-15/16

(continued)

* For untinned lugs, add "-NT" from the part number (example: SAL3-NT for a #6 untinned lug with a 1/4" bolt).

ONE-HOLE ALUMINUM LUGS


AL Series (continued)

PART NUMBER*	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES			
				B	L	P	W
AL23	700-750	1/2	125H, 608, 1-1/2	3-3/8	6-1/2	1-7/8	1-3/4
AL23-5/8	700-750	5/8	125H, 608, 1-1/2	3-3/8	6-1/2	1-7/8	1-3/4
AL24	800	1/2	140H, 474, 1-1/2	3-3/8	6-5/8	1-7/8	1-13/16
AL24-5/8	800	5/8	140H, 474, 1-1/2	3-3/8	6-5/8	1-7/8	1-13/16
AL28	1,000	1/2	150H, 725, 1-3/4	4-5/8	7-7/8	1-7/8	2-9/16
AL28-5/8	1,000	5/8	150H, 725, 1-3/4	4-5/8	7-7/8	1-7/8	2-9/16

STRAIGHT & STACKING ONE-HOLE ALUMINUM LUGS – COMMON DIE

ALCD & ASLCD Series

- Made of high-conductivity aluminum – tin plated.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.

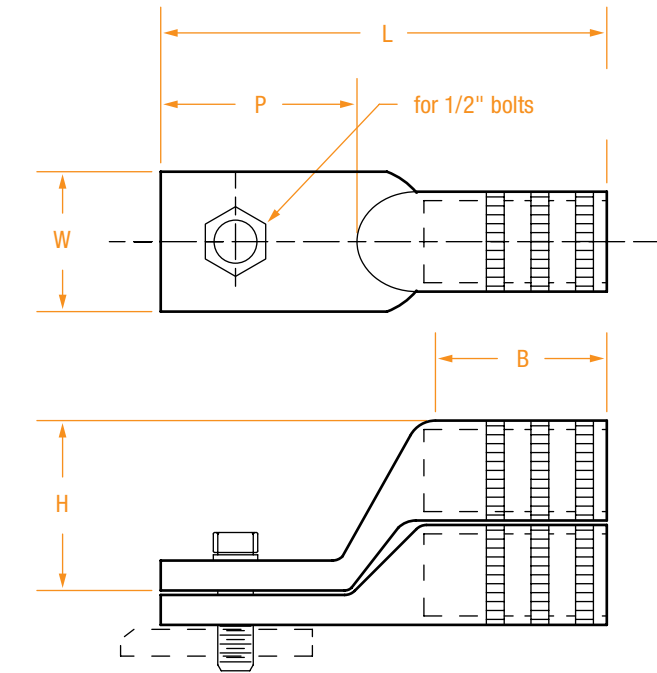

STRAIGHT LUG PART NUMBER*	STACKING LUG PART NUMBER*	CONDUCTOR		INSTALLING DIES	DIMENSIONS IN INCHES				
		CONCENTRIC	COMPACT		B	H**	L	P	W
ALCD2	ASLCD2	8	–	687, 52, BG, TU, 243, 5/8, 8A	1-3/8	1-1/2	3-1/8	1-5/16	7/8
ALCD3	ASLCD3	6	4	687, 52, BG, TU, 243, 5/8, 8A	1-3/8	1-1/2	3-1/8	1-5/16	7/8
ALCD5	ASLCD5	4	–	687, 52, BG, TU, 243, 5/8, 8A	1-3/8	1-1/2	3-1/8	1-5/16	7/8
ALCD7	ASLCD7	2	1	687, 52, BG, TU, 243, 5/8, 8A	1-3/8	1-1/2	3-1/8	1-5/16	7/8
ALCD8	ASLCD8	1	–	687, 52, BG, TU, 243, 5/8, 8A	1-3/8	1-1/2	3-1/8	1-5/16	7/8
ALCD9	ASLCD9	1/0	2/0	687, 52, BG, TU, 243, 5/8, 8A	1-3/8	1-1/2	3-1/8	1-5/16	7/8
ALCD10	ASLCD10	2/0	3/0	249, TX, 76, 658, 840, 324, 11A	1-7/16	1-3/4	3-1/4	1-3/8	1-1/4
ALCD11	ASLCD11	3/0	4/0	249, TX, 76, 658, 840, 324, 11A	1-1/2	1-3/4	3-3/8	1-3/8	1-1/4
ALCD12	ASLCD12	4/0	250	249, TX, 76, 658, 840, 324, 11A	1-1/2	1-3/4	3-3/8	1-3/8	1-1/4
ALCD13	ASLCD13	250	300	249, TX, 76, 658, 840, 324, 11A	1-1/2	1-3/4	3-3/8	1-3/8	1-1/4
ALCD14		300	350	299, 96, 655, 321, 316, 1-1/8	1-5/8	–	3-5/8	1-3/8	1-1/4
ALCD15		350	400	299, 96, 655, 321, 316, 1-1/8	1-5/8	–	3-5/8	1-3/8	1-1/4
ALCD16		400	500	300, 317, 1-5/16, 426	1-5/8	–	3-5/8	1-3/8	1-1/4
ALCD18		500	–	300, 317, 1-5/16, 426	2-1/8	–	3-5/8	1-1/4	1-5/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.


* For untinned lugs, add “-NT” to the part number (example: ALCD2-NT for #8 straight untinned lug).
 ** For stacking lugs only.

* For untinned lugs, add “-NT” to the part number (example: AL3-NT for a #6 untinned lug with a 1/4" bolt).

STRAIGHT & STACKING TWO-HOLE ALUMINUM NEMA LUGS

AL-N Series

- Made of high-conductivity aluminum – tin plated.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- In accordance with all NEMA standards.

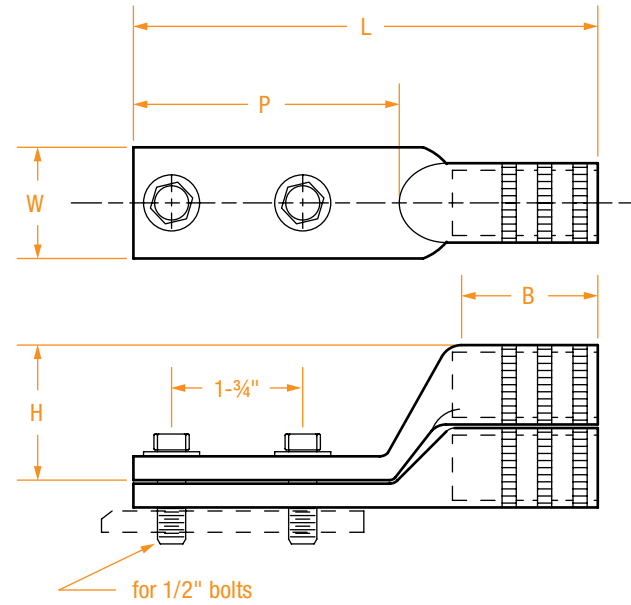

STRAIGHT LUG PART NUMBER*	STACKING LUG PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
				B	H**	L	P	W
AL3-2N	ASL3-2N	6	375, TB	1-1/4	-	4-3/4	3-1/8	7/8
AL5-2N	ASL5-2N	4	375, TB	1-1/4	-	4-3/4	3-1/8	7/8
AL7-2N	ASL7-2N	2	52, BG, 243, 5/8	1-5/8	1-1/2	5-1/4	3-1/8	1
AL8-2N	ASL8-2N	1	52, BG, 243, 5/8	1-1/2	1-1/2	5-1/4	3-1/8	1
AL9-2N	ASL9-2N	1/0	52, BG, 243, 5/8	1-1/2	1-1/2	5-1/8	3-1/8	1
AL10-2N	ASL10-2N	2/0	58, 297, 245, 5/8-1	1-3/4	1-5/8	5-1/2	3-1/8	1
AL11-2N	ASL11-2N	3/0	66, 167, 247, 781	1-7/8	1-3/4	5-5/8	3-1/8	1-1/8
AL12-2N	ASL12-2N	4/0	840, 298, TX	2	1-7/8	5-5/8	3-1/8	1-1/8
AL13-2N	ASL13-2N	250	840, 324, TX	2-1/8	2	6	3-1/8	1-1/8
AL14-2N	ASL14-2N	300	87H, 470, 251, 1	2-1/4	2	6-5/8	3-1/8	1-5/16
AL15-2N	ASL15-2N	350	96, 299, 655, 1-1/8	2-1/4	2-3/8	6-5/8	3-1/8	1-1/2
AL16-2N	ASL16-2N	400	96, 472, 705, 1-1/8	2-1/2	2-1/2	6-5/8	3-1/8	1-5/8
AL18-2N	ASL18-2N	500	106A, 300, 426 1-5/16	3	2-5/8	6-7/8	3-1/8	1-3/4
AL20-2N	ASL20-2N	600	115H, 473, 786 1-5/16	3	2-3/4	7-1/2	3-1/8	1-3/4
AL23-2N	ASL23-2N	700-750	140H, 301, 342, 1-1/2	3-3/8	3	7-1/2	3-1/8	1-3/4
AL24-2N	ASL24-2N	800	140H, 474, 724, 1-5/8	3-13/32	3-1/8	7-1/2	3-1/8	1-3/4

(continued)

STRAIGHT & STACKING TWO-HOLE ALUMINUM NEMA LUGS

AL-N Series (continued)


STRAIGHT LUG PART NUMBER*	STACKING LUG PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
				B	H**	L	P	W
AL28-2N-W	ASL28-2N-W	1,000	161, 302, 727, 1-3/4	4-11/16	3-1/4	9-1/2	3-5/8	2-9/16
AL28-2N	ASL28-2N	1,000	161, 302, 727, 1-3/4	4-5/8	3-1/4	9-1/2	3-5/8	1-3/4
AL29-2N	ASL29-2N	1,250	1-7/8, 727	4-5/8	-	9-5/8	3-5/8	1-3/4
AL30-2N	ASL30-2N	1,500	478	5-9/16	-	10-7/8	3-5/8	3-3/16
AL31-2N	ASL31-2N	1,750	204, 729, 40AH	5-1/2	-	-	3-5/8	3-3/16
AL32-2N	ASL32-2N	2,000	479	6-1/16	-	11-15/16	3-5/8	3-1/2

* For untinned lugs, add "-NT" to the part number (example: AL3-2N-NT for #6 straight untinned lug).
 ** For stacking lugs only.

STRAIGHT & STACKING TWO-HOLE ALUMINUM NEMA LUGS – COMMON DIE

ALCD-N Series

- Made of high-conductivity aluminum – tin plated.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- In accordance with all NEMA standards.

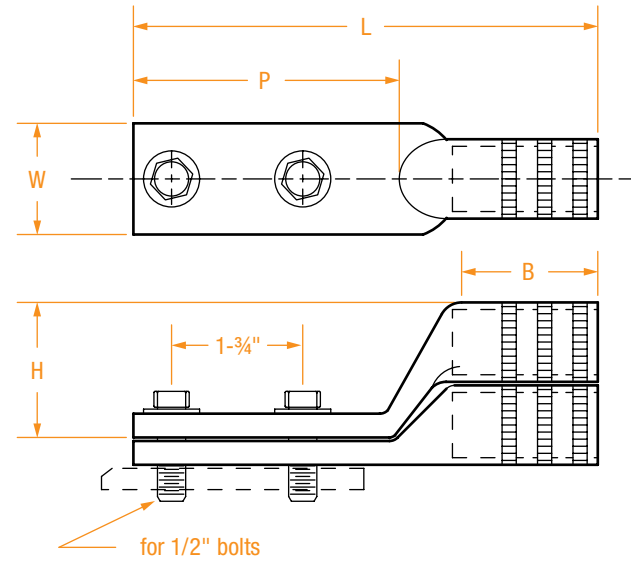

STRAIGHT LUG PART NUMBER*	STACKING LUG PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
				B	H**	L	P	W
ALCD1-2N	ASLCD1-2N	8	TU, 52, BG, 687, 243, 5/8, 8A	1-1/2	1-1/2	5-1/8	3-1/16	1-1/4
ALCD3-2N	ASLCD3-2N	6	TU, 52, BG, 687, 243, 5/8, 8A	1-1/2	1-1/2	5-1/8	3-1/16	1-1/4
ALCD5-2N	ASLCD5-2N	4	TU, 52, BG, 687, 243, 5/8, 8A	1-7/8	1-1/2	5-5/8	3-1/16	1-1/4
ALCD7-2N	ASLCD7-2N	2	TU, 52, BG, 687, 243, 5/8, 8A	1-7/8	1-1/2	5-5/8	3-1/16	1-1/4
ALCD8-2N	ASLCD8-2N	2&1	TU, 52, BG, 687, 243, 5/8, 8A	1-7/8	1-1/2	5-5/8	3-1/16	1-1/4
ALCD9-2N	ASLCD9-2N	1/0	TU, 52, BG, 687, 243, 5/8, 8A	1-7/8	1-1/2	5-5/8	3-1/16	1-1/4
ALCD10-2N	ASLCD10-2N	2/0	TX, 76, 324, 249, 658, 840, 11A	2	1-3/4	5-7/8	3-1/16	1-1/4
ALCD11-2N	ASLCD11-2N	3/0	TX, 76, 324, 249, 658, 840, 11A	2	1-3/4	6-5/16	3-1/16	1-1/4
ALCD12-2N	ASLCD12-2N	4/0	TX, 76, 324, 249, 658, 840, 11A	2	1-3/4	6-5/16	3-1/16	1-1/4
ALCD13-2N	ASLCD13-2N	250	TX, 76, 324, 249, 658, 840, 11A	2	1-3/4	6-5/16	3-1/16	1-9/16
ALCD14-2N	ASLCD14-2N	300	96, 299, 655, 1-1/8	2-1/4	-	6-1/2	3-1/16	1-9/16
ALCD15-2N	ASLCD15-2N	350	96, 299, 655, 1-1/8	2-1/4	-	6-1/2	3-1/16	1-9/16
ALCD16-2N	ASLCD16-2N	400	300, 1-5/16, 317, 426	2-1/2	-	6-1/2	3-1/16	1-5/8
ALCD18-2N	ASLCD18-2N	500	300, 1-5/16, 317, 426	2-3/4	-	6-5/8	3-1/16	1-5/8
ALCD23-2N	ASLCD23-2N	750	302, 1-3/4, 161	3-3/8	-	7-1/8	3-1/16	1-5/8
ALCD24-2N	ASLCD24-2N	800	302, 1-3/4, 161	3-3/8	-	7-1/8	3-1/16	1-5/8
ALCD28-2N	ASLCD28-2N	1000	302, 1-3/4, 161	3-7/8	-	7-5/8	3-1/16	1-5/8


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For untinned lugs, add "-NT" to the part number (example: ALCD2-2N-NT for a #8 straight untinned lug).
 ** For stacking lugs only.

TAPERED ALUMINUM LUGS

TAL Series

- Made of high-conductivity aluminum – tin plated.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- In accordance with all NEMA standards.

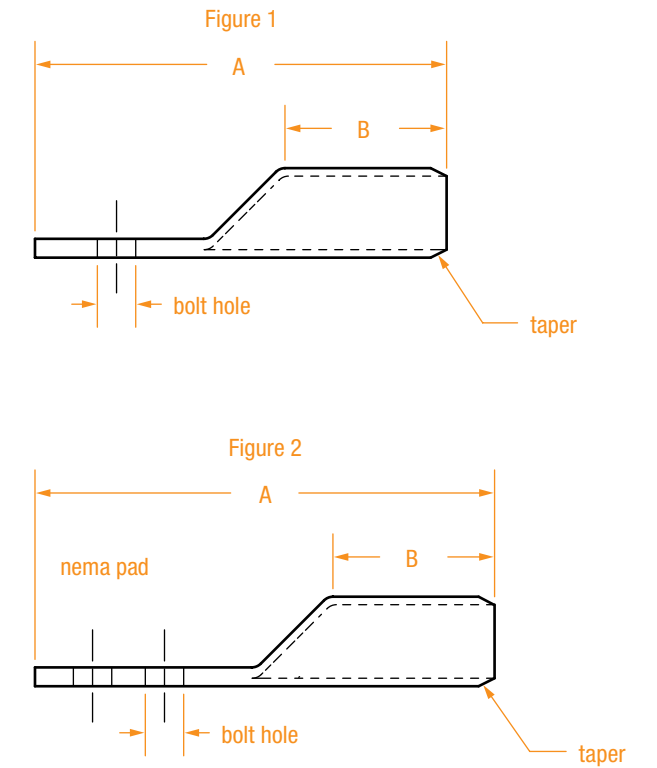

PART NUMBER*	FIGURE	WIRE SIZE	INSTALLING DIES	PAD WIDTH	BOLT HOLE	DIMENSIONS IN INCHES	
						A	B
TAL5	1	4	375, 162, 3/8, 37	11/16	7/16	2-3/16	7/8
TAL7	1	2	239, 348, 1/2, 6A, 42	13/16	7/16	2-1/2	1
TAL8	1	1	243, 296, 5/8, 8A, 49	7/8	7/16	3-3/16	1-1/4
TAL9	1	1/0	243, 296, BG, 5/8, 8A, 49	7/8	7/16	3-3/16	1-1/4
TAL9-2N	2	1/0	243, 296, BG, 5/8, 8A, 49	7/8	9/16	5-9/32	1-1/2
TAL10	1	2/0	245, 297, 5/8-1, 9A, 60	31/32	9/16	3-3/16	1-3/8
TAL10-2N	2	2/0	245, 297, 5/8-1, 9A, 60	31/32	9/16	5-1/2	1-1/2
TAL11	1	3/0	247, 467, 781, 10A, 66	1-1/16	9/16	3-7/16	1-1/2
TAL11-2N	2	3/0	247, 467, 781, 10A, 66	1-1/16	9/16	5-1/2	1-1/2
TAL12	1	4/0	298, 840, 11A, 71	1-1/4	9/16	3-9/16	1-1/2
TAL12-2N	2	4/0	298, 840, 11A, 71	1-1/4	9/16	5-15/16	1-3/4
TAL13	1	250	249, 840, 11A, 71	1-1/4	9/16	3-5/8	1-5/8
TAL13-2N	2	250	249, 840, 11A, 71	1-1/4	9/16	6	1-3/4

(continued)

TAPERED ALUMINUM LUGS

TAL Series (continued)


PART NUMBER*	FIGURE	WIRE SIZE	PAD WIDTH	BOLT HOLE	INSTALLING DIES	DIMENSIONS IN INCHES	
						A	B
TAL14	1	300	1-13/32	9/16	251, 470, 1.00, 12A, 96	4	2-1/4
TAL14-2N	2	300	1-13/32	9/16	251, 470, 1.00, 12A, 96	6-9/16	2-1/4
TAL15	1	350	1-9/16	9/16	299, 321, 1-1/8, 13A, 96	4-1/4	2-1/4
TAL15-2N	2	350	1-9/16	9/16	299, 321, 1-1/8, 13A, 96	6-9/16	2-1/4
TAL16-2N	2	400	1-21/32	9/16	472, 523, 1-1/8, 14A, 106	6-7/8	2-1/2
TAL18-2N	2	500	1-27/32	9/16	300, 317, 1-5/16, 15A, 106	7-5/16	3
TAL20-2N	2	600	2	9/16	473, 525, 1-5/16, 125	7-1/2	3
TAL23-2N	2	750	2-3/16	9/16	301, 527, 1-1/2, 140	8-1/4	3-3/8
TAL24-2N	2	800	2-9/32	9/16	474, 725, 1-5/8, 140	8-1/4	3-3/8
TAL28-2N	2	1,000	2-17/32	9/16	302, 292, 1-3/4, 150	9-5/8	4-5/8
TAL30-2N	2	1,500	3-3/32	9/16	478, 189	10-13/16	5-1/2
TAL32-2N	2	2,000	3-19/32	9/16	479, 225	11-7/8	6

* For untinned lugs, add "-NT" to the part number (example: TAL5-NT for a #4 untinned lug).

PIN TERMINALS

APT Series

- For Aluminum and ACSR cable.
- Fabricated from high-conductivity aluminum and soft-drawn, solid tin-plated copper wire.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- Available in a variety of cable and pin sizes.

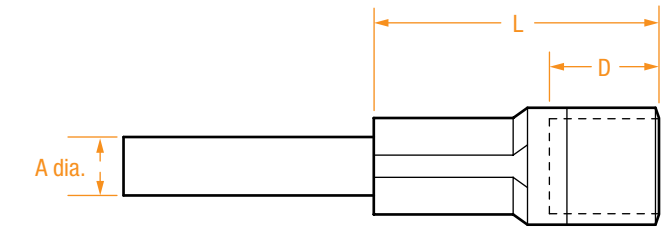

PART NUMBER	ALUMINUM CABLE SIZE	DIE INFORMATION	PIN DIAMETER A	DIMENSIONS IN INCHES	
				L	D
APT7	#2	5/8, 296	0.250	3.25	1.78
APT9	1/0	5/8, 296	0.250	3.25	1.78
APT10	2/0	3/4, 840	0.312	4.22	2.28
APT12	4/0	3/4, 840	0.375	4.22	2.28
APT15	350	1-1/8, 299	0.460	5.25	3.00
APT18	500	140H, 301	0.750	6.30	3.41
APT23	750	140H, 301	0.750	6.30	3.41
APT28	1,000	140H, 301	0.875	6.30	3.41


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

Available with any length pin – standard pin length is 6".

FOUR-HOLE ALUMINUM NEMA LUGS

AL-4N Series


- Made of high-conductivity aluminum – tin plated.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- In accordance with all NEMA standards.

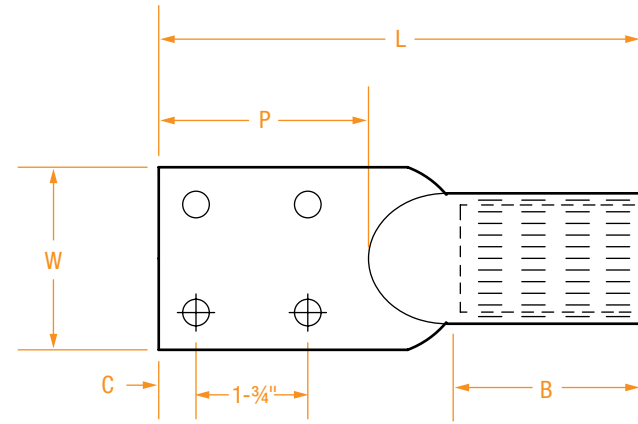

PART NUMBER	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
			B	C	L	P	W
AL15-4N	350	96, 299, 655, 1-1/8	3	5/8	7-5/16	3	3
AL18-4N	500	106A, 300, 426 1-5/16	3	5/8	7-5/16	3	3
AL23-4N	750	140H, 301, 342, 1-1/2	4	5/8	8-1/2	3	3
AL24-4N	800	140H, 474, 724, 1-5/8	4	5/8	8-1/2	3	3
AL28-4N	1,000	161, 302, 727, 1-3/4	5-5/8	5/8	10-3/8	3	3
AL28CR-4N	1,000	161, 302, 727, 1-3/4	6	5/8	11-1/4	3	3
AL29-4N	1,250	1-7/8, 727	6	5/8	11-1/8	3-3/8	3-1/8

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

Copper Compression Lugs

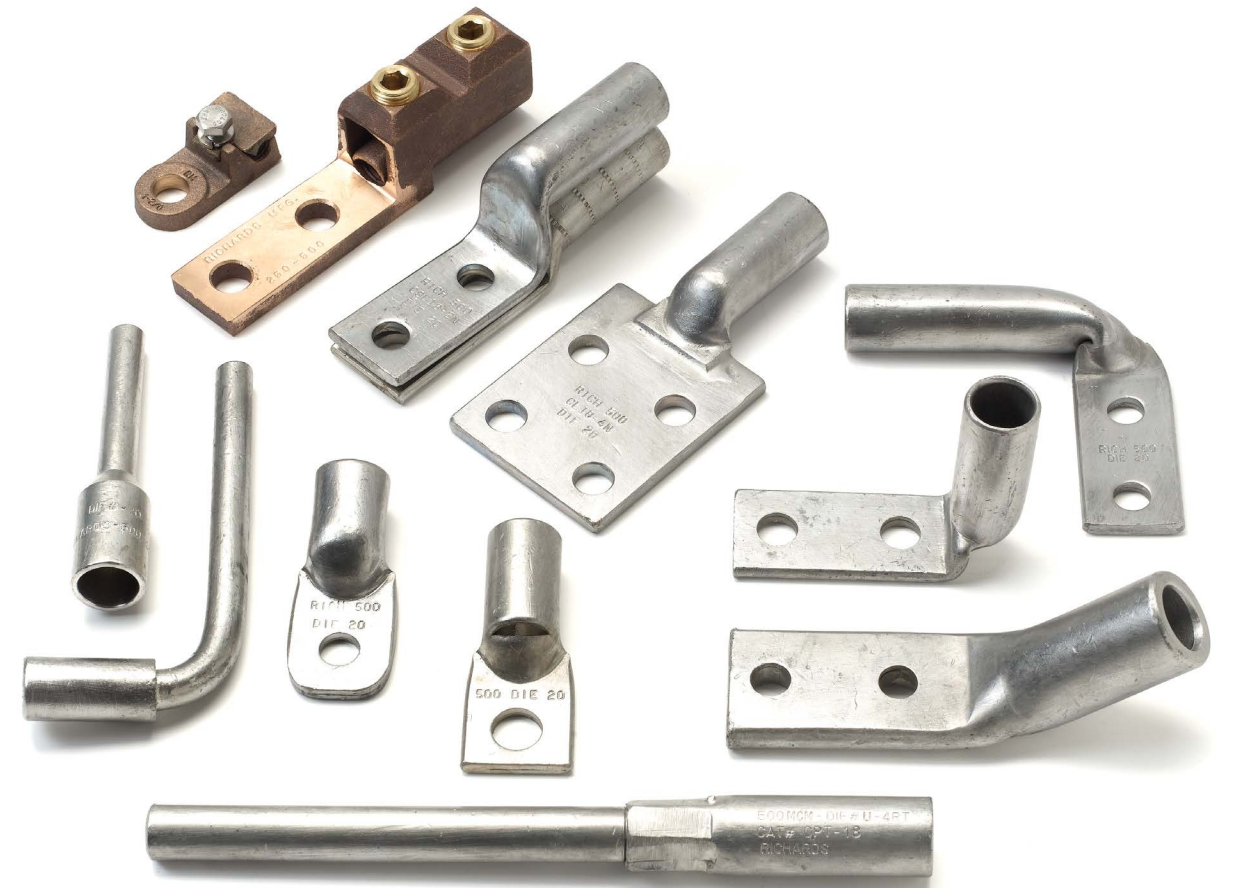


COPPER COMPRESSION LUGS

	SERIES	PAGE
Short-Barrel Copper Lugs	SCL Series	17
Short-Barrel Copper Lugs	SCL Series (continued)	18
One-Hole Copper Lugs	CL Series	19
One-Hole Copper Lugs	CL Series (continued)	20
Straight & Stacking Two-Hole Copper NEMA Lugs	CL-2N & CSL-2N Series	21
Straight & Stacking Two-Hole Copper NEMA Lugs	CL-2N & CSL-2N Series (continued)	22
Four-Hole Copper Lugs	CL-4N Series	23
Heavy-Duty Copper Lugs	HDCL Series	24
Tapered Copper Lugs	TCL Series	25
Tapered Copper Lugs	TCL Series (continued)	26
One-Hole Peephole Copper Lugs	CL-P Series	27
One-Hole Peephole Copper Lugs	CL-P Series (continued)	28
Two- & Four-Hole Peephole Copper NEMA Lugs	CL-N-P Series	29
Mechanical Copper Lugs	ML Series	30
Angled Copper Lugs	CL-2N-90 Series	31
Shrouded Copper Lugs	CL-66 Series	32
Copper Pin Terminals	CPT Series	33
Ring Bus Copper Lugs Assembly	MT Series	34

SHORT-BARREL COPPER LUGS

SCL Series

- Made of seamless copper tubing.
- Tin-plated to resist corrosion.
- Marked with conductor sizes and die information.
- UL listed.

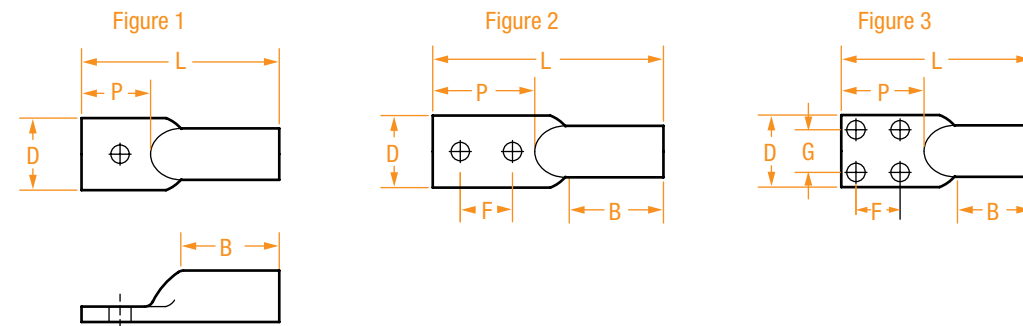

PART NUMBER	FIGURE	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
					L	B	P	D	F & G
SCL3	1	6	8, 9, or 10	J, 7, TE, 24	1-17/32	13/16	17/32	13/32	-
SCL3-1/4	1	6	1/4	J, 7, TE, 24	1-11/16	13/16	11/16	7/16	-
SCL3-5/16	1	6	5/16	J, 7, TE, 24	1-25/32	13/16	23/32	1/2	-
SCL5	1	4	8, 9 or 10	5/16, 8, TP, 29	1-1/2	13/16	1/2	1/2	-
SCL5-1/4	1	4	1/4	5/16, 8, TP, 29	1-3/4	13/16	11/16	1/2	-
SCL5-3/8	1	4	3/8	5/16, 8, TP, 29	1-15/16	13/16	7/8	19/32	-
SCL7-1/4	1	2	1/4	3/8, 10, TL-TN, 33	1-7/8	7/8	7/8	5/8	-
SCL7-5/16	1	2	5/16	3/8, 10, TL-TN, 33	1-7/8	7/8	7/8	5/8	-
SCL7-3/8	1	2	3/8	3/8, 10, TL-TN, 33	1-7/8	7/8	7/8	5/8	-
SCL7-2(3/8)	2	2	3/8	3/8, 10, TL-TN, 33	3	7/8	1-7/8	5/8	1
SCL7-390	1	2	3/8	3/8, 10, TL-TN, 33	1-3/4	7/8	7/8	11/16	-
SCL8-5/16	1	1	5/16	3/8, 11, TB, 37	1-31/32	7/8	25/32	11/16	-
SCL9-5/16	1	1/0	5/16	1/2, 12, TQ, 42	2-1/32	7/8	25/32	3/4	-
SCL9-3/8	1	1/0	3/8	1/2, 12, TQ, 42	2-5/32	7/8	29/32	3/4	-
SCL9-2(5/16)	2	1/0	5/16	1/2, 12, TQ, 42	2-15/16	7/8	1-21/32	3/4	7/8
SCL10-2(1/4)	2	2/0	1/4	9/16, 13, TS, 45	3-1/4	15/16	1-3/4	13/16	7/8
SCL10-2(3/8)	2	2/0	3/8	9/16, 13, TS, 45	3-1/4	15/16	1-3/4	13/16	7/8
SCL10-3/8	1	2/0	3/8	9/16, 13, TS, 45	2-9/32	15/16	29/32	13/16	-
SCL10	1	2/0	1/2	9/16, 13, TS, 45	3	1-1/8	1-3/8	13/16	7/8
SCL10-2N	2	2/0	1/2	9/16, 13, TS, 45	4-15/32	15/16	3	13/16	1-3/4

(continued)

SHORT-BARREL COPPER LUGS


SCL Series (continued)


PART NUMBER	FIGURE	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
					L	B	P	D	F & G
SCL11-2(3/8)	2	3/0	3/8	5/8, 14, TU, 50	3-1/4	1-1/4	1-7/8	15/16	7/8
SCL11-3/8	1	3/0	3/8	5/8, 14, TU, 50	2-3/8	1-1/4	29/32	29/32	-
SCL11-2N	2	3/0	1/2	5/8, 14, TU, 50	4-19/32	1-1/4	3	29/32	1-3/4
SCL12-3/8	1	4/0	3/8	5/8, 15, TW-TY, 54	2-1/2	1-1/4	7/8	1	-
SCL12	1	4/0	1/2	5/8, 15, TW-TY, 54	2-1/2	1-1/4	7/8	1	-
SCL12-2N	2	4/0	1/2	5/8, 15, TW-TY, 54	4-3/4	1-1/4	3	1-1/32	1-3/4
SCL13	1	250	1/2	11/16, 16, TR, 60	2 11/16	1-1/4	1-5/32	1-3/32	-
SCL13-2N	2	250	1/2	11/16, 16, TR, 60	4-3/4	1-1/4	3	1-3/32	1-3/4
SCL14	1	300	1/2	781, 17, TV, 66	2-15/16	1-1/4	1-5/32	1-3/16	-
SCL14-2N	2	300	1/2	781, 17, TV, 66	4-13/16	1-1/4	3	1-3/16	1-3/4
SCL15	1	350	1/2	840, 18, TX, 71	3	1-1/8	1-1/2	1-9/32	-
SCL15-2N	2	350	1/2	840, 18, TX, 71	4-29/32	1-1/8	3	1-9/32	1-3/4
SCL16	1	400	5/8	15/16, 19, TX, 76	3-11/32	1-13/32	1-13/32	1-3/16	-
SCL16-2N	2	400	1/2	15/16, 19, TX, 76	5-1/32	1-3/16	3	1-13/16	1-3/4
SCL18	1	500	5/8	1, 20, TH, 87	3-5/8	1-3/8	1-1/2	1-17/32	-
SCL18-2N	2	500	1/2	1, 20, TH, 87	5-5/16	1-3/8	3	1-17/32	1-3/4
SCL20	1	600	5/8	1-1/8, 22, 96	3-13/16	1-3/8	1-3/4	1-11/16	-
SCL20-2N	2	600	1/2	1-1/8, 22, 96	4-1/8	1-3/8	3	1-11/16	1-3/4
SCL23	1	750	5/8	1-5/16, 24, 106	4-11/32	1-5/8	1-15/16	1-29/32	-
SCL23-2N	2	750	1/2	1-5/16, 24, 106	5-3/4	1-5/8	3	1-29/32	1-3/4
SCL28	1	1000	5/8	1-1/2, 27, 125	4-7/8	1-7/8	2-1/8	2-3/16	-
SCL28-2N	2	1000	1/2	1-1/2, 27, 125	6-5/32	1-7/8	3	2-3/16	1-3/4
SCL28-4N	3	1000	3/8	1-1/2, 27, 125	4-15/16	1-7/8	2-3/16	2-3/16	1-1/8
SCL30	1	1500	3/4	31	5-15/32	2	2-1/4	2-11/16	-
SCL30-2N	2	1500	1/2	31	6-17/32	2	3	2-11/16	1-3/4
SCL30-4N	3	1500	1/2	31	5-27/32	2	2-5/8	2-11/16	1-3/8
SCL32	1	2000	3/4	34	5-15/16	2-1/4	2-3/8	3-1/16	-
SCL32-2N	2	2000	1/2	34	7	2-1/4	3	3-1/16	1-3/4
SCL32-4N	3	2000	1/2	34	6-5/16	2-1/4	2-3/4	3-1/16	1-1/2

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

ONE-HOLE COPPER LUGS

CL Series

- Made of seamless copper tubing.
- Tin-plated to resist corrosion.
- Marked with conductor sizes and die information.
-  UL listed.

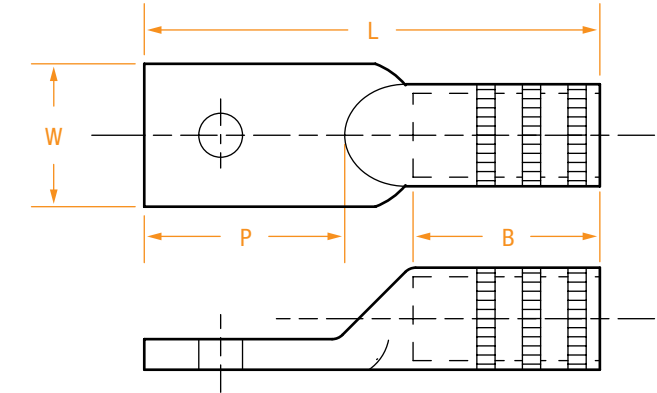

PART NUMBER	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES			
				B	L	P	W
CL2-1/4	8	1/4	1/4, 6, TC, 21	1	1-25/32	19/32	13/32
CL2-5/16	8	5/16	1/4, 6, TC, 21	1	1-15/16	3/4	7/16
CL2-3/8	8	3/8	1/4, 6, TC, 21	1	1-15/16	3/4	15/16
CL3-1/4	6	1/4	J, 7, TE, 24	1-1/8	2-1/8	3/4	1/2
CL3-5/16	6	5/16	J, 7, TE, 24	1-1/8	2-1/8	3/4	1/2
CL3-3/8	6	3/8	J, 7, TE, 24	1-1/8	2-1/8	3/4	11/16
CL5-1/4	4	1/4	5/16, 8, TP, 29	1-3/16	2-1/16	3/4	5/8
CL5-5/16	4	5/16	5/16, 8, TP, 29	1-3/16	2-1/16	3/4	5/8
CL5-3/8	4	3/8	5/16, 8, TP, 29	1-3/16	2-1/16	3/4	5/8
CL7-1/4	2	1/4	3/8, 10, TL-TN, 33	1-1/4	2-1/4	3/4	11/16
CL7-5/16	2	5/16	3/8, 10, TL-TN, 33	1-1/4	2-1/4	3/4	11/16
CL7-3/8	2	3/8	3/8, 10, TL-TN, 33	1-1/4	2-1/4	3/4	11/16
CL7	2	1/2	3/8, 10, TL-TN, 33	1-1/4	2-5/8	1	7/8
CL8-1/4	1	1/4	3/8, 11, TB, 37	1-3/8	2-43/64	57/64	11/16
CL8-5/16	1	5/16	3/8, 11, TB, 37	1-3/8	2-43/64	57/64	11/16
CL8-3/8	1	3/8	3/8, 11, TB, 37	1-3/8	2-43/64	57/64	11/16
CL8	1	1/2	3/8, 11, TB, 37	1-3/8	2-57/64	1-7/64	3/4
CL9-5/16	1/0	5/16	1/2, 12, TQ, 42	1-7/16	2-49/64	57/64	3/4
CL9-3/8	1/0	3/8	1/2, 12, TQ, 42	1-7/16	2-49/64	57/64	3/4
CL9	1/0	1/2	1/2, 12, TQ, 42	1-7/16	2-63/64	1-7/64	3/4
CL10-5/16	2/0	5/16	9/16, 13, TS, 45	1-1/2	2-57/64	57/64	13/16
CL10-3/8	2/0	3/8	9/16, 13, TS, 45	1-1/2	2-57/64	57/64	13/16
CL10	2/0	1/2	9/16, 13, TS, 45	1-1/2	3-7/64	1-7/64	13/16

(continued)

**ONE-HOLE
COPPER LUGS**


CL Series (continued)


PART NUMBER	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES			
				B	L	P	W
CL11-5/16	3/0	5/16	5/8, 14, TU, 50	1-1/2	2-59/64	57/64	29/32
CL11-3/8	3/0	3/8	5/8, 14, TU, 50	1-1/2	3-9/64	1-7/64	29/32
CL11	3/0	1/2	5/8, 14, TU, 50	1-1/2	3-9/64	1-7/64	29/32
CL12-5/16	4/0	5/16	5/8-1, 15, TW-TY, 54	1-9/16	3-1/64	57/64	1
CL12-3/8	4/0	3/8	5/8-1, 15, TW-TY, 54	1-9/16	3-15/64	1-7/64	1
CL12	4/0	1/2	5/8-1, 15, TW-TY, 54	1-9/16	3-15/64	1-7/64	1
CL13-5/16	250	5/16	11/16, 16, TR, 60	1-5/8	3-11/64	57/64	1-1/8
CL13-3/8	250	3/8	11/16, 16, TR, 60	1-5/8	3-25/64	1-7/64	1-1/8
CL13	250	1/2	11/16, 16, TR, 60	1-5/8	3-25/64	1-7/64	1-1/8
CL14-3/8	300	3/8	781, 17, TV, 66	2	3-51/64	1-7/64	1-7/32
CL14	300	1/2	781, 17, TV, 66	2	3-51/64	1-7/64	1-7/32
CL15-3/8	350	3/8	840, 18, TX, 71	2	3-55/64	-	1-9/32
CL15	350	1/2	840, 18, TX, 71	2	3-55/64	-	1-9/32
CL16-3/8	400	3/8	15/16, 19, TX, 76	2	3-59/64	-	1-13/32
CL16	400	1/2	15/16, 19, TX, 76	2	4-5/32	1-7/16	1-13/32
CL16-5/8	400	5/8	15/16, 19, TX, 76	2	4-5/32	1-7/16	1-13/32
CL18	500	1/2	1, 20, TH, 87	2-1/2	4-3/8	1-7/16	1-9/16
CL18-5/8	500	5/8	1, 20, TH, 87	2-1/2	4-3/8	1-7/16	1-9/16
CL20	600	1/2	1-1/8, 22, 96, 94H	2-11/16	5-1/8	1-3/4	1-11/16
CL20-5/8	600	5/8	1-1/8, 22, 96, 94H	2-11/16	5-1/8	1-3/4	1-11/16
CL23	750	1/2	1-5/16, 24, 106	2-7/8	5-11/16	1-15/16	1-29/32
CL23-5/8	750	5/8	1-5/16, 24, 106	2-7/8	5-11/16	1-15/16	1-29/32
CL23-3/4	750	3/4	1-5/16, 24, 106	2-7/8	5-11/16	1-15/16	1-29/32
CL28	1000	1/2	1-1/2, 27, 125	3	6-1/4	2-1/8	2-3/16
CL28-5/8	1000	5/8	1-1/2, 27, 125	3	6-1/4	2-1/8	2-3/16
CL28-3/4	1000	3/4	1-1/2, 27, 125	3	6-1/4	2-1/8	2-3/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

**STRAIGHT & STACKING
TWO-HOLE COPPER NEMA LUGS**

CL-2N & CSL-2N Series

- Made of seamless copper tubing.
- Tin-plated to resist corrosion.
- The "CSL" lugs are offset to allow the connection of two lugs to a common surface.
- The "offset" allows clearance between the lug barrels.
-  UL listed.

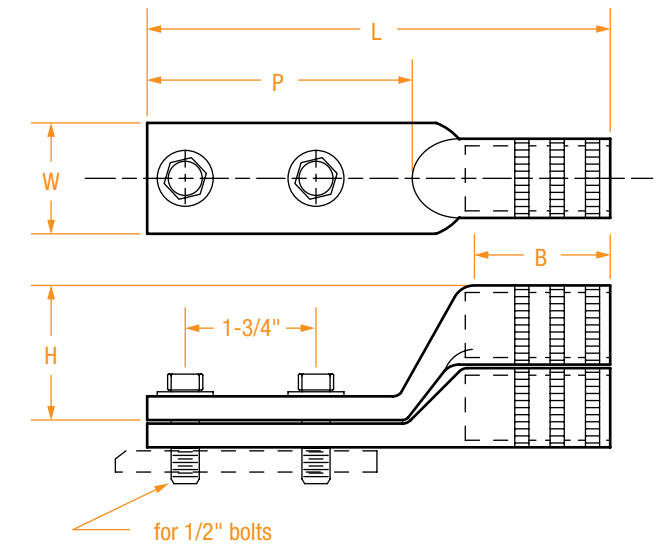

STRAIGHT PART NUMBER	STACKING PART NUMBER	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
					B	H*	L	P	W
CL3-2N-1/4		6	1/4	J, 7, TE, 24	1	-	4-1/2	3	15/32
CL3-2N-5/16		6	5/16	J, 7, TE, 24	1	-	4-1/2	3	17/32
CL5-2N-1/4		4	1/4	5/16, 8, TP, 29	1	-	4-1/2	3	1/2
CL5-2N-5/16		4	5/16	5/16, 8, TP, 29	1	-	4-1/2	3	1/2
CL5-2N***	CSL5-2N	4	1/2	5/16, 8, TP, 29	1	-	4-1/2	3	1
CL7-2N-1/4		2	1/4	3/8, 10, TL-TN, 33	1-1/4	-	4-9/16	3	3/4
CL7-2N-5/16		2	5/16	3/8, 10, TL-TN, 33	1-1/4	-	4-9/16	3	3/4
CL7-2N	CSL7-2N	2	1/2	3/8, 10, TL-TN, 33	1-1/4	-	4-9/16	3	3/4
CL8-2N-1/4		1	1/4	3/8, 11, TB, 37	1-3/8	-	3-3/8	3	21/32
CL8-2N-5/16		1	5/16	3/8, 11, TB, 37	1-1/2	-	3-3/8	3	21/32
CL9-2N-5/16		1/0	5/16	1/2, 12, TQ, 42	1-1/4	-	4-9/16	3	3/4
CL9-2N-3/8		1/0	3/8	1/2, 12, TQ, 42	1-1/4	-	4-9/16	3	3/4
CL9-2N	CSL9-2N	1/0	1/2	1/2, 12, TQ, 42	1-1/4	-	4-9/16	3	3/4
CL10-2N-3/8		2/0	3/8	9/16, 13, TS, 45	1-1/2	-	5-1/32	3	27/32
CL10-2N	CSL10-2N	2/0	1/2	9/16, 13, TS, 45	1-1/2	1-1/2	5-1/32	3	27/32
CL11-2N-3/8		3/0	3/8	5/8, 14, TU, 50	1-1/2	-	5-1/8	3	29/32
CL11-2N	CSL11-2N	3/0	1/2	5/8, 14, TU, 50	1-1/2	1-5/8	5-1/8	3	29/32
CL12-2N-3/8		4/0	3/8	5/8-1, 15, TW-TY, 54	1-5/8	-	5-3/16	3	1
CL12-2N	CSL12-2N	4/0	1/2	5/8-1, 15, TW-TY, 54	1-5/8	1-11/16	5-3/16	3	1

(continued)


STRAIGHT & STACKING TWO-HOLE COPPER NEMA LUGS


CL-2N & CSL-2N Series (continued)

STRAIGHT PART NUMBER	STACKING PART NUMBER	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
					B	H*	L	P	W
CL13-2N-3/8		250	3/8	11/16, 16, TR, 60	1-3/4	–	5-1/4	3	1-1/8
CL13-2N	CSL13-2N	250	1/2	11/16, 16, TR, 60	1-3/4	1-3/4	5-1/4	3	1-7/32
CL14-2N-3/8		300	3/8	781, 17, TV, 66	2	–	5-3/4	3	1-7/32
CL14-2N	CSL14-2N	300	1/2	781, 17, TV, 66	2	1-13/16	5-3/4	3	1-7/32
CL15-2N-3/8		350	3/8	840, 18, TX, 71	2	–	5-3/4	3	1-5/16
CL15-2N	CSL15-2N	350	1/2	840, 18, TX, 71	2	1-7/8	5-3/4	3	1-5/16
CL16-2N-3/8		400	3/8	15/16, 19, TX, 76	2-1/8	–	6	3-1/16	1-13/32
CL16-2N	CSL16-2N	400	1/2	15/16, 19, TX, 76	2-1/8	1-15/16	6	3-3/32	1-13/32
CL18-2N	CSL18-2N	500	1/2	1, 20, TH, 87	2-1/4	2-1/16	6-1/16	3-1/8	1-9/16
CL20-2N	CSL20-2N	600	1/2	1-1/8, 22, 96	2-5/8	2-3/16	6-23/32	3-1/8	1-11/16
CL23-2N	CSL23-2N	750	1/2	1-5/16, 24, 106	2-7/8	2-5/16	6-3/4	3-1/8	1-3/4
CL28-2N	CSL28-2N	1000	1/2	1-1/2, 27, 125	2-15/16	2-5/8	7-1/4	3-1/4	2-5/32
CL28-2N-1-3/4	CSL28-2N-1-3/4	1000	1/2	1-1/2, 27, 125	2-15/16	2-5/8	7-1/4	3-1/4	1-3/4**
CL29-2N	CSL29-2N	1250	1/2	1-5/8, 29	2-1/2	–	7-1/4	3-1/16	1-11/16
CL30-2N	CSL30-2N	1500	1/2	1-3/4, 31, 150	3-3/16	–	7-1/2	3	2-11/16
CL32-2N	CSL32-2N	2000	1/2	2.00, 34, 175	3-3/16	–	8-1/16	3-3/16	3-1/16

FOUR-HOLE COPPER LUGS

CL-4N Series

- Made of seamless copper tubing.
- Tin-plated to resist corrosion.
- Marked with conductor sizes and die information.
- Meets all NEMA standards.
-  UL listed.

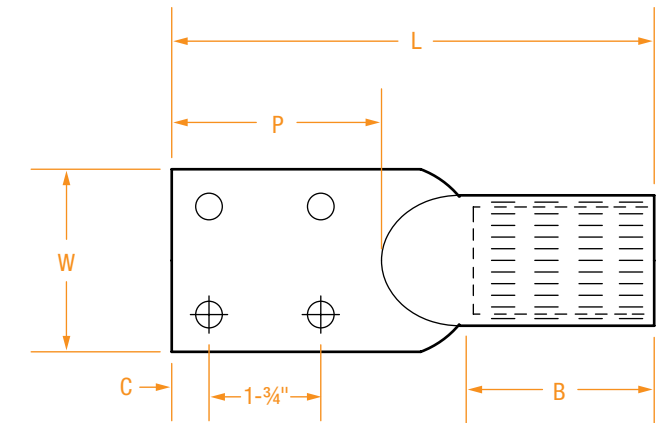

PART NUMBER	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
				B	C	L	P	W
CL18-4N	500	1/2	20, 1, 87	2-1/4	5/8	6-1/4	3-1/8	3
CL23-4N	750	1/2	24, 1-5/16, 106	2-7/8	5/8	7	3-1/8	3
CL28-4N	1000	1/2	1-1/2, 27, 125	3	5/8	7-1/4	3-1/4	3
CL29-4N	1250	1/2	1-5/8, 29	3-1/4	5/8	7-3/4	3	3
CL30-4N	1500	1/2	1-3/4, 31, 150	3-3/16	5/8	7-1/2	3	2-11/16
CL32-4N	2000	1/2	2.00, 34, 175	3-7/16	5/8	8-1/16	3-3/16	3-1/16
CL33-4N	2500	1/2	486, L486RT	3-5/8	5/8	8-3/4	3-1/8	3-3/4
CL371885	2750	1/2	729	3-3/4	5/8	9	3-1/8	3

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.


* Only for stacking lugs.


** Trimmed to 1-3/4" max. to fit side by side on NEMA spades.

*** Brazed pad.

HEAVY-DUTY COPPER LUGS

HDCL Series

- Designed for heavy-duty applications.
- Features include heavy wall barrel and thicker contact pad.
- Made of seamless copper tubing.
- Tin-plated to resist corrosion.
- Marked with conductor sizes and die information.
-  UL listed.

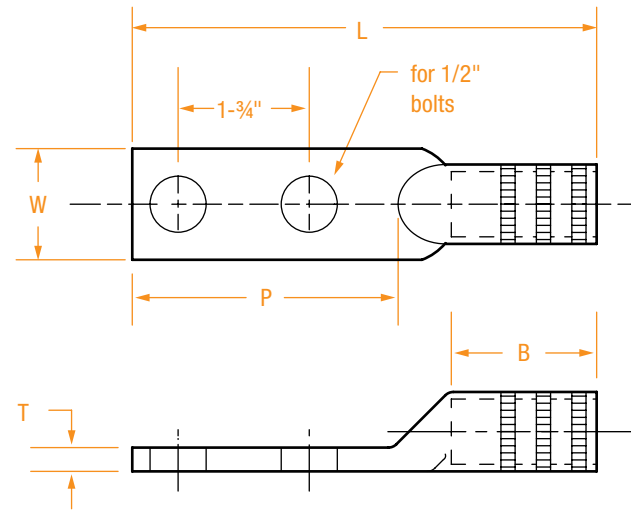


PART NUMBER*	CONDUCTOR SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
			B	T	L	P	W
HDCL7-2N	2	TQ, 42, 163, 1/2	1-1/2	0.17	5	3	15/16
HDCL8-2N	1	TS, 45, 241, 1/2	1-1/2	0.18	5-1/4	3	15/16
HDCL9-2N	1/0	TU, 50, 165, 5/8	1-1/2	0.19	5-1/4	3	15/16
HDCL10-2N	2/0	TZ, 166, 5/8	1-1/2	0.26	5-1/2	3	15/16
HDCL11-2N	3/0	62, 167, 737	1-1/2	0.29	5-1/2	3	1
HDCL12-2N	4/0	71, 168, 840	1-5/8	0.30	5-1/2	3	1-1/4
HDCL13-2N	250	80, 169	1-5/8	0.34	5-5/8	3	1-1/4
HDCL14-2N	300	87, 170, 1	2-1/4	0.39	6-9/16	3-1/4	1-1/2
HDCL15-2N	350	94, 299, 1-1/8	2-1/4	0.43	6-9/16	3-1/4	1-7/16
HDCL18-2N	500	112, 210, 1-5/16	3	0.48	7-5/16	3-1/4	1-3/4
HDCL20-2N	600	125, 608, 1-1/2	3	0.51	7-1/2	3-5/8	1-15/16
HDCL23-2N	750	138, 627, 1-5/8	3-3/8	0.64	8-1/4	3-5/8	2-3/16
HDCL28-2N	* 1000	160, 345, 2	4-5/8	0.62	9-5/8	3-5/8	2-5/8


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For heavy-duty one-hole lug, delete the "-2N" from the part number. For use with a different bolt size, add the bolt size to the part number (example: HDCL9-2N-3/8 will have two 7/16" holes for 3/8" bolts). For four-hole lugs, change "-2N" to "-4N".

TAPERED COPPER LUGS

TCL Series

- Made of seamless pure copper tubing.
- Tin-plated to resist corrosion.
- Tapered for high-voltage connections.
- One-hole and two-hole NEMA standard.
-  UL listed.

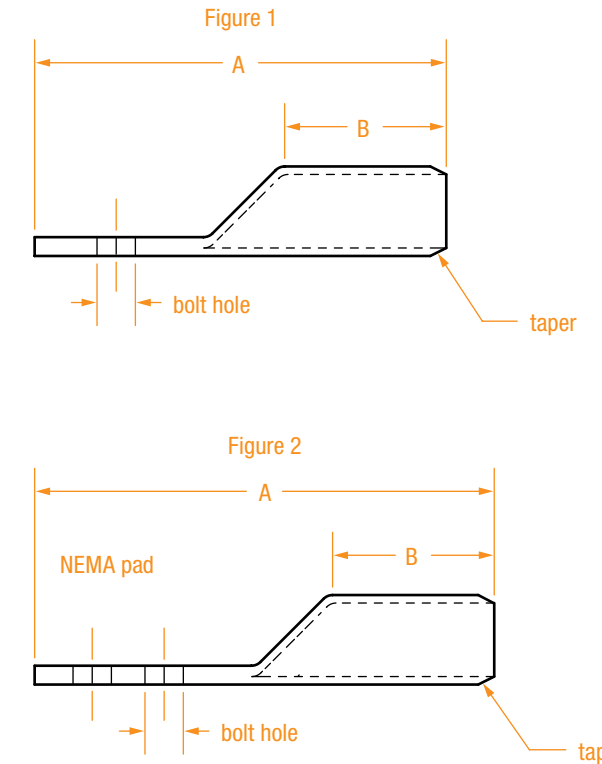

PART NUMBER*	FIGURE	CONDUCTOR SIZE		INSTALLING DIES	DIMENSIONS IN INCHES				
		CONCENTRIC	COMPACT		L	B	PAD WIDTH	PAD THICKNESS	BOLT HOLE
TCL5	1	#4	#4	5/16, 8, TP, 29	2-3/16	1-1/4	5/8	3/32	7/16
TCL7	1	#2	#2 & #1	3/8, 10, TL-TN, 33	2-5/16	1-3/8	5/8	7/64	7/16
TCL8	1	#1	#1/0	3/8, 11, TB, 37	2-1/2	1-3/8	11/16	7/64	7/16
TCL9	1	#1/0	#2/0	1/2, 12, TQ, 42	2-5/8	1-3/8	13/16	1/8	7/16
TCL9-2N	2	#1/0	#2/0	1/2, 12, TQ, 42	4-7/8	1-3/8	13/16	1/8	9/16
TCL10	1	#2/0	#3/0	9/16, 13, TS, 45	3	1-1/2	7/8	1/8	9/16
TCL10-2N	2	#2/0	#3/0	9/16, 13, TS, 45	5	1-1/2	7/8	1/8	9/16
TCL11	1	#3/0	#4/0	5/8, 14, TU, 50	3-1/8	1-1/2	15/16	1/8	9/16
TCL11-2N	2	#3/0	#4/0	5/8, 14, TU, 50	5-1/8	1-1/2	15/16	1/8	9/16
TCL12	1	#4/0	250MCM	5/8-1, 15, TW-TY	3-5/16	1-5/8	1	9/64	9/16
TCL12-2N	2	#4/0	250MCM	5/8-1, 15, TW-TY	5-1/4	1-5/8	1	9/64	9/16
TCL13	1	250MCM	300MCM	11/16, 16, TR, 60	3-3/8	1-5/8	1-1/8	5/32	9/16
TCL13-2N	2	250MCM	300MCM	11/16, 16, TR, 60	5-5/16	1-5/8	1-1/8	5/32	9/16

(continued)

TAPERED COPPER LUGS

TCL Series (continued)


PART NUMBER*	FIGURE	CONDUCTOR SIZE		INSTALLING DIES	DIMENSIONS IN INCHES				
		CONCENTRIC	COMPACT		L	B	PAD WIDTH	PAD THICKNESS	BOLT HOLE
TCL14	1	300MCM	350MCM	781, 17, TV, 66	3-3/4	2	1-3/16	5/32	9/16
TCL14-2N	2	300MCM	350MCM	781, 17, TV, 66	5-3/4	2	1-3/16	5/32	9/16
TCL15	1	350MCM	400MCM	840, 18, TX, 71	3-13/16	2	1-5/16	15/16	9/16
TCL15-2N	2	350MCM	400MCM	840, 18, TX, 71	5-13/16	2	1-5/16	15/16	9/16
TCL16-2N	2	400MCM	500MCM	15/16, 19, 76	6	2-1/8	1-7/16	3/16	9/16
TCL18-2N	2	500MCM	600MCM	1, 20, 87	6-3/16	2-1/4	1-9/16	15/64	9/16
TCL20-2N	2	600MCM	750MCM	1-1/8, 22, 94H	6-11/16	2-11/16	1-11/16	17/64	9/16
TCL23-2N	2	750MCM	-	1-5/16, 24, 106	7	2-7/8	1-15/16	19/64	9/16
TCL24-2N	2	800MCM	-	1-5/16, 25, 106	7-1/8	2-15/16	2	19/64	9/16
TCL28-2N	2	1000MCM	-	1-1/2, 27, 125	7-1/4	3	2-3/16	21/64	9/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

ONE-HOLE PEEPHOLE COPPER LUGS

CL-P Series

- Opening allows inspection to ensure complete cable insertion.
- Made of seamless copper tubing.
- Tin-plated to resist corrosion.
- Marked with conductor sizes and die information.
- UL listed.

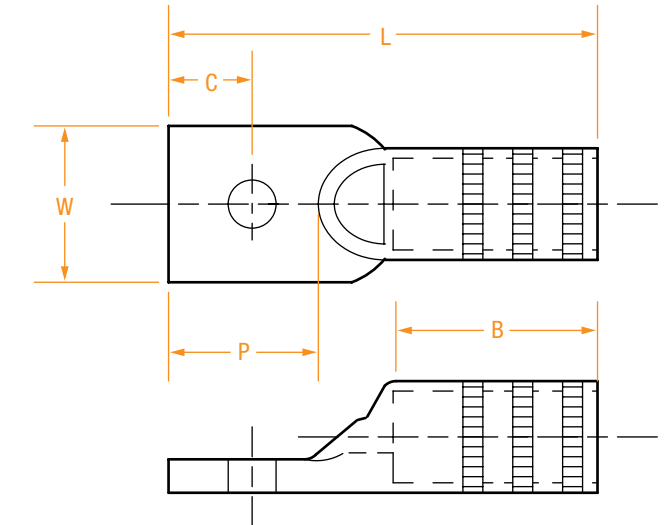

PART NUMBER	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
				B	C	L	P	W
CL2-1/4-P	8	1/4	1/4, 6, TC, 21	1/2	5/16	1-7/32	19/32	13/32
CL3-1/4-P	6	1/4	J, 7, TE, 24	13/16	3/8	1-3/4	3/4	1/2
CL3-5/16-P	6	5/16	J, 7, TE, 24	13/16	3/8	1-3/4	3/4	1/2
CL3-3/8-P	6	3/8	J, 7, TE, 24	13/16	3/8	1-3/4	3/4	9/16
CL5-1/4-P	4	1/4	5/16, 8, TP, 29	29/32	3/8	1-63/64	57/64	19/32
CL5-5/16-P	4	5/16	5/16, 8, TP, 29	29/32	3/8	1-63/64	57/64	19/32
CL5-3/8-P	4	3/8	5/16, 8, TP, 29	29/32	3/8	1-63/64	57/64	19/32
CL7-1/4-P	2	1/4	3/8, 10, TL-TN, 33	7/8	3/8	2	57/64	5/8
CL7-5/16-P	2	5/16	3/8, 10, TL-TN, 33	7/8	3/8	2	57/64	5/8
CL7-3/8-P	2	3/8	3/8, 10, TL-TN, 33	7/8	3/8	2	57/64	5/8
CL7-1/2-P	2	1/2	3/8, 10, TL-TN, 33	7/8	17/32	2-5/32	1-7/64	3/4
CL8-1/4-P	1	1/4	3/8, 11, TB, 37	7/8	3/8	2-9/64	57/64	11/16
CL8-5/16-P	1	5/16	3/8, 11, TB, 37	7/8	3/8	2-9/64	57/64	11/16
CL8-3/8-P	1	3/8	3/8, 11, TB, 37	7/8	3/8	2-9/64	57/64	11/16
CL8-1/2-P	1	1/2	3/8, 11, TB, 37	7/8	17/32	2-15/64	1-7/64	3/4
CL9-5/16-P	1/0	5/16	1/2, 12, TQ, 42	7/8	3/8	2-9/64	57/64	3/4
CL9-3/8-P	1/0	3/8	1/2, 12, TQ, 42	7/8	3/8	2-9/64	57/64	3/4
CL9-P	1/0	1/2	1/2, 12, TQ, 42	7/8	17/32	2-15/64	1-7/64	3/4

(continued)

* "-2N" indicates a two-hole NEMA pad.

**ONE-HOLE PEEPHOLE
COPPER LUGS**


CL-P Series (continued)


PART NUMBER	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES				
				B	C	L	P	W
CL10-5/16-P	2/0	5/16	9/16, 13, TS, 45	15/16	3/8	2-5/64	57/64	13/16
CL10-3/8-P	2/0	3/8	9/16, 13, TS, 45	15/16	3/8	2-5/64	57/64	13/16
CL10-P	2/0	1/2	9/16, 13, TS, 45	15/16	17/32	2-9/32	1-7/64	13/16
CL11-5/16-P	3/0	5/16	5/8, 14, TU, 50	1-1/8	3/8	2-17/64	57/64	29/32
CL11-3/8-P	3/0	3/8	5/8, 14, TU, 50	1-1/8	17/32	2-1/2	1-7/64	29/32
CL11-P	3/0	1/2	5/8, 14, TU, 50	1-1/8	17/32	2-1/2	1-7/64	29/32
CL12-5/16-P	4/0	5/16	5/8-1, 15 TW-TY, 54	1-3/16	3/8	2-7/16	57/64	1
CL12-3/8-P	4/0	3/8	5/8-1, 15 TW-TY, 54	1-3/16	17/32	2-9/16	1-7/64	1
CL12-1/2-P	4/0	1/2	5/8-1, 15 TW-TY, 54	1-3/16	17/32	2-9/16	1-7/64	1
CL13-3/8-P	250	3/8	11/16, 16, TR, 60	1-1/4	17/32	2-13/16	1-7/64	1-1/8
CL13-P	250	1/2	11/16, 16, TR, 60	1-1/4	17/32	2-13/16	1-7/64	1-1/8
CL14-P	300	1/2	781, 17, TV, 66	1-1/4	17/32	2-13/16	1-7/64	1-7/32
CL14-5/8-P	300	5/8	781, 17, TV, 66	1-1/4	21/32	3-1/32	1-11/32	1-7/32
CL15-P	350	1/2	840, 18, TX, 71	1-1/4	17/32	2-15/16	1-7/64	1-9/32
CL15-5/8-P	350	5/8	840, 18, TX, 71	1-1/4	21/32	3-3/32	1-11/32	1-9/32
CL16-P	400	1/2	15/16, 19, TX 76	1-1/2	21/32	3-9/32	1-11/32	1-13/32
CL16-5/8-P	400	5/8	15/16, 19, TX 76	1-1/2	21/32	3-9/32	1-11/32	1-13/32
CL18-P	500	1/2	1, 20, TH, 87	1-3/4	21/32	3-17/32	1-11/32	1-17/32
CL18-5/8-P	500	5/8	1, 20, TH, 87	1-3/4	21/32	3-17/32	1-11/32	1-17/32
CL20-P	600	1/2	1-1/8, 22, 96	1-7/16	7/8	3-7/8	1-3/4	1-11/16
CL20-5/8-P	600	5/8	1-1/8, 22, 96	1-7/16	7/8	3-7/8	1-3/4	1-11/16
CL23-P	750	1/2	1-5/16, 24, 106	1-5/8	7/8	4-3/8	1-15/16	1-7/8
CL23-5/8-P	750	5/8	1-5/16, 24, 106	1-5/8	7/8	4-3/8	1-15/16	1-7/8
CL23-3/4-P	750	3/4	1-5/16, 24, 106	1-5/8	31/32	4-3/8	1-15/16	1-7/8
CL28-P	1000	1/2	1-1/2, 27, 125	1-15/16	15/16	4-15/16	2-1/8	2-5/32
CL28-5/8-P	1000	5/8	1-1/2, 27, 125	1-15/16	15/16	4-15/16	2-1/8	2-5/32
CL28-3/4-P	1000	3/4	1-1/2, 27, 125	1-15/16	1-1/16	4-15/16	2-1/8	2-5/32
CL30-3/4-P	1500	3/4	1-3/4, 31, 150	2	1-1/8	5-15/32	2-1/4	2-43/64
CL32-3/4-P	2000	3/4	2.00, 34, 150	2-1/4	1-3/16	5-15/16	2-3/8	3-1/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

**TWO- & FOUR-HOLE PEEPHOLE
COPPER NEMA LUGS**

CL-N-P Series

- Made of seamless copper tubing.
- Tin-plated to resist corrosion.
- Marked with conductor sizes and die information.
-  UL listed.

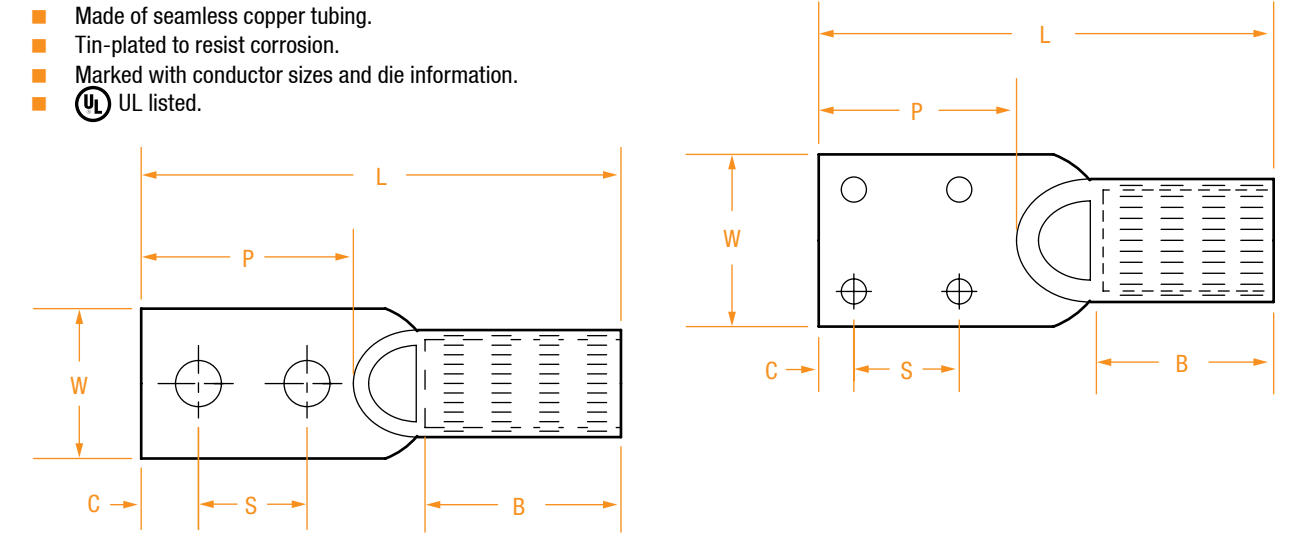

PART NUMBER*	WIRE SIZE	BOLT SIZE	INSTALLING DIES	DIMENSIONS IN INCHES					
				B	C	L	P	S	W
CL10-2N-P	2/0	1/2	9/16, 13, TS, 45	15/16	5/8	4-15/32	3	1-3/4	13/16
CL11-2N-P	3/0	1/2	5/8, 14, TU, 50	1	5/8	4-5/8	3	1-3/4	29/32
CL12-2N-P	4/0	1/2	5/8-1, 15, TW-TY, 54	1	5/8	4-11/16	3	1-3/4	1
CL13-2N-P	250	1/2	11/16, 16, TR, 60	1-1/16	5/8	4-3/4	3	1-3/4	1-3/32
CL14-2N-P	300	1/2	781, 17, TV, 66	1-1/16	5/8	4-13/16	3	1-3/4	1-3/16
CL15-2N-P	350	1/2	840, 18, TX, 71	1-1/8	5/8	4-15/16	3	1-3/4	1-9/32
CL16-2N-P	400	1/2	15/16, 19, TX, 76	1-3/16	5/8	5-1/8	3	1-3/4	1-3/8
CL18-2N-P	500	1/2	1, 20, TH, 87	1-3/8	5/8	5-5/16	3	1-3/4	1-17/32
CL20-2N-P	600	1/2	1-1/8, 22, 96	1-3/8	5/8	5-1/2	3	1-3/4	1-11/16
CL23-2N-P	750	1/2	1-5/16, 24, 106	1-5/8	5/8	5-3/4	3	1-3/4	1-29/32
CL28-2N-P	1000	1/2	1-1/2, 27, 125	1-7/8	5/8	6-5/32	3	1-3/4	2-11/64
CL30-2N-P	1500	1/2	1-3/4, 31, 150	2	5/8	6-17/32	3	1-3/4	2-43/64
CL32-2N-P	2000	1/2	2.00, 34, 150	2-1/4	5/8	7	3	1-3/4	3-1/16
CL30-4N-P	*1500	1/2	1-3/4, 31, 150	2	5/8	6-17/32	3	1-3/4	3-1/16
CL32-4N-P	*2000	1/2	2.00, 34, 150	2-1/4	5/8	7	3	1-3/4	3-1/16


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* "-2N" indicates a two-hole NEMA pad. - "-4N" indicates a four-hole NEMA pad.

MECHANICAL COPPER LUGS

ML Series

- Made from high-conductivity copper alloy.
- Designed to accept a range of conductor sizes.

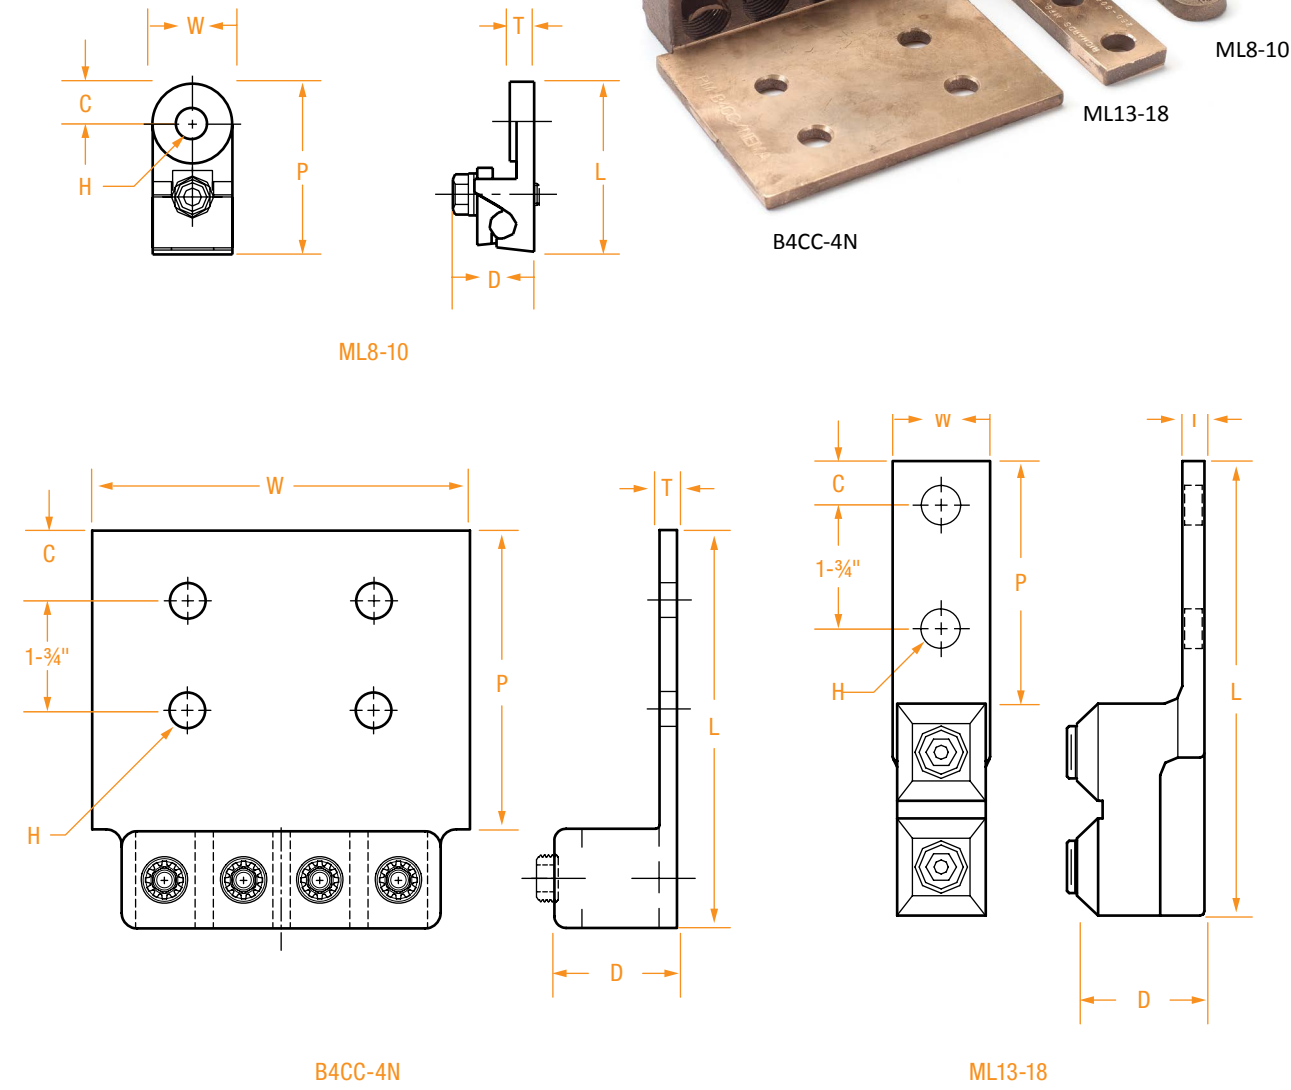


PART NUMBER	CABLE SIZE	CABLE PORTS	HOLES IN PAD	DIMENSIONS IN INCHES						
				L	W	C	H	D	T	P
ML13-18	250-500	1	2	5	1-1/2	5/8	9/16	1-3/4	3/8	3-1/4
ML8-10	#1-2/0	1	1	2-3/8	1-13/32	9/16	9/16	1-3/32	11/32	1-3/8
B3CC-4N*	250-500	3	4	6	4	7/8	9/16	2 to 2-1/4	1/4	4-3/8
B4CC-4N**	250-500	4	4*	6-3/8	6	1-1/8	9/16	2 to 2-1/4	5/16	4-3/4

* B3CC-4N (not shown in the above photo) has 1-3/4" hole spacing front to back and side to side.
 ** B4CC-4N has 3" side-to-side hole spacing and 1-3/4" hole spacing front to back as shown in the drawing.

ANGLED COPPER LUGS

CL-2N-90 Series

- Made of seamless copper tubing.
- Lugs available with a "BEND" or a "TWIST."
- Specify the angle in the part number.
- Tin-plated to resist corrosion.
- Marked with conductor sizes and die information.
- Meets all NEMA standards.

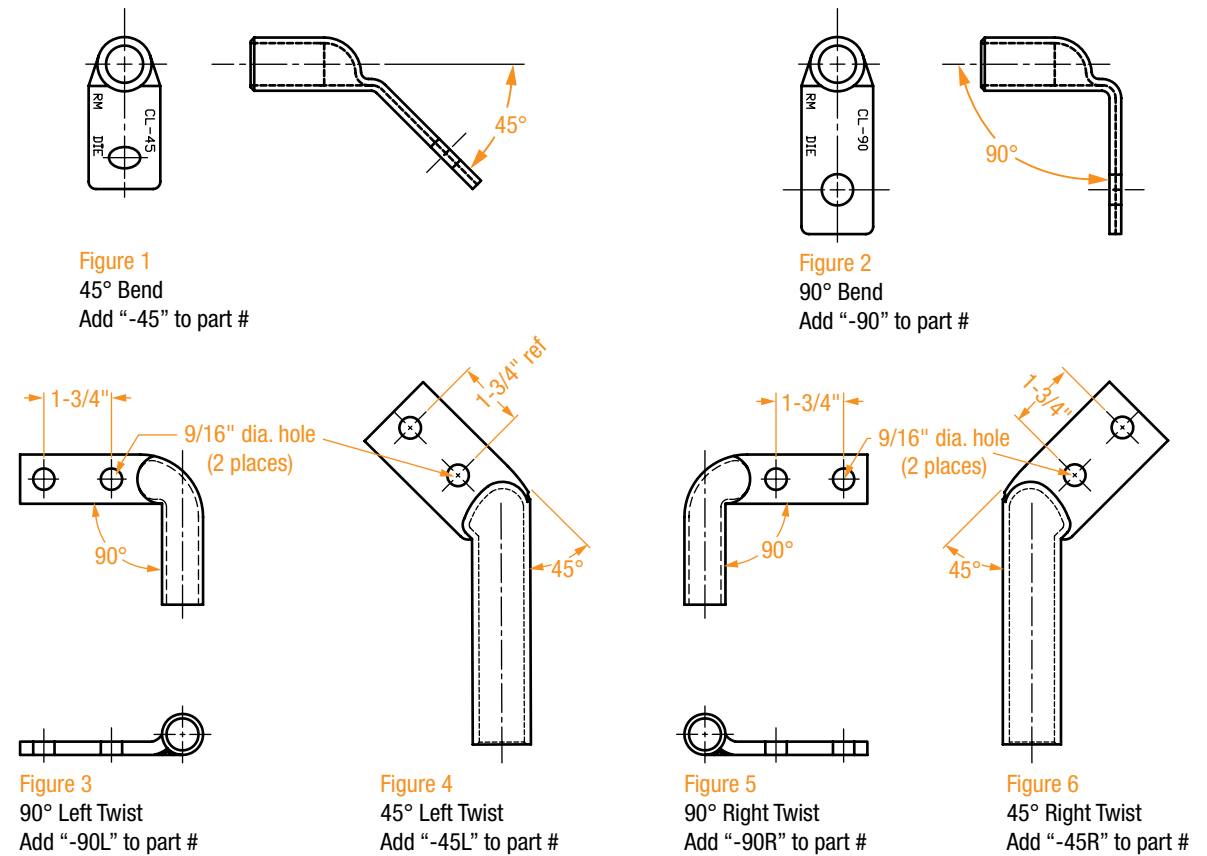

To determine the correct part number, use the part numbers of the basic copper lug and add the following suffixes.

- "-45" = 45° bend straight up – Figure 1.
- "-90" = 90° bend straight up – Figure 2
- "-90L" = 90° twist to the LEFT – Figure 3
- "-45L" = 45° twist to the LEFT – Figure 4.
- "-90R" = 90° twist to the RIGHT – Figure 5
- "-45R" = 45° twist to the RIGHT – Figure 6.

FOR OTHER ANGLES AND CONFIGURATIONS, PLEASE CONTACT THE FACTORY.

SHROUDED COPPER LUGS

CL-66 Series

- Made of seamless copper tubing.
- Hot tin dipped.
- The shroud prevents water from seeping into the copper conductor strands and minimizes taping.
- Contact the factory for other sizes.

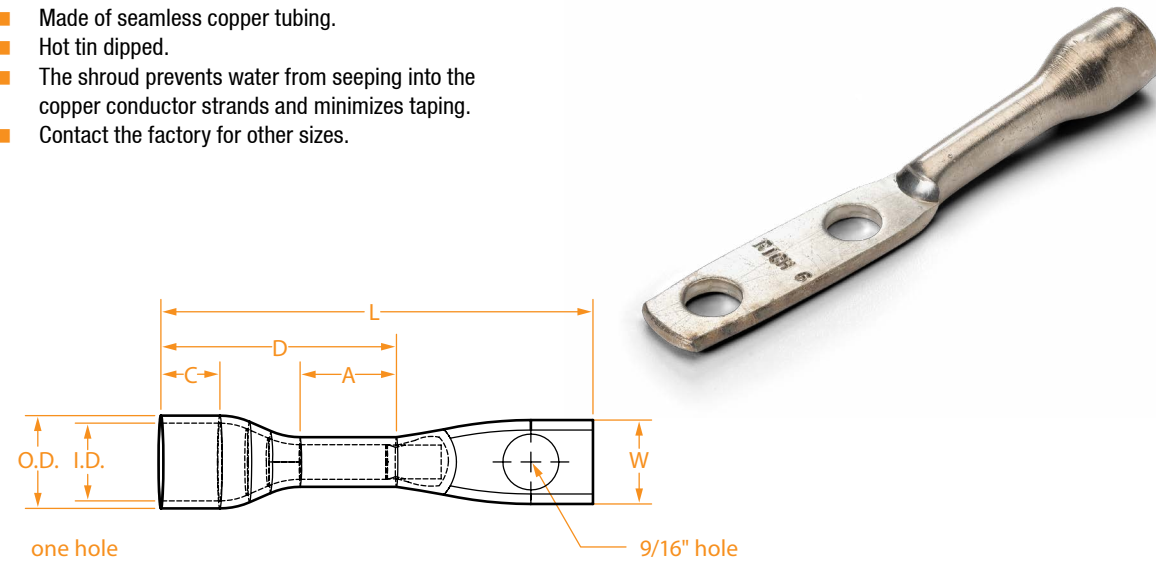


Figure 1

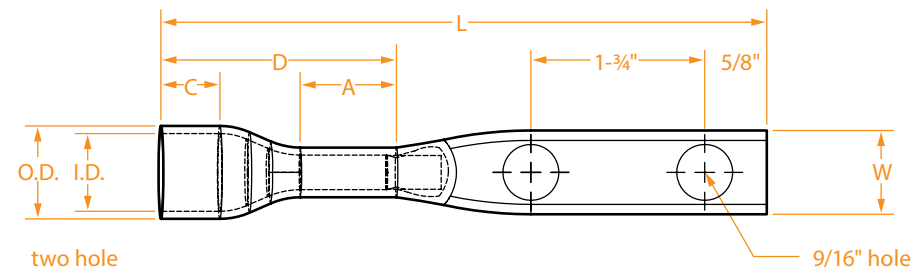



Figure 2

PART NUMBER	FIG	CONDUCTOR	APPROXIMATE DIMENSIONS IN INCHES							DIE INDEX
			O.D.	I.D.	A	C	D	L	W	
CL5-1-66PS	1	#4 STR	0.72	.625	1.25	.625	2.125	3.5	.875	1/2, 12
CL5-2N-066	2	#4 STR	.72	.55	1.625	.625	2.50	6	.875	1/2, 12
CL7-2N-066	2	#2 STR	.95	.80	1.25	.80	2.50	6-1/8	.875	163

COPPER PIN TERMINALS

CPT Series

- The barrel is made of seamless copper tubing.
- The pin is made of solid copper rod.
- Connection brazed watertight.
- Crimp with standard dies.
- Hot tin dipped.
- Contact the factory for other sizes.

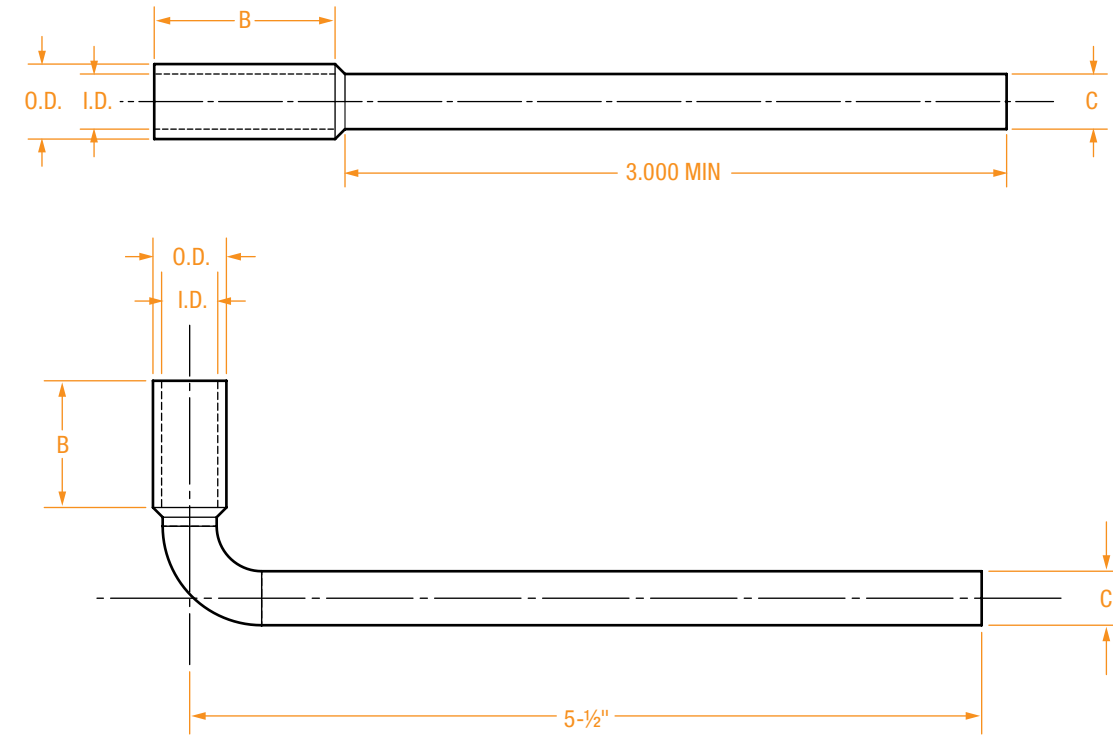


PART NUMBER	FIG	CONDUCTOR	APPROXIMATE DIMENSIONS IN INCHES				DIE INDEX
			I.D.	BARREL O.D.	B (MIN)	PIN O.D.	
CPT5	1	#4 Cu str	.25	.34	.82	0.250	5/16, 8
CPT9	1	1/0 Cu str	.39	.51	.88	0.375	1/2, 12
CPT10	1	2/0 Cu str	.44	.56	.94	0.375	9/16, 13
CPT12	1	4/0 Cu str	.55	.69	1.00	0.460	5/8-1, 15
CPT15	1	350 Cu str	.70	.88	1.12	0.562	840, 18
CPT18	1	500 Cu str	.83	1.06	1.38	0.562	1, 20
CPT5-90	2	#4 Cu str	.25	.34	.81	0.375	5/16, 8
CPT9-90	2	1/0 Cu str	.39	.51	.88	0.375	1/2, 12
CPT12-90	2	4/0 Cu str	.55	.69	1.00	0.460	5/8-1, 15
CPT15-90	2	350 Cu str	.70	.88	1.12	0.562	840, 18
CPT18-90	2	500 Cu str	.83	1.06	1.38	0.562	1, 20

RING BUS COPPER LUGS ASSEMBLY

MT Series

- Designed to connect secondary cable to the "ring bus" of a network system
- Ideal for neutral connections in network vaults and manholes
- Lug, U-Bolt and Bronze Saddle are tin-plated
- Hardware includes star and flat washers and nuts to tighten down U-Bolt

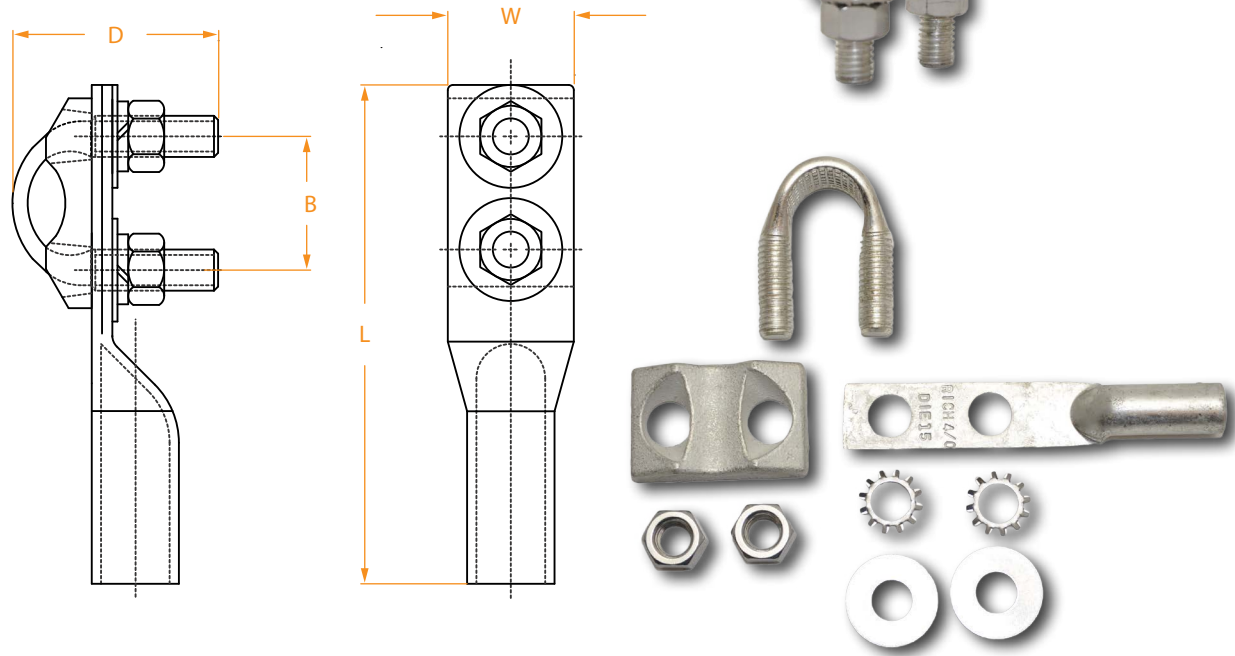

PART NUMBER	U BOLT SIZE	LUG SIZE	APPROXIMATE DIMENSIONS IN INCHES			
			D	B	L	W
MT18-12	500 MCM	4/0 AWG	2 3/8	1-3/8	5-1/8	1 17/32
MT18	500 MCM	500 MCM	2-3/8	1-3/8	6-1/16	1 17/32
MT23-18	750 MCM	500 MCM	2-1/2	1-5/8	6-1/16	1 17/32
MT23	750 MCM	750 MCM	2-1/2	1-5/8	7	1-29/32

Aluminum Compression Connectors




ALUMINUM COMPRESSION CONNECTORS	SERIES	PAGE
Short Aluminum Splices	SALC Series	37
Aluminum Splices	ALC Series	38
Aluminum Splices – Common Die	ALCCD Series	39
Tapered Aluminum Splices	OATC Series	40
Tapered Aluminum Splices – Common Die	OATCCD Series	41
Aluminum Tees	ALT Series	42
Aluminum Tapered Tees	ALTT Series	43
Aluminum Tapered Tees	ALTT Series (continued)	44
Aluminum Reducers	ALCR Series	45
Tapered Aluminum Reducers	OATCR Series	46
Aluminum Reducers – Common Die	ALCRCD Series	47

SHORT ALUMINUM SPLICES

SALC Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.

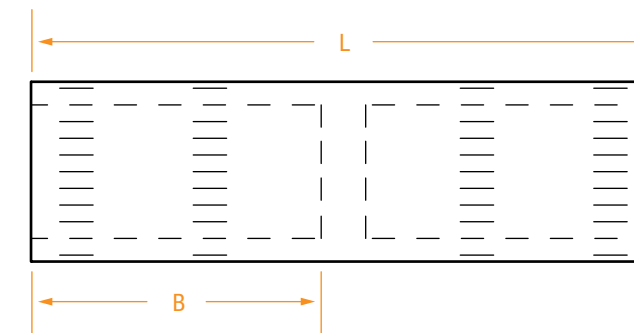

PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
SALC3	6	TP, 29, 346, 161, 5/16	3/4	1-5/8
SALC5	4	TB, 37, 375, 162	7/8	1-7/8
SALC7	2	TQ, 45, 348, 6A, 1/2, 163	15/16	2
SALC8	1	TQ, 45, 348, 6A, 1/2, 163	15/16	2
SALC9	1/0	TU, BG, 8A, 5/8, 52, 243	1	2-1/8
SALC10	2/0	TWTY, 297, 9A, 5/8-1, 58	1-3/32	2-5/16
SALC11	3/0	TV, 10A, 781, 66, 247	1-1/4	2-5/8
SALC12	4/0	TX, 298, 11A, 840, 71H	1-5/16	2-3/4
SALC13	250	TX, 11A, 840, 76, 249	1-3/8	2-15/16
SALC14	300	TX, 12A, 87H, 251	1-15/32	3-1/8
SALC15	350	96, 299, 13A, 94A	1-19/32	3-3/8
SALC16	400	96, 13A, 655, 99H	1-25/32	3-3/4
SALC18	500	106A, 14A, 300, 317	1-27/32	3-7/8
SALC20	600	115H, 473, 786, 936, 112H	1-15/16	4-1/8
SALC23	750	140H, 301	2-3/16	4-5/8
SALC24	800	140H, 474	2-1/4	4-3/4
SALC28	1000	302, 161	2-1/2	5-1/4
SALC29	1250	161, 352, 579	3-1/16	6-1/2
SALC30	1500	478, 189	3-1/16	6-1/2
SALC31	1750	204, 729, 40AH	3-1/16	6-1/2
SALC32	2000	479, 735, 214	3-9/16	7-1/2


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For tinned splices, add "-TN" to the part number (example: SALC3-TN for #6 tinned splice).

ALUMINUM SPLICES

ALC Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.

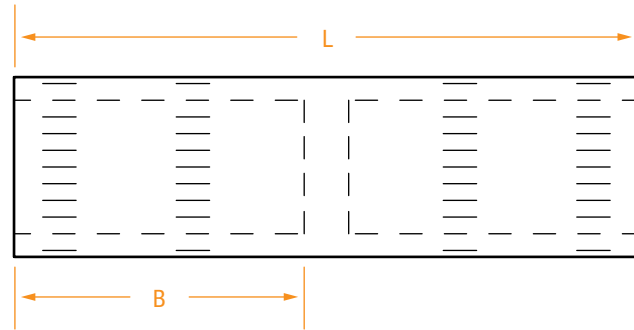


PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
ALC5	4	TB, 37, 375, 162	1-7/16	3-1/8
ALC7	2	TQ, 45, 348, 6A, 1/2	1-5/8	3-13/32
ALC8	1	TQ, 45, 348, 6A, 1/2	1-5/8	3-13/32
ALC9	1/0	TU, BG, 8A, 5/8, 52, 243	1-7/16	3-11/16
ALC10	2/0	TWTY, 297, 9A, 5/8-1, 58	1-3/4	3-11/16
ALC11	3/0	TV, 10A, 781, 66, 247	1-13/16	3-15/16
ALC12	4/0	TX, 298, 11A, 840, 71H	1-7/8	4-3/16
ALC13	250	TX, 11A, 840, 76, 249	2-7/16	5-3/16
ALC14	300	TX, 12A, 87H, 251	2-11/16	5-11/16
ALC15	350	96, 299, 13A, 94A	3-1/4	6-5/8
ALC16	400	96, 13A, 655, 99H	3-7/16	7-7/32
ALC18	500	106, 106A, 14A, 300, 317	3-5/8	7-17/32
ALC20	600	115H, 473, 112H	3-3/4	7-25/32
ALC23	700-750	140H, 301	4	8-9/32
ALC24	800	140H, 474	4-1/16	8-7/16
ALC28	1000	302, 161	4-11/32	9-7/8
ALC29	1250	161, 352, 579	4-5/8	10
ALC30	1500	478, 189	6-11/32	13
ALC31	1750	204, 729, 40AH	6-5/16	13
ALC32	2000	735, 214	7-11/32	15

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

ALUMINUM SPLICES – COMMON DIE

ALCCD Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- Solid center stop to ensure proper cable insertion.

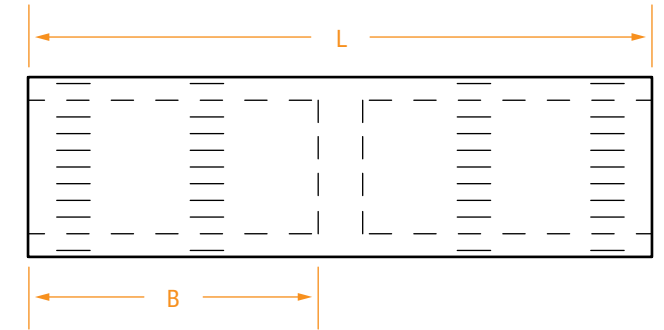

PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
ALCCD5	4	8A, TU, 5/8, 243, BG, 52	1-7/16	3
ALCCD7	2	8A, TU, 5/8, 243, BG, 52	1-7/16	3
ALCCD8	1	8A, TU, 5/8, 243, BG, 52	1-7/16	3
ALCCD9	1/0	8A, TU, 5/8, 243, BG, 52	1-7/16	3
ALCCD10	2/0	249, 840, TX, 11A, 76	1-7/8	4
ALCCD11	3/0	249, 840, TX, 11A, 76	1-7/8	4
ALCCD12	4/0	249, 840, TX, 11A, 76	1-7/8	4
ALCCD13	250	249, 840, TX, 11A, 76	1-7/8	4
ALCCD14	300	299, 1-1/8, 96, 13A	2-5/16	5
ALCCD15	350	299, 1-1/8, 96, 13A	2-5/16	5
ALCCD16	400	15A, 1-5/16, 115H, 300, 317	2-21/32	5-11/16
ALCCD18	500	15A, 1-5/16, 115H, 300, 317	2-21/32	5-11/16
ALCCD20	600	301, 1-1/2, 140	3-3/8	6-31/32
ALCCD23	700-750	301, 1-1/2, 140	3-3/8	6-31/32
ALCCD24	800	301, 1-1/2, 140	3-3/8	6-31/32
ALCCD28	1000	302, 1-3/4, 161	3-5/16	8

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.


* For tinned splices, add "-TN" to the part number (example: ALCCD5-TN for a #4 tinned splice).

* For tinned splices, add "-TN" to the part number (example: ALC5-TN for #4 tinned splice). For a different length connector, add the length in inches to the part number (example: ALC28-8in for an 8" connector).

TAPERED ALUMINUM SPLICES

OATC Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Tapered ends for easy taping.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- Solid center stop to ensure proper cable insertion.
- Designed for 5kV and higher.

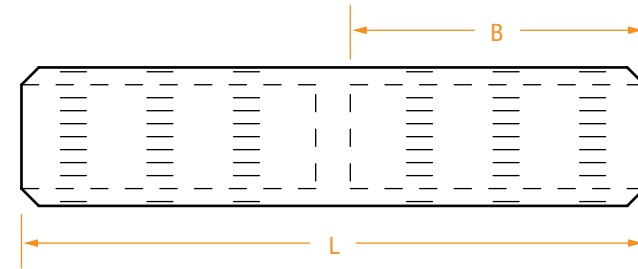


PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
OATC7	2	TQ, 45, 348, 6A	1-9/32	2-11/16
OATC9	1/0	TU, 8A, 52, 243	1-7/16	3
OATC10	2/0	TWTY, 245, 9A, 58	1-7/16	3-1/16
OATC11	3/0	TV, 10A, 66, 247	1-7/16	3
OATC12	4/0	TX, 298, 11A, 71	1-3/4	3-21/32
OATC13	250	TX, 11A, 76, 249	1-3/4	3-21/32
OATC14	300	TH, 12A, 87, 251	2-3/32	4-5/16
OATC15	350	96, 299, 13A	2-9/32	4-5/16
OATC16	400	96, 13A, 472	2-9/16	5-7/32
OATC18	500	106, 14A, 300, 317	2-11/16	5-1/2
OATC20	600	115, 473	2-31/32	6-1/32
OATC23	700-750	140, 301	3-3/8	6-27/32
OATC24	800	140, 474	3-5/8	7-5/16
OATC28	1000	302, 161	4-11/32	8-27/32
OATC29	1250	161, 302	4-5/8	9-3/4
OATC30	1500	478, 189	4-5/8	9-3/4
OATC31	1750	204, 729, 40AH	5-1/2	11-1/2
OATC32	2000	479, 225	5-11/16	11-7/8

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

TAPERED ALUMINUM SPLICES – COMMON DIE

OATCCD Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Tapered ends for easy taping.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- Solid center stop to ensure proper cable insertion.
- Designed for 5kV and higher.

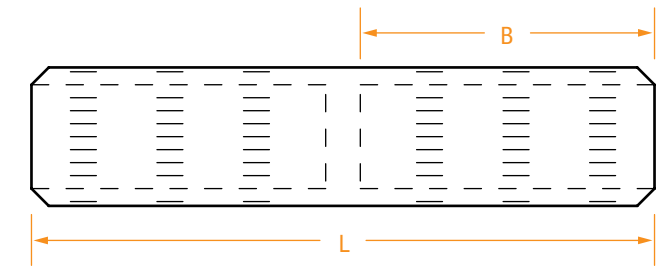

PART NUMBER*	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
OATCCD5	4	TU, 8A, 52, 243, 296, 5/8	1-7/16	3
OATCCD7	2	TU, 8A, 52, 243, 296, 5/8	1-7/16	3
OATCCD9	1/0	TU, 8A, 52, 243, 296, 5/8	1-7/16	3
OATCCD10	2/0	11A, 76, 249, 840, 298	1-7/8	4
OATCCD11	3/0	11A, 76, 249, 840, 298	1-7/8	4
OATCCD12	4/0	11A, 76, 249, 840, 298	1-7/8	4
OATCCD13	250	11A, 76, 249, 840, 298	1-7/8	4
OATCCD14	300	96, 299, 13A, 1-1/8, 321, 705	2-5/16	5
OATCCD15	350	96, 299, 13A, 1-1/8, 321, 705	2-5/16	5
OATCCD16	400	115, 15A, 300, 1-5/16, 317	2-5/8	5-1/2
OATCCD18	500	115, 15A, 300, 1-5/16, 317	3-5/16	7
OATCCD20	600	1-5/16, 473, 1154	3-5/16	7
OATCCD23	700-750	1-1/2, 140, 301	3-3/8	6-27/32


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For tinned splices, add "-TN" to the part number (example: OATC7-TN for a #2 tinned splice). For a different length connector, add the length in inches to the part number (example: OATC28-8in for an 8" connector).

ALUMINUM TEES

ALT Series

- Made of high-conductivity aluminum.
- Available in different run and tap sizes.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.

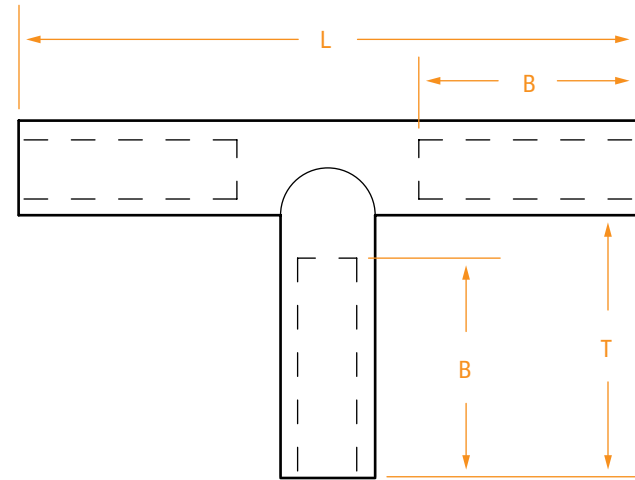

PART NUMBER*	RUN	TAP	DIMENSIONS IN INCHES		
			L	B	T
ALT7	2	2	4-1/4	2	2-1/2
ALT9-7	1/0	2	5-1/2	2-1/4	2-1/2
ALT9	1/0	1/0	5-1/2	2-1/4	2-1/2
ALT10-9	2/0	1/0	6	2-1/4	2-1/2
ALT10	2/0	2/0	6	2-1/4	2-1/2
ALT11	3/0	3/0	6-5/8	2-5/8	3
ALT12-10	4/0	2/0	6-5/8	2-5/8	3
ALT12	4/0	4/0	6-5/8	2-5/8	3
ALT13	250	250	6-5/8	2-5/8	3
ALT14	300	300	6-5/8	2-5/8	3
ALT15-9	350	1/0	6-5/8	2-5/8	3
ALT15-12	350	4/0	6-5/8	2-5/8	3
ALT15	350	350	6-5/8	2-5/8	3


PART NUMBER*	RUN	TAP	DIMENSIONS IN INCHES		
			L	B	T
ALT16	400	400	7-3/4	3-1/8	3-1/2
ALT18-12	500	4/0	8	3-1/8	3-1/2
ALT18-15	500	350	8	3-1/8	3-1/2
ALT18	500	500	8	3-1/8	3-1/2
ALT23-12	750	4/0	8	3-1/8	3-1/2
ALT23-15	750	350	8	3-1/8	3-1/2
ALT23-18	750	500	9	3-1/2	4
ALT23	750	750	9	3-1/2	4
ALT28-15	1000	350	9-7/8	4	4-1/2
ALT28-18	1000	500	9-7/8	4	4-1/2
ALT28-23	1000	750	9-7/8	4	4-1/2
ALT28	1000	1000	9-7/8	4	4-1/2

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

ALUMINUM TAPERED TEES

ALTT Series

- Made of high-conductivity aluminum.
- Available in different run and tap sizes.
- Designed for 5kV and higher.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.

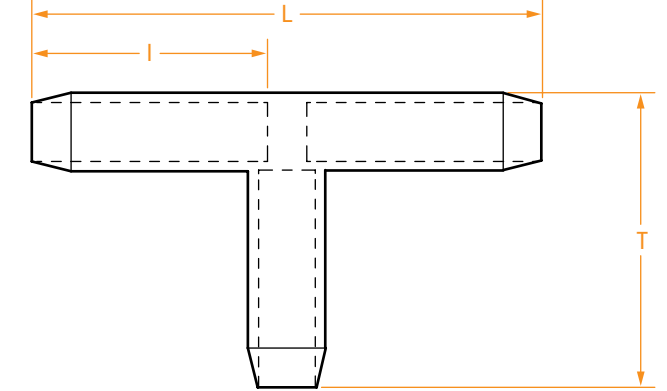

PART NUMBER	CABLE SIZE		DIMENSIONS IN INCHES			INSTALLING DIES
	RUN	TAP	L	I	T	
ALTT7-5	2	4	5-1/4	2-9/16	2-21/32	348, 6A, 45, TQ
ALTT7	2	2	5-1/4	2-9/16	2-23/32	348, 6A, 45, TQ
ALTT9-7	1/0	2	5-1/8	2-1/2	2-25/32	243, 52, 8A, TU
ALTT9	1/0	1/0	5-1/8	2-1/2	2-25/32	243, 52, 8A, TU
ALTT10-7	2/0	2	5-3/8	2-5/8	2-7/8	297, 58, 9A, TWTY
ALTT10-8	2/0	1	5-3/8	2-5/8	2-3/4	297, 58, 9A, TWTY
ALTT10-9	2/0	1/0	5-1/2	2-11/16	2-7/8	297, 58, 9A, TWTY
ALTT10	2/0	2/0	5-1/2	2-11/16	3-1/16	297, 58, 9A, TWTY
ALTT12-9	4/0	1/0	5-7/8	2-7/8	3-1/32	298, 71, 11A, TX
ALTT12-10	4/0	2/0	6	2-15/16	3-7/32	298, 71, 11A, TX
ALTT12	4/0	4/0	6-1/8	3	3-15/32	298, 71, 11A, TX
ALTT14-9	300	1/0	6-5/8	3-1/4	3-3/16	251, 87, 12A
ALTT14-10	300	2/0	6-5/8	3-1/4	3-3/8	251, 87, 12A
ALTT15-9	350	1/0	7-5/8	3-3/4	3-5/16	96, 299, 1-1/8
ALTT15-10	350	2/0	7-5/8	3-3/4	3-1/2	96, 299, 1-1/8
ALTT15-12	350	4/0	7-7/8	3-7/8	3-3/4	96, 299, 1-1/8
ALTT15-14	350	300	8	3-15/16	4	96, 299, 1-1/8
ALTT15	350	350	8-1/8	4	4-9/16	96, 299, 1-1/8

(continued)

* For tinned tees, add "-TN" to the part number (example: ALT7-TN for a #2 tinned Aluminum Tee).

ALUMINUM TAPERED TEES

ALTT Series (continued)


PART NUMBER	CABLE SIZE		DIMENSIONS IN INCHES			INSTALLING DIES
	RUN	TAP	L	I	T	
ALTT18-9	500	1/0	9-1/8	4-1/2	3-1/2	106A, 300, 1-5/16
ALTT18-10	500	2/0	9-1/8	4-1/2	3-11/16	106A, 300, 1-5/16
ALTT18-12	500	4/0	9-1/4	4-9/16	3-15/16	106A, 300, 1-5/16
ALTT18-14	500	300	9-3/8	4-5/8	4-3/16	106A, 300, 1-5/16
ALTT18-15	500	350	9-1/2	4-11/16	4-3/4	106A, 300, 1-5/16
ALTT18	500	500	9-3/4	4-13/16	5-7/16	106A, 300, 1-5/16
ALTT23-12	750	4/0	9-3/4	4-13/16	4-3/16	301, 140, 1-1/2, 527
ALTT23-14	750	300	9-7/8	4-7/8	4-7/16	301, 140, 1-1/2, 527
ALTT23-15	750	350	10	4-15/16	5	301, 140, 1-1/2, 527
ALTT23-18	750	500	10-1/8	5	5-5/8	301, 140, 1-1/2, 527
ALTT23	750	750	10-3/8	5-1/8	6	301, 140, 1-1/2, 527
ALTT28-12	1000	4/0	10-7/8	5-3/8	4-7/16	302, 161, 1-3/4, 150
ALTT28-14	1000	300	11	5-7/16	4-11/16	302, 161, 1-3/4, 150
ALTT28-15	1000	350	11-1/8	5-1/2	5-1/4	302, 161, 1-3/4, 150
ALTT28-18	1000	500	11-1/4	5-9/16	5-15/16	302, 161, 1-3/4, 150
ALTT28-23	1000	750	11-5/8	5-3/4	6-1/4	302, 161, 1-3/4, 150
ALTT28	1000	1000	10-7/8	5-7/8	6-13/16	302, 161, 1-3/4, 150

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

ALUMINUM REDUCERS

ALCR Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- Solid center stop to ensure proper cable insertion.

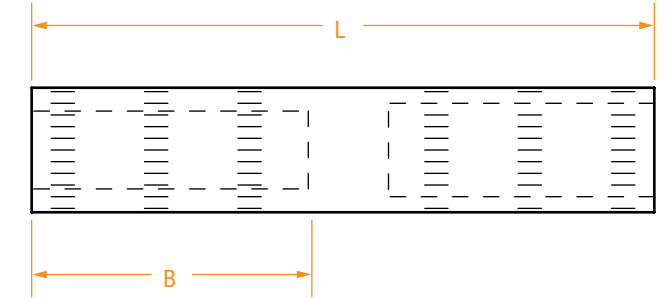

PART NUMBER*	WIRE SIZE		INSTALLING DIES	DIMENSIONS IN INCHES	
	FROM	TO (RANGE)		B	L
ALCR7-	2	#8 - #3	TQ, 45, 348, 6A, 1/2	1-7/8	4-9/16
ALCR9-	1/0	#8 - #1	TU, BG, 8A, 5/8	1-7/8	4-9/16
ALCR10-	2/0	#6 - 1/0	TWTY, 60, 245, 9A, 5/8-1	1-7/8	4-9/16
ALCR11-	3/0	#6 - 2/0	TU, 781, 56	2	5
ALCR12-	4/0	#4 - 3/0	TX, 298, 11A, 840, 71H	2-1/8	5-1/4
ALCR13-	250	#4 - 4/0	TX, 11A, 840, 249	2-5/8	6-5/16
ALCR14-	300	#4 - 250	96, 299, 1-1/8	3-17/32	8-3/16
ALCR15-	350	#4 - 300	96, 299, 1-1/8	3-17/32	8-3/16
ALCR16-	400	#2 - 350	96, 472, 1-1/8	3-11/16	8-19/32
ALCR18-	500	#2 - 450	106, 300, 1-5/16	3-13/16	8-19/32
ALCR20-	600	#2 - 550	115H, 473, 1-5/16	3-15/16	8-7/8
ALCR23-	750	1/0 - 700	140, 301, 1-1/2	4-7/32	9-5/8
ALCR28-	1000	2/0 - 950	302, 161, 1-3/4	4-5/8	9-7/8
ALCR29-	1250	500 - 1000	352, 161	4-3/4	10



FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For tinned reducers, add "-TN" to the part number (example: ALCR7-5-TN for a #2 to #4 tinned reducer). For a different length connector, add the length in inches to the part number (example: ALCR28-23-7in for a 7" connector).

TAPERED ALUMINUM REDUCERS

OATCR Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Designed for 5kV and higher.
- Filled with a high-voltage oxide-inhibiting compound.
- Marked with conductor size and die information.
- Solid center stop to ensure proper cable insertion.
- When ordering, specify both cable sizes in the part numbers listed below.
- Figure 1 or Figure 2 will be supplied depending on the amount of reduction.

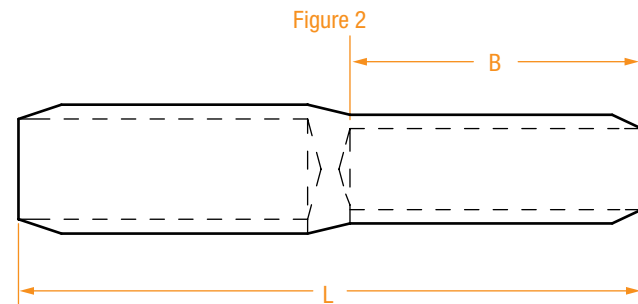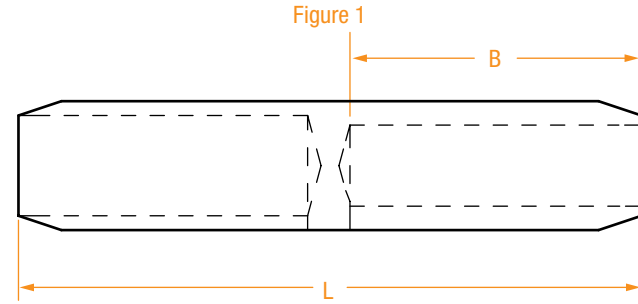

PART NUMBER*	WIRE SIZE		INSTALLING DIES	DIMENSIONS IN INCHES	
	FROM	TO (RANGE)		B	L
OATCR3-2	#6	#8	346, 161, TP, 29, 5/16	1-3/8	3
OATCR5-	#4	#8 - #6	375, 162, TB, 37	1-5/8	3-1/2
OATCR7-	#2	#8 - #4	348, 1/2, 45, TQ, 6A	1-5/8	3-1/2
OATCR8-	#1	#8 - #2	348, 1/2, 45, TQ, 6A	1-5/8	3-1/2
OATCR9-	1/0	#8 - #1	243, 52, TU, 5/8, 8A	1-5/8	3-1/2
OATCR10-	2/0	#6 - 1/0	297, 58, TWTY, 5/8, 9A	1-5/8	3-1/2
OATCR11-	3/0	#4 - 2/0	247, 66, 781, TV, 10A	1-7/8	4
OATCR12-	4/0	#4 - 3/0	298, 840, 71H, 11A, TX	2-3/8	5
OATCR13-	250	#4 - 4/0	249, 840, 76, TX, 11A	2-3/8	5
OATCR14-	300	#2 - 250	251, 12A, 87H, TX	2-1/2	5-1/4
OATCR15-	350	#2 - 300	299, 1-1/8, 96	2-15/16	6-1/4
OATCR18-	500	#2 - 450	300, 1-5/16, 106	3-5/8	7-5/8
OATCR23-	750	1/0 - 700	301, 1-1/2, 140	4	8-1/2
OATCR28-	1000	2/0 - 950	302, 1-3/4, 161	4-3/4	10
OATCR29-	1250	500 - 1000	352, 161	5-3/8	11


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For tinned reducers, add "-TN" to the part number (example: OATCR6-8-TN for a #6 to #8 tinned reducer). For a different length connector, add the length in inches to the part number (example: OATC28-8in for an 8" connector).

ALUMINUM REDUCERS – COMMON DIE

ALCRCD Series

- Made of high-conductivity aluminum.
- Accepts both aluminum and copper conductors.
- Filled with an oxide-inhibiting compound.
- Marked with conductor size and die information.
- Solid center stop to ensure proper cable insertion.

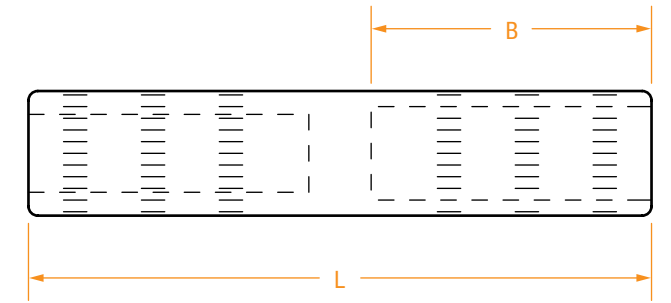

PART NUMBER*	WIRE SIZE		INSTALLING DIES	DIMENSIONS IN INCHES	
	FROM	TO (RANGE)		B	L
ALCRCD5-3	4	6	243, TU, 5/8, 8A, BG, 52	1-7/16	3
ALCRCD7-	2	#8 - #6	243, TU, 5/8, 8A, BG, 52	1-7/16	3
ALCRCD9-	1/0	#8 - #1	243, TU, 5/8, 8A, BG, 52	1-7/16	3
ALCRCD10-	2/0	#6 - 1/0	249, 840, TX, 11A, 76	1-7/8	4
ALCRCD11-	3/0	#6 - 2/0	249, 840, TX, 11A, 76	1-7/8	4
ALCRCD12-	4/0	#4 - 3/0	249, 840, TX, 11A, 76	1-7/8	4
ALCRCD13-	250	#4 - 4/0	249, 840, TX, 11A, 76	1-7/8	4
ALCRCD14-	300	#2 - 250	299, 1-1/8, 96, 13A	2-13/32	5
ALCRCD15-	350	#2 - 300	299, 1-1/8, 96, 13A	2-13/32	5
ALCRCD18-	500	#2 - 450	15A, 1-5/16, 106	2-21/32	5-11/16
ALCRCD23-	750	1/0 - 700	301, 1-1/2, 140	3-3/8	6-3/16
ALCRCD28-	1000	2/0 - 950	302, 1-3/4, 161	3-5/16	8
ALCRCD29-	1250	500 - 1000	352, 161	4-3/8	9

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.


* For tinned reducers, add "-TN" to the part number (example: ALCRCD5-3-TN for a #4 to #6 tinned reducer). For a different length connector, add the length in inches to the part number (example: ALCRCD28-18-8in for an 8" connector).




COPPER COMPRESSION CONNECTORS	SERIES	PAGE
Short Copper Splices	.SCC Series	51
Copper Splices	.CC Series	52
Tapered Copper Splices	.TCC Series	53
Straight Oil-Stop Copper Splices	.OCC Series	54
Tapered Oil-Stop Copper Splices	.OTCC Series	55
Copper Compression Tees	.CCT Series	56
Tapered Copper Compression Tees	.TCCT Series	57
Copper Compression Reducers	.CCR Series	58
Tapered Copper Compression Reducers	.TCCR Series	59
Oil-Stop Copper Compression Reducers	.OCCR Series	60
Oil-Stop Tapered Copper Compression Reducers	.OTCCR Series	61
Corrugated Copper Reducing Adapters	.CRA Series	62

SHORT COPPER SPLICES

SCC Series

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Indentation in the center of the connector provides a cable stop to ensure proper installation.
-  UL listed.

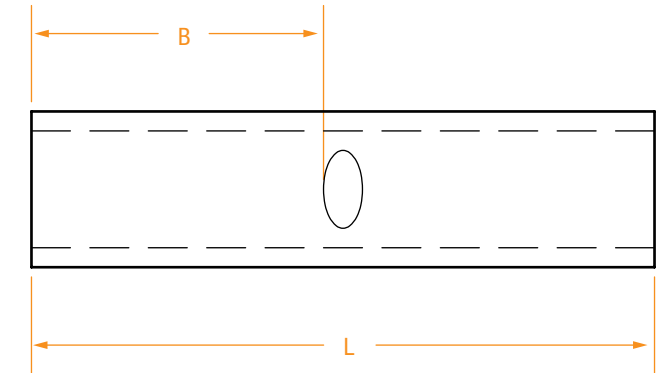


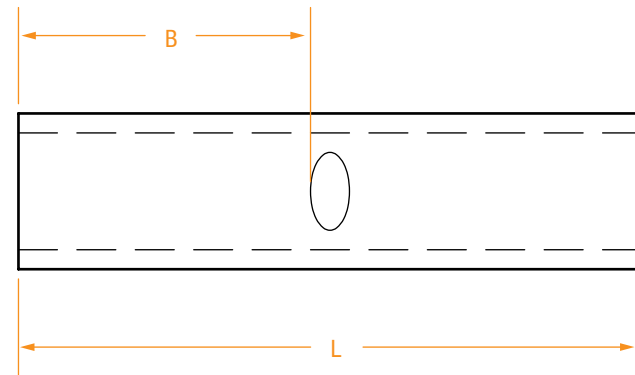
PART NUMBER	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
SCC3	6	J, 7, TE, 24, 5/16, 161	13/16	1-3/4
SCC4	5	J, 7, TE, 24	13/16	1-3/4
SCC5	4	5/16, 8, TP, 29	13/16	1-3/4
SCC7	2	3/8, 10, TL-TN, 33, M, 162	7/8	1-7/8
SCC8	1	3/8, 11, TB, 37, M, 162	7/8	1-7/8
SCC9	1/0	1/2, 12, TQ, 42	7/8	1-7/8
SCC10	2/0	9/16, 13, TS, 45	15/16	2
SCC11	3/0	5/8, 14, TU, 50	1	2-1/8
SCC12	4/0	5/8-1, 15, TW-TY, 54	1	2-1/8
SCC13	250	11/16, 16, TR, 60	1-1/16	2-1/4
SCC14	300	781, 17, TV, 66	1-1/16	2-1/4
SCC15	350	840, 18, TX, 71	1-1/8	2-3/8
SCC16	400	15/16, 19, TX, 76	1-3/16	2-1/2
SCC18	500	1, 20, TH, 87H	1-3/8	2-7/8
SCC20	600	1-1/8, 22, 96, 94H	1-3/8	2-7/8
SCC23	750	1-5/16, 24, 106	1-5/8	3-3/8
SCC28	1000	1-1/2, 27, 125	1-7/8	3-7/8
SCC29	1250	29	2	4-1/8
SCC30	1500	1-3/4, 31, 150	2	4-1/8
SCC32	2000	2.00, 34, 175	2-1/4	4-5/8
SCC33	2500	Y60 Press, L486 RT Die	2-7/16	5

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

COPPER SPLICES

CC Series

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Indentation in the center of the connector provides a cable stop to ensure proper installation.
-  UL listed.




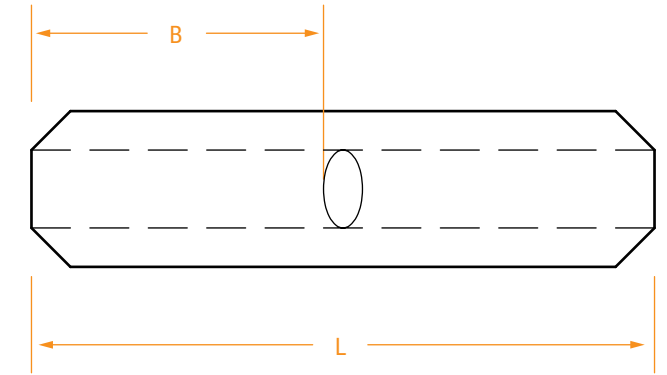
PART NUMBER	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
CC3	6	J, 7, TE, 24	1-1/8	2-3/8
CC4	5	J, 7, TE, 24	1-1/8	2-3/8
CC5	4	5/16, 8, TP, 29	1-1/8	2-3/8
CC7	2	3/8, 10, TL-TN, 33	1-1/4	2-5/8
CC8	1	3/8, 11, TB, 37	1-3/8	2-7/8
CC9	1/0	1/2, 12, TQ, 42	1-3/8	2-7/8
CC10	2/0	9/16, 13, TS, 45	1-1/2	3-1/8
CC11	3/0	5/8, 14, TU, 50	1-1/2	3-1/8
CC12	4/0	5/8-1, 15, TW-TY, 54	1-5/8	3-3/8
CC13	250	11/16, 16, TR, 60	1-5/8	3-3/8
CC14	300	781, 17, TV, 66	2	4-1/8
CC15	350	840, 18, TX, 71	2	4-1/8
CC16	400	15/16, 19, TX, 76	2-1/8	4-3/8
CC18	500	1, 20, TH, 87H	2-1/4	4-5/8
CC20	600	1-1/8, 22, 96, 94H	2-11/16	5-1/2
CC23	750	1-5/16, 24, 106	2-7/8	5-7/8
CC28	1000	1-1/2, 27, 125	3	6-1/8
CC29	1250	29	3-3/16	6-1/2
CC30	1500	1-3/4, 31, 150	3-3/16	6-1/2
CC32	2000	2.00, 34, 175	3-7/16	7
CC33	2500	1/60 Press, L486RT	3-15/16	8

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

TAPERED COPPER SPLICES

TCC Series

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Tapered ends for high-voltage use.
- Indentation in the center of the connector provides a cable stop to ensure proper installation.
- 12° taper.
-  UL listed.




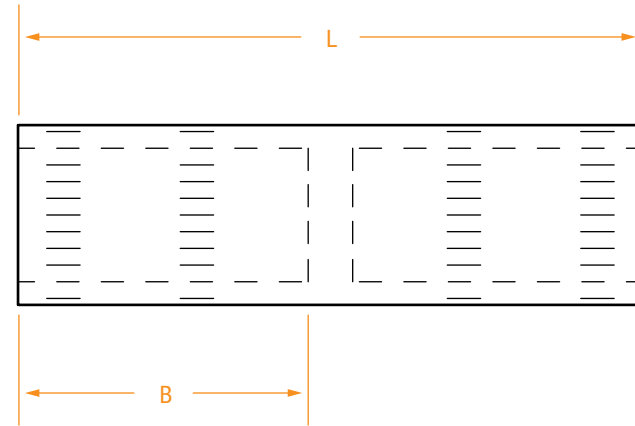
PART NUMBER	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
TCC3	6	J, 7, TE, 24	7/8	1-29/32
TCC5	4	5/16, 8, TP, 29	7/8	1-29/32
TCC7	2	3/8, 10, TL-TN, 33	31/32	2-1/16
TCC8	1	3/8, 11, TB, 37	31/32	2-1/16
TCC9	1/0	1/2, 12, TQ, 42	31/32	2-1/16
TCC10	2/0	9/16, 13, TS, 45	1-1/32	2-7/32
TCC11	3/0	5/8, 14, TU, 50	1-1/8	2-13/32
TCC12	4/0	5/8-1, 15, TW-TY, 54	1-1/8	2-3/8
TCC13	250	11/16, 16, TR, 60	1-7/32	2-9/16
TCC14	300	781, 17, TV, 66	1-1/4	2-5/8
TCC15	350	840, 18, TX, 71	1-5/16	2-25/32
TCC16	400	15/16, 19, TX, 76	1-7/16	2-31/32
TCC18	500	1, 20, TH, 87H	1-11/16	3-17/32
TCC20	600	1-1/8, 22, 96, 94H	2-1/16	4-7/32
TCC23	750	1-5/16, 24, 106	2-1/16	4-7/32
TCC28	1000	1-1/2, 27, 125	2-7/16	4-31/32
TCC29	1250	29	3-7/32	6-1/2
TCC30	1500	1-3/4, 31, 150	3-7/32	6-1/2
TCC32	2000	2.00, 34, 175	3-15/32	6-11/16
TCC33	2500	Y60 Press, L486RT	3-15/16	8

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

STRAIGHT OIL-STOP COPPER SPLICES

OCC Series

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Solid copper barriers are brazed in the center to insure an oil-tight seal.
- Long enough for double crimping to add mechanical strength.
-  UL listed.




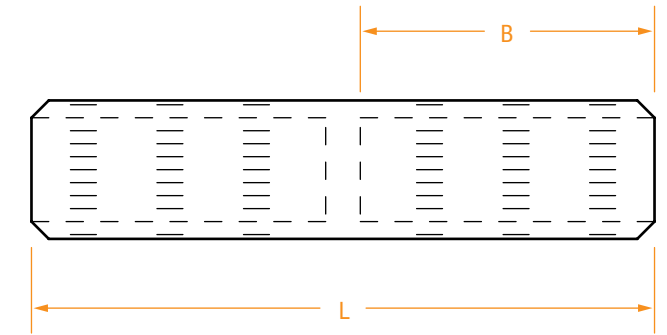
PART NUMBER	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
OCC3	6	7, TE, 24	1-1/8	2-3/8
OCC5	4	5/16, 8, TP, 29, 161	1-1/8	2-3/8
OCC7	2	3/8, 10, TL-TN, 162	1-1/4	2-5/8
OCC8	1	3/8, 11, TB, 37, 276	1-3/8	2-7/8
OCC9	1/0	1/2, 12, TQ, 42, 163	1-3/8	2-7/8
OCC10	2/0	9/16, 13, TS, 164	1-1/2	3-1/8
OCC11	3/0	5/8, 14, TU, 243	1-1/2	3-1/8
OCC12	4/0	5/8-1, 15, 165	1-5/8	3-3/8
OCC13	250	11/16, 16, TR, 166	1-5/8	3-3/8
OCC14	300	781, 17, TV, 167	2	4-1/8
OCC15	350	840, 18, TX, 168	2	4-1/8
OCC16	400	15/16, 19, TX, 169	2-1/8	4-3/8
OCC18	500	1, 20, 170	2-1/4	4-5/8
OCC20	600	1-1/8-2, 22, 96, 316, 94H	2-11/16	5-1/2
OCC23	750	1-5/16, 24, 106, 317	2-7/8	5-7/8
OCC24	800	1-5/16, 25, 112, 300	2-15/16	6
OCC28	1000	1-1/2, 27, 125	3	6-1/8
OCC29	1250	29	3-1/4	7

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

TAPERED OIL-STOP COPPER SPLICES

OTCC Series


- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Tapered ends for high-voltage use.
- Solid copper barriers are brazed in the center to insure an oil-tight seal.
- 12° taper.
-  UL listed.




PART NUMBER	WIRE SIZE	INSTALLING DIES	DIMENSIONS IN INCHES	
			B	L
OTCC3	6	J, 7, TE, 24	7/8	1-29/32
OTCC5	4	5/16, 8, TP, 29	7/8	1-29/32
OTCC7	2	3/8, 10, TL-TN, 33	31/32	2-1/16
OTCC8	1	3/8, 11, TB, 37	31/32	2-1/16
OTCC9	1/0	1/2, 12, TQ, 42	31/32	2-1/16
OTCC10	2/0	9/16, 13, TS, 45	1-1/32	2-7/32
OTCC11	3/0	5/8, 14, TU, 50	1-1/8	2-13/32
OTCC12	4/0	5/8-1, 15, TW-TY, 54	1-1/8	2-3/8
OTCC13	250	11/16, 16, TR, 60	1-7/32	2-9/16
OTCC14	300	781, 17, TV, 66	1-1/4	2-5/8
OTCC15	350	840, 18, TX, 71	1-5/16	2-25/32
OTCC16	400	15/16, 19, TX, 76	1-7/16	2-31/32
OTCC18	500	1, 20, TH, 87H	1-11/16	3-17/32
OTCC20	600	1-1/8, 22, 96, 94H	2-1/16	4-7/32
OTCC23	750	1-5/16, 24, 106	2-1/16	4-7/32
OTCC28	1000	1-1/2, 27, 125	2-7/16	4-31/32
OTCC29	1250	29	3-7/32	6-1/2
OTCC30	1500	1-3/4, 31, 150	3-7/32	6-1/2
OTCC32	2000	2.00, 34, 175	3-15/32	6-11/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

COPPER COMPRESSION TEES

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Available in different run and tap sizes.
- Marked with conductor size and die information.
-  UL listed.

CCT Series

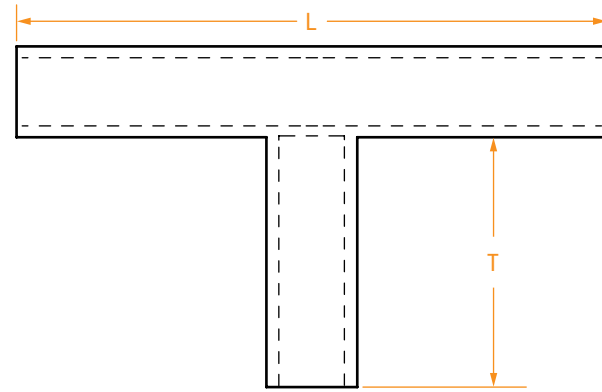


PART NUMBER	RUN	TAP	DIMENSIONS IN INCHES	
			L	T
CCT9-3	1/0	6	3-3/4	1-1/2
CCT9-5	1/0	4	3-13/16	1-1/2
CCT9-7	1/0	2	3-7/8	1-1/2
CCT9-8	1/0	1	3-15/16	1-1/2
CCT9	1/0	1/0	4	1-1/2
CCT10-3	2/0	6	3-29/32	1-5/8
CCT10-5	2/0	4	3-31/32	1-5/8
CCT10-7	2/0	2	4-1/32	1-5/8
CCT10-8	2/0	1	4-3/32	1-5/8
CCT10-9	2/0	1/0	4-5/32	1-5/8
CCT10	2/0	2/0	4-5/32	1-5/8
CCT12-7	4/0	2	4-3/16	1-3/4
CCT12-8	4/0	1	4-3/16	1-3/4
CCT12-9	4/0	1/0	4-1/4	1-3/4
CCT12-10	4/0	2/0	4-5/16	1-3/4
CCT12	4/0	4/0	4-7/16	1-3/4
CCT13-7	250	2	4-1/4	1-3/4
CCT13-8	250	1	4-1/4	1-3/4
CCT13-9	250	1/0	4-5/16	1-3/4
CCT13-10	250	2/0	4-3/8	1-3/4
CCT13-12	250	4/0	4-1/2	1-3/4
CCT13	250	250	4-9/16	1-3/4
CCT15-9	350	1/0	5-37/64	2-3/16
CCT15-10	350	2/0	5-37/64	2-3/16
CCT15-12	350	4/0	5-23/32	2-3/16
CCT15	350	350	5-29/32	2-3/16


PART NUMBER	RUN	TAP	DIMENSIONS IN INCHES	
			L	T
CCT16-9	400	1/0	5-21/32	2-3/8
CCT16-10	400	2/0	5-21/32	2-3/8
CCT16-12	400	4/0	5-25/32	2-3/8
CCT16-13	400	250	5-27/32	2-3/8
CCT16-14	400	300	5-29/32	2-3/8
CCT16-15	400	350	5-31/32	2-3/8
CCT16	400	400	6-1/32	2-3/8
CCT18-9	500	1/0	6-23/64	2-19/32
CCT18-10	500	2/0	6-23/64	2-19/32
CCT18-12	500	4/0	6-15/32	2-19/32
CCT18-13	500	250	6-17/32	2-19/32
CCT18-15	500	350	6-21/32	2-19/32
CCT18-16	500	400	6-23/32	2-19/32
CCT18	500	500	6-23/32	2-19/32
CCT20-10	600	2/0	7-3/16	3-3/32
CCT20-12	600	4/0	7-7/16	3-3/32
CCT20-13	600	350	7-9/16	3-3/32
CCT20-18	600	500	7-11/16	3-3/32
CCT20	600	600	7-7/8	3-3/32
CCT23-15	750	350	7-7/8	3-3/8
CCT23-18	750	500	7-7/8	3-3/8
CCT23	750	750	7-7/8	3-3/8
CCT28-18	1,000	500	9-1/2	4
CCT28-20	1,000	600	9-1/2	4
CCT28-23	1,000	750	9-1/2	4
CCT28	1,000	1,000	9-1/2	4

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

TAPERED COPPER COMPRESSION TEES

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Available in different run and tap sizes.
- Marked with conductor size and die information.
-  UL listed.

TCCT Series

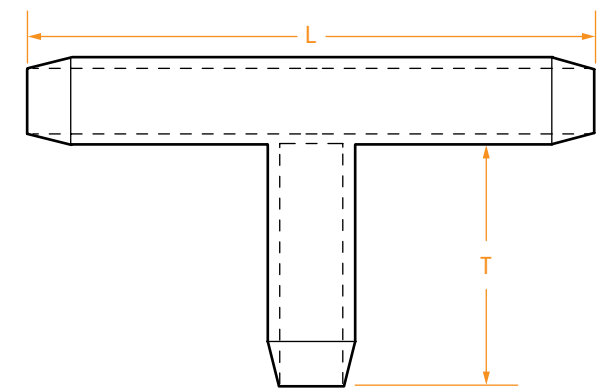


PART NUMBER	RUN	TAP	DIMENSIONS IN INCHES	
			L	T
TCCT9-3	1/0	6	3-3/4	1-1/2
TCCT9-5	1/0	4	3-13/16	1-1/2
TCCT9-7	1/0	2	3-7/8	1-1/2
TCCT9-8	1/0	1	3-15/16	1-1/2
TCCT9	1/0	1/0	4	1-1/2
TCCT10-3	2/0	6	3-29/32	1-5/8
TCCT10-5	2/0	4	3-31/32	1-5/8
TCCT10-7	2/0	2	4-1/32	1-5/8
TCCT10-8	2/0	1	4-3/32	1-5/8
TCCT10-9	2/0	1/0	4-5/32	1-5/8
TCCT10	2/0	2/0	4-5/32	1-5/8
TCCT12-7	4/0	2	4-3/16	1-3/4
TCCT12-8	4/0	1	4-3/16	1-3/4
TCCT12-9	4/0	1/0	4-1/4	1-3/4
TCCT12-10	4/0	2/0	4-5/16	1-3/4
TCCT12	4/0	4/0	4-7/16	1-3/4
TCCT13-7	250	2	4-1/4	1-3/4
TCCT13-8	250	1	4-1/4	1-3/4
TCCT13-9	250	1/0	4-5/16	1-3/4
TCCT13-10	250	2/0	4-3/8	1-3/4
TCCT13-12	250	4/0	4-1/2	1-3/4
TCCT13	250	250	4-9/16	1-3/4
TCCT15-9	350	1/0	5-37/64	2-3/16
TCCT15-10	350	2/0	5-37/64	2-3/16
TCCT15-12	350	4/0	5-23/32	2-3/16
TCCT15	350	350	5-29/32	2-3/16


PART NUMBER	RUN	TAP	DIMENSIONS IN INCHES	
			L	T
TCCT16-9	400	1/0	5-21/32	2-3/8
TCCT16-10	400	2/0	5-21/32	2-3/8
TCCT16-12	400	4/0	5-25/32	2-3/8
TCCT16-13	400	250	5-27/32	2-3/8
TCCT16-14	400	300	5-29/32	2-3/8
TCCT16-15	400	350	5-31/32	2-3/8
TCCT16	400	400	6-1/32	2-3/8
TCCT18-9	500	1/0	6-23/64	2-19/32
TCCT18-10	500	2/0	6-23/64	2-19/32
TCCT18-12	500	4/0	6-15/32	2-19/32
TCCT18-13	500	250	6-17/32	2-19/32
TCCT18-15	500	350	6-21/32	2-19/32
TCCT18-16	500	400	6-23/32	2-19/32
TCCT18	500	500	6-23/32	2-19/32
TCCT20-10	600	2/0	7-3/16	3-3/32
TCCT20-12	600	4/0	7-7/16	3-3/32
TCCT20-13	600	350	7-9/16	3-3/32
TCCT20-18	600	500	7-11/16	3-3/32
TCCT20	600	600	7-7/8	3-3/32
TCCT23-15	750	350	7-7/8	3-3/8
TCCT23-18	750	500	7-7/8	3-3/8
TCCT23	750	750	7-7/8	3-3/8
TCCT28-18	1,000	500	9-1/2	4
TCCT28-20	1,000	600	9-1/2	4
TCCT28-23	1,000	750	9-1/2	4
TCCT28	1,000	1,000	9-1/2	4

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

COPPER COMPRESSION REDUCERS

CCR Series

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Below is a list of common conductor sizes and the range of reduction sizes available. When ordering, specify both cable sizes in the part numbers listed below. A Figure 1 or Figure 2 design will be supplied depending on the amount of reduction.
- All connectors are marked with conductor size and die information.
-  UL listed.

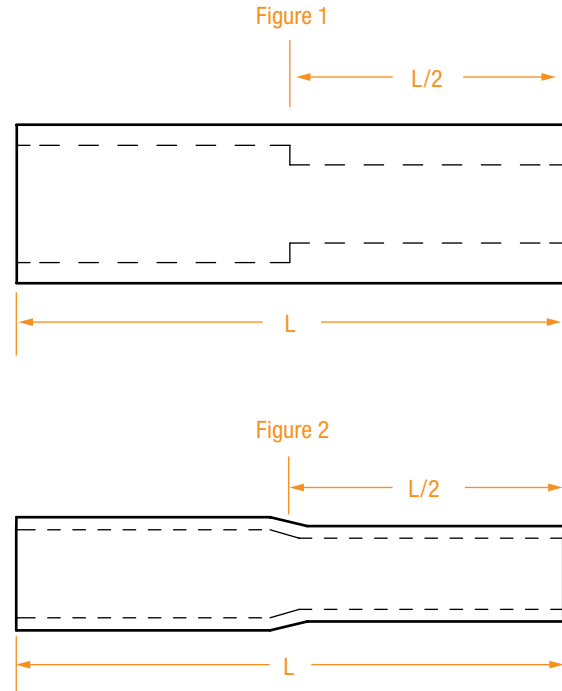


PART NUMBER*	FROM CABLE SIZE	TO CABLE SIZE (RANGE)	DIMENSIONS IN INCHES
			L
CCR3-2	#6	#8	2
CCR5-	#4	#6 - #8	2
CCR7-	#2	#4 - #8	2
CCR8-	#1	#2 - #8	2-1/4
CCR9-	1/0	#1 - #6	2-1/4
CCR10-	2/0	1/0 - #6	2-1/4
CCR11-	3/0	2/0 - #6	3-1/2
CCR12-	4/0	3/0 - #6	3-1/2
CCR13-	250	4/0 - #4	3-3/4
CCR14-	300	250 - #4	3-3/4
CCR15-	350	300 - #4	3-3/4
CCR18-	500	450 - 1/0	4-1/4
CCR23-	750	700 - 1/0	4-3/4
CCR28-	1000	950 - 2/0	6
CCR29-	1250	1000 - 4/0	7


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* Add second wire size to the part number when ordering (example: CCR28-23 is a Cu compression reducer for 1000 to 750 copper cables).

TAPERED COPPER COMPRESSION REDUCERS

TCCR Series

- Made of pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Below is a list of common conductor sizes and the range of reduction sizes available. When ordering, specify both cable sizes in the part numbers listed below. A Figure 1 or Figure 2 design will be supplied depending on the amount of reduction.
- All connectors are marked with conductor size and die information.
-  UL listed.

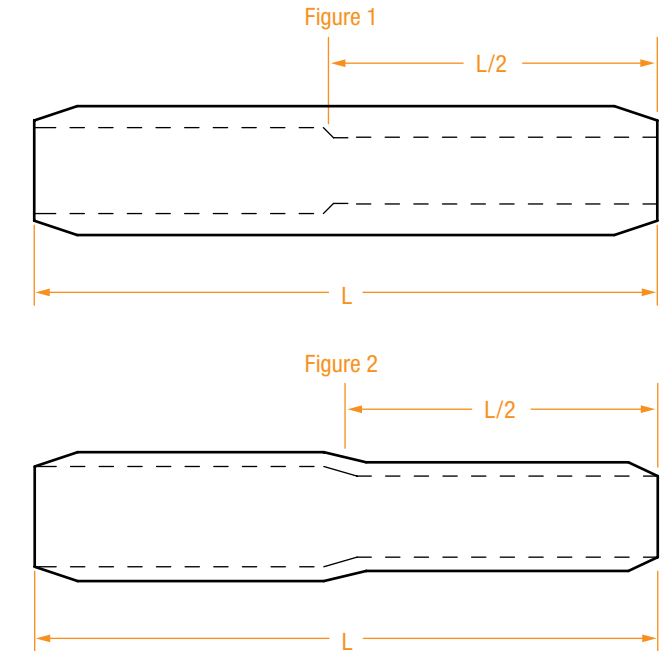


PART NUMBER*	FROM CABLE SIZE	TO CABLE SIZE (RANGE)	INSTALLING DIES	DIMENSIONS IN INCHES
				L
TCCR3-2	#6	#8	7, TE, 24	2
TCCR5-	#4	#6 - #8	5/16, 8, TP, 29, 161	2
TCCR7-	#2	#4 - #8	3/8, 10, TL-TN, 162	2
TCCR8-	#1	#2 - #8	3/8, 11, TB, 37, 276	2-1/4
TCCR9-	1/0	#1 - #6	1/2, 12, TQ, 42, 163	2-1/4
TCCR10-	2/0	1/0 - #6	9/16, 13, TS, 164	2-1/4
TCCR11-	3/0	2/0 - #4	5/8, 14, TU, 243	3-1/2
TCCR12-	4/0	3/0 - #6	5/8-1, 15, 165	3-1/2
TCCR13-	250	4/0 - #4	11/16, 16, TR, 166	3-3/4
TCCR14-	300	250 - #4	781, 17, TV, 167	3-3/4
TCCR15-	350	300 - #4	840, 18, TX, 168	3-3/4
TCCR18-	500	450 - 1/0	1, 20, 170	4-1/4
TCCR23-	750	700 - 1/0	1-5/16, 24, 106, 317	4-3/4
TCCR28-	1000	950 - 2/0	1-1/2, 27, 125	6
TCCR29-	1250	4/0 - 1000	29	8


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* Add second wire size to the part number when ordering (example: TCCR15-9 is a tapered Cu compression reducer for 350 to 1/0 copper cables).

OIL-STOP COPPER COMPRESSION REDUCERS

OCCR Series

- Made of high-conductivity copper.
- Tin-plated to resist corrosion.
- Below is a list of common conductor sizes and the range of reduction sizes available. When ordering, specify both cable sizes in the part numbers listed below. A Figure 1 or Figure 2 design will be supplied depending on the amount of reduction.
- All connectors are marked with conductor size and die information.
-  UL listed.

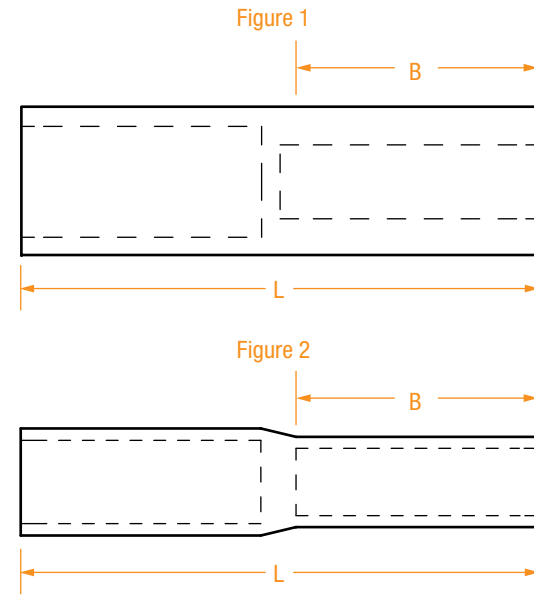


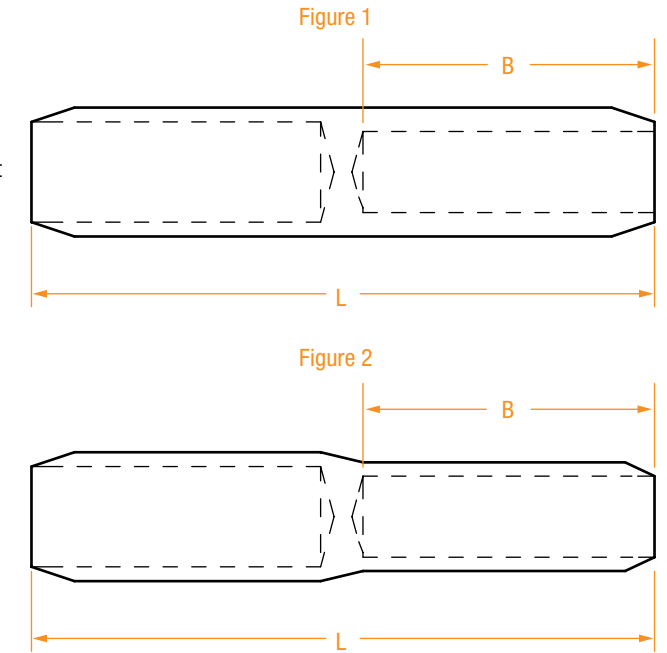
PART NUMBER*	FROM CABLE SIZE	TO CABLE SIZE (RANGE)	INSTALLING DIES	DIMENSIONS IN INCHES	
				L	B
OCCR3-2	#6	#8	7, TE, 24	2	7/8
OCCR5-	#4	#6 - #8	5/16, 8, TP, 29, 161	2	7/8
OCCR7-	#2	#4 - #8	3/8, 10, TL-TN, 162	2	7/8
OCCR8-	#1	#2 - #8	3/8, 11, TB, 37, 276	2-1/4	1
OCCR9-	1/0	#1 - #6	1/2, 12, TQ, 42, 163	2-1/4	1
OCCR10-	2/0	1/0 - #6	9/16, 13, TS, 164	2-1/4	1
OCCR11-	3/0	2/0 - #6	5/8, 14, TU, 243	3-1/2	1-5/8
OCCR12-	4/0	3/0 - #6	5/8-1, 15, 165	3-1/2	1-5/8
OCCR13-	250	4/0 - #4	11/16, 16, TR, 166	3-3/4	1-3/4
OCCR14-	300	250 - #4	781, 17, TV, 167	3-3/4	1-3/4
OCCR15-	350	300 - #4	840, 18, TX, 168	3-3/4	1-11/16
OCCR18-	500	450 - 1/0	1, 20, 170	4-1/4	1-15/16
OCCR23-	750	700 - 1/0	1-5/16, 24, 106, 317	4-3/4	2-1/8
OCCR28-	1000	950 - 2/0	1-1/2, 27, 125	6	2-3/4
OCCR29-	1250	4/0 - 1000	29	8	3-3/4

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

OIL-STOP TAPERED COPPER COMPRESSION REDUCERS

OTCCR Series

- Made of high-conductivity copper.
- Tin-plated to resist corrosion.
- Below is a list of common conductor sizes and the range of reduction sizes available. When ordering, specify both cable sizes in the part numbers listed below. A Figure 1 or Figure 2 design will be supplied depending on the amount of reduction.
- All connectors are marked with conductor size and die information.
-  UL listed.



PART NUMBER*	FROM CABLE SIZE	TO CABLE SIZE (RANGE)	INSTALLING DIES	DIMENSIONS IN INCHES	
				L	B
OTCCR3-	#6	#8	7, TE, 24	2	7/8
OTCCR5-	#4	#6 - #8	5/16, 8, TP, 29, 161	2	7/8
OTCCR7-	#2	#4 - #8	3/8, 10, TL-TN, 162	2	7/8
OTCCR8-	#1	#2 - #8	3/8, 11, TB, 37, 276	2-1/4	1
OTCCR9-	1/0	#1 - #6	1/2, 12, TQ, 42, 163	2-1/4	1
OTCCR10-	2/0	1/0 - #6	9/16, 13, TS, 164	2-1/4	1
OTCCR11-	3/0	2/0 - #4	5/8, 14, TU, 243	3-1/2	1-5/8
OTCCR12-	4/0	3/0 - #6	5/8-1, 15, 165	3-1/2	1-5/8
OTCCR13-	250	4/0 - #4	11/16, 16, TR, 166	3-3/4	1-3/4
OTCCR14-	300	250 - #4	781, 17, TV, 167	3-3/4	1-3/4
OTCCR15-	350	300 - #4	840, 18, TX, 168	3-3/4	1-11/16
OTCCR18-	500	450 - 1/0	1, 20, 170	4-1/4	1-15/16
OTCCR23-	750	700 - 1/0	1-5/16, 24, 106, 317	4-3/4	2-1/8
OTCCR28-	1000	950 - 2/0	1-1/2, 27, 125	6	2-3/4
OTCCR29-	1250	1000 - 4/0	29	8	3-3/4



FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* Add second wire size to the part number when ordering (example: OTCCR18-10 is an oil-stop tapered Cu compression reducer for 500 mcm to 2/0 copper cables).

CORRUGATED COPPER REDUCING ADAPTERS

CRA Series

- Used to reduce the socket size of a standard compression connector – enabling the use of a smaller wire size.
- Fabricated from pure soft copper.
- Hot-tinned to resist corrosion.
- Some sizes are not available with corrugation and have a smooth I.D and O.D.

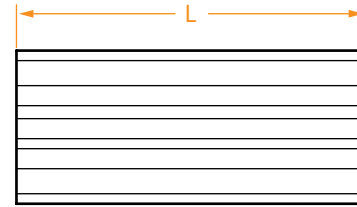

PART NUMBER	CABLE SIZE		DIMENSIONS IN INCHES	PART NUMBER	CABLE SIZE		DIMENSIONS IN INCHES
	FROM	TO	L		FROM	TO	L
CRA12-3	4/0	#6	1-3/4	CRA18-3	500	#6	2-1/2
CRA12-5	4/0	#4	1-3/4	CRA18-5	500	#4	2-1/2
CRA12-7	4/0	#2	1-3/4	CRA18-7	500	#2	2-1/2
CRA12-8	4/0	#1	1-3/4	CRA18-8	500	#1	2-1/2
CRA12-9	4/0	1/0	1-3/4	CRA18-9	500	1/0	2-1/2
CRA12-10	4/0	2/0	1-3/4	CRA18-10	500	2/0	2-1/2
CRA12-11	4/0	3/0	1-3/4	CRA18-11	500	3/0	2-1/2
CRA15-3	350	#6	1-3/4	CRA18-13	500	250	2-1/2
CRA15-5	350	#4	1-3/4	CRA18-14	500	300	2-1/2
CRA15-7	350	#2	1-3/4	CRA18-15	500	350	2-1/2
CRA15-9	350	1/0	1-3/4	CRA18-16	500	400	2-1/2
CRA15-11	350	3/0	1-3/4	CRA23-12	750	4/0	2-1/2
CRA15-12	350	4/0	1-3/4	CRA23-15	750	350	2-1/2
CRA15-13	350	250	1-3/4	CRA23-16	750	400	2-1/2
CRA15-14	350	300	1-3/4	CRA23-18	750	500	2-1/2
				CRA23-20	750	600	2-1/2

NOTE: Many other sizes available.

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

Split Tinned Connectors




SPLIT TINNED CONNECTORS	SERIES	PAGE
Split Tinned Straight Connectors	RSS Series	65
Split Tinned Concentric Reducing Connectors	CR Series	66
Split Tinned Branch Connectors – Full Duplex	FD Series	67
Split Tinned Branch Connectors – Half Duplex	HD Series	68
Split Tinned Tee Connectors	ST Series	69
Lead Splicing Sleeves	LS Series	70

SPLIT TINNED STRAIGHT CONNECTORS

RSS Series

- Made of pure copper.
- Tin-plated to resist corrosion.
- Fabricated in accordance with EEL specifications.

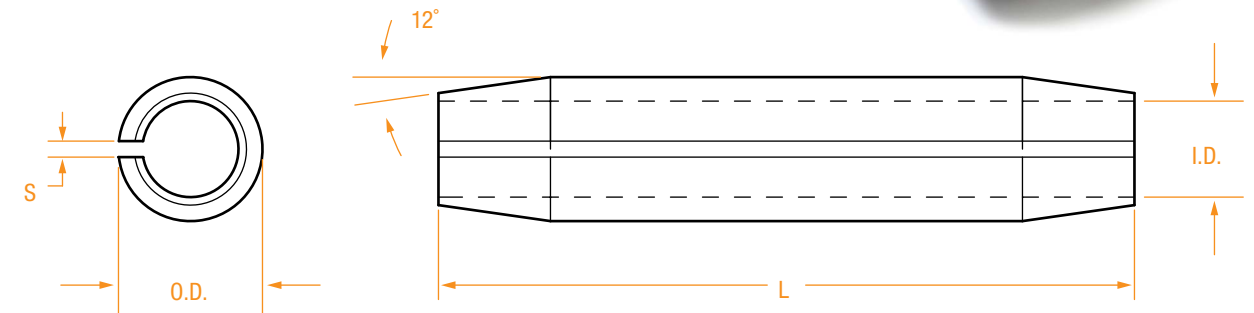

PART NUMBER*	WIRE SIZE	DIMENSIONS IN INCHES			
		L	S	I.D.	O.D.
RSS3	#6	1.5	0.030	0.189	0.251
RSS5	#4	2.0	0.030	0.237	0.315
RSS7	#2	2.0	0.030	0.297	0.395
RSS8	#1	2.0	0.070	0.337	0.449
RSS9	1/0	2.0	0.070	0.378	0.504
RSS10	2/0	2.0	0.070	0.423	0.565
RSS11	3/0	2.0	0.070	0.475	0.635
RSS12	4/0	2.5	0.070	0.533	0.713
RSS13	250	2.5	0.120	0.581	0.778
RSS14	300	2.5	0.120	0.635	0.849
RSS15	350	2.5	0.120	0.690	0.920
RSS16	400	3.0	0.120	0.740	0.986
RSS17	450	3.0	0.120	0.784	1.046
RSS18	500	3.0	0.120	0.826	1.102
RSS19	550	3.0	0.175	0.868	1.154


PART NUMBER*	WIRE SIZE	DIMENSIONS IN INCHES			
		L	S	I.D.	O.D.
RSS20	600	3.5	0.175	0.906	1.206
RSS21	650	3.5	0.175	0.948	1.260
RSS22	700	3.5	0.175	0.983	1.307
RSS23	750	3.5	0.175	1.018	1.356
RSS24	800	4.0	0.175	1.050	1.400
RSS25	850	4.0	0.220	1.083	1.441
RSS26	900	4.0	0.220	1.115	1.483
RSS27	950	4.0	0.220	1.145	1.525
RSS28	1,000	4.5	0.220	1.175	1.565
RSS29	1,250	4.5	0.220	1.320	1.754
RSS30	1,500	5.0	0.280	1.440	1.912
RSS31	1,750	5.5	0.280	1.560	2.074
RSS32	2,000	6.0	0.280	1.664	2.214
RSS33	2,500	6.5	0.280	1.885	2.455

* For "weak back" connectors, add "-WB" to the part number.

SPLIT TINNED CONCENTRIC REDUCING CONNECTORS

CR Series

- Made of pure copper.
- Tin-plated to resist corrosion.
- Fabricated in accordance with EEL specifications.
- The larger wire size dictates the price of the connector.
- When ordering, specify a second wire size after the part number shown below.
- 12° taper.

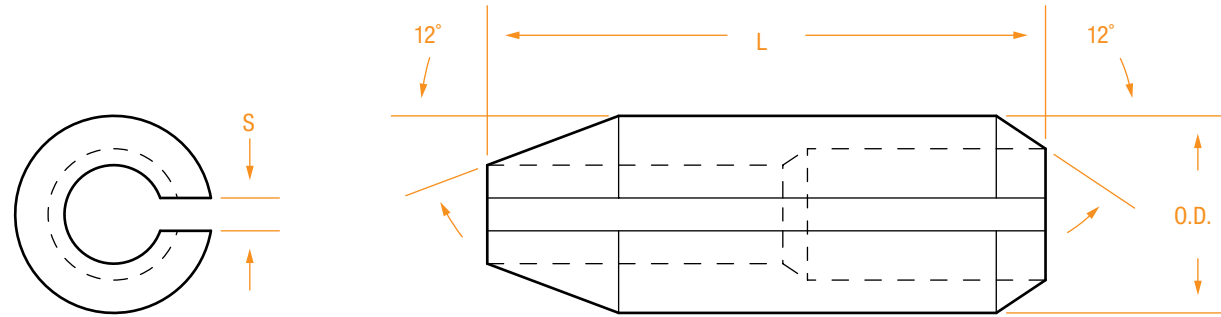

PART NUMBER*	LARGE WIRE SIZE	DIMENSIONS IN INCHES		
		L	S	O.D.
CR3	#6	1.5	0.030	0.251
CR4	#5	1.5	0.030	0.295
CR5	#4	2.0	0.030	0.315
CR6	#3	2.0	0.030	0.353
CR7	#2	2.0	0.030	0.395
CR8	#1	2.0	0.070	0.449
CR9	1/0	2.0	0.070	0.504
CR10	2/0	2.0	0.070	0.565
CR11	3/0	2.0	0.070	0.635
CR12	4/0	2.5	0.070	0.713
CR13	250	2.5	0.120	0.778
CR14	300	2.5	0.120	0.849
CR15	350	2.5	0.120	0.920
CR16	400	3.0	0.120	0.986
CR17	450	3.0	0.120	1.046

PART NUMBER*	LARGE WIRE SIZE	DIMENSIONS IN INCHES		
		L	S	O.D.
CR18	500	3.0	0.120	1.102
CR19	550	3.0	0.175	1.154
CR20	600	3.5	0.175	1.206
CR21	650	3.5	0.175	1.260
CR22	700	3.5	0.175	1.307
CR23	750	3.5	0.175	1.356
CR24	800	4.0	0.175	1.400
CR26	900	4.0	0.220	1.483
CR28	1,000	4.5	0.220	1.565
CR29	1,250	4.5	0.220	1.754
CR30	1,500	5.0	0.280	1.912
CR31	1,750	5.5	0.280	2.074
CR32	2,000	6.0	0.280	2.214
CR33	2,500	6.5	0.280	2.455


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* Add second wire size to the part number when ordering (example: CR23-18 is a concentric reducer for 750 to 500 mcm copper cables).

SPLIT TINNED BRANCH CONNECTORS – FULL DUPLEX

FD Series

- Available in any combination of wire sizes.
- Made of pure copper.
- Tin-plated to resist corrosion.
- Fabricated in accordance with EEL specifications.
- Price is governed by the largest wire size.
- When ordering, specify sizes as A & B to C & D.

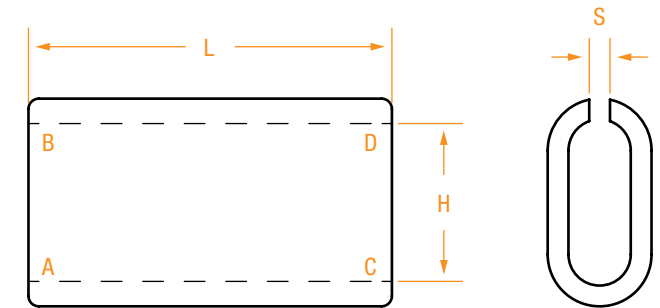


PART NUMBER	WIRE SIZE	DIMENSIONS IN INCHES		
		L	H	S
FD3	#6	1.5	0.378	0.050
FD5	#4	2.0	0.474	0.070
FD6	#3	2.0	0.530	0.070
FD7	#2	2.0	0.594	0.070
FD8	#1	2.0	0.647	0.070
FD9	1/0	2.0	0.756	0.070
FD10	2/0	2.0	0.846	0.070
FD11	3/0	2.0	0.950	0.070
FD12	4/0	2.5	1.066	0.120
FD13	250	2.5	1.162	0.120
FD14	300	2.5	1.270	0.120
FD15	350	2.5	1.380	0.120
FD16	400	3.0	1.480	0.175
FD17	450	3.0	1.560	0.175
FD18	500	3.0	1.652	0.175
FD19	550	3.0	1.736	0.175
FD20	600	3.5	1.812	0.175
FD21	650	3.5	1.896	0.175

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

**SPLIT TINNED
BRANCH CONNECTORS – HALF DUPLEX**

HD Series

- Available in any combination of wire sizes.
- Made of pure copper.
- Tin-plated to resist corrosion.
- Fabricated in accordance with EEI specifications.
- Price is governed by the largest wire size.
- When ordering, specify sizes A and B & C.

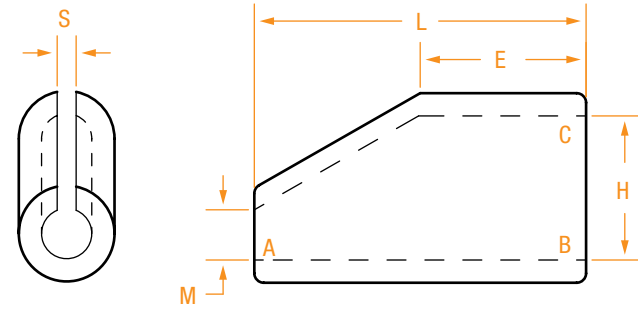


PART NUMBER	WIRE SIZE	DIMENSIONS IN INCHES				
		M	H	E	L	S
HD3	#6	0.189	0.378	0.75	1.5	0.050
HD5	#4	0.237	0.474	1.00	2.0	0.070
HD6	#3	0.265	0.530	1.00	2.0	0.070
HD7	#2	0.297	0.594	1.00	2.0	0.070
HD8	#1	0.337	0.674	1.00	2.0	0.070
HD9	1/0	0.378	0.756	1.00	2.0	0.070
HD10	2/0	0.423	0.846	1.00	2.0	0.070
HD11	3/0	0.475	0.950	1.00	2.0	0.070
HD12	4/0	0.533	1.066	1.25	2.5	0.120
HD13	250	0.581	1.162	1.25	2.5	0.120
HD14	300	0.635	1.270	1.25	2.5	0.120
HD15	350	0.690	1.380	1.25	2.5	0.120
HD16	400	0.740	1.480	1.50	3.0	0.175
HD17	450	0.784	1.568	1.50	3.0	0.175
HD18	500	0.826	1.652	1.50	3.0	0.175
HD19	550	0.868	1.736	1.50	3.0	0.175
HD20	600	0.906	1.812	1.75	3.5	0.175
HD21	650	0.948	1.896	1.75	3.5	0.175
HD23	750	1.018	2.036	1.75	3.5	0.220
HD24	800	1.052	2.104	2.00	4.0	0.220
HD25	850	1.083	2.166	2.00	4.0	0.220
HD28	1000	1.2	2.32	2.35	4.5	0.150
HD32	2000	1.7	3.4	3.2	6.0	0.260

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

**SPLIT TINNED
TEE CONNECTORS**

ST Series

- Available in any combination of wire sizes.
- Made of pure copper.
- Tin-plated to resist corrosion.
- Silver solder is used as a brazing material for mechanical strength and conductivity.
- The larger wire size dictates the price of the connector.
- When ordering, specify a "tap" wire size after the part number shown below.
- Fabricated in accordance with EEI specifications.

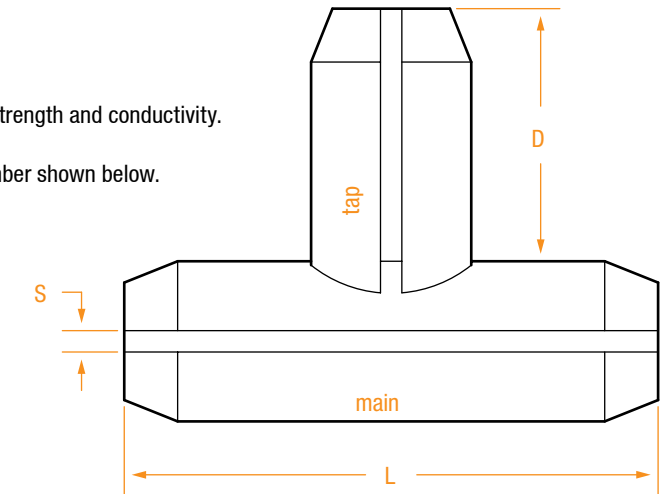

PART NUMBER	WIRE (MAIN)	DIMENSIONS IN INCHES		
		L	D	S
ST1	#10	1.5	3/4	0.030
ST2	#8	1.5	3/4	0.030
ST3	#6	1.5	3/4	0.030
ST5	#4	2.0	1	0.030
ST6	#3	2.0	1	0.030
ST7	#2	2.0	1	0.030
ST8	#1	2.0	1	0.070
ST9	1/0	2.0	1	0.070
ST10	2/0	2.0	1	0.070
ST11	3/0	2.0	1	0.070
ST12	4/0	2.5	1-1/4	0.070
ST13	250	2.5	1-1/4	0.120
ST14	300	2.5	1-1/4	0.120
ST15	350	2.5	1-1/4	0.120
ST16	400	3.0	1-1/2	0.120

PART NUMBER	WIRE (MAIN)	DIMENSIONS IN INCHES		
		L	D	S
ST17	450	3.0	1-1/2	0.120
ST18	500	3.0	1-1/2	0.120
ST19	550	3.0	1-1/2	0.175
ST20	600	3.5	1-3/4	0.175
ST21	650	3.5	1-3/4	0.175
ST22	700	3.5	1-3/4	0.175
ST23	750	3.5	1-3/4	0.175
ST24	800	4.0	2	0.175
ST26	900	4.0	2	0.220
ST28	1,000	4.5	2-1/4	0.220
ST29	1,250	4.5	2-1/4	0.220
ST30	1,500	5.0	2-1/2	0.280
ST31	1,750	5.5	2-3/4	0.280
ST32	2,000	6.0	3	0.280
ST33	2,500	6.5	3-1/4	0.280

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

LEAD SPLICING SLEEVES


LS Series

- Used in conjunction with split tinned connectors when splicing PILC cable.
- Bridges lead neutral.
- When ordering, specify length (L), inside diameter (ID) and thickness (T)

INSIDE DIAMETER (ID)	THICKNESS (T)
2.00"	.125"
2.50"	.125"
2.50"	.150"
3.00"	.125"
3.50"	.150"
4.00"	.200"
4.50"	.200"
6.00"	.200"

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

Distribution Equipment

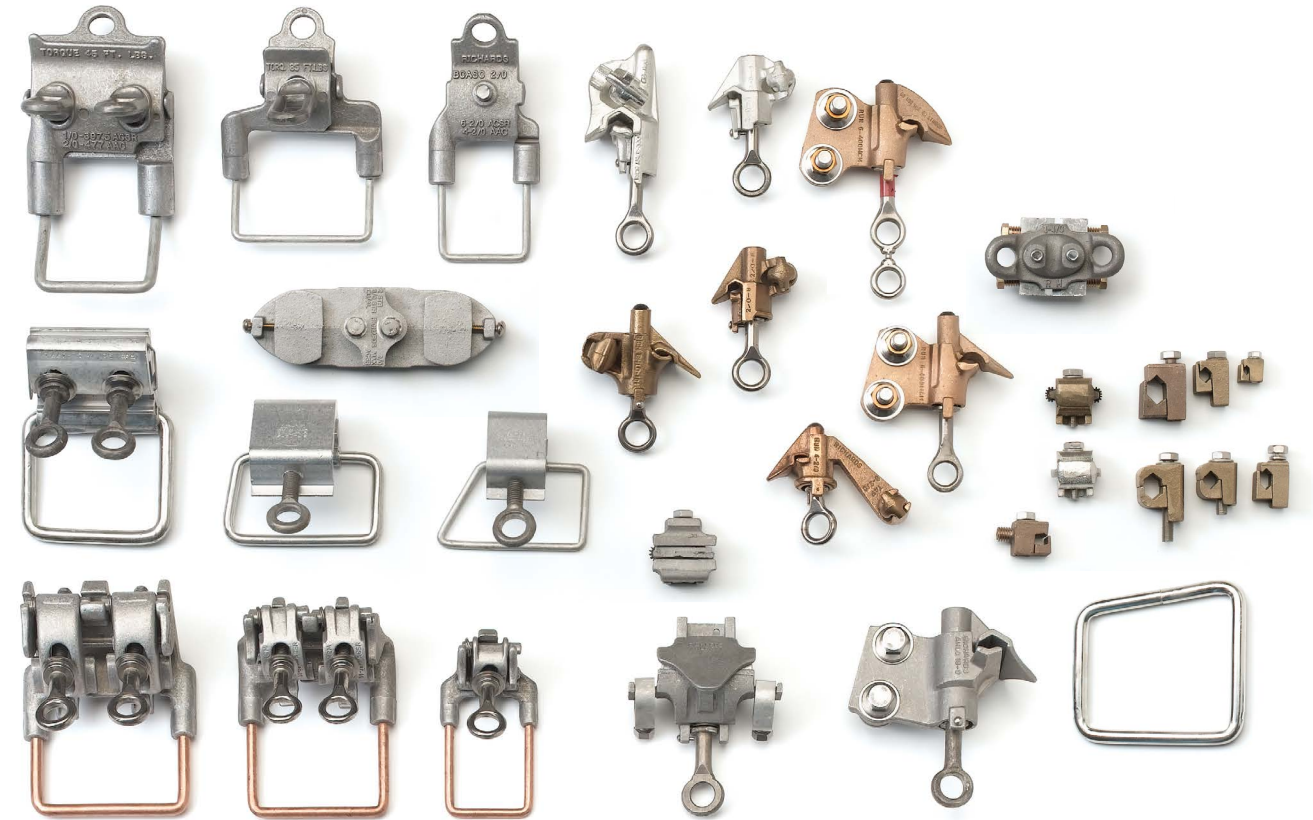


DISTRIBUTION EQUIPMENT

	SERIES	PAGE
Bronze Vise Connectors – Jaws Overlap	.VC Series	73
Aluminum Hot-Line Clamps	.AHL Series	74
Bronze Hot-Line Clamps	.BHL Series	75
Aluminum Hot-Line Clamps	.AHL-397 Series	76
Aluminum Parallel Clamps With Plastic Covers	.APC Series	77
Aluminum & Bronze Stirrup Connectors	.ASC & BSC Series	78
Aluminum Clamshell Stirrups	.BCASC Series	79
Bronze Vise Connectors – Jaws Meet	.VC-H Series	80
Tank Ground Connectors	.RTG Series	81
Service Drop Connectors	.RSD Series	82
Mid-Span Clamps	.SDC & SEC Series	83
Neutral Dead Ends	.RDE Series	84
Stirrups	.RST Series	85
Overhead Bail Clamps	.RB Series	86
Bolted Wedge Connectors	.RBWC Series	87
Bronze Parallel Vise Connectors	.VC-80XX Series	88
Pedestal Connectors	.PC371105 Series	89
Acorn Ground Clamps	.ACRN Series	90
Neutral-Span Clamps	.R07-1285 Series	91
Underground Residential Distribution Multi-Splice	.URD Series	92
Fiber Optic Clamp	.RAFOB Series	93
Fiber Optic Offset Bracket	.RFB Series	94

BRONZE VISE CONNECTORS – JAWS OVERLAP

VC Series

- Made of high-strength silicon bronze.
- Accepts a range of conductors.
- RUS Approved.

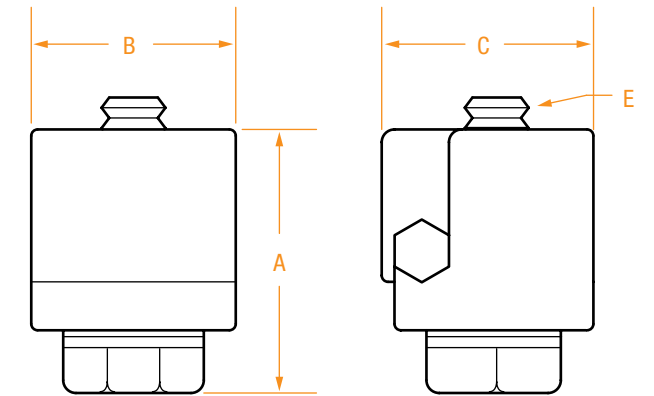

PART NUMBER*	CLAMPS 2 CABLES TOGETHER: THIS SIZE CABLE COMBINED WITH ANY CABLE LESS THAN OR EQUAL IN DIAMETER	DIMENSIONS IN INCHES			BOLT HEAD SIZE
		A	B	C	
VC3	6 Solid or 8 Stranded	7/8	5/8	3/4	3/8 (Slot)
VC5	4 Solid or Stranded	1-1/8	3/4	13/16	9/16
VC7	2 Solid or 3 Stranded	1-3/8	13/16	15/16	9/16
VC10	1 Solid or 2 Stranded	1-5/8	13/16	1	9/16
VC10S	3/0 Solid or 2/0 Stranded	2	7/8	1-1/4	9/16
VC12	4/0 Solid or Stranded	2-1/8	1	1-3/8	9/16
VC15	350 Stranded	3	1-1/4	1-3/4	3/4
VC18	500 Stranded	3-1/2	1-3/8	2	3/4

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For tin plated connectors, add "-P" to the part number. For a shear head bolt, add "-SH" to the part number. For a washer under the bolt, add "-W" to the part number.

ALUMINUM HOT-LINE CLAMPS

- Designed to be used for distribution service connections with hot sticks.
- Eyebolts are made from forged stainless steel.
- Eyelets and keepers are made from aluminum bronze.
- Bodies are made from high-strength aluminum.
- Wide jaws provide a greater surface contact, reducing twisting of the conductor during installation.
- Spring-loaded with a sturdy steel spring to compensate for temperature changes.

AHLC Series

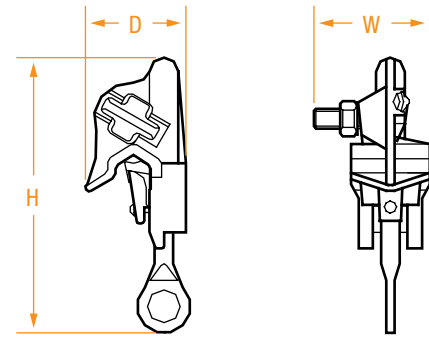


Figure 1

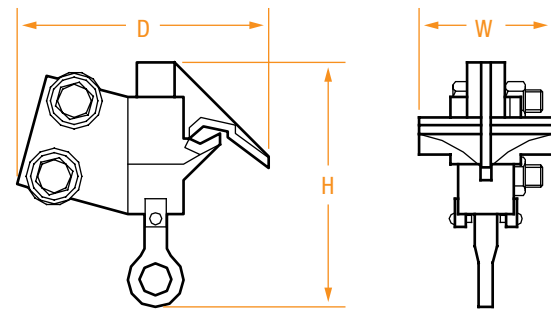


Figure 2

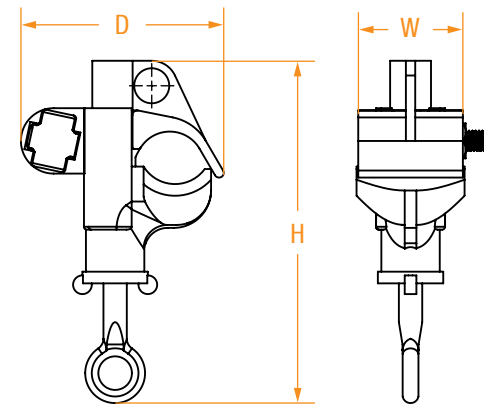


Figure 3



PART NUMBER*	FIGURE	RUN RANGE		TAP RANGE		DIMENSIONS IN INCHES		
		MIN.	MAX.	MIN.	MAX.	H	D	W
AHLC-100-TN	1	#8	2/0	#8	2/0	5	2-3/4	2
AHLC-300-TN**	1	#6	400	#6	3/0	6	2-1/4	1-3/4
AHLC-18-9	2	1/0	500	two-hole NEMA Spade		6-1/2	4-1/2	3
AHLC-700-TN	2	#4 Str	800	#4 Sol	300	7	3	3
AHLC-2000	3	666 ACSR	2000 ACSR	#6 Sol Cu	250	7	4-5/16	2-1/2


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For tin plated connectors, add "-TN" to the part number. For pre-applied inhibitor in the clamp's jaws (individually bagged) add "-IB" to the part number.
** For 3/4" eyelet, add "-3/4" to the part number.

BRONZE HOT-LINE CLAMPS

- Designed to be used for distribution service connections with hot sticks.
- Bodies are made from silicon bronze.
- Eyebolts are made from forged stainless steel.
- Eyelets and keepers are made from aluminum bronze.
- Wide jaws provide a greater area of surface contact reducing twisting of the conductor during installation.
- Spring-loaded with a sturdy steel spring to compensate for temperature change.

BHLC Series

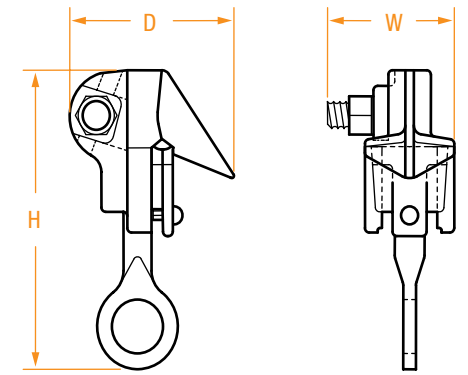

PART NUMBER*	RUN RANGE		TAP RANGE		DIMENSIONS IN INCHES		
	MIN.	MAX.	MIN.	MAX.	H	D	W
BHLC-100	#8	2/0	#8	2/0	5	2-3/4	2
BHLC-101	#6	400	#6	4/0	5-3/4	3-5/8	2-3/8
BHLC-102	#6	400	2/0 - 500 (U-Bolt Tap)		5-3/4	4-1/2	2-3/4
BHLC-201	#4	2/0	#6	2/0	3-7/8	4-1/2	1-7/8
BHLC-300	#6	400	#6	4/0	6-1/2	2-1/2	2-1/2
BHLC-400	#6	400	two-hole NEMA Spade		6-3/8	4-1/2	2-3/8
BHLC-401	#6	400	two-hole NEMA Spade		5-1/4	4-5/8	1-7/8

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

NOW AVAILABLE

BHLC-100 is now available with extended tongue which facilitates landing the clamp onto the overhead conductor. To order, use part number BHLC-100-XT.



* For tin plated connectors, add "-TN" to the part number. For pre-applied inhibitor in the clamp's jaws (individually bagged) add "-IB" to the part number.


ALUMINUM HOT-LINE CLAMPS

AHLC-397 Series

- A full duty connector designed to replace the function of hot-line taps in heavily loaded applications.
- Acorn clamps allow secure taps to exit from either side.
- Clamp is made of high-strength aluminum.
- Center piece is made from soft, high-conductive pure aluminum.
- Filled with oxide-inhibiting grease.
- Easily installed using a hot stick.



AHLC-397

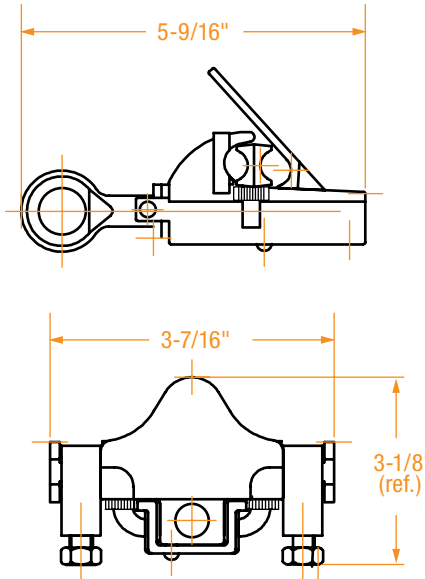


PART NUMBER	CONDUCTOR RANGE RUN SIZE		CONDUCTOR RANGE TAP SIZE	
	MIN	MAX	MIN	MAX
AHLC-397	3/0 ACSR / 4/0 Str. Al	336,400 ACSR / 397,500 Al	3/0 ACSR / 4/0 Str. Al	336,400 ACSR / 397,500 Al


ALUMINUM PARALLEL CLAMPS WITH PLASTIC COVERS

APC Series

- Taps overhead secondary for connection to customer.
- Easily installed on energized or de-energized cables.
- Designed to withstand vibrations.
- Low torque provides high pressure on conductor.

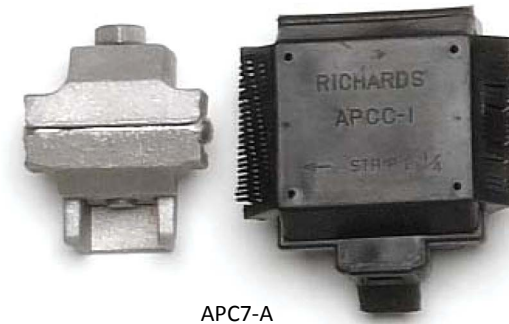

APC7-A

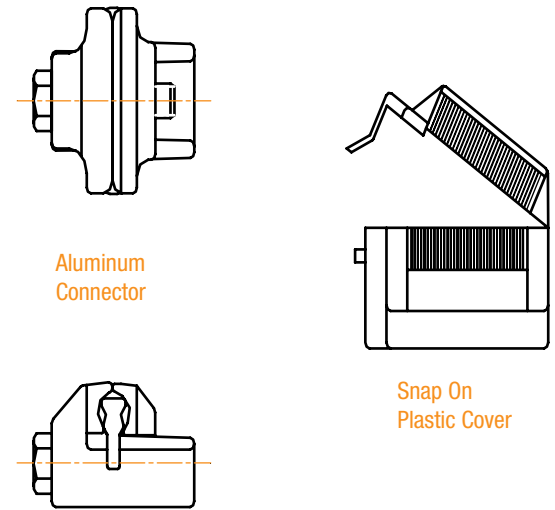



PART NUMBER*	RUN SIZE		TAP SIZE		SNAP-ON COVER
	ACSR	AL	ACSR	AL OR CU	
APC5	#6-#4 ACSR	#2 Sol. #8 Sol. Al	#6-#4 ACSR	#2 Sol.-#8 Sol.	APCC-1
APC7	#6-#2 ACSR	#1 Str. #6 Sol. Al	#6-#2 ACSR	#1 Str.-#12 Sol.	APCC-1
APC10	#6-1/0 ACSR	#6 Sol. 2/0 Str. Al	#6-1/0 ACSR	#6 Sol.-2/0 Str.	APCC-1
APC11	#2-4/0 ACSR	#1 Str. 4/0 Str. Al	#2-4/0 ACSR	#1 Str.-4/0 Str.	APCC-2
APC12	#2-4/0 ACSR	#1 Str. 4/0 Str. Al	#6-2/0 ACSR	#6 Sol.-2/0 Str.	APCC-2
APC132	4/0-666,000 ACSR	266,800-800,000 Al	#6-2/0 ACSR	#6 Sol.-2/0 Str.	APCC-2
APC13	4/0-666,000 ACSR	266,800-800,000 Al	#2-4/0 ACSR	#1 Str.-4/0	APCC-2
APC14	3/0-336,400 ACSR	4/0-397,500 Al	#6-4/0 ACSR	#6 Sol.-266,800	APCC-2
APC15	3/0-336,400 ACSR	4/0-397,500 Al	3/0-336,400 ACSR	4/0-397,500	APCC-2

* For a rubber grommet on the spacer, add "-G" to the part number. For connector and cover shipped together, add "-A" to the part number.

ALUMINUM & BRONZE STIRRUP CONNECTORS

ASC & BSC Series

- ASC connector has a pure aluminum body and pure copper bail.
- BSC connector has a bronze body and pure copper bail.
- Bail is knurled prior to insertion into aluminum connector to prevent pull-out.

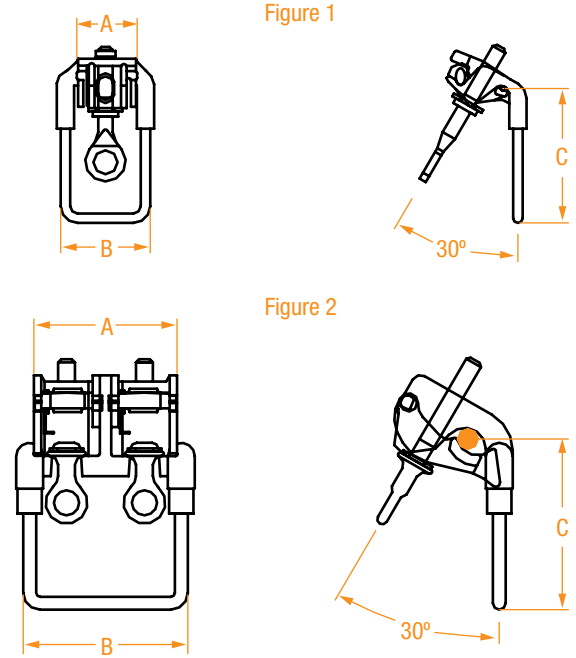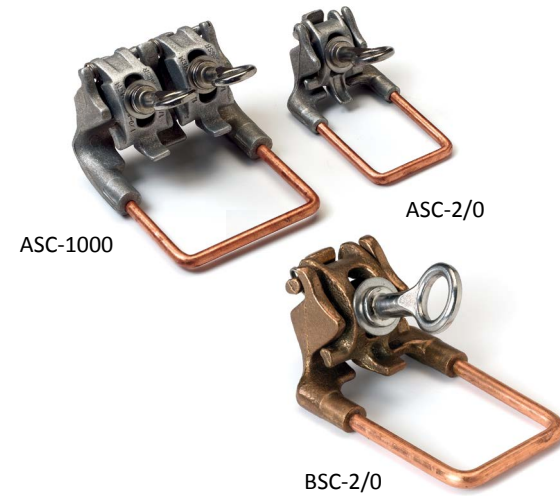


PART NUMBER*	CABLE RANGE	# OF EYEBOLTS	DIMENSIONS IN INCHES			BAIL DIA.
			A	B	C	
ASC-2/0**	AAC: #6 Sol. – 2/0 ACSR: #8 – 2/0	1	1-13/16	2-5/8	4-1/8	.289"
BSC-2/0***	#6 Sol. – 2/0 Cu #8 – 2/0 Cu	1	1-7/8	2-5/8	4-1/4	.289"
ASC-500**	AAC: 1/0 – 500 MCM ACSR: 1/0 – 397.5 MCM	2	4	4-3/8	4-13/16	.332"
ASC-1000**	AAC: 350 – 1000 MCM ACSR: 336.4 – 954 MCM	2	4-1/4	4-13/16	5-1/8	.385"

ALUMINUM CLAMSHELL STIRRUPS

BCASC Series

- Connector has a pure A356T6 aluminum body and pure copper bail.
- Bail is knurled prior to insertion into aluminum connector to prevent pull-out.
- Bail is tin-plated for better electrical connection.

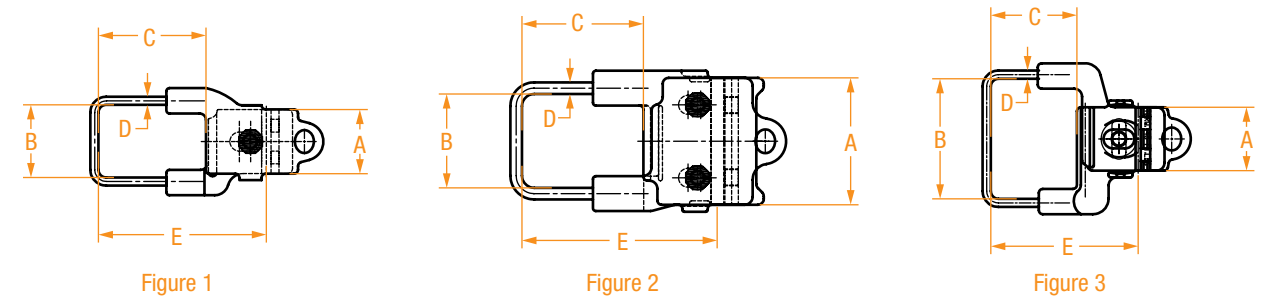

PART NUMBER	FIGURE	CABLE RANGE		DIMENSIONS IN INCHES				
		AAC	ACSR	A	B	C	D	E
BCASC2/0	1&4	4-2/0 (.232" - .414")	6-2/0 (.198" - .447")	2	2-1/4	3-3/8	#2 Cu	5-5/16
BCASC2/0-E-W	3&4	4-2/0 (.232" - .414")	6-2/0 (.198" - .447")	2	2-1/4	3-3/8	#2 Cu	5-5/16
BCASC2/0-E-45	1&5	4-2/0 (.232" - .414")	6-2/0 (.198" - .447")	2	2-1/4	3-1/8	#2 Cu	4-7/8
BCASC2/0-W	3&4	4-2/0 (.232" - .414")	6-2/0 (.198" - .447")	2	3-3/4	3-3/8	#2 Cu	5-5/16
BCASC2/0-45	1&5	4-2/0 (.232" - .414")	6-2/0 (.198" - .447")	2	3-3/4	3-1/8	#2 Cu	4-7/8
BCASC2/0-E-W-45	3&5	4-2/0 (.232" - .414")	6-2/0 (.198" - .447")	2	3-3/4	3-1/8	#2 Cu	4-7/8
BCASC397	2&4	2/0-477 (.414" - .795")	1/0-477 18/1 (.398" - .814")	4	3-1/8	4-1/4	2/0 Cu	6-1/8
BCASC397-45	1&5	2/0-477 (.414" - .795")	1/0-477 18/1 (.398" - .814")	4	3-1/8	4-1/4	2/0 Cu	6-1/8
BCASC397-E-45	2&5	2/0-477 (.414" - .795")	1/0-477 18/1 (.398" - .814")	4	3-1/8	4	2/0 Cu	5-3/4
BCASC397-L	2&4	2/0-477 (.414" - .795")	1/0-477 18/1 (.398" - .814")	4	3-1/8	4-1/8	1/0 Cu	6-1/8
BCASC397-E-45-L	2&5	2/0-477 (.414" - .795")	1/0-477 18/1 (.398" - .814")	4	3-1/8	3-7/8	1/0 Cu	5-3/4


E=Eye Bolt W=Wide Bail 45=45° Bail

* For tin plated bails, add "-TN" to the part number.
 ** ASC-2/0, ASC-500 and ASC-1000 come with inhibitor applied to the clamp and individually bagged.
 *** BSC-2/0 is not greased or bagged. Please add "-I" for inhibitor, "-B" for individually bagged or "-IB" for both.

BRONZE VISE CONNECTORS – JAWS MEET

VC-H Series

- Made of high-strength silicon bronze.
- Accepts a range of conductors.

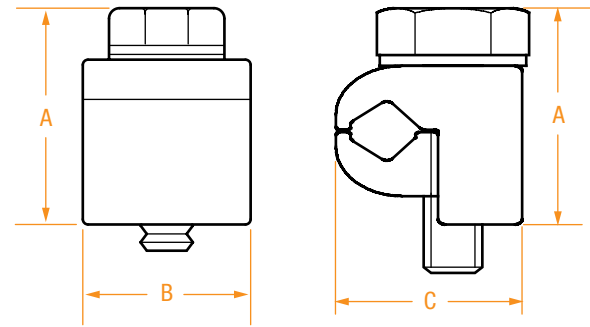


PART NUMBER*	CLAMPS 2 CABLES TOGETHER: THIS SIZE CABLE COMBINED WITH ANY CABLE LESS THAN OR EQUAL IN DIAMETER	DIMENSIONS IN INCHES			BOLT HEAD SIZE
		A	B	C	
VC3-H	#6	15/16	9/16	5/8	3/8 Slotted
VC5-H	#2	1-1/8	11/16	13/16	9/16
VC7-H	1/0	1-1/2	13/16	1-1/16	9/16
VC10S-H	2/0	1-5/8	1	1-1/8	9/16
VC12-H	4/0	1-3/4	1	1-7/16	9/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

TANK GROUND CONNECTORS

RTG Series




- Used for grounding connections on distribution transformer tanks.
- Recommended for copper ground conductors.
- Made of high-strength silicon bronze.
- Provided with standard 1/2 - 13 thread studs with a 9/16" bolt head.



RTG512



RTG512F

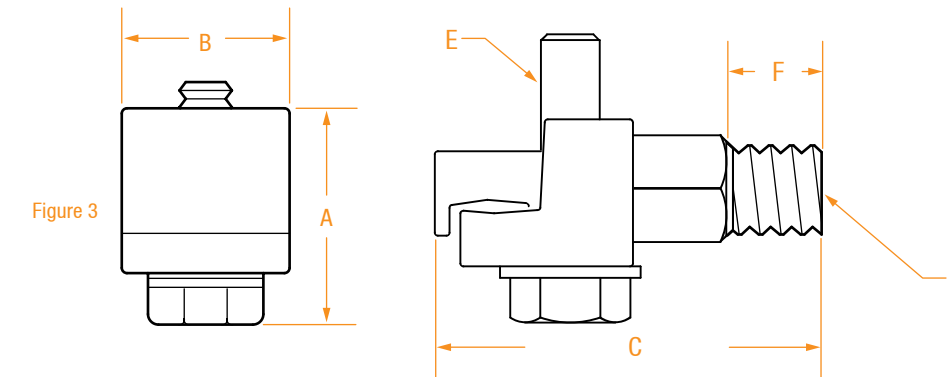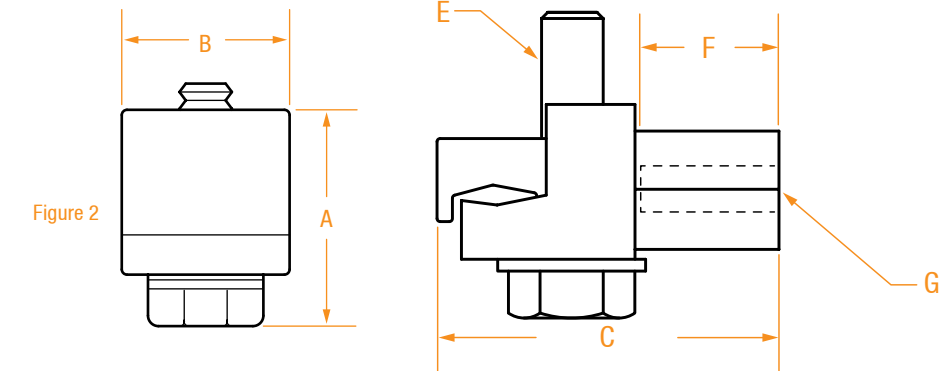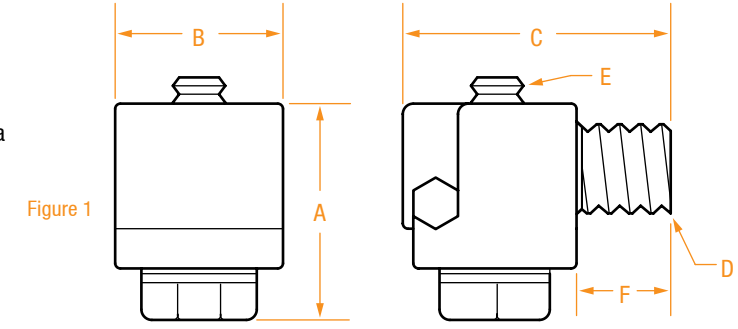

PART NUMBER*	CONDUCTOR RANGE	FIGURE #	DIMENSIONS IN INCHES						
			A	B	C	D	E	F	G
RTG512	6 Sol. to 1/0	1	1-1/4	3/4	1-3/8	1/2-13	5/16	1/2	-
RTG512-XL	6 Sol. to 1/0	1	1-1/4	3/4	1-3/8	1/2-13	5/16	1-1/16	-
RTG512-F	6 Sol. to 1/0	2	7/8	7/8	1-11/16	-	5/16	1/2	Threaded hole 5/16 -18
RTG512-F-3/8	6 Sol. to 1/0	2	7/8	7/8	1-11/16	-	5/16	3/4	Threaded hole 3/8 -16
RTG512-M	6 Sol. to 1/0	3	1	13/16	2-1/8	1/2-13	5/16	1/2	-

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

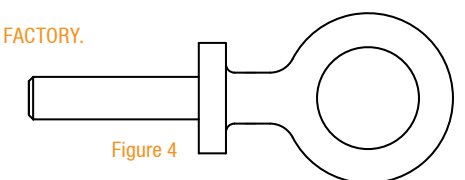


Figure 4

- * For plated connectors, add "-TN" to the part number.
- Note: All RTG designs are available with eyebolt shown in Figure 4. To order add "E" to the part number.

* For tin plated, add "-P" to the part number. For a shear head bolt, add "-SH" to the part number.



SERVICE DROP CONNECTORS

RSD Series

- Designed for multiple service connections.
- It provides a compact, readily accessible, reliable secondary connection.
- Allows for one main run and four service drop connections.
- Each service drop is individually connected, which allows easy installation and removal.
- The body is made of high-strength aluminum.
- Cable ports are prefilled with an oxide-inhibiting compound.

Cover:

- The cover is designed to protect the connector from contact with other phases.
- Holes for the service drops are precut to allow installation and removal of each service without having to remove the cover.
- Contains UV stabilizers.

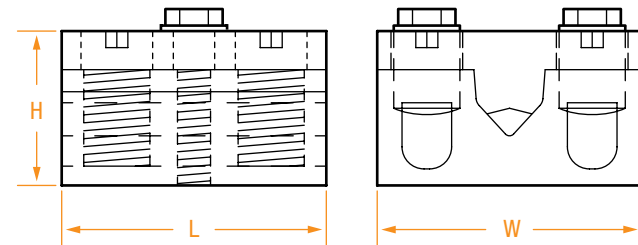

RSD262



PART NUMBER	CONDUCTOR RANGES		DIMENSIONS IN INCHES		
	RUN	TAP	L	W	H
RSD262*	2 Str. – 350 MCM	#4 Sol. – 3/0 Str.	3-1/16	2-7/8	1-3/4
RSD262C	2 Str. – 350 MCM	#4 Sol. – 3/0 Str.	3-15/16	3-9/16	3

RSD262C IS THE COVER FOR THE RSD262 CONNECTOR

MID-SPAN CLAMPS

SDC & SEC Series

- Mid-span clamps are designed for use on bare cable and triplex secondaries for single or multiple service connections away from the pole.
- Fabricated from high-strength, high-conductivity aluminum.
- Features a four-tap connection block and an aluminum base with side loop that attach to service dead ends.
- Cable ports are pre-filled with an oxide-inhibiting compound.
- The service tap block enables the joining of one through four cables.
- Each cable is held by a separate bolt allowing for easy installation and removal.
- High-strength washer bolts are used to secure the neutrals.
- These bolts are anodized to prevent the aluminum from galling when installing and removing cables.
- Plastic cover contains UV stabilizers.

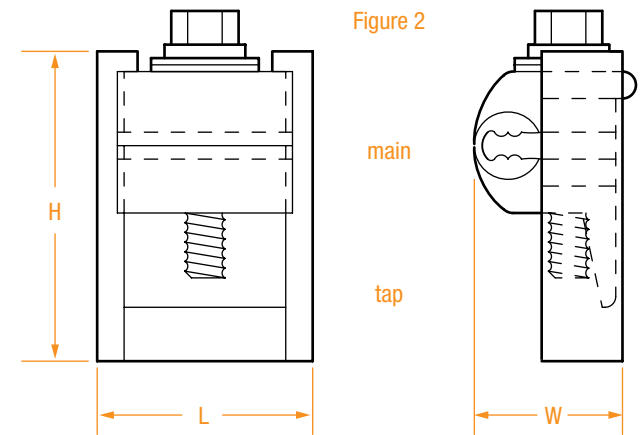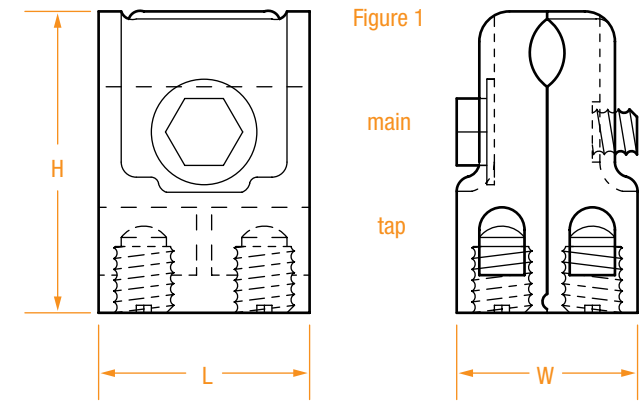

SDC495



SEC3-12


PART NUMBER	CONDUCTOR RANGES		FIG.	DIMENSIONS IN INCHES		
	MAIN	TAP		L	W	H
SDC495	#2 Str. – 3/0 Str.	#6 – 1/0 Str.	1	2	1-9/16	2-7/8
SEC3-12	#6 Sol. Cu – 2/0 Str. #6 Str. Al – 4/0 Str. Al	#6 Sol. Cu – 2/0 Str. #6 Str. Al – 4/0 Str. Al	2	1-3/4	1-1/2	2-1/2

* Comes with the black cover RSD262C.

NEUTRAL DEAD ENDS

- The RICHARDS RDE-101 and RSPTAP use an aluminum connector block with four taps to join neutrals from one through four services.
- Designed for neutral dead-end connections.
- High-strength aluminum washer head bolts are used to provide easy installations on bare wire or triplex secondary neutrals away from the pole.
- Side loops allow service dead ends to be attached at any angle.
- Each service is individually connected, which provides easy removal and installation.
- When installed on triplex secondaries, the fitted grooves protect the covered phase wires.
- Each cable port is pre-filled with an oxide-inhibiting compound.

RDE Series

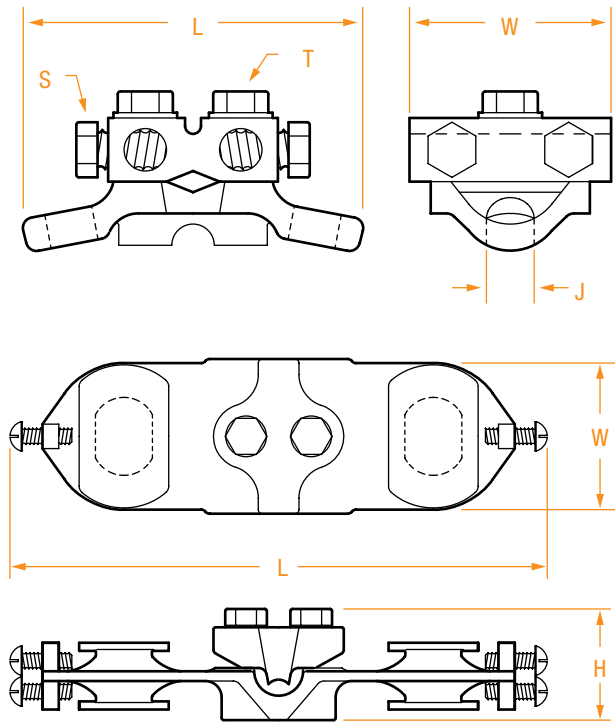

RSPTAP



RDE-101

PART NUMBER	CONDUCTOR RANGE				DIMENSIONS IN INCHES					
	RUN		TAP		H	J	L	W	T	S
	MIN	MAX	MIN	MAX						
RDE-101	#4	4/0	#6	2/0	2-1/4	5/8	4-1/8	2-7/8	3/8	1/2
RSPTAP	-	-	-	-	1-1/2	-	8-1/8	2-3/8	-	-

STIRRUPS

- Stirrups allow the attachment of hot-line clamps and grounding connectors to different system components.
- Stirrup holes are spaced such that they will be accepted on standard NEMA pads.
- The flange on the end of the stirrup prevents any clamps from sliding off during installation.

RST Series

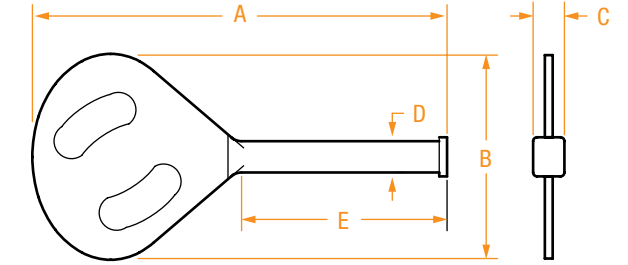


Figure 1

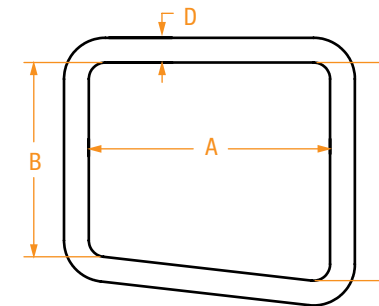


Figure 2

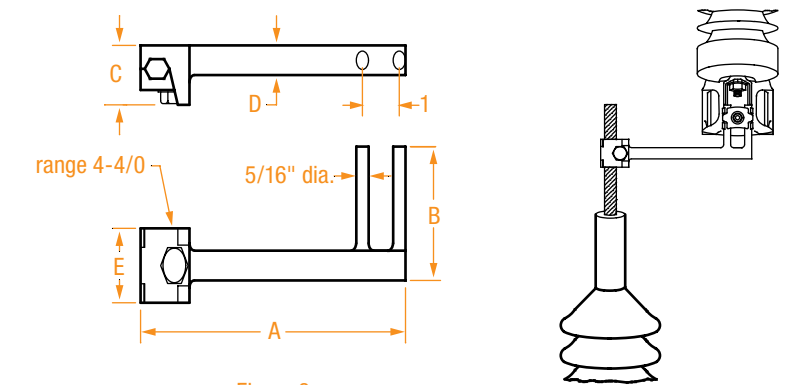


Figure 3

PART NUMBER	FIGURE	DIMENSIONS IN INCHES				
		A	B	C	D	E
RST-275*	1	7	3-1/2	1-1/4	3/4	3-1/4
R124214**	2	4-1/4	3-3/8	4-1/8	0.460 (4/0)	N/A
RST-356***	3	7	2-1/4	1-1/2	1/2	1-1/4

* RST-275 is made of high-strength cast aluminum.
 ** R124214 is made of high-conductivity copper rod.
 *** RST-356 is made of cast bronze.

OVERHEAD BAIL CLAMPS

- Designed to be used for distribution service connections with standard hot sticks.
- Bail size ranges from #1 to 4/0 solid.
- The body is made of high-strength aluminum.
- Large area of compression between the aluminum body and the bail makes an extremely reliable connection.
- The wide jaws provide a greater area of surface contact, reducing twisting of the conductor during installation.
- Jaws are pre-coated with an oxide-inhibiting compound.

RB Series

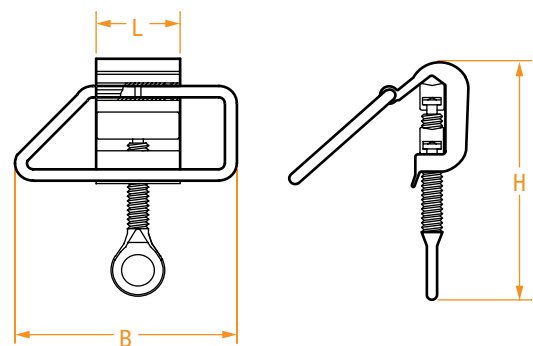


Figure 1

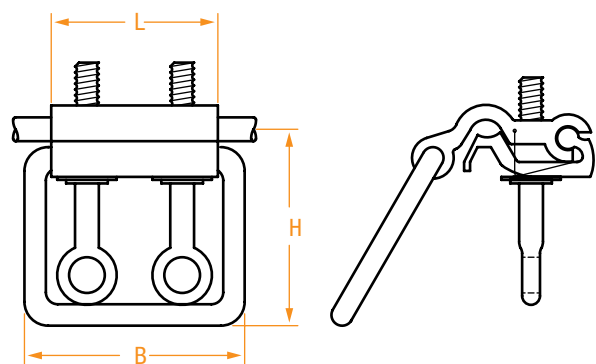


Figure 2


PART NUMBER*	FIGURE	CONDUCTOR RANGE		BAIL SIZE	DIMENSIONS IN INCHES		
		MIN.	MAX.		L	B	H
RB563	1	#4	4/0	#1	1-3/4	4-1/2	4-1/2
RB319	1	1/0	477	1/0	2-1/2	5	4-1/2
RB341	2	1/0 Al	477 Al	4/0 Cu	3-1/2	4-5/8	5

* Standard connectors have tinned copper bails. Add "-NTN" to the part number if non-tinned bails are acceptable.

BOLTED WEDGE CONNECTORS

- Made of high-strength silicon bronze.
- Wedge design keeps constant compression.
- Shear-head bolt ensures proper torque.
- Forces in excess of 4,000 lbs. on each cable or ground rod.

RBWC Series

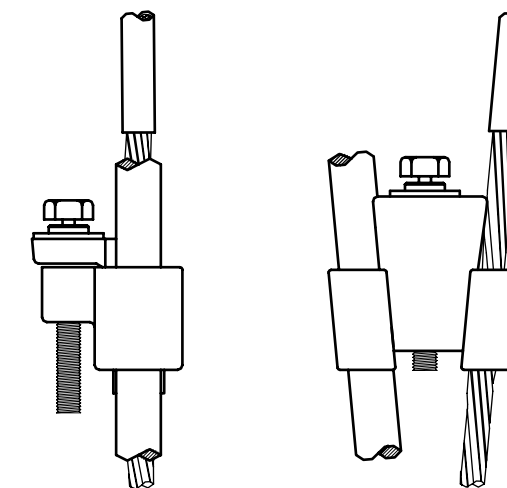


PART NUMBER	CONDUCTOR RANGE		BOLT	BOLT HEAD
	MIN	MAX		
RBWC-L-9-7	#2	1/0	5/16	9/16
RBWC-L-9-5	#4	1/0	5/16	9/16
RBWC-L-9	1/0	1/0	5/16	9/16
RBWC-M-5/8-5	#4 or #6	5/8" Ground Rod	5/16	9/16
RBWC-M-5/8-7	#2	5/8" Ground Rod	5/16	9/16
RBWC-M-5/8-9	1/0	5/8" Ground Rod	5/16	9/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

BRONZE PARALLEL VISE CONNECTORS

- Made of high-strength silicon bronze.
- Accepts a range of conductors.
- Size overlapping allows for smaller inventory requirements.
- Interlocking design provides resistance to vibration loosening.
- Spacer provides additional contact area for lower resistance.

VC-80XX Series

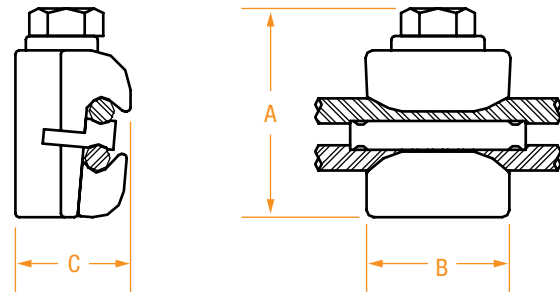

VC-8020-G



VC-8020-TN



VC-8058-SH

PART NUMBER*	CONDUCTOR RANGE		DIMENSIONS IN INCHES			BOLT	BOLT HEAD
	MIN	MAX	A	B	C		
VC-8002	#8	#2 Sol	1-3/16	1	¾	5/16	9/16
VC-8010	#8	#1	1-7/16	1	1	5/16	9/16
VC-8020	#8	3/0	1-9/16	1	1	5/16	9/16
VC-8058-SH	#6 - #2	5/8 Ground Rod	2-1/4	1-3/16	1-3/16	3/8	9/16


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For tin-plated connectors, add "-P" to the part number. For a shear-head bolt, add "-SH" to the part number. For a rubber grommet on the spacer, add "-G" to the part number.


PEDESTAL CONNECTORS

- Plate is tin-plated aluminum.
- Stainless steel studs.
- Zinc dichromate-plated washer nuts.

PC371105 Series

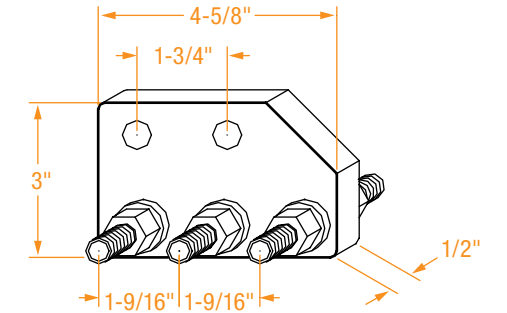

Insulating cover available. See page RB2.

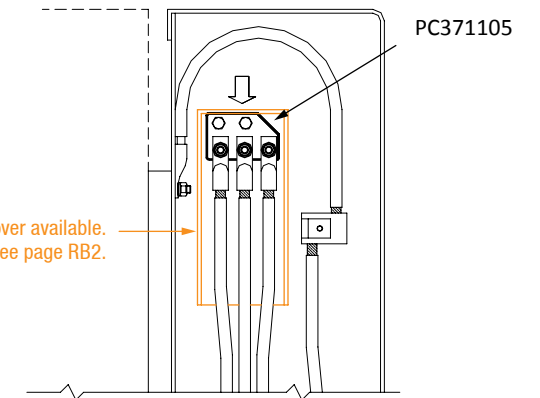


PART NUMBER	STUD SIZE
PC371105	1/2"

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

ACORN GROUND CLAMPS

ACRN Series

- Used for grounding copper conductor to copper ground.
- Made from bronze alloy.



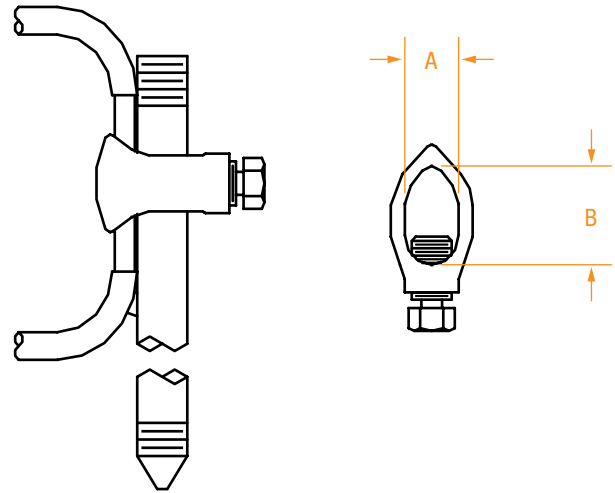


PART NUMBER	CONDUCTOR RANGE	ROD SIZE	DIMENSIONS IN INCHES	
			A	B
ACRN-5/8*	#8-1/0	5/8"	11/16	1-1/16
ACRN-5/8-CPS	#2-14	5/8"	5/8	1-1/16

NEUTRAL-SPAN CLAMPS

R07-1285 Series

- Used for mid-span taps.
- Made of high-strength aluminum.
- Filled with oxide-inhibiting grease.

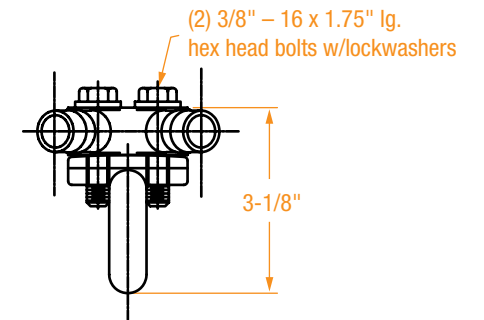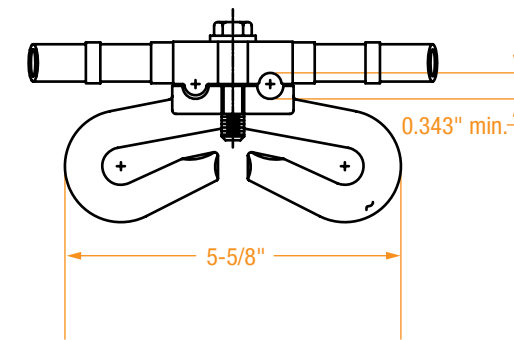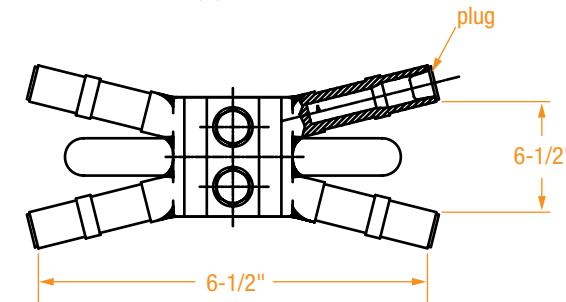

PART NUMBER	HEIGHT
R07-1285	3-1/8"

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For a shear-head bolt, add "-SH" to the part number.


UNDERGROUND RESIDENTIAL DISTRIBUTION MULTI-SPLICE

URD Series

- Consists of Aluminum bus, insulated with EPDM rubber.
- Allows quick and simple installation.
- Connects using 5/16" hexagonal wrench.
- Seals tight to keep out water and other foreign contaminants.



PART NUMBER	CABLE RANGE	OUTLETS	L	H
RM124036-6WAY	#12 Sol. through 500 MCM	6	10-1/2"	2-5/8"
RM124036-8WAY	#12 Sol. through 500 MCM	8	14"	2-5/8"

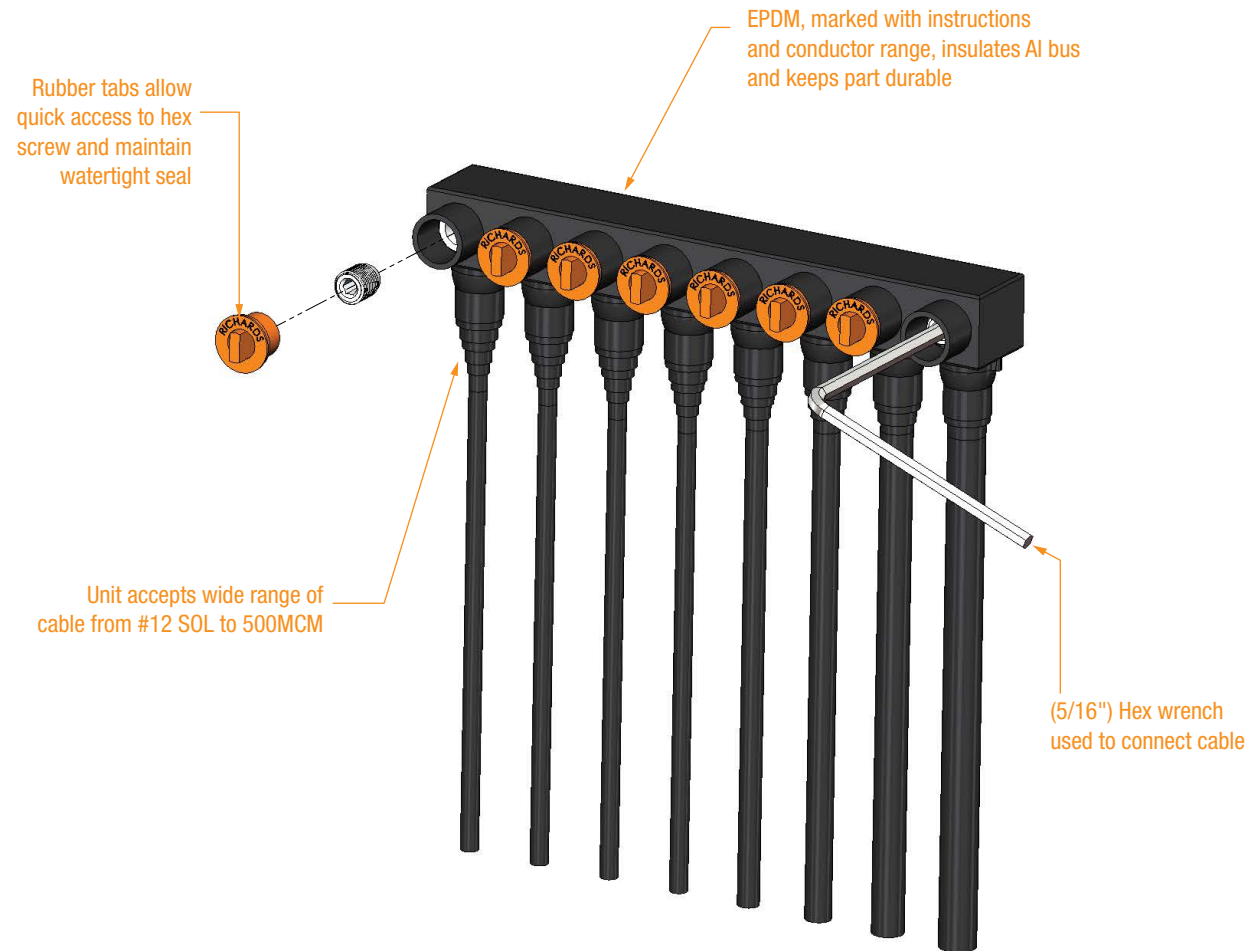

FIBER OPTIC CLAMP

RAFOB Series

- Unit clamps onto fiber optic cable.
- Rubber "O" ring keeps bolt captive to bracket.
- EPDM Rubber insert withstands the toughest environmental conditions, including extreme temperature fluxuations and ozone exposure.
- Multiple insert sizes are offered to house a variety of cable diameters.
- Offset bracket is available to attach and offset fiber optic bracket.
- Body constructed from high strength Aluminum.




PART NUMBER FOR CLAMP AND INSERT	CABLE RANGE IN INCHES	PART NUMBER FOR CLAMP ONLY	PART NUMBER FOR INSERT ONLY
RAFOB-6045	0.426 – 0.475	RAFOB	FORS-6045
RAFOB-6050	0.476 – 0.525	RAFOB	FORS-6050
RAFOB-6055	0.526 – 0.575	RAFOB	FORS-6055
RAFOB-6065	0.626 – 0.675	RAFOB	FORS-6065
RAFOB-6080	0.776 – 0.825	RAFOB	FORS-6080
RAFOB-6085	0.826 – 0.875	RAFOB	FORS-6085
RAFOB-6100	0.976 – 1.025	RAFOB	FORS-6100

FOR OTHER SIZES, PLEASE CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY

FIBER OPTIC OFFSET BRACKET

RFB Series

- Designed to offset Richards Fiber Optic Bracket from pole.
- Fabricated from steel for high-strength and durability.
- Available in two sizes for different offset lengths.

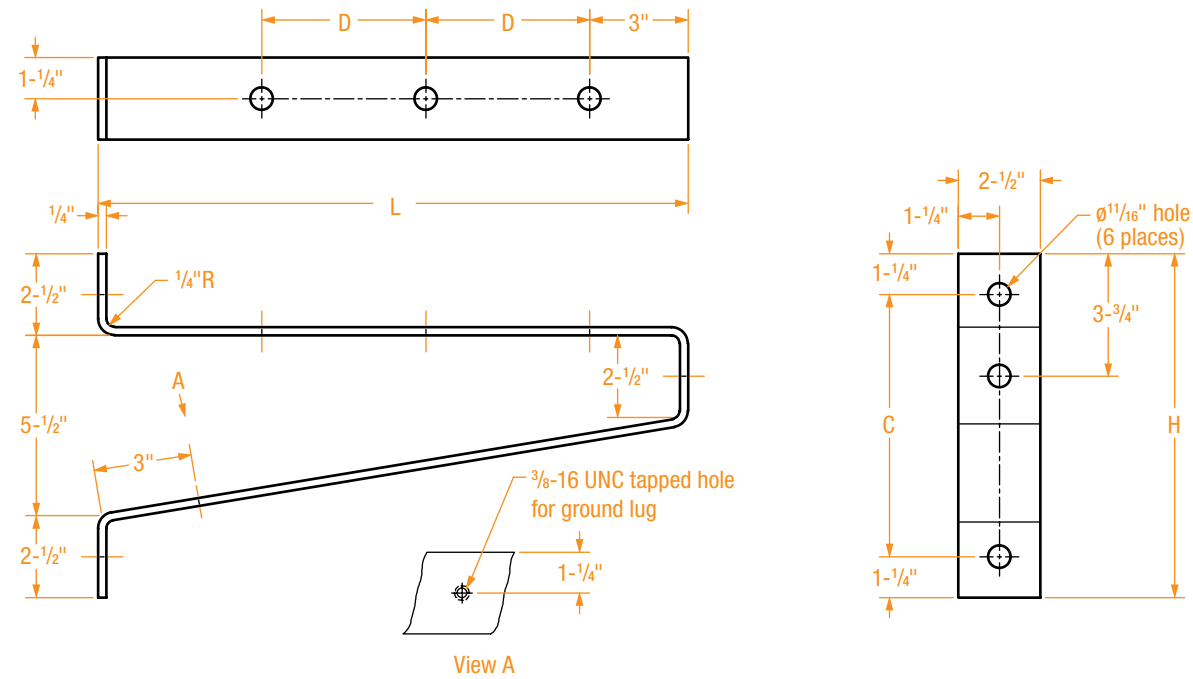

PART NUMBER	DIMENSIONS IN INCHES			
	L	D	C	H
RFB1	12	3	8	10-1/2
RFB2	18	5	8	10-1/2

Underground Equipment



UNDERGROUND EQUIPMENT

	SERIES	PAGE
Bare Crab Joints For Joining Bare Neutral Cables	FJB Series	97
Insulated Crab Joints	FJI Series	98
Insulated Crab Joints – No Tape Type	FJINT Series	99
Fusible Crab Joints – Tower Joints	TWJ Series	100
Tower Joint Accessories – Cable End Caps & Shells	TWJA Series	101
High-Temperature Filler Shell	TWJA Series	101
Tower Joint Accessories – Insulating Sleeves & Caps	TWJS Series	102
Insulating Sleeves For Use With “TWJ” Series Fusible Crab Joints	TWJS Series	102
Fusible Crab Joints With Pigtails	CJLP Series	103
Crab Joints With Pigtails	SJ Series	104
Mole Limiter Assembly	RMLA Series	105
Cable-To-Cable IN-LINE Limiter	CCLA Series	106
Cable-To-Cable Limiter Assembly	CCLA Series	107
Cable-To-Cable Limiters	CCL Series	108
Two-Piece Cable-To-Cable Limiter Insulating Sleeves	LS Series	109
High-Temperature Filler Shell For Cable-To-Cable Limiters	ALS Series	109
Limiter Lug Assembly	CLLA Series	110
Limiter Lugs	CLL Series	111
Limiter Lug Accessories – Insulating Sleeves & Shells	LLS Series	112
High-Temperature Filler Shells For Limiter Lugs	ALLS Series	112
Ring bus Limiter Lug Assembly	CLLA Series	113
Network Protector Terminals	NPT Series	114
Network Protector Terminals	NPT Series (continued)	115
Accessories For Network Protector Terminals		115
Disconnect Network Protector Terminals	NPT-DISC Series	116
Disconnect Legs For Disconnect Network Protector Terminals	RDL Series	117
Protector Fuses – Low-Loss “S” Fuse	LLF Series	118
Network Protector Fuses – “Z” Fuse	NPF-Q Series	119
Network Protector Fuses – “Y” Fuse	NPF-L Series	120
Lead Alloy Network Protector Fuses – Laminated Type – Standard Speed	Alloy Fuse Series	121

Lead Alloy Network Protector Fuses – Laminated Type – Time Lag	Alloy Fuse Series (continued)	122
Lead Alloy Network Protector Fuses – Non-Laminated Type (Single Layer)	NF Series	123
Copper Link Fuses	NWP Series	124
Copper Braids	CB Series	125
Secondary Spades	TRSS Series	126
Set Screw Connectors	SSCRW Series	127
Joint Casings	JC Series	128
Cable Rack Arms	RA Series	129
Stanchions	RA Series	130
Standard Cable Rack Arms	SRA Series	131
Pigtail Plug	PTP Series	132
Secondary Cold-Shrink Splice	PSCS Series	133
Lifting Hooks	RLH Series	134
Insulated T-Wrench		135

BARE CRAB JOINTS FOR JOINING BARE NEUTRAL CABLES

FJB Series

- Used for joining bare underground neutral cables.
- Made from pure seamless copper tubing.
- Tin-plated to resist corrosion.
- Corrugated reducing adapters may be used when smaller cable is required.

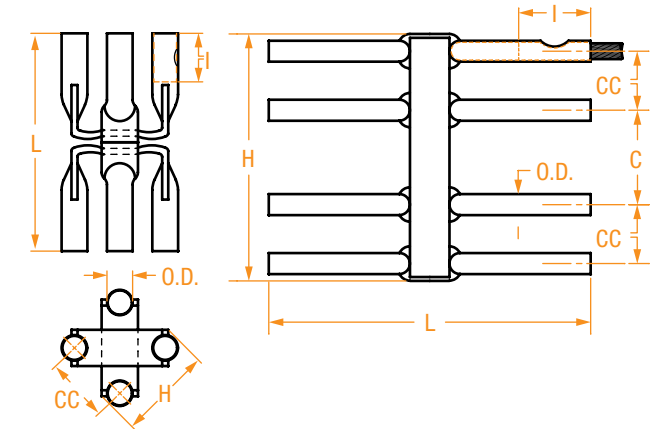


Figure 1

Figure 2

PART NUMBER	CABLE SIZE	FIGURE	# OF OUTLETS	# OF INDENTS	DIMENSIONS IN INCHES					
					I	H	L	C	CC	O.D.
FJB4/0-2W	4/0	2	4	1	2.0	3-3/16	6-7/16	–	2-3/16	0.687
FJB4/0-3W	4/0	2	6	1	2.0	7-1/16	6-7/16	3-7/8	2-3/16	0.687
FJB4/0-4W	4/0	2	8	1	2.0	9-1/4	6-7/16	3-7/8	2-3/16	0.687
CJB4/0-4W	4/0	1	8	2	2.0	3-1/2	9	–	2-3/16	0.687
CJB350-4W	350	1	8	2	2.5	3-3/4	9	–	2-1/2	0.875
FJB500-2W	500	2	4	2	2.5	3-15/16	7-1/2	–	2-3/8	1.062
FJB500-3W	500	2	6	2	2.5	8-3/16	7-1/2	4-1/4	2-3/8	1.062
FJB500-4W	500	2	8	2	2.5	10-9/16	7-1/2	4-1/4	2-3/8	1.062
CJB500-4W	500	1	8	2	2.5	3-3/4	8-3/4	–	2-3/4	1.062
CJB500-5W	500	1	10	2	2.5	4	9	–	2-3/4	1.062

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

INSULATED CRAB JOINTS

FJI Series

- Provides a means for connecting several cables at one common junction.
- Corrugated adapters allow a wide variety of cables to be used.
- Made from pure copper.
- Tin-plated to resist corrosion.
- Installation is done by "rolling back" the insulation over the cable sockets; inserting the cable into the sockets and crimping it. The insulation is then returned to its original position covering the socket.
- Eliminates bulky, time-consuming crotch taping.
- Insulated with an EPDM rubber for optimum electrical and mechanical properties.

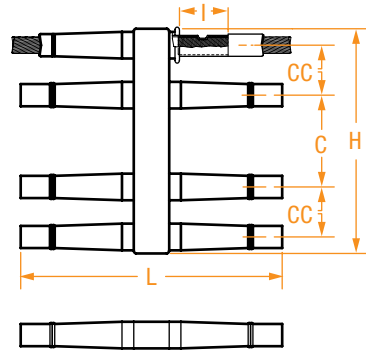


Figure 1




Figure 2




Figure 3




Figure 4

PART NUMBER	CABLE SIZE	FIGURE	# OF OUTLETS	# OF INDENTS	DIMENSIONS IN INCHES				
					I	H	L	C	CC
FJI4/0-2W	4/0	1	4	1	2.0	3-11/16	8-3/4	-	2-3/16
FJI4/0-3W	4/0	1	6	1	2.0	7-9/16	8-3/4	3-7/8	2-3/16
FJI4/0-4W	4/0	1	8	1	2.0	9-3/4	8-3/4	3-7/8	2-3/16
FJI4/0-5W	4/0	1	10	1	2.0	13-1/2	8-3/4	3-1/2	2-1/2
FJI4/0-6W	4/0	1	12	1	2.0	16	8-3/4	3-1/2	2-1/2
BIC4/0-4W	4/0	2	8	1	2.0	4	8-3/4	-	3
FJI500-(2)4/0	500 - 4/0	3	3	2	2.5	3	8-1/4	-	1-3/4
FJI500-U	500	4	2	2	3.5	4-1/4	6	-	2-3/4
FJI500-2W	500	1	4	2	2.5	4-3/8	12-5/8	-	2-3/8
FJI500-3W	500	1	6	2	2.5	8-5/8	12-5/8	4-1/4	2-3/8
FJI500-4W	500	1	8	2	2.5	11	12-5/8	4-1/4	2-3/8
FJI500-5W	500	1	10	2	2.5	14-1/2	12-5/8	3-3/4	2-1/2
FJI500-6W	500	1	12	2	2.5	17	12-5/8	3-3/4	2-1/2
FJI750-2W	750	1	4	2	2.5	4-3/4	13	-	2-1/2
FJI750-3W	750	1	6	2	2.5	9	13	4-1/2	2-1/2
FJI750-4W	750	1	8	2	2.5	12	13	4-1/2	2-1/2
FJI750-5W	750	1	10	2	2.5	16	13	4-1/2	2-1/2

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

INSULATED CRAB JOINTS – NO TAPE TYPE

FJINT Series

- Provides a means for connecting several cables at one common junction.
- No Tape Type Insulated Crab Joints provide an extension of free rubber at the end of the cable socket, which makes a water-tight fit over the cable insulation.
- Eliminates bulky, time-consuming crotch taping.
- Corrugated adapters allow a wide variety of cables to be used.
- Made from pure copper.
- Tin-plated to resist corrosion.
- Insulated with an EPDM rubber for optimum electrical and mechanical properties.

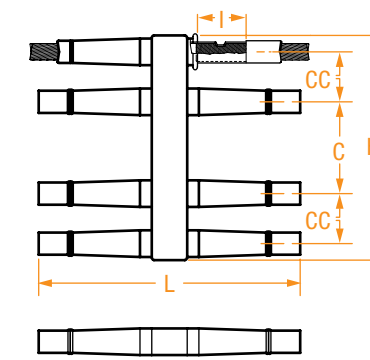


Figure 1




Figure 2



PART NUMBER	CABLE SIZE	FIGURE	# OF OUTLETS	# OF INDENTS	DIMENSIONS IN INCHES				
					I	H	L	C	CC
FJINT4/0-2W	4/0	1	4	1	2.0	3-11/16	9-1/2	-	2-3/16
FJINT4/0-3W	4/0	1	6	1	2.0	7-9/16	9-1/2	3-7/8	2-3/16
FJINT4/0-4W	4/0	1	8	1	2.0	9-3/4	9-1/2	3-7/8	2-3/16
BJINT4/0-4W	4/0	2	8	1	2.0	4	10-1/4	-	3
FJINT4/0-5W	4/0	1	10	1	2.0	13-1/2	9-1/2	3-1/2	2-1/2
FJINT4/0-6W	4/0	1	12	1	2.0	16	9-1/2	3-1/2	2-1/2
FJINT500-2W	500	1	4	2	2.5	4-1/4	11-1/2	-	2-3/8
FJINT500-3W	500	1	6	2	2.5	8-1/4	11-1/2	4-1/4	2-3/8
FJINT500-4W	500	1	8	2	2.5	10-3/4	11-1/2	4-1/4	2-3/8
FJINT500-5W	500	1	10	2	2.5	14-1/2	11-1/2	3-3/4	2-1/2
FJINT500-6W	500	1	12	2	2.5	17	11-1/2	3-3/4	2-1/2

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

FUSIBLE CRAB JOINTS – TOWER JOINTS

TWJ Series

- Provides limiter protection for six or eight cables at one common junction.
- For 125/216V applications only.
- Eliminates bulky, time-consuming crotch taping.
- Each cable is attached to its own separate fusible section.
- The fusible elements are made from pure copper seamless tubing and tin-plated.
- The elements are encased in a high-temperature shell, which provides separate arcing chambers for each fusible section.
- Corrugated adapters allow a wide variety of cables to be used.
- Insulated with an EPDM rubber for optimum electrical and mechanical properties.

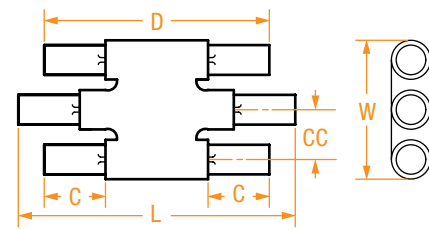


Figure 1

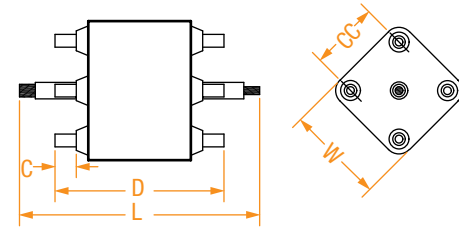


Figure 2



PART NUMBER	CABLE SIZE	FIGURE	# OF INDENTS	DIMENSIONS IN INCHES				
				C	L	D	CC	W
TWJ4/0-5*	4/0	2	1	2	18	10-1/2	3-1/4	5-11/16
TWJ500-3	500	1	2	2-7/8	15-7/16	10-7/8	2-5/16	6-7/16
TWJ500-5	500	2	2	3	20	13-1/2	3-9/16	6-3/16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

TOWER JOINT ACCESSORIES – CABLE END CAPS & SHELLS

TWJA Series

- Cable end caps are used to insulate the center cable of the fusible crab type “TWJ.”
- An EPDM rubber is used for optimum electrical and mechanical properties.

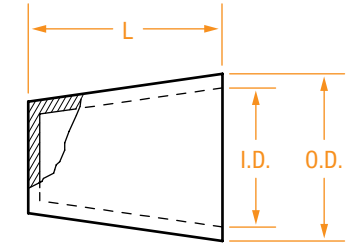


Figure 1

PART NUMBER	CABLE SIZE	FIGURE	DIMENSIONS IN INCHES		
			L	I.D.	O.D.
CC500	500	1	2-3/8	27/32	1-1/4

HIGH-TEMPERATURE FILLER SHELL

TWJA Series

- High-temperature filler shells are used with fusible crab joints type “TWJ.”
- These shells prevent cable insulation damage due to the heat generated from the connections.

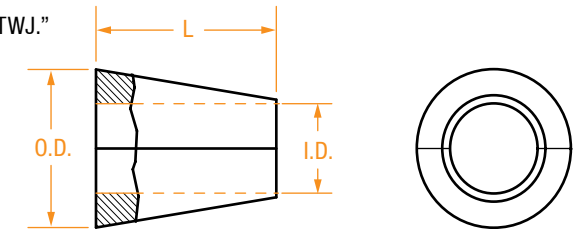


Figure 2

PART NUMBER	CABLE SIZE	FIGURE	DIMENSIONS IN INCHES		
			L	O.D.	I.D.
AS4/0	4/0	2	2-3/4	2-1/8	3/4
AS500/3	500	2	3	1-13/16	1-1/8
AS500-5	500	2	3	2-3/16	1-1/8

* TWJ4/0-5 has an unfused center cable port designed for 500 mcm copper cable. The outer cable ports are fused (limited) and designed for 4/0 cable.

TOWER JOINT ACCESSORIES – INSULATING SLEEVES & CAPS

TWJS Series

- Dead-end insulating caps are used to cap unused outlets of fusible crab joints.
- This cap holds the filler shell in place and reduces the amount of hand taping.
- An EPDM rubber is used for optimum electrical and mechanical properties.




Figure 1

PART NUMBER	CABLE SIZE	FIGURE	DIMENSIONS IN INCHES		
			L	I.D.	O.D.
TWJC4/0	4/0	1	4-1/4	2-1/8	2-1/2
TWJC500-3	500	1	4-1/4	1-3/4	2-1/4
TWJC500-5	500	1	4-9/16	2-5/32	2-1/2

INSULATING SLEEVES FOR USE WITH “TWJ” SERIES FUSIBLE CRAB JOINTS

TWJS Series

- Insulating sleeves are used to hold the filler shell in place and reduces the amount of hand taping.
- An EPDM rubber is used for optimum electrical and mechanical properties.

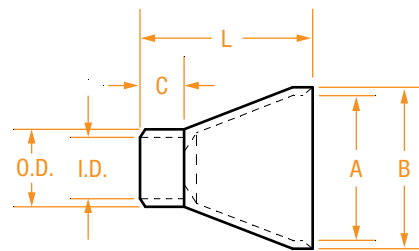


Figure 2

PART NUMBER	CABLE SIZE	FIGURE	DIMENSIONS IN INCHES					
			L	A	B	C	I.D.	O.D.
TWJS4/0	4/0	2	6-3/16	2-1/8	2-1/2	1-3/4	1-3/4	1-1/8
TWJS500-3	500	2	6-3/16	1-3/4	2-1/4	1-3/4	1-5/32	1-1/2
TWJS500-5	500	2	6-7/8	2-5/32	2-1/2	1-3/4	1-5/32	1-1/2

FUSIBLE CRAB JOINTS WITH PIGTAILS

CJLP Series

- Installation is as easy as making a cable-to-cable butt splice.
- Provides limiter protection for six, eight or 12 cables at one common junction.
- Eliminates bulky, time-consuming crotch taping.
- Each cable is attached to its own separate fusible section.
- The fusible elements are made from pure copper seamless tubing and hot-tinned.
- The elements are encased in a high-temperature shell, which provides separate arcing chambers for each fusible section.
- Insulated with an EPDM rubber for optimum electrical and mechanical properties.
- For 125/216V applications only.


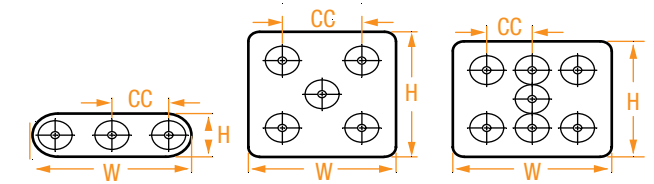


Figure 1

Figure 2

Figure 3

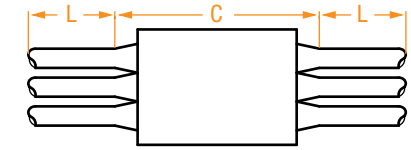

PART NUMBER	CABLE SIZE	FIGURE	DIMENSIONS IN INCHES				
			C	L	H	W	CC
CJLP500-3W	500	1	14-1/2	21	2-1/2	7	2-1/2
CJLP500-5W	500	2	17-5/8	21	6-1/2	6-1/2	3-1/2
CJLP500-7W	500	3	19	21	6	7	2-1/4

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* For 18" cable lengths, add "S" to the part number (example: CJLPS500-3W is a 3-way crab joint with 18" cable). 21 inches is the standard cable length.

CRAB JOINTS WITH PIGTAILS

- Installation is as easy as making a cable-to-cable butt splice.
- Eliminates bulky, time-consuming crotch taping.
- Insulated with an EPDM rubber for optimum electrical and mechanical properties.
- When fusible elements are used, the elements are made from pure copper seamless tubing and tin-plated.
- The fusible elements are encased in a high-temperature shell, which provides separate arcing chambers for each fusible section.

SJ Series




Figure 1




Figure 2




Figure 3




Figure 4



PART NUMBER	CABLE SIZE	CABLE SIZE # OF CABLES IN ()	FIGURE	DIMENSIONS IN INCHES		
				C	L**	LL*
SJ573-0536*	500	(2) 4/0	1	5	9 1/2	19 1/2
SJ573-0171	4/0	(2) #2 & (2) #6	2	4 1/2	6	6
SJ1420	4/0	(4) #4 Solid	2	5	9	8
SJ573-0346	4/0	(3) #2	3	4 3/4	24	16
SJ4/0-(6)1/0	4/0	(6) 1/0	2	-	-	-
SJ573-0569	(2) 500	(6) #2	4	8	-0-	11
SJ573-0551	(2) 500	(8) #2	4	11	-0-	11
SJ350AL-4/0-8W	(2) 350 AL	(8) 4/0 AL	4	12	-0-	-0-
SJ573-0668	-	(3) #2	See photo	2	-	6
SJ573-0676	-	(4) #2	See photo	2	-	6
SJ573-0692	-	(5) #2	See photo	2	-	6


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

-0- indicates a cable port, rather than a cable length.
 * The two (2) 4/0 cables are limited. 125/216V applications only.
 ** Cable lengths given are standard, contact the factory for different lengths.

MOLE LIMITER ASSEMBLY

RMLA Series

- Mole limiter assemblies are complete units that include a fusible element, a high-temperature filler shell and an insulating sleeve.
- Can be ordered as a complete assembly or individual components.
- For 125/216V applications only.

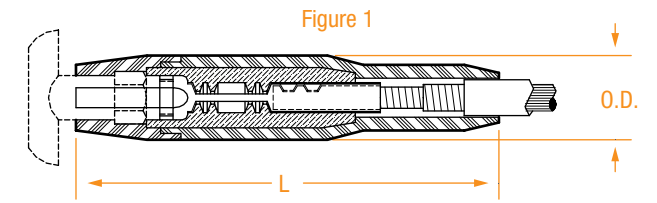

Complete Assemblies

PART NUMBER	CABLE SIZE	# OF INDENTS	DIMENSIONS IN INCHES	
			L	OD
RMLA4/0	4/0	1	7-1/2	1-7/8
RMLA500	500	2	12	2.40

Mole Limiter Element Only

PART NUMBER	CABLE SIZE	# OF INDENTS	DIMENSIONS IN INCHES		
			L	STUD OD	SOCKET OD
RML4/0	4/0	1	6	.52	.68
RML500	500	2	8-3/8	.81	1.05

Mole Limiter Shell Only

PART NUMBER	CABLE SIZE	# OF INDENTS	DIMENSIONS IN INCHES	
			L	OD
RMLSHELL-4/0	4/0	1	5-7/16	1.47
RMLSHELL-500	500	2	7	1.8

Mole Limiter Sleeve Only

PART NUMBER	CABLE SIZE	# OF INDENTS	DIMENSIONS IN INCHES		
			L	OD	ID
RMLSLV-4/0	4/0	1	6-7/16	1-7/8	.92
RMLSLV-500	500	2	12	2.40	1.27

CABLE-TO-CABLE IN-LINE LIMITER

CCLA Series

- Cable-to-Cable Limiter Assemblies are complete units that include a cable-to-cable fusible element, a high-temperature filler shell and an insulating sleeve.
- This one-piece design is easy install and use.
- For 125/216V applications only.




PART NUMBER	CABLE SIZE	# OF INDENTS*	DIMENSIONS IN INCHES	
			L	O.D.
CCLA-IN-500	500	2	13	2-1/8

CABLE-TO-CABLE LIMITER ASSEMBLY

CCLA Series

- Cable-to-Cable Limiter Assemblies are complete units that include a cable-to-cable fusible element, a high-temperature filler shell and an insulating sleeve.
- When ordering individual components, refer to the following pages.
- The "CCLAP" limiters are designed for use on paper-insulated cable and feature an oil-tight seal.
- For 125/216V applications only.

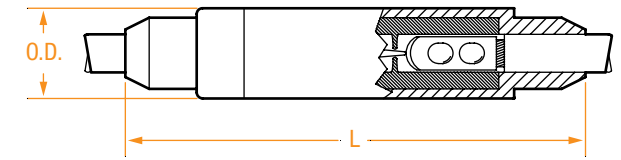


PART NUMBER		CABLE SIZE	# OF INDENTS	DIMENSIONS IN INCHES	
RUBBER INS.	PAPER INS.			L	O.D.
CCLA4/0	CCLAP4/0	4/0	1	8-1/4	1-1/2
CCLA250	CCLAP250	250	1	8-1/4	1-1/2
CCLA300	CCLAP300	300	2	12-1/8	2-1/2
CCLA350	CCLAP350	350	2	12-1/8	2-1/2
CCLA400	CCLAP400	400	2	12-1/8	2-1/2
CCLA500	CCLAP500	500	2	12-1/8	2-1/2
CCLA7500	CCLAP750	750	2	12-1/8	2-1/2

* Number of indents refers to the number of crimps (min) to make on each side of the limiter using a nested indenter tool.

CABLE-TO-CABLE LIMITERS

CCL Series

- Made of pure copper.
- Tin-plated dipped for corrosion resistance.
- These connectors combine the functions of fuse and a connector.
- Designed to clear faults great enough to cause cable damage, while not clearing minor overloads.
- The "CCLP" fuses are designed for use on paper-insulated cable and feature an oil-tight seal.
- For 125/216V applications only.

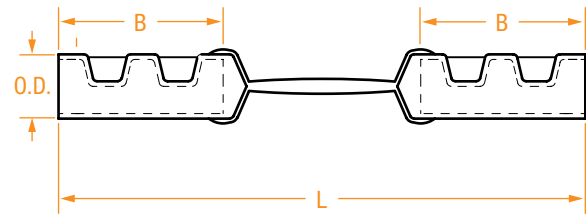

PART NUMBER		CABLE SIZE	DIMENSIONS IN INCHES		
RUBBER INS.	PAPER INS.		O.D.	B	L
CCL4/0	CCLP4/0	4/0	11/16	1-3/4	6-3/8
CCL250	CCLP250	250	3/4	1-7/8	6-3/8
CCL300	CCLP300	300	13/16	2	6-3/4
CCL350	CCLP350	350	7/8	2	6-3/4
CCL400	CCLP350	400	31/32	2-1/8	7
CCL500	CCLP500	500	1-1/16	2-7/8	8-3/4
CCL750	CCLP750	750	1-5/16	2-7/8	9

TWO-PIECE CABLE-TO-CABLE LIMITER INSULATING SLEEVES

LS Series

- Cable-to-cable insulating sleeves are used to hold the high-temperature shell and to minimize the need for hand taping.
- Molded from EPDM rubber, these sleeves have excellent mechanical and electrical properties.

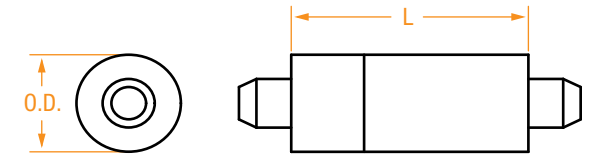


Figure 1

PART NUMBER	CABLE SIZE (RANGE)	FIGURE	DIMENSIONS IN INCHES	
			O.D.	L
LS-250	4/0 TO 250	1	1-1/2	8-1/4
LS-2PC-500	300 TO 500	1	2-1/2	12-1/8
LS-2PC-750	750	1	2-1/2	12-1/8

HIGH-TEMPERATURE FILLER SHELL FOR CABLE-TO-CABLE LIMITERS

ALS Series

- High-temperature shells provide an arcing chamber for the limiter element under overload conditions.






Figure 2

PART NUMBER	CABLE SIZE (RANGE)	FIGURE	DIMENSIONS IN INCHES	
			O.D.	L
ALS250	4/0 TO 250	2	1-3/8	6-1/2
ALS500	300 TO 500	2	1-7/8	8
ALS750	750	2	2-1/16	9

LIMITER LUG ASSEMBLY


- Limiter lug assemblies are complete units that are comprised of a fusible element, a high-temperature filler shell and an insulating sleeve.
- When ordering individual components, refer to the following pages.
- The "CLLAP" limiters are designed for use on paper-insulated cable and feature an oil-tight seal.
- For 125/216V applications only.

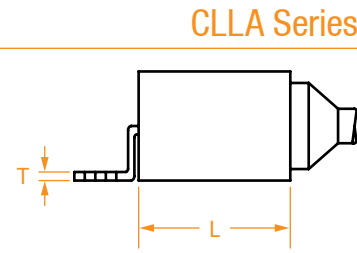

PART NUMBER		CABLE SIZE	FIGURE	DIMENSIONS IN INCHES					
RUBBER INS.	PAPER INS.			L	W	X	H	P	T
CLLA4/0N	CLLAP4/0N	4/0	1	10	1	1-3/4	9/16	2-7/16	9/64
CLLA4/0-A	CLLAP4/0-A	4/0	2	9-3/4	1	1	7/16	2-3/16	9/64
CLLA250N	CLLAP250N	250	1	10	1-1/8	1-3/4	9/16	2-7/16	5/32
CLLA250-A	CLLAP250-A	250	2	9-3/4	1-1/8	1	7/16	2-3/16	5/32
CLLA300N	CLLAP300N	300	1	10-7/8	1-3/16	1-3/4	9/16	2-9/16	5/32
CLLA300-A	CLLAP300-A	300	2	10-3/8	1-3/16	1	7/16	2-5/16	5/32
CLLA350N	CLLAP350N	350	1	10-7/8	1-5/16	1-3/4	9/16	2-9/16	3/16
CLLA350-A	CLLAP350-A	350	2	10-3/8	1-5/16	1	7/16	2-5/16	3/16
CLLA400N	CLLAP400N	400	1	10-3/4	1-7/16	1-3/4	9/16	2-9/16	3/16
CLLA400-A	CLLAP400-A	400	2	10-1/2	1-7/16	1	7/16	2-5/16	3/16
CLLA500N	CLLAP500N	500	1	11-3/4	1-1/2	1-3/4	9/16	3	7/32
CLLA500-A	CLLAP500-A	500	2	11-1/2	1-15/16	1	7/16	2-3/4	1/4
CLLA750N	CLLAP750N	750	1	11-3/4	1-15/16	1-3/4	9/16	3	1/4
CLLA750-A	CLLAP750-A	750	2	11-1/2	1-15/16	1	7/16	2-3/4	1/4

LIMITER LUGS

- Made of pure copper.
- Tin-plated to resist corrosion.
- These connectors combine the functions of fuse and a connector.
- Designed to clear faults great enough to cause cable damage, while not clearing minor overloads.
- The "CLLP" and "CLLPL" fuses are designed for use on paper-insulated cable and feature an oil-tight seal.
- For 125/216V applications only.

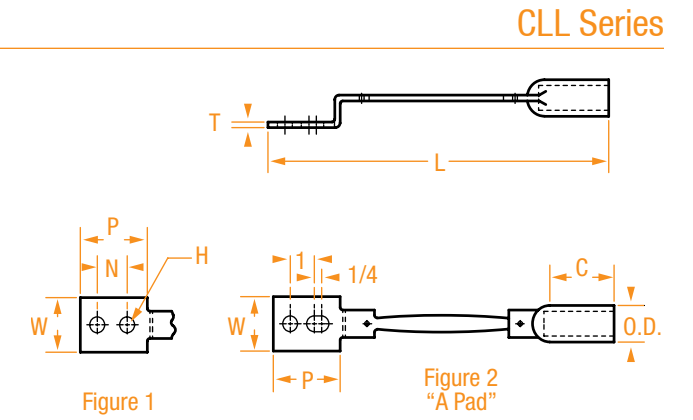

PART NUMBER		CABLE SIZE	DIMENSIONS IN INCHES							
RUBBER INS.	PAPER INS.		L	C	W	P	H	N	T	O.D.
CLL4/0-N	CLLP4/0-N	4/0	8-1/2	1-7/8	1	2-7/16	9/16	1-3/4	9/64	11/16
CLL4/0-A	CLLP4/0-A	4/0	8-1/2	1-7/8	1	2-7/16	7/16	1	9/64	11/16
CLL250-N	CLLP250-N	250	8-1/2	1-7/8	1-1/8	2-7/16	9/16	1-3/4	5/32	3/4
CLL250-A	CLLP250-A	250	8-1/2	1-7/8	1-1/8	2-7/16	7/16	1	5/32	3/4
CLL300-N	CLLP300-N	300	9	2	1-3/4	2-9/16	9/16	1-3/4	5/32	13/16
CLL300-A	CLLP300-A	300	9	2	1-3/4	2-9/16	7/16	1	5/32	13/16
CLL350-N	CLLP350-N	350	9	2	1-5/16	2-9/16	9/16	1-3/4	3/16	7/8
CLL350-A	CLLP350-A	350	9	2	1-5/16	2-9/16	7/16	1	3/16	7/8
CLL400-N	CLLP400-N	400	9-1/4	2-1/8	1-7/16	2-9/16	9/16	1-3/4	3/16	31/32
CLL400-A	CLLP400-A	400	9-1/4	2-1/8	1-7/16	2-9/16	7/16	1	3/16	31/32
CLL500-N	CLLP500-N	500	10-1/4	2-9/16	1-1/2	3	9/16	1-3/4	7/32	1-1/16
CLL500-A	CLLP500-A	500	10-1/4	2-9/16	1-1/2	3	7/16	1	7/32	1-1/16
CLL750-N	CLLP750-N	750	10-1/4	2-9/16	1-15/16	3	9/16	1-3/4	1/4	1-5/16
CLL750-A	CLLP750-A	750	10-1/4	2-9/16	1-15/16	3	7/16	1	1/4	1-5/16

LIMITER LUG ACCESSORIES – INSULATING SLEEVES & SHELLS

LLS Series

- Limiter lug insulating sleeves are used to hold the high-temperature filler shell and to minimize the need for hand taping.
- Molded from EPDM rubber, these sleeves have excellent mechanical and electrical properties.

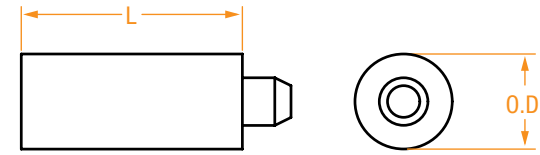


Figure 1

PART NUMBER	CABLE SIZE (RANGE)	FIGURE	DIMENSIONS IN INCHES	
			O.D.	L
LLS4/0	4/0 to 250	1	7/8	6-5/8
LLS500	300 to 500	1	1-11/32	8-1/2
LLS750	750	1	1-1/2	8-1/2

HIGH-TEMPERATURE FILLER SHELLS FOR LIMITER LUGS

ALLS Series

- High-temperature shells provide an arcing chamber for the limiter element under overload conditions.

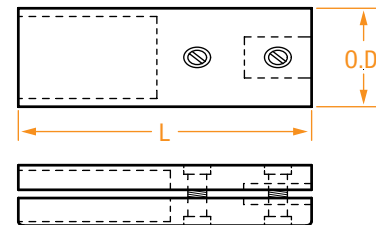




Figure 2

PART NUMBER	CABLE SIZE (RANGE)	FIGURE	DIMENSIONS IN INCHES	
			O.D.	L
ALLS250	4/0 TO 250	2	1-7/16	5-11/16
ALLS500	300 TO 500	2	1-7/8	7-1/8
ALLS750	750	2	1-7/8	7-1/2

RING BUS LIMITER LUG ASSEMBLY

CLLA-UBOLT Series

- Ring Bus Limiter Lug assemblies are complete units that are comprised of a fusible element, a high-temperature filler shell, an insulating sleeve, U-bolt and saddle and rubber hood.
- Facilitates connection to secondary network "ring bus"
- Protects network secondary cable with fusible element contained within a high-temperature filler shell
- For 125/216V applications only.

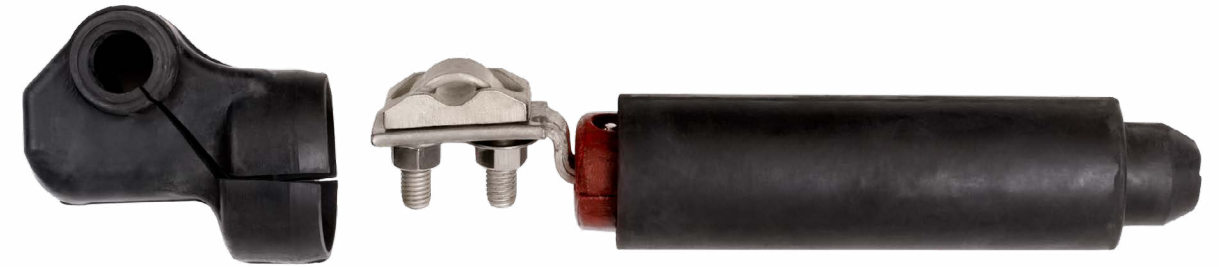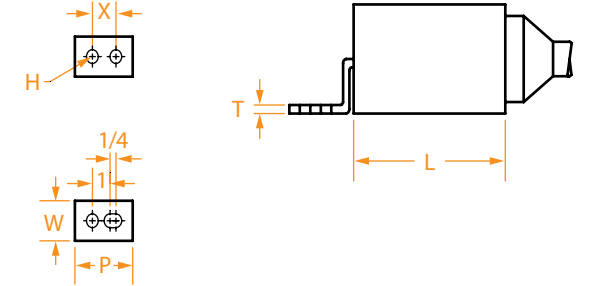


PART NUMBER*	CABLE SIZE	DIMENSIONS IN INCHES					
		L	W	X	H	P	T
CLLA4/0N-UBOLT	4/0	10	1	1-3/4	9/16	2-7/16	9/64
CLLA250N-UBOLT	250	10	1-1/8	1-3/4	9/16	2-7/16	5/32
CLLA300N-UBOLT	300	10-7/8	1-3/16	1-3/4	9/16	2-9/16	5/32
CLLA350N-UBOLT	350	10-7/8	1-5/16	1-3/4	9/16	2-9/16	3/16
CLLA400N-UBOLT	400	10-3/4	1-7/16	1-3/4	9/16	2-9/16	3/16
CLLA500N-UBOLT	500	11-3/4	1-1/2	1-3/4	9/16	3	7/32
CLLA750N-UBOLT	750	11-3/4	1-15/16	1-3/4	9/16	3	1/4

* Each Ring Bus Assembly is available with "A" pad. To order, replace "N" with "A". See page UG15 for more information about "A" pad limiter lugs.

NETWORK PROTECTOR TERMINALS

NPT Series

- Network protector terminals are designed for use on network protectors.
- Terminals available with built-in cable limiters (limited) or without (non-limited).
- The fusible elements are made of pure copper and tin-plated for corrosion resistance.
- The element is enclosed in a high-temperature shell which provides separate arcing chambers for each fusible section.
- The terminals are molded with silicone rubber for optimum electrical properties, high-temperature capabilities and low-compression set.

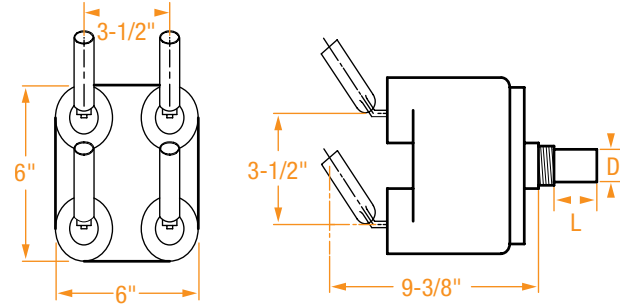

PART NUMBER	NETWORK PROTECTOR MANUFACTURER	CABLE SIZE	DRAWING NO.	# OF CABLE PORTS	FIGURE	LIMITED OR NON-LIMITED	DIMENSIONS IN INCHES	
							B (L)	D
NPT523-0925 (was NPT500A)	Richards 313NPs & Westinghouse	500	MN-EO2167-B	4	1	Limited **	1-7/8	1-1/4
312-1316-00	Richards 313NPs & Westinghouse	500	MN107447	4	1	Non-Limited	1-7/8	1-1/4
ze	Richards 313NPs & Westinghouse	750	MN106980	6	2	Limited **	2-1/8	3-3/4
312-1315-00*	Richards 313NPs & Westinghouse	500	MN106147	4 2-hole spades	4	Limited **	1-7/8	1-1/4
312-1315-01*	Richards 313NPs & Westinghouse	500	MN106147	4 2-hole spades	4	Non-Limited	1-7/8	1-1/4
312-1268-00	Richards 313NPs & Westinghouse	500	MN101003	4	3	Limited **	1-7/8	1-1/4
312-1269-00	Richards 313NPs & Westinghouse	500	MN101003	4	3	Non-Limited	1-7/8	1-1/4
NPT523-0909 (was NPT500B)	Richards 137NPs & General Electric	500	MN-EO2167-B	4	1	Limited **	1-1/4	1-1/4
312-1330-00	Richards 137NPs & General Electric	500	MN111240	4	1	Non-Limited	1-1/4	1-1/4

NETWORK PROTECTOR TERMINALS

NPT Series (continued)



Figure 1



Figure 2



Figure 3

Terminal supplied with four rubber boots.





Figure 4

Terminal supplied with four rubber sleeves
Shown, 4 CL18-2N (500 mcm Cu lugs) and hardware.

ACCESSORIES FOR NETWORK PROTECTOR TERMINALS

High-Temperature Shell

Insulating Sleeve

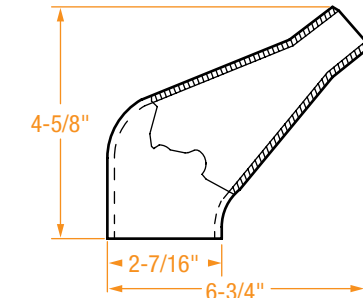

PART NUMBER	CABLE	SHELL OR SLEEVE
HTS-500	500 kcmil cable	High Temperature Shell
HTS-750	750 kcmil cable	High Temperature Shell
ES-500	500 kcmil cable	Insulating Sleeve
ES-750	750 kcmil cable	Insulating Sleeve


* Terminal supplied with four rubber sleeves, four two-hole 500 mcm copper lugs and hardware.
** For 125/216V applications only.

DISCONNECT NETWORK PROTECTOR TERMINALS

- The Richards disconnect network protector terminals are designed for fast and easy installations. The disconnect legs on the following page are crimped onto the system cable and then plugged into the terminal. The disconnect leg forms a water-tight seal around the terminal, so there is no taping.
- Disconnect network protector terminals are designed for use on General Electric or Westinghouse network protectors.
- The terminals are molded with silicone rubber for optimum electrical properties, high-temperature capabilities and low-compression set.
- Disconnect legs, shown on the next page, come limited or unlimited, which eliminates the need to externally limiter each cable.




NPT-DISC Series

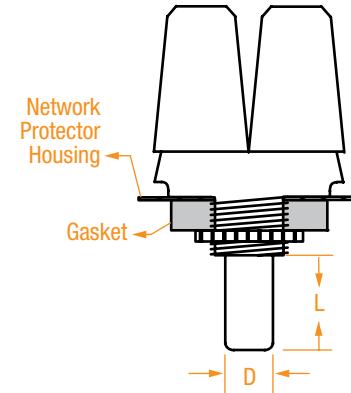

DISCONNECT LEGS FOR DISCONNECT NETWORK PROTECTOR TERMINALS

- The disconnect legs are available fused or unfused, straight or angled.
- Made of pure copper.
- Accepts 500 kcmil cable.
- Accessories available when using the disconnect.

RDL Series

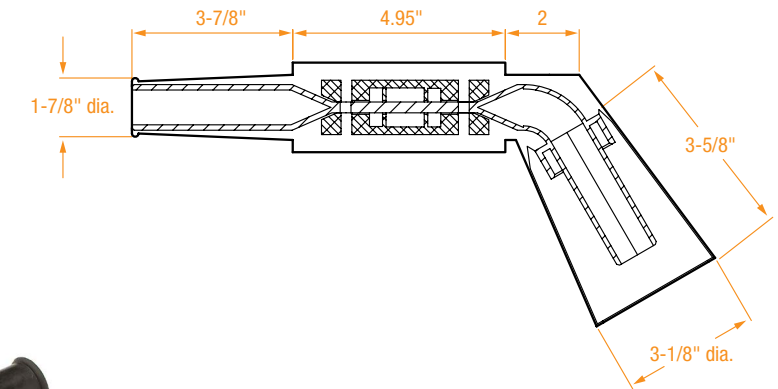

PART NUMBER	NETWORK PROTECTOR MANUFACTURER	CABLE SIZE	DRAWING NUMBER	NP TYPE	# OF POSITIONS	DIMENSIONS IN INCHES	
						L	D
312-1228-00	Richards 313NPs & Westinghouse	500	L9821	313NP, 2250 A	4	2-3/4	1-3/4
312-1228-00	Richards 313NPs & Westinghouse	500	L9821	313NP, 2250 A	8	2-3/4	3-3/4
312-1200-00	Richards 313NPs & Westinghouse	500	MN100984	313NP, 1875A	4	2-3/4	1-1/4
312-1265-00	Richards 313NPs & Westinghouse	500	MN100919	313NP wall mount, 2500 & 3500A	8	1-9/16	2-3/4
312-1270-00	Richards 313NPs & Westinghouse	500	MN100918	313NP 2500 & 3500 A	8	2-5/8	2-3/4
237-1229-00	Richards 137NPs & General Electric	500	MN103252	MG8, 1875A	4	1-1/4	1-3/4
312-1228-00	Richards 137NPs & General Electric	500	L9821	313NP	4	2-3/4	1-3/4
237-1221-00	Richards 137NPs & General Electric	500	MN101210	MG8 – 3500A	8	1-5/8	3-3/4
237-1245-00	Richards 137NPs & General Electric	500	MN105056	MG14 – 4500A	8	2-1/8	3-3/4
237-1234-10	Richards 137NPs & General Electric	500	MN105533	Special	4	1-1/8	1-1/4



PART NUMBER	DISCONNECT LEG TYPE	
RDL-FA500	Fused *	Angled
RDL-US500	Unfused	Straight
RDL-UA500	Unfused	Angled

* For 125/216V applications only.



PROTECTOR FUSES – LOW-LOSS “S” FUSE

LLF Series



- LLF-KA fuses are to be used on 125/216V network protectors.
- LLF-KA fuses are made from silver-plated copper with a tin or cadmium overlay in the element.
- LLF-KA fuses are “low loss” meaning they radiate a limited amount of heat until they approach their melting temperature.

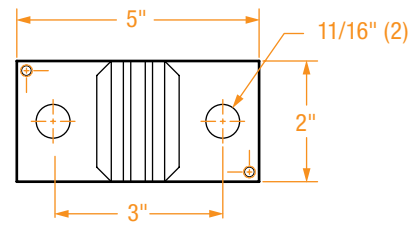



LLF-2KA
2,000 Amperes

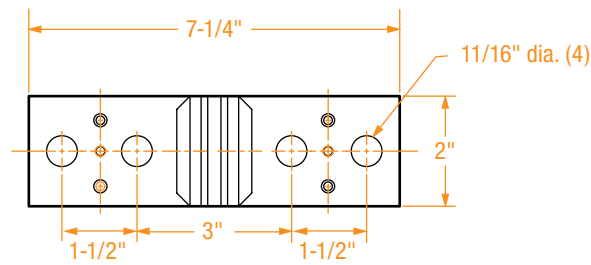

LLF-2.25 KA
2,250 Amperes

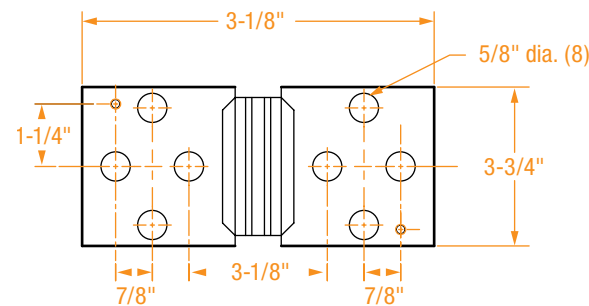

LLF-3KA/LLF-4KA
3,000/4,000 Amperes
(Same hole configuration
for both sizes)

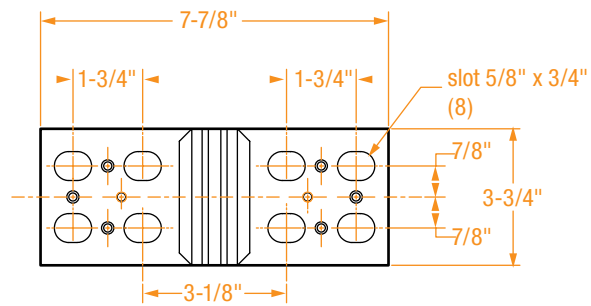


LLF-5KA
5,000 Amperes

NETWORK PROTECTOR FUSES – “Z” FUSE

NPF-Q Series

- Network protector fuses are used for backup. They are designed to coordinate with the protector relay and should not blow on a network feeder fault before the relays have time to trip the protector. However, in case the protector fails to open, the fuses must blow in time to prevent transformer damage.
- Fuses are made of pure copper and are available with tin or silver plating depending on the application.
- Time current curves are available upon request.

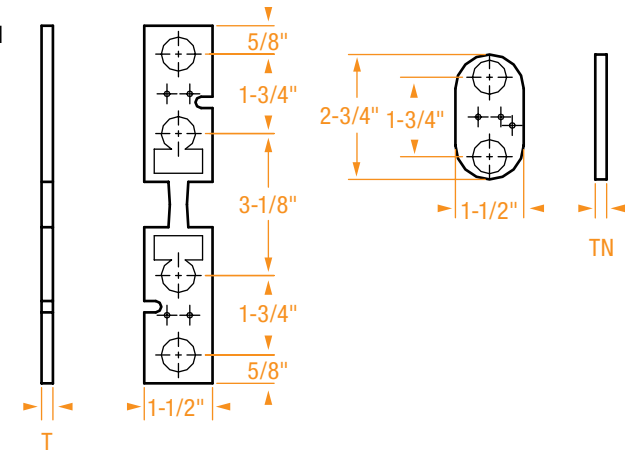

PART NUMBER	TRANSFORMER FULL LOAD (NORMAL) AMPERES	FUSE “T” DIMENSIONS IN INCHES	WASHER “TN” DIMENSIONS IN INCHES
NPF-5-Q	270	.050	28/64
NPF-7.5-Q	400	.075	26/64
NPF-11-Q	600	.110	24/64
NPF-15-Q	800	.150	21/64
NPF-22.5-Q	1200	.225	17/64
NPF-25-Q	1333	.250	15/64
NPF-30-Q	1600	.300	12/64
NPF-37.5-Q	2000	.375	8/64
NPF-44-Q	2500	.440	4/64
NPF-50-Q	3000	.500	N/A




Fuse cover is available for 125/216V applications. The part number is 312-3120-00.

NETWORK PROTECTOR FUSES – “Y” FUSE

NPF-L Series

- Network protector fuses are designed to coordinate with the network protector relay and should not blow on a network feeder fault before the relay has time to trip the protector. However, in case the protector fails to open, the fuses must blow in time to prevent transformer damage.
- Fuses are made of pure silver-plated copper.
- For network protectors with two bolt-fuse mountings.
- Fuse mounting enclosure is available for 125/216V network-protector applications.
- Time-current curves available upon request.

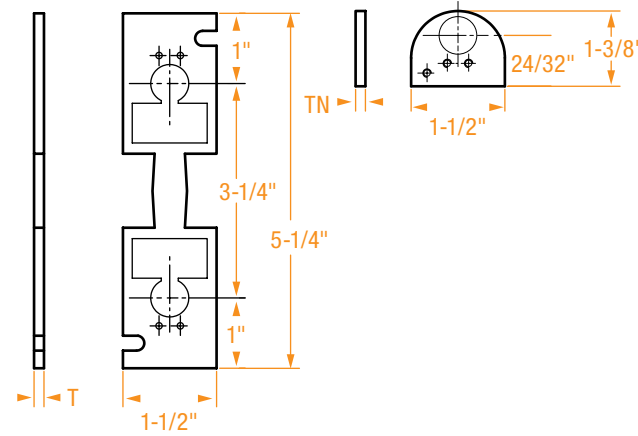


PART NUMBER	TRANSFORMER FULL LOAD (NORMAL) AMPERES	FUSE “T” DIMENSIONS IN INCHES	WASHER “TN” DIMENSIONS IN INCHES
NPF-11-L	800	.110	3/8
NPF-15-L	1200	.150	5/16
NPF-22.5-L	1600	.225	1/4
NPF-25-L	1875	.250	15/64
NPF-30-L	2000	.300	3/16
NPF-37.5-L	2500	.375	1/8
NPF-44-L	2825	.438	1/16
NPF-50-L	3000	.500	N/A
NPF-50-L	3500	.500	N/A



Fuse cover is available for 125/216V applications. The part number is 312-3120-00.

LEAD ALLOY NETWORK PROTECTOR FUSES – LAMINATED TYPE – STANDARD SPEED

Alloy Fuse Series

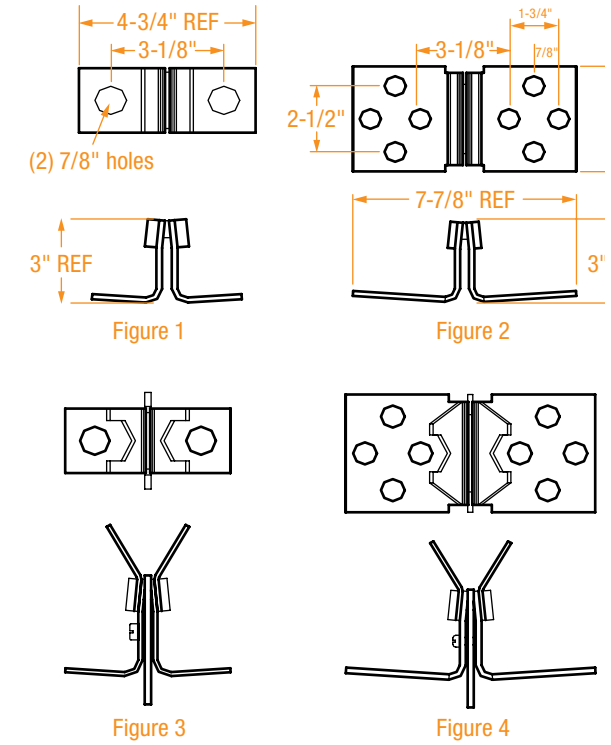


PART NUMBER		AMP.	VOLTAGE	OEM EQUIV. (OPEN/ VENTILATED)	OEM EQUIV. (SUBMERSIBLE/ NEMA 1A)	FIGURE
OPEN/VENTILATED ENCLOSURE	SUBMERSIBLE/ NEMA 1A ENCLOSURE					
312-3200-00	312-3201-00	800	120/208	1173006	1173007	1
312-3250-00	312-3251-00	800	277/480	1254871	1254872	3
312-3201-00	312-3202-00	1200	120/208	1173007	1173008	1
312-3251-00	312-3252-00	1200	277/480	1254872	1300550	3
312-3202-00	312-3203-00	1600	120/208	1173008	1173010	1
312-3252-00	312-3253-00	1600	277/480	1300550	1300551	3
312-3204-00	312-3205-00	1875	120/208	1173009	1173011	1
312-3254-00	312-3255-00	1875	277/480	1346424	14A5795G06	3
312-3110-00	312-3208-00	2500	120/208	1346917	1247325	2
312-3259-00	312-3260-00	2500	277/480	1491538	1332318	4
312-3208-00	312-3209-00	2825	120/208	1247325	1291274	2
312-3260-00	312-3261-00	2825	277/480	1332318	1615572	4
312-3208-00	312-3211-00	3000	120/208	1247325	12A3822G07	2
312-3260-00	312-3263-00	3000	277/480	1332318	15A4106G04	4
312-3209-00	312-3211-00*	3500	120/208	1291274	12A3822G07	2
312-3261-00	312-3263-00*	3500	277/480	1615572	15A4106G04	4

* This fuse to be used only in a submersible 3500 Ampere unit.

**LEAD ALLOY NETWORK PROTECTOR FUSES –
LAMINATED TYPE – TIME LAG**

Alloy Fuse Series (continued)

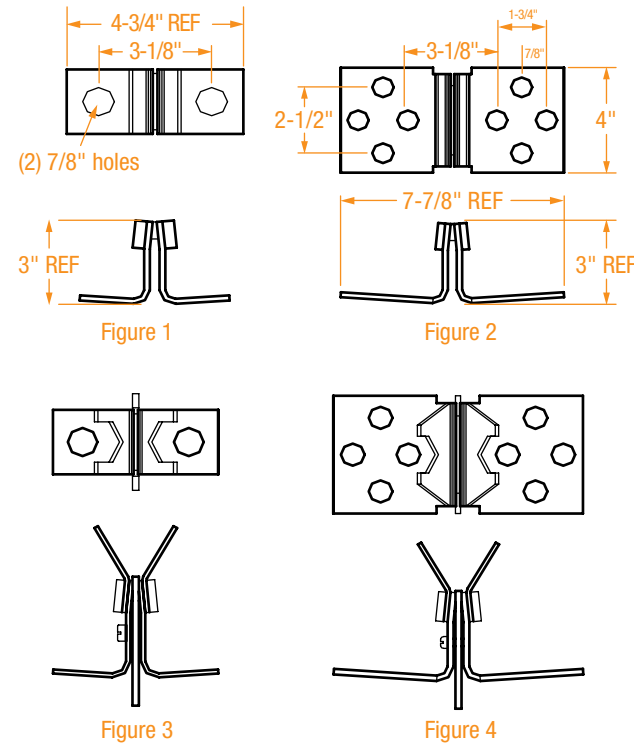


PART NUMBER		AMP.	VOLTAGE	OEM EQUIV. (OPEN/ VENTILATED)	OEM EQUIV. (SUBMERSIBLE/ NEMA 1A)	FIGURE
OPEN/ VENTILATED ENCLOSURE	SUBMERSIBLE/ NEMA 1A ENCLOSURE					
312-3300-00	312-3301-00	800	120/208	1019506	1019507	1
312-3500-00	312-3501-00	800	277/480	1300576	1300577	3
312-3301-00	312-3302-00	1200	120/208	1019507	1019508	1
312-3501-00	312-3502-00	1200	277/480	1300577	1300578	3
312-3302-00	312-3303-00	1600	120/208	1019508	1019510	1
312-3502-00	312-3503-00	1600	277/480	1300578	1300579	3
312-3304-00	312-3100-00	1875	120/208	1019509	1019511	1
312-3305-00	312-3306-00	1875	277/480	-	-	3
312-3308-00	312-3309-00	2500	120/208	12A3822G06	1649110	2
312-3506-00	312-3507-00	2500	277/480	-	405D312G01	4
312-3309-00	312-3311-00	2825	120/208	1649110	-	2
312-3507-00	312-3511-00	2825	277/480	405D312G01	-	4
312-3309-00	312-3310-00	3000	120/208	1649110	1649797	2
312-3507-00	312-3508-00	3000	277/480	405D312G01	405D312G03	4
312-3310-00		3500	120/208	1649797	-	2
312-3508-00		3500	277/480	405D312G03	-	4

**LEAD ALLOY NETWORK PROTECTOR FUSES –
NON-LAMINATED TYPE (SINGLE LAYER)**

NF Series

- Made from silver-plated copper and tin/lead solder.
- May be used at 125/216V or 277/480V.
- NF fuses have a lower loss, and a lower operating temperature than the equivalent copper link fuses.
- Time-current curves available upon request.

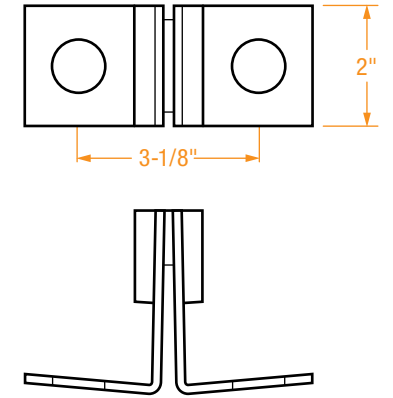


PART NUMBER	NETWORK PROTECTOR RATING
NF-2	800
NF-3	1200
NF-4	1600
NF-5	1875
NF-6	2000
NF-7*	2500
NF-10*	3000
NF-10*	3500

* Have two NEMA-spaced holes on each side.

COPPER LINK FUSES

NWP Series

- Made from silver-plated copper.
- May be used at 125/216V or 277/480V.
- The most inexpensive network-protector fuse available.
- Time-current curves available upon request.





PART NUMBER	NETWORK-PROTECTOR RATING
NWP-7	800
NWP-6	1200
NWP-5	1600
NWP-5	1875
NWP-4	2000
NWP-3	2500

COPPER BRAIDS

CB Series

- Made of flexible pure copper braid.
- Designed to compensate for misalignment or equipment, dampen vibrations and take up linear expansion and contraction.
- Pads can be drilled to any specification.
- For special lengths and drillings, contact the factory.

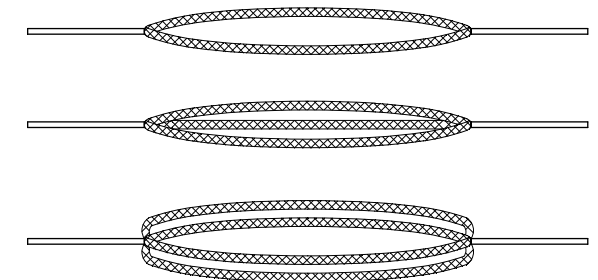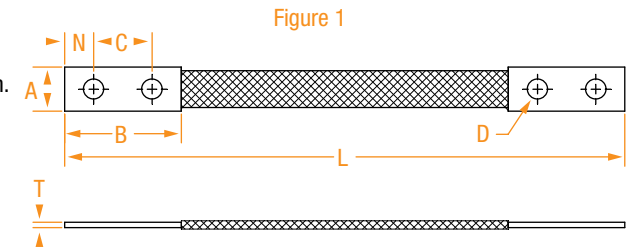

PART NUMBER	RATING	DIMENSIONS IN INCHES						
		A	L	B	D	N	C	T
CB504-0530	900A	1-3/4	9-1/4	3	3/4	3/4	1-1/2	3/4
CB570-2774	1200A	2	13-1/2	3-1/8	9/16	11/16	1-1/2	7/8
CB183030	-	2	32	2-1/2	1/2	9/16	N/A one-hole	1/8
CB396271	-	1	1" x 15' copper wire mesh					
CB396740	-	1	1" x 100' copper wire mesh					

SECONDARY SPADES

TRSS Series

- Designed to fit onto pad mount transformer's secondary studs.
- The "clamp-on" design offers a solid and reliable connection, while not damaging the transformer stud.
- Made of solid copper or aluminum.
- The threaded studs and nuts are made of stainless steel.
- Tin-plated to resist corrosion.
- Available in an assortment of shapes and sizes for any transformer stud size.
- Spaced according to NEMA standards.

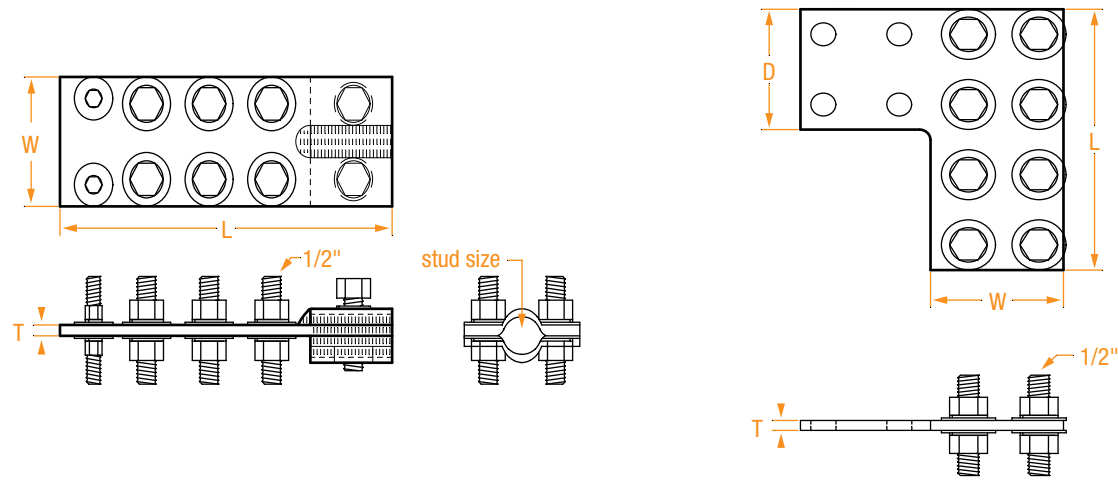
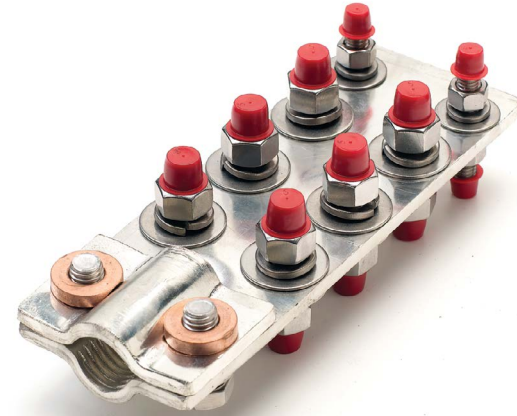


Figure 1

Figure 2


PART NUMBER	MATERIAL	FIGURE	DIMENSIONS IN INCHES					STUD SIZE
			L	T	W	D		
TRSS-C100	Cu	1	8-1/2	1/4	3	-	5/8	
TRSS-C101	Cu	1	8-1/2	1/4	3	-	1	
TRSS-C102	Cu	1	6-3/4	1/2	3	-	5/8	
TRSS-A200	Al	2	6-1/2	1/2	3-1/16	3	four-hole NEMA Pad	
TRSS-A201	Al	2	4-5/8	1/2	3	3-1/8	two-hole NEMA Pad	

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

SET SCREW CONNECTORS

SSCRW Series

- Made of aluminum alloy.
- Used on pad-mounted transformers.
- Accepts a range of conductor sizes – from #8 to 4/0.
- Two-hole NEMA pad.
- Comes with a plastic cover.

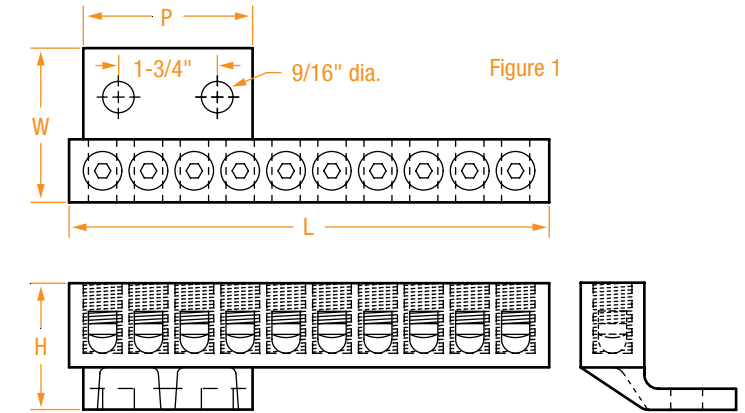


PART NUMBER	DIMENSIONS IN INCHES			
	L	H	W	P
SSCRW10-12-1	8-1/2	2-1/4	2-3/4	3

JOINT CASINGS


JC Series

- Used on low pressure oil filled transmission cable — 69kV, 138kV and 345kV.
- Made from spun copper.
- Fill plugs allow addition of oil or compound.

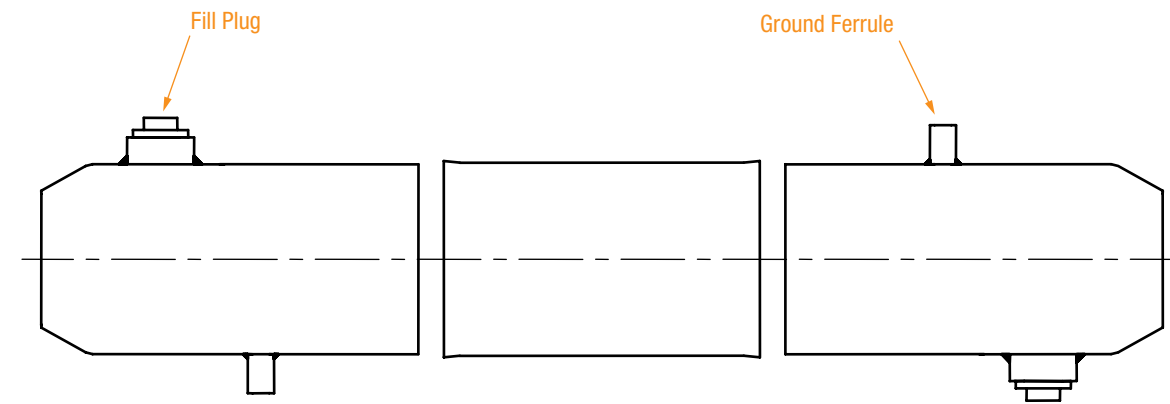

Available with inside diameters of 5, 7 & 9 inches.


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

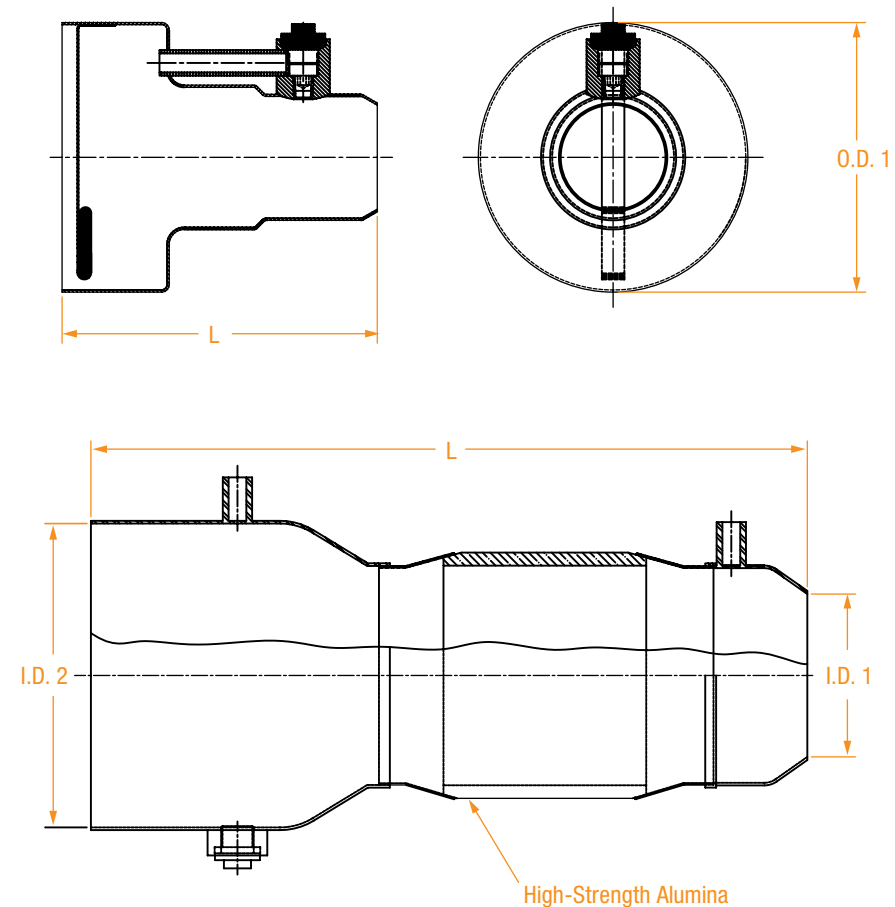

CABLE RACK ARMS

RA Series

- Made of galvanized steel.
- Used to support underground cables, splices, crab joints and other accessories in manholes and vaults.

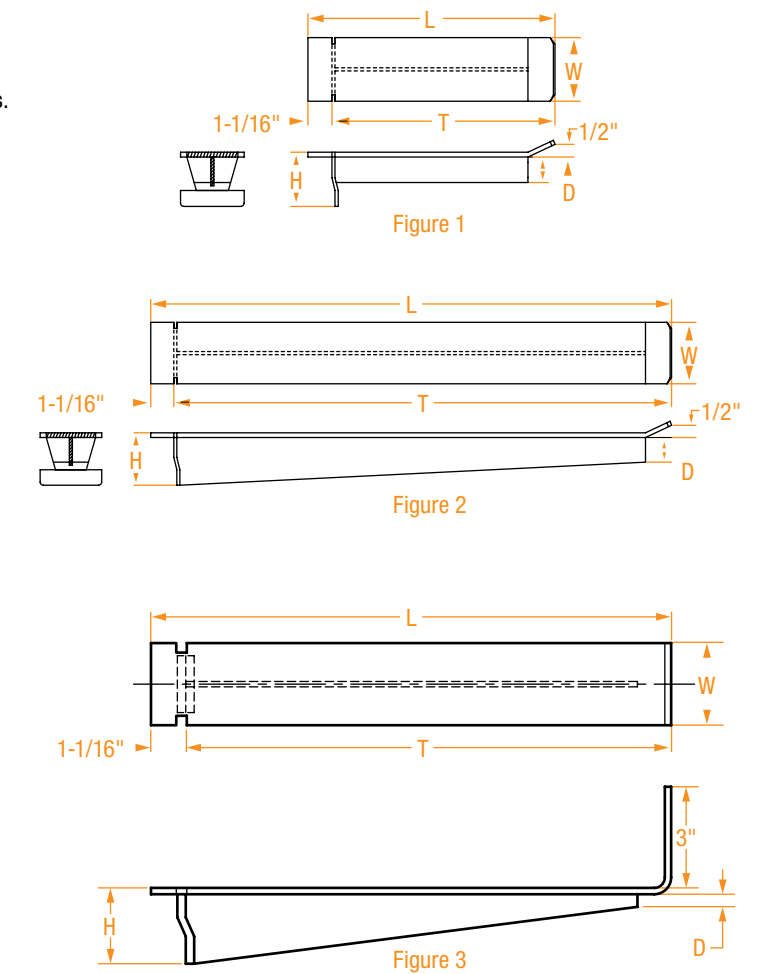

Cable Rack Arms

PART NUMBER*	FIGURE	DIMENSIONS IN INCHES			
		L	T	H	D
RA-1W	1	9-11/16	8-5/8	2-7/16	1
RA-2W	2	13-13/16	12-3/4	2-7/16	3/8
RA-3W	2	21-3/16	19-9/16	2-7/16	1/2
RA-1W-90	3	10	9-15/16	2-7/16	3/8
RA-2W-90	3	15-1/4	12-3/4	2-7/16	3/8
RA-3W-90	3	21-3/16	20-1/16	2-7/16	3/8

Rack Arm Covers


PART NUMBER	FIGURE	DIMENSIONS IN INCHES			
		L	T	H	D
RA-1W-C	4	9	—	4.5	—
RA-2W-C	4	13	—	4.5	—

* Add "-A" for the rack arms assembled with the covers.

STANCHIONS

RA Series

- Made of galvanized steel.
- Used to support cables in manholes.
- Rack arms available in three different sizes.

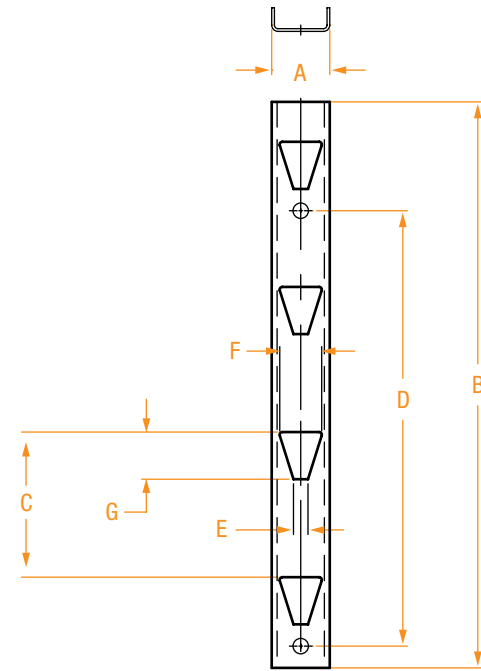


PART NUMBER	# OF SLOTS	DIMENSIONS IN INCHES						
		A	B	C	D	E	F	G
003-0346	1	4	9	–	6-3/4	1	2-29/32	3-1/4
003-0353	2	4	17-1/4	8	10	1	2-29/32	3-1/4
003-0379	2	4	19	10	10	1	2-29/32	3-1/4
003-0387	2	4	21	12	10	1	2-29/32	3-1/4
003-0395	3	4	25-3/4	8	23-1/4	1	2-29/32	3-1/4
003-0437	4	4	32	8	23-1/4	1	2-29/32	3-1/4
003-0445	4	4	39	10	30	1	2-29/32	3-1/4
003-0452	4	4	45	12	30	1	2-29/32	3-1/4
003-0460*	6	4	48	8	23-1/4 & 16*	1	2-29/32	3-1/4
003-0478*	6	4	59	10	20 & 29-1/2*	1	2-29/32	3-1/4

* Two "D" dimensions are given because there are three mounting holes. The first dimension is from the top hole to the center mounting hole. The second dimension is from the center hole to the bottom mounting hole.

STANDARD CABLE RACK ARMS

SRA Series

- Made from galvanized steel channel.
- Epoxy coated.
- Fits standard cable racks.

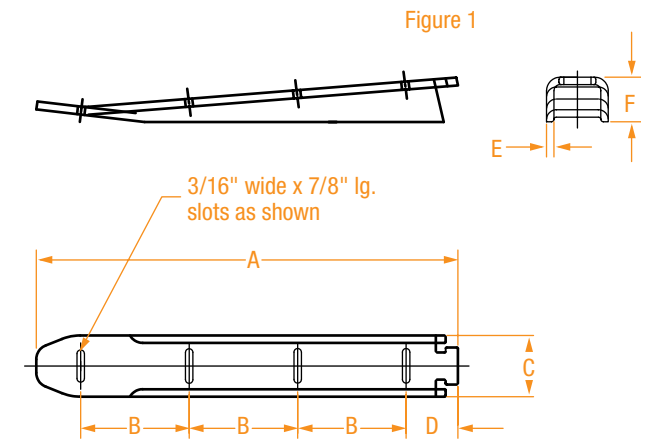

PART NUMBER	# OF SLOTS	DIMENSIONS IN INCHES					
		A	B	C	D	E	F
SRA-4	2	4-1/2	2-1/4	1-1/2	1-7/16	3/16	1-1/4
SRA-7	3	8	2-3/4	1-1/2	1-1/4	3/16	1-1/4
SRA-10*	4	10-11/16	2-3/4	1-1/2	1-5/16	3/16	1-1/8
SRA-14	5	14-1/2	2-3/4	1-1/2	2-1/2	3/16	1-5/8

* This size has one 1/2" diameter hole between the 2nd and 3rd slots.

PIGTAIL PLUG

PTP Series

- Designed to provide a permanently installed waterproof 115V NEMA 5-15R receptacle for underground application.
- Constructed with 2 ft. of 2/0 copper wire for connection to the 115V source and 2 lengths of #12 wire for the neutral and ground.
- Preassembled internal connection to the receptacle is enclosed in a polyurethane potting material to prevent oil or water infiltration through the wire strands.
- The 2/0 hot leg is designed to provide a rigid but bendable support for the entire receptacle.
- The cap is sealed water tight with 2 Buna-N O-rings. A deep grooved finish on both the cap and body affords positive grip even when wearing dielectric gloves.
- Connection to the 115V source can be accomplished with a mechanical vise connector or compression sleeve onto an available crab leg. Ground and neutral connections can utilize a mechanical vise connector or compression terminal lug.



PART NUMBER	LENGTH OF 4/0 SOURCE CABLE (INCHES)	LENGTH OF #12 NEUTRAL AND GROUND CABLES (INCHES)
PTP-1	12	24

SECONDARY COLD-SHRINK SPLICE

PSCS Series

- Available in several sizes, for use on secondary cable, at secondary voltages (below 600V).
- Molded from high-strength silicone rubber, resistant to tearing and abrasion.
- Eliminates the need for a blow-torch in confined spaces.
- Two short ribbon-cores allow for easy removal, even in tight spaces.
- When the core is removed, the splice “automatically” creates a watertight seal. No additional steps or parts required.
- Oval cross-section of the splice has been engineered to make installation easy while still providing excellent heat dissipation for the connector underneath.



PART NUMBER	CABLE SIZE
PSCS-12	4/0
PSCS-18	500MCM
PSCS-23	750MCM




* Ends of Neutral and Ground wires can be connected to using a 4/0 crimp connector

LIFTING HOOKS

- Made from hot-forged steel.
- Heat treated for a hard, durable tip.
- Lightly coated with rust preventative oil.
- The hook head is thinner than the shaft to fit into vault entrance covers.

RLH Series

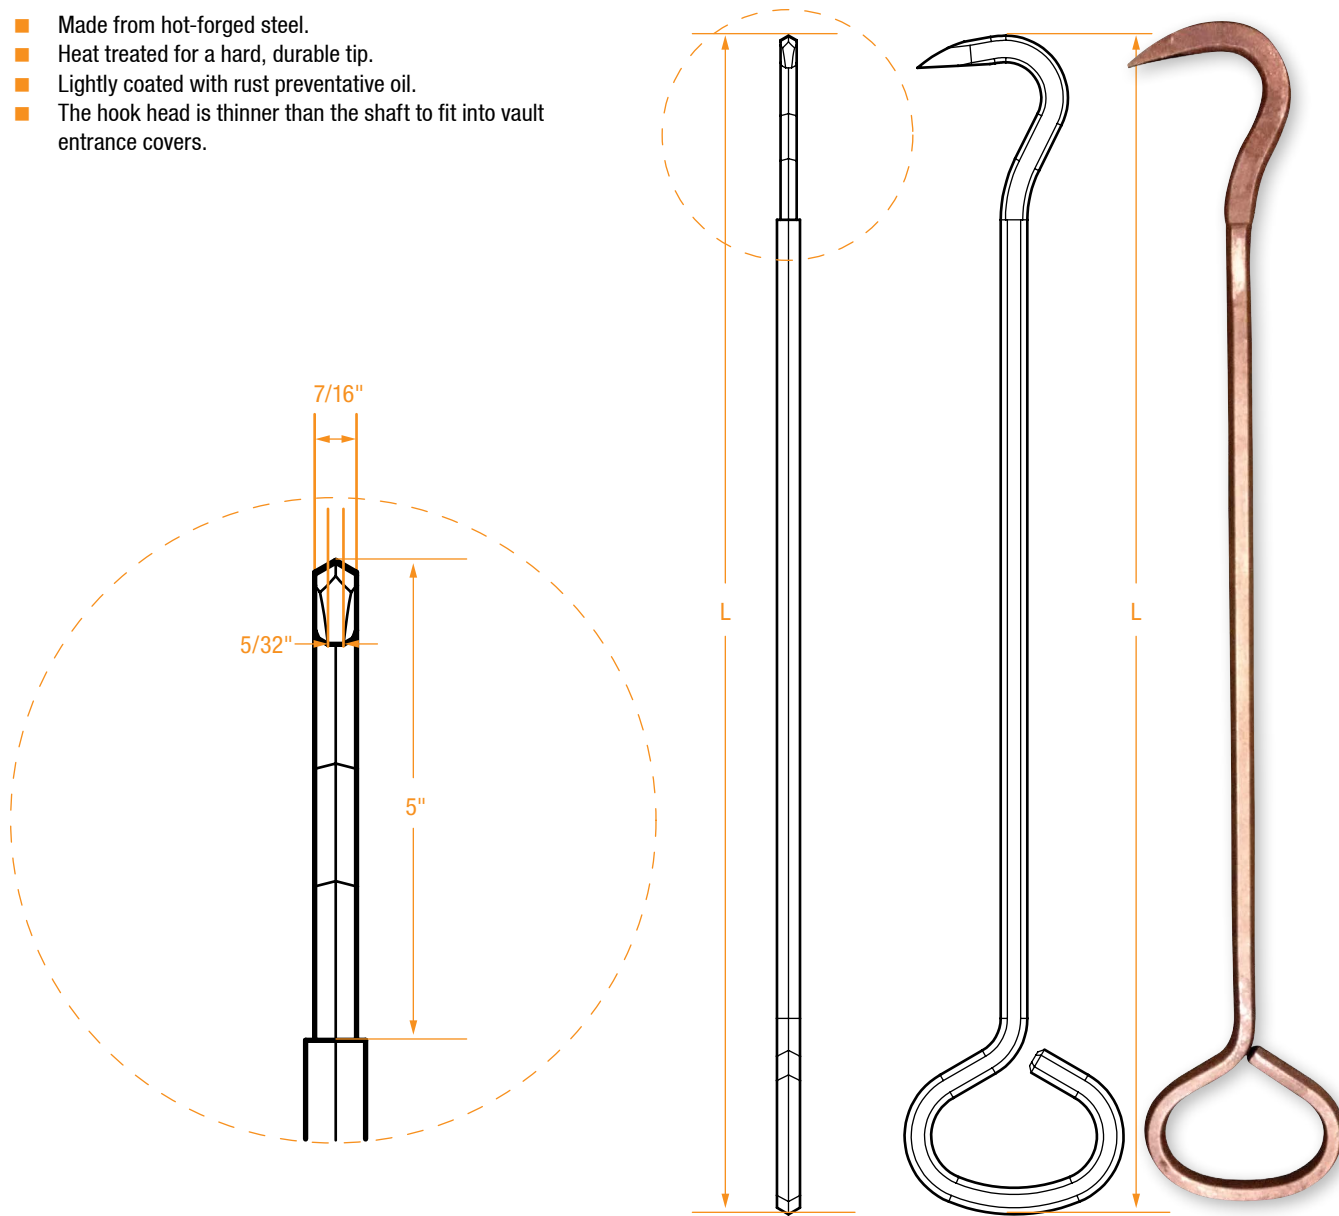

PART NUMBER	L
RLH-1	24
RLH-2	28
RLH-3	32
RLH-4	36

INSULATED T-WRENCH

- Insulated T-Wrench is commonly used to work on Network Protectors.
- Layer of red insulation underneath black top-coat of insulation provides visual indication of worn or damaged insulation.
- Allows work to be performed at a great distance than by doing the same operation by hand.



PART NUMBER	DESCRIPTION
312-1903-00	INSULATED T-WRENCH, 3/4" x 32"
312-1903-10	INSULATED T-WRENCH, 3/4"x 53 1/2"
312-1903-20	INSULATED T-WRENCH, 3/4" x 36"
312-1903-30	INSULATED T-WRENCH, 3/4" x 22"
312-1947-00	INSULATED T-WRENCH 9/16" x 32




POLE LINE HARDWARE	SERIES	PAGE
EyeletsRENUT Series	139
"J" HooksRJH Series	140
Single-Position Equipment BracketsLPB Series	141
Grid Gains & Crossarm GainsRGG & RCG Series	142
Crossarm Support GainsRCSG Series	143
Pole-Eye PlatesRPEP Series	144
Guy HooksRGH Series	145
Aerial ClampsRAC Series	146
TurnbucklesRTB Series	147
Pole-Top ExtensionsRPTA Series	148
Three-Hole Messenger ClampsRSC1204 Series	149
Heavy-Duty Messenger ClampsRHDC Series	150

EYELETS

RENUT Series

- Tapped oversize for easy assembly.
- Made from ductile iron or forged steel.
- Some available forged for additional strength.

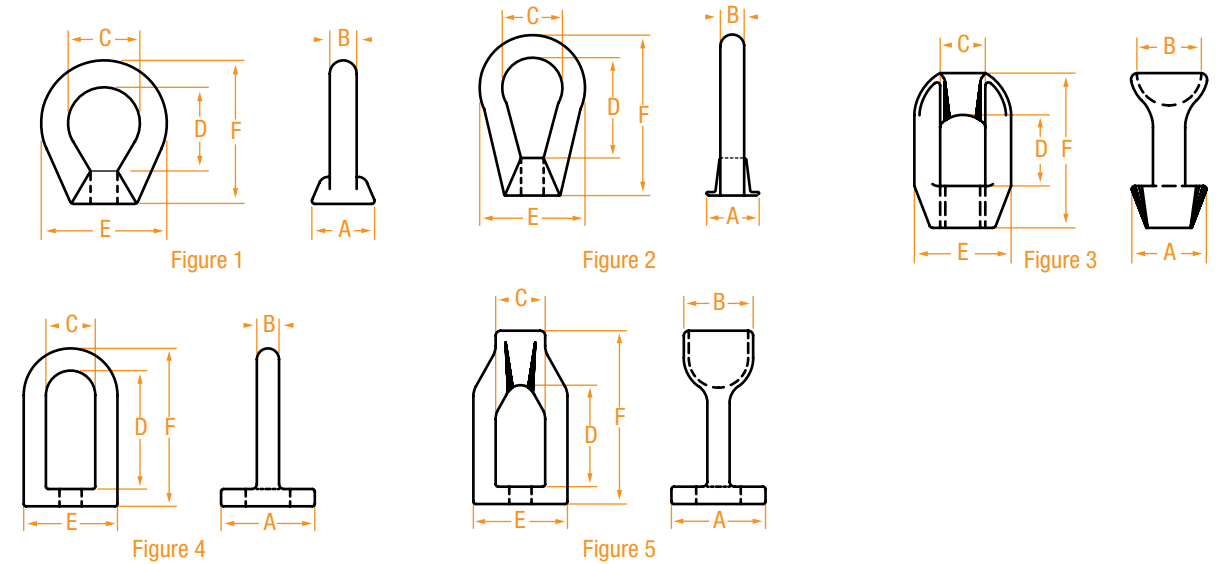

PART NUMBER	FIGURE	BOLT DIA	DIMENSIONS IN INCHES					
			A	B	C	D	E	F
RENUT-1*	1	5/8	1-3/8	9/16	1-1/2	1-3/4	2-5/8	3
RENUT-2	1	3/4	1-3/8	9/16	1-1/2	1-3/4	2-5/8	3
RTMBL-1	3	5/8	1-1/2	1-1/2	7/8	1-3/8	1-7/8	3
RTMBL-2	3	3/4	1-1/2	1-1/2	7/8	1-3/8	1-7/8	3
RBLTE-1	4	5/8	2-3/8	9/16	1-1/4	3	2-3/8	4
RBLTE-2	4	3/4	2-3/8	9/16	1-1/4	3	2-3/8	4
RTMBE-1*	5	5/8	2-3/8	1-1/2	1-1/4	2-9/16	2-3/8	4
RTMBE-2	5	3/4	2-3/8	1-1/2	1-1/4	2-9/16	2-3/8	4-3/8

* RUS Approved.

"J" HOOKS

RJH Series

- Made of steel or bronze.

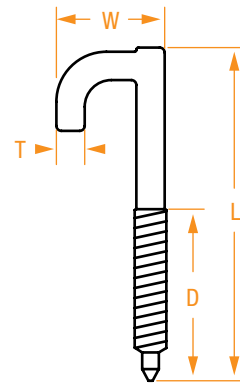


Figure 1

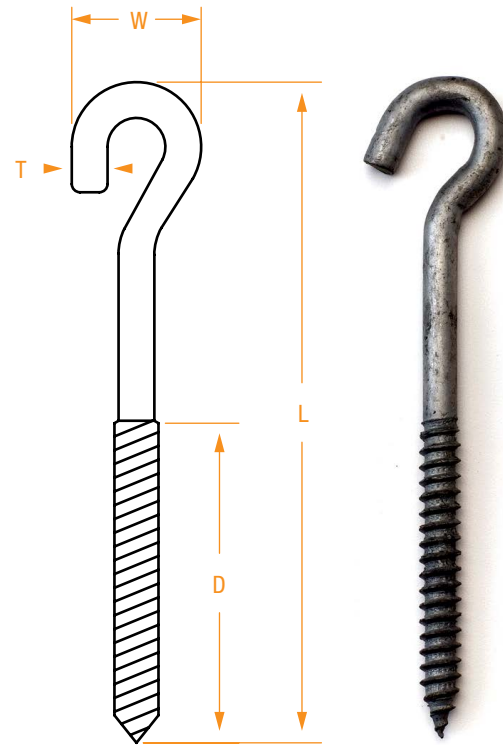



Figure 2

PART NUMBER	MATERIAL	FIGURE	DIMENSIONS IN INCHES			
			L	W	T	D
RJH18666	Steel	1	5	1-9/16	7/16	2-1/2
RJH18667	Bronze	2	6	1-1/4	3/8	2-7/8
RJH18668	Steel	2	6	1-1/4	3/8	3
RJH18669	Steel	2	5	1-1/2	3/8	2-5/8
RJH18670	Steel	2	9	1-1/2	3/8	3

SINGLE-POSITION EQUIPMENT BRACKETS

LPB Series

- Designed for mounting pin or post-type insulators in vertical position.
- Can support arresters and cutouts at the end of the bracket.
- Made of malleable iron ASTMA197-47- hot-dipped galvanized.

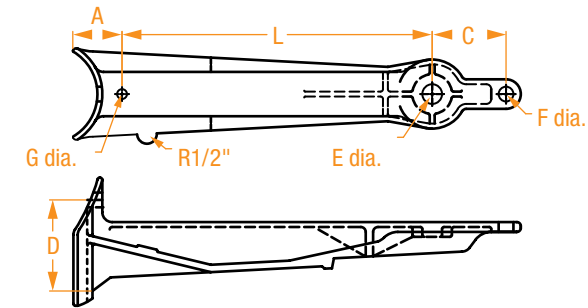


PART NUMBER	FIGURE	BOLT DIA.	DIMENSIONS IN INCHES						
			A	L	C	D	E	F	G
LPB622	1	5/8	2	15-1/2	4-1/2	4-1/2	13/16	11/16	1/2

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

GRID GAINS & CROSSARM GAINS

RGG & RCG Series

- Reduces bolt slotting by spreading the applied load across a large area.
- Fits a large range of pole diameters.
- Reduces the chances of pole fires due to leakage current.
- Made of malleable iron – hot-dipped galvanized.

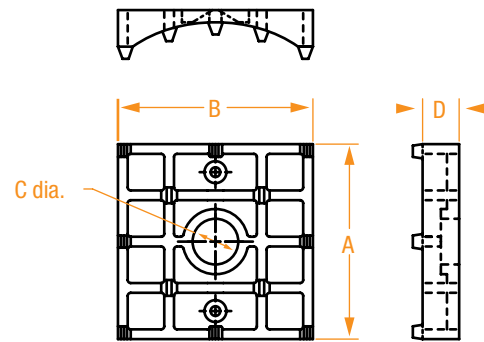


PART NUMBER	FIGURE	DIMENSIONS IN INCHES				POLE RANGE
		A	B	C	D	
RGG122	1	4	4	13/16	3/4	6-12
RGG122-15/16	1	4	4	15/16	3/4	6-12

GRID GAINS

Crossarm Gains

- Provides additional stability.
- Reduces leakage current.
- No wood-to-wood contact.
- Accepts a range of crossarm sizes.
- Made of malleable iron ASTMA197-47– hot-dipped galvanized.

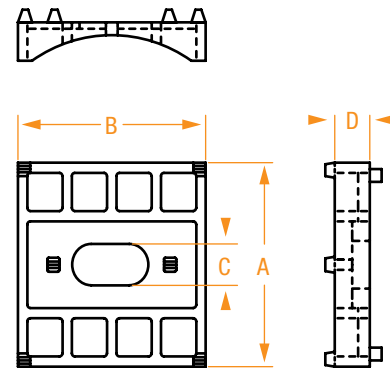


PART NUMBER	DIMENSIONS IN INCHES				POLE RANGE	MAX. BOLT	CROSSARM RANGE
	A	B	C	D			
RCG395	4	4	13/16	7/8	6-12	3/4	31/2 - 51/2

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

CROSSARM SUPPORT GAINS

RCSG Series

- No need for crossarm braces at capacitor and transformer installations, cable and corner poles.
- Provides additional stability.
- Improves appearance.
- Made of malleable iron ASTMA197-47– hot-dipped galvanized.

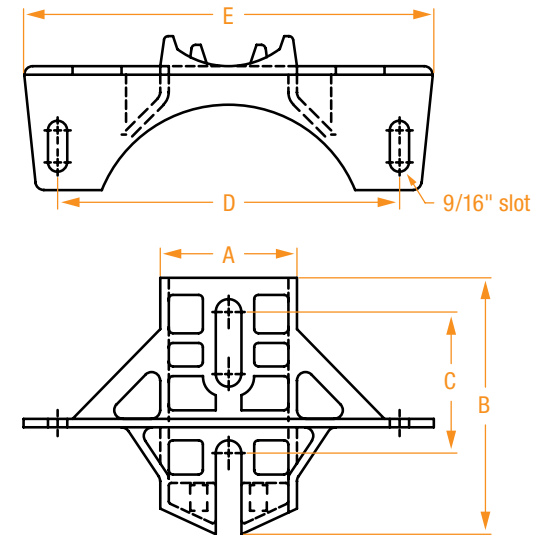


PART NUMBER	DIMENSIONS IN INCHES					POLE RANGE	MOUNTING BOLT		BOLT ON SHELF	CROSSARM RANGE
	A	B	C	D	E		TOP	BOTTOM		
RCSG182	4	7-1/2	6	10	12	6-12	3/4	5/8	9/16 x 1-1/2	31/2 - 61/2
RCSG182-1	4	7-1/2	6	10	12	6-12	3/4	5/8	9/16 x 2	31/2 - 61/2

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

POLE-EYE PLATES

RPEP Series

- Designed to allow any guy or dead-end angle up to 90°.
- Will fit on any diameter pole.
- Teeth on the back increase stability.
- Made of hot-dipped galvanized ductile iron.

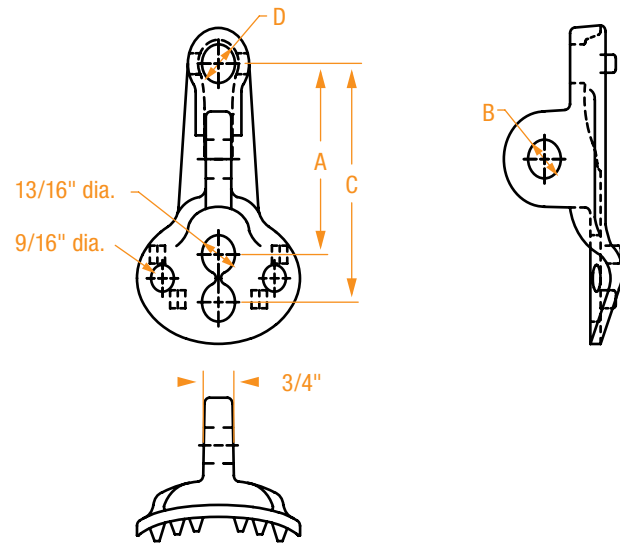

PART NUMBER	DIMENSIONS IN INCHES			
	A	B	C	D
RPEP88	4	13/16	5	13/16

GUY HOOKS

RGH Series

- Increases the load that can be carried by the through bolt by applying the load in tension, rather than in shear.
- The teeth on the back increase stability.
- Allows easy installation of a guy loop or dead-end device.
- Accepts a wide range of stranding diameters.
- Can handle pull-off angles from 0 to 90°.
- Made of hot-dipped galvanized ductile iron.

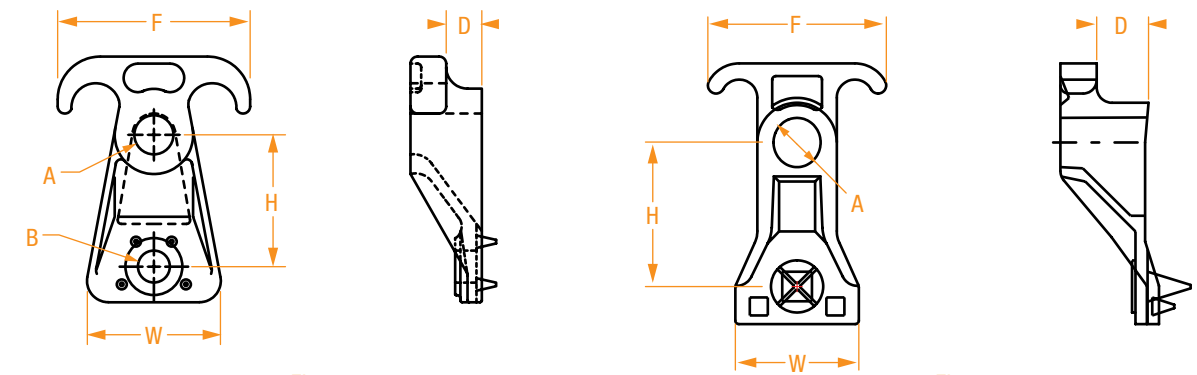


Figure 1

Figure 2

PART NUMBER	FIGURE	DIMENSIONS IN INCHES					MOUNTING HARDWARE		THIMBLE DIAMETER
		H	D	F	P	W	A	B	
RGH133	1	2-3/4	1/2	3-5/8	-	2-1/2	3/4	1/2	1-3/8
RGH133-AX	2	-	7/8	3-1/8	-	2-1/4	5/8	-	1-3/8
RGH135	1	2-3/4	7/8	3-3/4	-	2-1/2	5/8	1/2	1-3/8

AERIAL CLAMPS

- Designed for attaching small aerial cable and triplex.
- The body is tapped to insure proper clamping.
- Teeth on the back increase stability and resist down slotting.
- Made of malleable iron ASTM A197-47– hot-dipped galvanized.

RAC Series

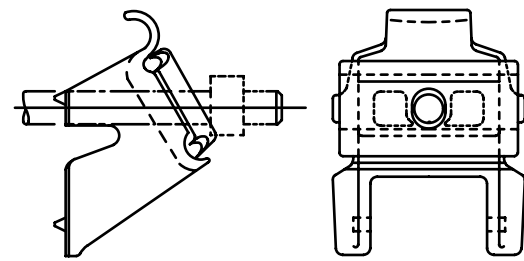


Figure 1

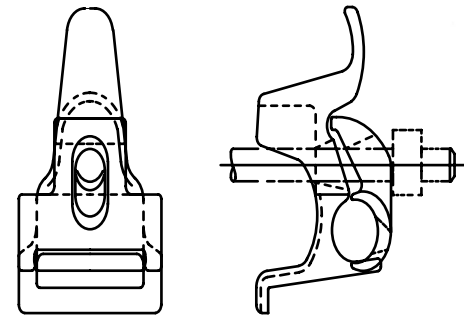



Figure 2

PART NUMBER	FIGURE	MESSENGER RANGE	GRD. WIRE GROOVE SIZE	CLEARANCE POLE TO MESSENGER	MTG. BOLT
RAC197A	1	.375 - .500	#6 AWG - 1/4	1-1/2	5/8
RAC336	2	.43 - .80	–	1-1/2	5/8

TURNBUCKLES

- Designed to alleviate stress point when tying two guy wires together.
- Made of malleable iron ASTM A197-47– hot-dipped galvanized.

RTB Series

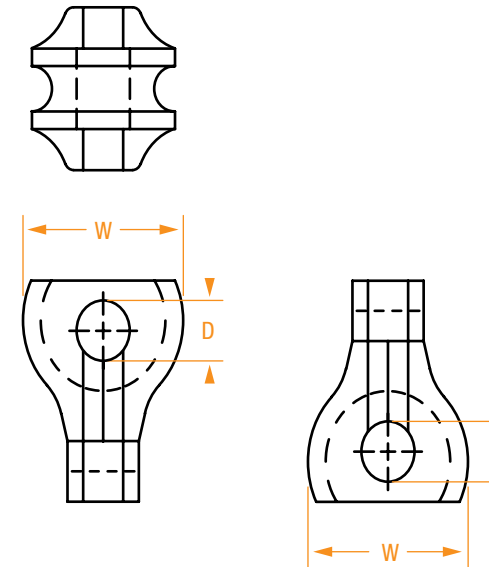


PART NUMBER	DIMENSIONS IN INCHES	
	W	D
RTB071330	2-1/2	3/4

POLE-TOP EXTENSIONS

RPTA Series

- Design aids in dampening vibrations and permits inline grade variations.
- Made of malleable iron ASTMA197-47– hot-dipped galvanized.

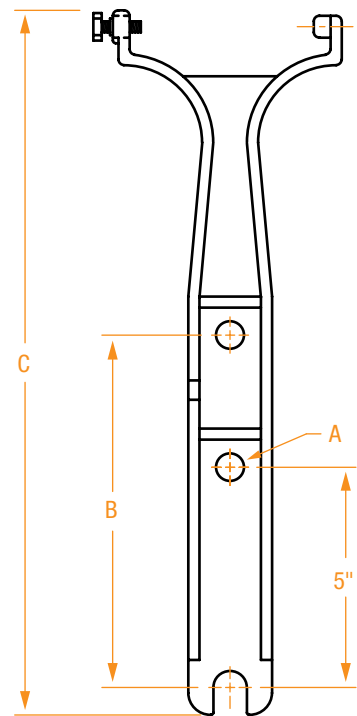


PART NUMBER	MTG. BOLT A	DIMENSIONS IN INCHES	
		B	C
RPTA529	5/8	8	16

FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

THREE-HOLE MESSENGER CLAMPS

RSC1204 Series

- Connects messenger cable to pole.
- Made of hot-dipped galvanized ductile iron.

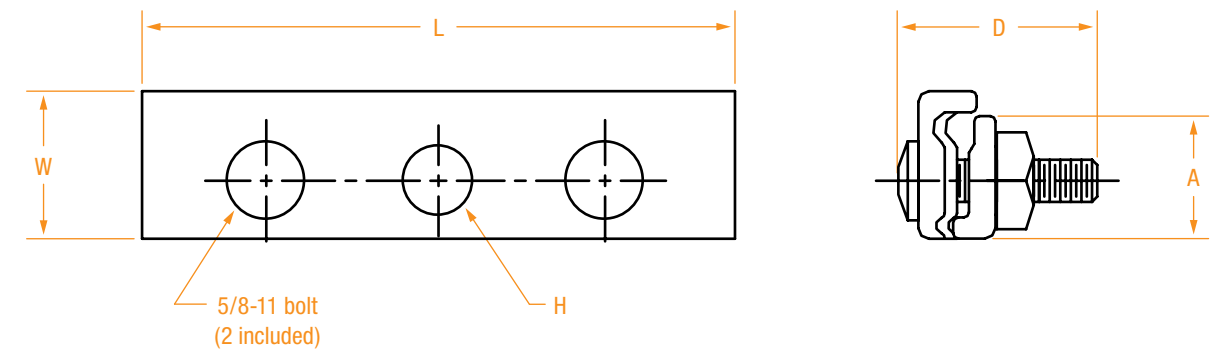


PART NUMBER	DIMENSIONS IN INCHES				
	A	H	D	L	W
RSC1204	1-7/8	13/16	2-3/8	7	2-1/4

HEAVY-DUTY MESSENGER CLAMPS

- Connects messenger cable to pole.
- Made of hot-dipped galvanized ductile iron.

RHDC Series

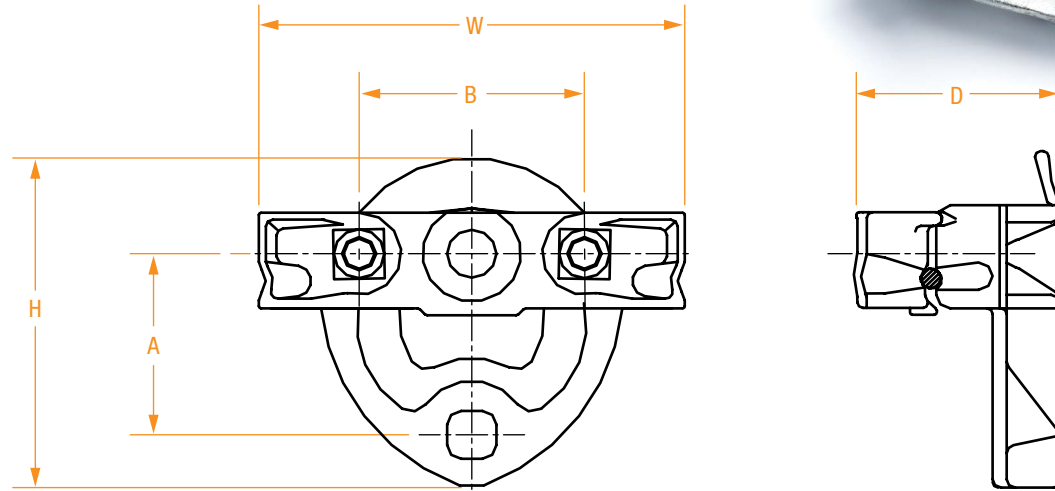

PART NUMBER	DIMENSIONS IN INCHES				
	H	A	B	W	D
RHDC176	6-1/4	3-1/4	4	7-3/8	3-11/16

Rubber Products




RUBBER PRODUCTS

	SERIES	PAGE
Cable End Caps	CCAP Series	153
Insulated Connector Covers	348 Series	154
Wildlife Protectors – Plastic	RWP Series	155
Wildlife Protectors – Rubber	BG Series	156

CABLE END CAPS

CCAP Series

- Made of ethylene propylene rubber.
- Available in several different sizes.

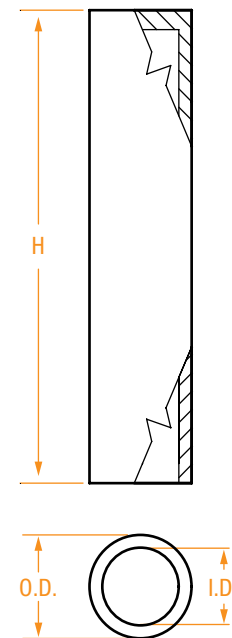

PART NUMBER *	CABLE SIZE	DIMENSIONS IN INCHES		
		H	OD	ID
CCAP348382	1/0	4-1/2	1	0.60
CCAP348300-B *	3/0	4-1/2	1-3/4	1.1875
CCAP4/0	4/0	2-1/2	1-1/4	.75
CCAP350	350	2-1/2	1-3/8	1
CCAP500	500	2-1/2	1-1/2	1.125
CCAP348383-B**	500	4-1/4	2	1
CCAP750	750	2-1/2	1-3/4	1.375
CCAP348301-B*	750	5-1/2	2-5/16	1.825


FOR OTHER SIZES, CONTACT YOUR SALES REPRESENTATIVE OR THE FACTORY.

* "-B" indicates that the Cable End Cap comes with a tightening band for easy installation.
 ** Made for 4kV, marked "4kV DEAD AS ALIVE."


INSULATED CONNECTOR COVERS

348 Series

- Made from weather-resistant vinyl.
- Insulates and protects electrical connections.
- Available with or without a side split.

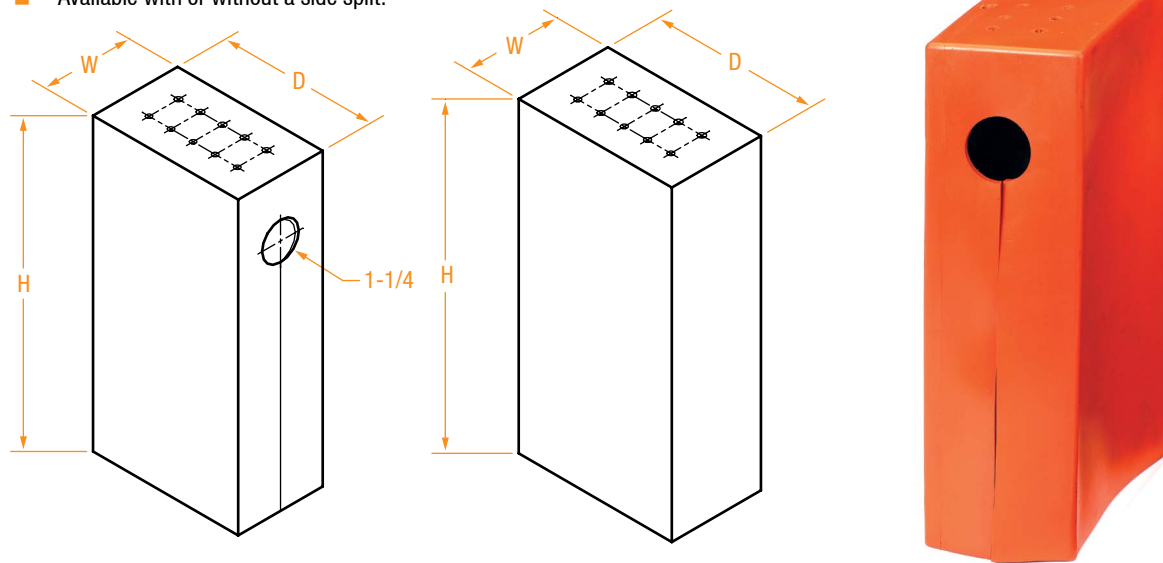


PART NUMBER	SIDE STYLE	DIMENSIONS IN INCHES		
		H	W	D
348458	Seamless	10	5	3
348311	Split	10	5	3

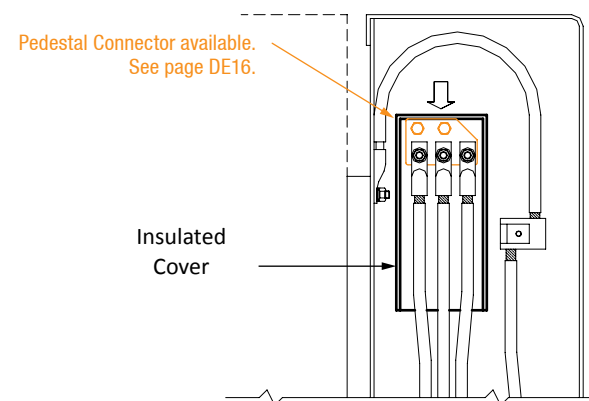

WILDLIFE PROTECTORS – PLASTIC

RWP Series

- Protects against accidental contact between wildlife and equipment bushings.
- Track resistant per ASTM D 2303-97 standard test methods for liquid-contaminant, inclined-plane tracking and erosion of insulating materials.
- Side and top snaps provide secure closure.
- Knock outs on both sides for lightning arresters.

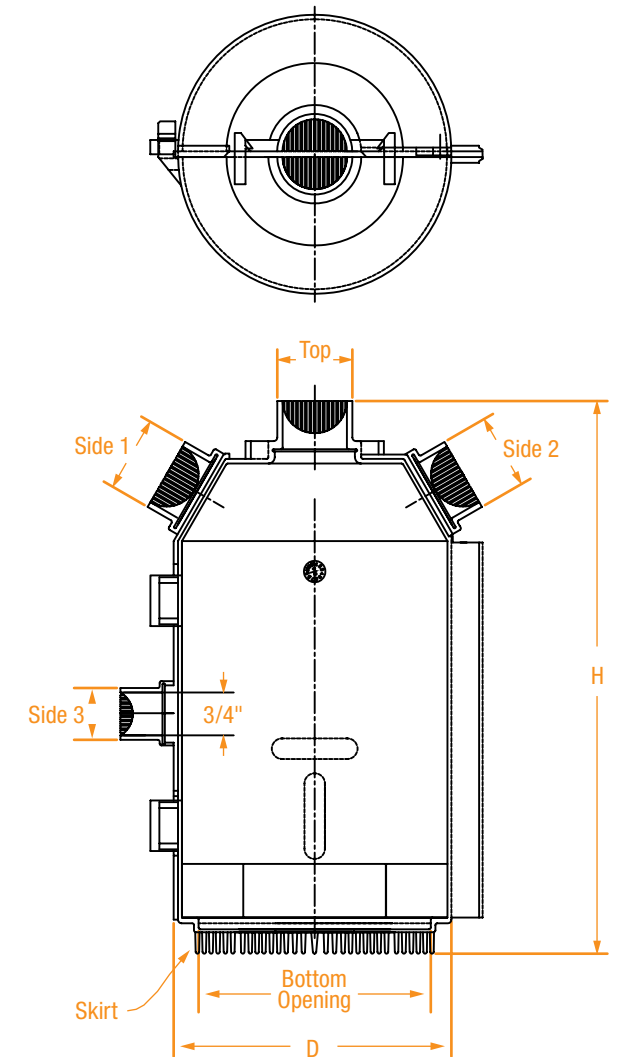


PART NUMBER	DIMENSIONS IN INCHES		# OF CABLE PORTS	SIZE OF CABLE PORTS				
	H	D		TOP	SIDE 1	SIDE 2	SIDE 3	BOTTOM
RWP2	9	4-3/4	3	3/4	3/4	3/4	–	2-1/2
RWP3*	9-1/2	4-3/4	4	1-1/8	1-1/8	1-1/8	3/4	2-1/2
RWP4*	9-1/2	4-3/4	4	1-5/16	1-5/16	1-5/16	15/16	2-1/2
RWP5	7	4-3/4	4	1-5/16	1-5/16	1-5/16	15/16	2-1/2

* Comes with a "skirt" at the bottom and a rubber insert to firmly grip bushing.

WILDLIFE PROTECTORS – RUBBER

BG Series

- Used on transformers, reclosers and potheads.
- Made of ethylene propylene rubber.
- Highly resistant to ozone and ultraviolet light deterioration.
- Track resistant.
- Easy Installation.
- 20+ year life expectancy.
- Available slit for "HOT" installations.

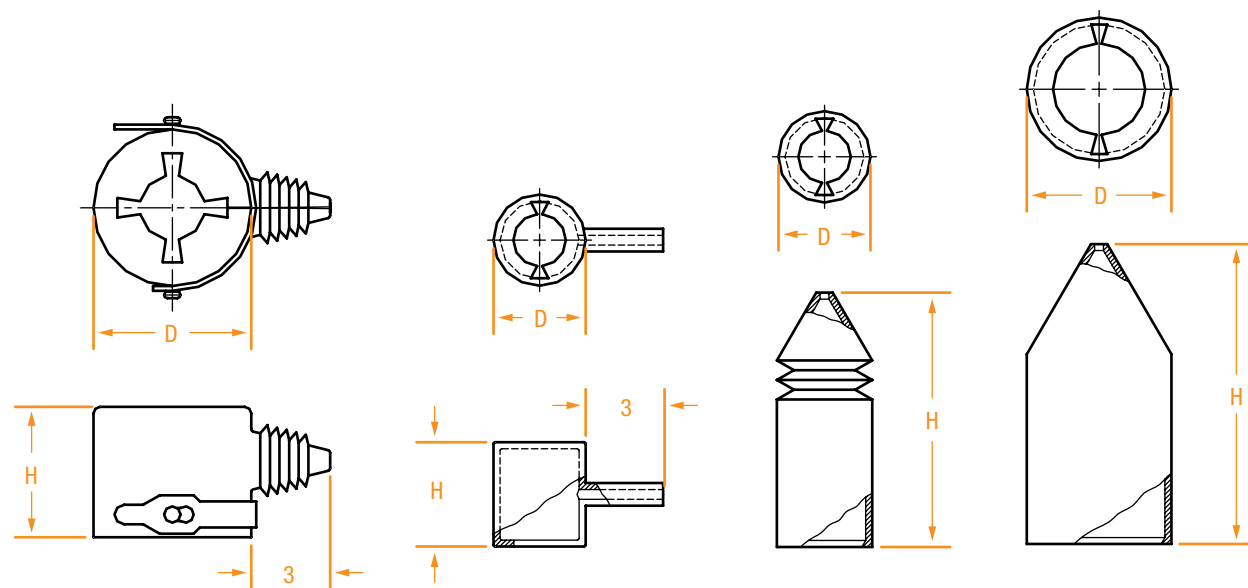

PART NUMBER	FIGURE	DIMENSIONS IN INCHES	
		H	D
BG30-EN*	1	4 7/8	5 7/8
BG554-5678*	2	4	3-1/2
BG13-8-18	2	5-1/2	4-1/4
BG30-S*	3	4	3-1/2
BG30	3	9-3/4	3-1/2
BG30-414	4	11-1/2	5-1/2
BG30-12	4	11-3/4	4-3/8
BG-RS0218	4	14-1/2	6

* Wildlife protector slit for "HOT" installations.

INDEX

Alphabetical Listing by Richards Part Number

003-0346	130	348311	154	ALC11	38	ALCR15	45
003-0353	130	348458	154	ALC12	38	ALCR16	45
003-0379	130	ACRN-5/8	90	ALC13	38	ALCR18	45
003-0387	130	ACRN-5/8-CPS	90	ALC14	38	ALCR20	45
003-0395	130	AHLC-18-9	74	ALC15	38	ALCR23	45
003-0437	130	AHLC-100-TN	74	ALC16	38	ALCR28	45
003-0445	130	AHLC-300-TN	74	ALC18	38	ALCR29	45
003-0452	130	AHLC-397	76	ALC20	38	ALCRCD5-3	47
003-0460	130	AHLC-700	74	ALC23	38	ALCRCD7	47
003-0478	130	AL3-1/4	5	ALC24	38	ALCRCD9	47
237-1221-00	116	AL3-2N	8	ALC28	38	ALCRCD10	47
237-1229-00	116	AL5-1/4	5	ALC29	38	ALCRCD11	47
237-1234-10	116	AL5-2N	8	ALC30	38	ALCRCD12	47
237-1245-00	116	AL7-1/4	5	ALC31	38	ALCRCD13	47
312-1200-00	116	AL7-2N	8	ALC32	38	ALCRCD14	47
312-1228-00	116	AL8-2N	8	ALCCD5	39	ALCRCD15	47
312-1265-00	116	AL9	5	ALCCD7	39	ALCRCD18	47
312-1268-00	114	AL9-2N	8	ALCCD8	39	ALCRCD23	47
312-1269-00	114	AL9-3/8	5	ALCCD9	39	ALCRCD28	47
312-1270-00	116	AL10	5	ALCCD10	39	ALCRCD29	47
312-1315-00	114	AL10-2N	8	ALCCD11	39	ALLS250	112
312-1315-01	114	AL10-3/8	5	ALCCD12	39	ALLS500	112
312-1316-00	114	AL11	5	ALCCD13	39	ALLS750	112
312-1330-00	114	AL11-2N	8	ALCCD14	39	ALS250	109
312-1903-00	135	AL11-3/8	5	ALCCD15	39	ALS500	109
312-1903-10	135	AL12	5	ALCCD16	39	ALS750	109
312-1903-20	135	AL12-2N	8	ALCCD18	39	ALT7	42
312-1903-30	135	AL12-3/8	5	ALCCD20	39	ALT9	42
312-1947-00	135	AL13	5	ALCCD23	39	ALT9-7	42
312-3100-00	122	AL13-2N	8	ALCCD24	39	ALT10	42
312-3110-00	121	AL14	5	ALCCD28	39	ALT10-9	42
312-3200-00	121	AL14-2N	8	ALCD1-2N	10	ALT11	42
312-3201-00	121	AL15	7	ALCD2	7	ALT12	42
312-3202-00	121	AL15-2N	8	ALCD3	7	ALT12-10	42
312-3203-00	121	AL15-4N	14	ALCD3-2N	10	ALT13	42
312-3204-00	121	AL16	5	ALCD5	7	ALT14	42
312-3205-00	121	AL16-2N	8	ALCD5-2N	10	ALT15	42
312-3208-00	121	AL16-5/8	5	ALCD7	7	ALT15-9	42
312-3209-00	121	AL18	5	ALCD7-2N	10	ALT15-12	42
312-3211-00	121	AL18-2N	8	ALCD8	7	ALT7	43
312-3250-00	121	AL18-4N	14	ALCD8-2N	10	ALT7-5	43
312-3251-00	121	AL18-5/8	5	ALCD9	7	ALT9	43
312-3252-00	121	AL20	5	ALCD9-2N	10	ALT9-7	43
312-3253-00	121	AL20-2N	8	ALCD10	7	ALT10	43
312-3254-00	121	AL20-5/8	5	ALCD10-2N	10	ALT10-7	43
312-3255-00	121	AL23	6	ALCD11	7	ALT10-8	43
312-3259-00	121	AL23-2N	8	ALCD11-2N	10	ALT10-9	43
312-3260-00	121	AL23-4N	14	ALCD12	7	ALT12	43
312-3261-00	121	AL23-5/8	6	ALCD12-2N	10	ALT12-9	43
312-3263-00	121	AL24	6	ALCD13	7	ALT12-10	43
312-3300-00	122	AL24-2N	8	ALCD13-2N	10	ALT14-9	43
312-3301-00	122	AL24-4N	14	ALCD14	7	ALT14-10	43
312-3302-00	122	AL24-5/8	6	ALCD14-2N	10	ALT15	43
312-3303-00	122	AL28	6	ALCD15	7	ALT15-9	43
312-3304-00	122	AL28-2N	9	ALCD15-2N	10	ALT15-10	43
312-3305-00	122	AL28-2N-W	9	ALCD16	7	ALT15-12	43
312-3306-00	122	AL28-4N	14	ALCD16-2N	10	ALT15-14	43
312-3308-00	122	AL28-5/8	6	ALCD18	7	ALT18	44
312-3309-00	122	AL28CR-4N	14	ALCD18-2N	10	ALT18-9	44
312-3310-00	122	AL29-2N	9	ALCD23-2N	10	ALT18-10	44
312-3311-00	122	AL29-4N	14	ALCD24-2N	10	ALT18-12	44
312-3500-00	122	AL30-2N	9	ALCD28-2N	10	ALT18-14	44
312-3501-00	122	AL31-2N	9	ALCR7	45	ALT18-15	44
312-3502-00	122	AL32-2N	9	ALCR9	45	ALT23	44
312-3503-00	122	ALC5	38	ALCR10	45	ALT23-12	44
312-3506-00	122	ALC7	38	ALCR11	45	ALT23-14	44
312-3507-00	122	ALC8	38	ALCR12	45	ALT23-15	44
312-3508-00	122	ALC9	38	ALCR13	45	ALT23-18	44
312-3511-00	122	ALC10	38	ALCR14	45	ALT28	44

INDEX

(continued)

ALTT28-12	44	ASLCD13-2N	10	CCAP750	153	CCT13-10	56
ALTT28-14	44	ASLCD14-2N	10	CCAP348300-B	153	CCT13-12	56
ALTT28-15	44	ASLCD15-2N	10	CCAP348301-B	153	CCT15	56
ALTT28-18	44	ASLCD16-2N	10	CCAP348382	153	CCT15-9	56
ALTT28-23	44	ASLCD18-2N	10	CCAP348383-B	153	CCT15-10	56
APC5	77	ASLCD23-2N	10	CCL4/0	108	CCT15-12	56
APC7	77	ASLCD24-2N	10	CCL250	108	CCT16	56
APC10	77	ASLCD28-2N	10	CCL300	108	CCT16-9	56
APC11	77	B3CC-4N	30	CCL350	108	CCT16-10	56
APC12	77	B4CC-4N	30	CCL400	108	CCT16-13	56
APC13	77	BCASC2/0	79	CCL500	108	CCT16-14	56
APC14	77	BCASC2/0-45	79	CCL750	108	CCT16-15	56
APC15	77	BCASC2/0-E-45	79	CCLA4/0	107	CCT18	56
APC132	77	BCASC2/0-E-W	79	CCLA250	107	CCT18-9	56
APT7	13	BCASC2/0-E-W-45	79	CCLA300	107	CCT18-10	56
APT9	13	BCASC2/0-W	79	CCLA350	107	CCT18-12	56
APT10	13	BCASC397	79	CCLA400	107	CCT18-13	56
APT12	13	BCASC397-45	79	CCLA500	107	CCT18-15	56
APT15	13	BCASC397-E-45	79	CCLA7500	107	CCT18-16	56
APT18	13	BCASC397-E-45-L	79	CCLA-IN-500	106	CCT20	56
APT23	13	BCASC397-L	79	CCLAP4/0	107	CCT20-10	56
APT28	13	BG13-8-18	156	CCLAP250	107	CCT20-12	56
AS4/0	101	BG30	156	CCLAP300	107	CCT20-13	56
AS500/3	101	BG30-12	156	CCLAP350	107	CCT20-18	56
AS500-5	101	BG30-414	156	CCLAP400	107	CCT23	56
ASC-2/0	78	BG30-EN	156	CCLAP500	107	CCT23-15	56
ASC-500	78	BG30-S	156	CCLAP750	107	CCT23-18	56
ASC-1000	78	BG554-5678	156	CCLP4/0	108	CCT28	56
ASL3-2N	8	BG-RS0218	156	CCLP250	108	CCT28-18	56
ASL5-2N	8	BHLC-100	75	CCLP300	108	CCT28-20	56
ASL7-2N	8	BHLC-101	75	CCLP350	108	CCT28-23	56
ASL8-2N	8	BHLC-102	75	CCLP500	108	CJB4/0-4W	97
ASL9-2N	8	BHLC-201	75	CCLP750	108	CJB350-4W	97
ASL10-2N	8	BHLC-300	75	CCR3-2	58	CJB500-4W	97
ASL11-2N	8	BHLC-400	75	CCR5	58	CJB500-5W	97
ASL12-2N	8	BHLC-401	75	CCR7	58	CJLP500-3W	103
ASL13-2N	8	BIC4/0-4W	98	CCR8	58	CJLP500-5W	103
ASL14-2N	8	BJINT4/0-4W	99	CCR9	58	CJLP500-7W	103
ASL15-2N	8	BSC-2/0	78	CCR10	58	CL2-1/4	19
ASL16-2N	8	CB504-0530	125	CCR11	58	CL2-1/4-P	27
ASL18-2N	8	CB570-2774	125	CCR12	58	CL2-3/8	19
ASL20-2N	8	CB183030	125	CCR13	58	CL2-5/16	19
ASL23-2N	8	CB396271	125	CCR14	58	CL3-1/4	19
ASL24-2N	8	CB396740	125	CCR15	58	CL3-1/4-P	27
ASL28-2N	9	CC3	52	CCR18	58	CL3-2N-1/4	21
ASL28-2N-W	9	CC4	52	CCR23	58	CL3-2N-5/16	21
ASL29-2N	9	CC5	52	CCR28	58	CL3-3/8	19
ASL30-2N	9	CC7	52	CCR29	58	CL3-3/8-P	27
ASL31-2N	9	CC8	52	CCT6-12	56	CL3-5/16	19
ASL32-2N	9	CC9	52	CCT9	56	CL3-5/16-P	27
ASLCD1-2N	10	CC10	52	CCT9-3	56	CL5-1/4	19
ASLCD2	7	CC11	52	CCT9-5	56	CL5-1/4-P	27
ASLCD3	7	CC12	52	CCT9-7	56	CL5-1-66PS	32, 34
ASLCD3-2N	10	CC13	52	CCT9-8	56	CL5-2N	21
ASLCD5	7	CC14	52	CCT10	56	CL5-2N-1/4	21
ASLCD5-2N	10	CC15	52	CCT10-3	56	CL5-2N-5/16	21
ASLCD7	7	CC16	52	CCT10-5	56	CL5-2N-066	32, 34
ASLCD7-2N	10	CC18	52	CCT10-7	56	CL5-3/8	19
ASLCD8	7	CC20	52	CCT10-8	56	CL5-3/8-P	27
ASLCD8-2N	10	CC23	52	CCT10-9	56	CL5-5/16	19
ASLCD9	7	CC28	52	CCT12	56	CL5-5/16-P	27
ASLCD9-2N	10	CC29	52	CCT12-7	56	CL7	19
ASLCD10	7	CC30	52	CCT12-8	56	CL7-1/2-P	27
ASLCD10-2N	10	CC32	52	CCT12-9	56	CL7-1/4	19
ASLCD11	7	CC33	52	CCT12-10	56	CL7-1/4-P	27
ASLCD11-2N	10	CC500	101	CCT13	56	CL7-2N	21
ASLCD12	7	CCAP4/0	153	CCT13-7	56	CL7-2N-1/4	21
ASLCD12-2N	10	CCAP350	153	CCT13-8	56	CL7-2N-5/16	21
ASLCD13	7	CCAP500	153	CCT13-9	56	CL7-2N-066	32, 34

INDEX

(continued)

CL7-3/8.....	19	CL15-3/8.....	20	CLL750-A.....	111	CR17.....	66
CL7-3/8-P.....	27	CL15-5/8-P.....	28	CLL750-N.....	111	CR18.....	66
CL7-5/16.....	19	CL15-P.....	28	CLLA4/0-A.....	110	CR19.....	66
CL7-5/16-P.....	27	CL16.....	20	CLLA4/0N.....	110	CR20.....	66
CL8.....	19	CL16-2N.....	22	CLLA250-A.....	110	CR21.....	66
CL8-1/2-P.....	27	CL16-2N-3/8.....	22	CLLA250N.....	110	CR22.....	66
CL8-1/4.....	19	CL16-2N-P.....	29	CLLA300-A.....	110	CR23.....	66
CL8-1/4-P.....	27	CL16-3/8.....	20	CLLA300N.....	110	CR24.....	66
CL8-2N-1/4.....	21	CL16-5/8.....	20	CLLA350-A.....	110	CR26.....	66
CL8-2N-5/16.....	21	CL16-5/8-P.....	28	CLLA350N.....	110	CR28.....	66
CL8-3/8.....	19	CL16-P.....	28	CLLA400-A.....	110	CR29.....	66
CL8-3/8-P.....	27	CL18.....	20	CLLA400N.....	110	CR30.....	66
CL8-5/16.....	19	CL18-2N.....	22	CLLA500-A.....	110	CR31.....	66
CL8-5/16-P.....	27	CL18-2N-P.....	29	CLLA500N.....	110	CR32.....	66
CL9.....	19	CL18-4N.....	23	CLLA750-A.....	110	CR33.....	66
CL9-2N.....	21	CL18-5/8.....	20	CRA12-3.....	62	FJB4/0-2W.....	97
CL9-2N-3/8.....	21	CL18-5/8-P.....	28	CRA12-5.....	62	FJB4/0-3W.....	97
CL9-2N-5/16.....	21	CL18-P.....	28	CRA12-7.....	62	FJB4/0-4W.....	97
CL9-3/8.....	19	CL20.....	20	CRA12-8.....	62	FJB500-2W.....	97
CL9-3/8-P.....	27	CL20-2N.....	22	CRA12-9.....	62	FJB500-3W.....	97
CL9-5/16.....	19	CL20-2N-P.....	29	CRA12-10.....	62	FJB500-4W.....	97
CL9-5/16-P.....	27	CL20-5/8.....	20	CRA12-11.....	62	FJ14/0-2W.....	98
CL9-P.....	27	CL20-5/8-P.....	28	CRA15-3.....	62	FJ14/0-3W.....	98
CL10.....	19	CL20-P.....	28	CRA15-5.....	62	FJ14/0-4W.....	98
CL10-2N.....	21	CL23.....	20	CRA15-7.....	62	FJ14/0-5W.....	98
CL10-2N-3/8.....	21	CL23-2N.....	22	CRA15-9.....	62	FJ14/0-6W.....	98
CL10-2N-P.....	29	CL23-2N-P.....	29	CRA15-11.....	62	FJ1500-(2)4/0.....	98
CL10-3/8.....	19	CL23-3/4.....	20	CRA15-12.....	62	FJ1500-2W.....	98
CL10-3/8-P.....	28	CL23-3/4-P.....	28	CRA15-13.....	62	FJ1500-3W.....	98
CL10-5/16.....	19	CL23-4N.....	23	CRA15-14.....	62	FJ1500-4W.....	98
CL10-5/16-P.....	28	CL23-5/8.....	20	CRA18-3.....	62	FJ1500-5W.....	98
CL10-P.....	28	CL23-5/8-P.....	28	CRA18-5.....	62	FJ1500-6W.....	98
CL11.....	20	CL23-P.....	28	CRA18-7.....	62	FJ1500-U.....	98
CL11-2N.....	21	CL28.....	20	CRA18-8.....	62	FJ1750-2W.....	98
CL11-2N-3/8.....	21	CL28-2N.....	22	CRA18-9.....	62	FJ1750-3W.....	98
CL11-2N-P.....	29	CL28-2N-1-3/4.....	22	CRA18-10.....	62	FJ1750-4W.....	98
CL11-3/8.....	20	CL28-2N-P.....	20	CRA18-11.....	62	FJ1750-5W.....	98
CL11-3/8-P.....	28	CL28-3/4.....	29	CRA18-13.....	62	FJINT4/0-2W.....	99
CL11-5/16.....	20	CL28-3/4-P.....	28	CRA18-14.....	62	FJINT4/0-3W.....	99
CL11-5/16-P.....	28	CL28-4N.....	23	CRA18-15.....	62	FJINT4/0-4W.....	99
CL11-P.....	28	CL28-5/8.....	20	CRA18-16.....	62	FJINT4/0-5W.....	99
CL12.....	20	CL28-5/8-P.....	28	CRA23-12.....	62	FJINT4/0-6W.....	99
CL12-1/2-P.....	28	CL28-P.....	28	CRA23-15.....	62	FJINT500-2W.....	99
CL12-2N.....	21	CL29-2N.....	22	CRA23-16.....	62	FJINT500-3W.....	99
CL12-2N-3/8.....	21	CL29-4N.....	23	CRA23-18.....	62	FJINT500-4W.....	99
CL12-2N-P.....	29	CL30-2N.....	22	CRA23-20.....	62	FJINT500-5W.....	99
CL12-3/8.....	20	CL30-2N-P.....	29	CSL5-2N.....	21	FJINT500-6W.....	99
CL12-3/8-P.....	28	CL30-3/4-P.....	28	CSL7-2N.....	21	HD3.....	68
CL12-5/16.....	20	CL30-4N.....	23	CSL9-2N.....	21	HD5.....	68
CL12-5/16-P.....	28	CL30-4N-P.....	29	CSL10-2N.....	21	HD6.....	68
CL13.....	20	CL32-2N.....	22	CSL11-2N.....	21	HD7.....	68
CL13-2N.....	22	CL32-2N-P.....	29	CSL12-2N.....	21	HD8.....	68
CL13-2N-3/8.....	22	CL32-3/4-P.....	28	CSL13-2N.....	22	HD9.....	68
CL13-2N-P.....	29	CL32-4N.....	23	CSL14-2N.....	22	HD10.....	68
CL13-3/8.....	20	CL32-4N-P.....	29	CSL15-2N.....	22	HD11.....	68
CL13-3/8-P.....	28	CL33-4N.....	23	CR3.....	66	HD12.....	68
CL13-5/16.....	20	CL371885.....	23	CR4.....	66	HD13.....	68
CL13-P.....	28	CLL4/0-A.....	111	CR5.....	66	HD14.....	68
CL14.....	20	CLL4/0-N.....	111	CR6.....	66	HD15.....	68
CL14-2N.....	22	CLL250-A.....	111	CR7.....	66	HD16.....	68
CL14-2N-3/8.....	22	CLL250-N.....	111	CR8.....	66	HD17.....	68
CL14-2N-P.....	29	CLL300-A.....	111	CR9.....	66	HD18.....	68
CL14-3/8.....	20	CLL300-N.....	111	CR10.....	66	HD19.....	68
CL14-5/8-P.....	28	CLL350-A.....	111	CR11.....	66	HD20.....	68
CL14-P.....	28	CLL350-N.....	111	CR12.....	66	HD21.....	68
CL15.....	20	CLL400-A.....	111	CR13.....	66	HD23.....	68
CL15-2N.....	22	CLL400-N.....	111	CR14.....	66	HD24.....	68
CL15-2N-3/8.....	22	CLL500-A.....	111	CR15.....	66	HD25.....	68
CL15-2N-P.....	29	CLL500-N.....	111	CR16.....	66	HD28.....	68
						HD32.....	68

INDEX

(continued)

FD8.....	67	HDCL7-2N.....	24	OATC23.....	40, 41	OTCC13.....	55
FD9.....	67	HDCL8-2N.....	24	OATC24.....	40	OTCC14.....	55
FD10.....	67	HDCL9-2N.....	24	OATC28.....	40	OTCC15.....	55
FD11.....	67	HDCL10-2N.....	24	OATC29.....	40	OTCC16.....	55
FD12.....	67	HDCL11-2N.....	24	OATC30.....	40	OTCC18.....	55
FD13.....	67	HDCL12-2N.....	24	OATC31.....	40	OTCC20.....	55
FD14.....	67	HDCL13-2N.....	24	OATC32.....	40	OTCC23.....	55
FD15.....	67	HDCL14-2N.....	24	OATCCD5.....	41	OTCC28.....	55
FD16.....	67	HDCL15-2N.....	24	OATCCD7.....	41	OTCC29.....	55
FD17.....	67	HDCL18-2N.....	24	OATCCD10.....	41	OTCC30.....	55
FD18.....	67	HDCL20-2N.....	24	OATCCD11.....	41	OTCC32.....	55
FD19.....	67	HDCL23-2N.....	24	OATCCD14.....	41	OTCCR3.....	61
FD20.....	67	HDCL28-2N.....	24	OATCCD16.....	41	OTCCR5.....	61
FD21.....	67	HTS-500.....	115	OATCR3-2.....	46	OTCCR7.....	61
FJB4/0-2W.....	97	HTS-750.....	115	OATCR5.....	46	OTCCR8.....	61
FJB4/0-3W.....	97	LLS4/0.....	112	OATCR7.....	46	OTCCR9.....	61
FJB4/0-4W.....	97	LLS500.....	112	OATCR8.....	46	OTCCR10.....	61
FJB500-2W.....	97	LLS750.....	112	OATCR9.....	46	OTCCR11.....	61
FJB500-3W.....	97	LPB622.....	141	OATCR10.....	46	OTCCR12.....	61
FJB500-4W.....	97	LS-2PC-500.....	109	OATCR11.....	46	OTCCR13.....	61
FJ14/0-2W.....	98	LS-2PC-750.....	109	OATCR12.....	46	OTCCR14.....	61
FJ14/0-3W.....	98	LS-250.....	109	OATCR13.....	46	OTCCR15.....	61
FJ14/0-4W.....	98	ML8-10.....	30	OATCR14.....	46	OTCCR18.....	61
FJ14/0-5W.....	98	ML13-18.....	30	OATCR15.....	46	OTCCR23.....	61
FJ14/0-6W.....	98	NF-2.....	123	OATCR18.....	46	OTCCR28.....	61
FJ1500-(2)4/0.....	98	NF-3.....	123	OATCR23.....	46	OTCCR29.....	61
FJ1500-2W.....	98	NF-4.....	123	OATCR28.....	46	PC371105.....	89
FJ1500-3W.....	98	NF-5.....	123	OATCR29.....	46	PSCS-12.....	133
FJ1500-4W.....	98	NF-6.....	123	OCC3.....	54	PSCS-18.....	133
FJ1500-5W.....	98	NF-7.....	123	OCC5.....	54	PSCS-23.....	133
FJ1500-6W.....	98	NF-10.....	123	OCC7.....	54	PTP-1.....	132
FJ1500-U.....	98	NPF-5-Q.....	119	OCC8.....	54	R07-1285.....	91
FJ1750-2W.....	98	NPF-7.5-Q.....	119	OCC9.....	54	R124214.....	85
FJ1750-3W.....	98	NPF-11-L.....	120	OCC10.....	54	RA-1W.....	129
FJ1750-4W.....	98	NPF-11-Q.....	119	OCC11.....	54	RA-1W-90.....	129
FJ1750-5W.....	98	NPF-15-L.....	120	OCC12.....	54	RA-2W.....	129
FJINT4/0-2W.....	99	NPF-15-Q.....	119	OCC13.....	54	RA-2W-90.....	129
FJINT4/0-3W.....	99	NPF-22.5-L.....	120	OCC14.....	54	RA-2W-C.....	129
FJINT4/0-4W.....	99	NPF-22.5-Q.....	119	OCC15.....	54	RA-3W.....	129
FJINT4/0-5W.....	99	NPF-25-L.....	120	OCC16.....	54	RA-3W-90.....	129
FJINT4/0-6W.....	99	NPF-25-Q.....	119	OCC18.....	54	RA-3W-C.....	129
FJINT500-2W.....	99	NPF-30-L.....	120	OCC20.....	54	RAC197A.....	146
FJINT500-3W.....	99	NPF-30-Q.....	119	OCC23.....	54	RAC336.....	146
FJINT500-4W.....	99	NPF-37.5-L.....	120	OCC24.....	54	RAFOB-6045.....	93
FJINT500-5W.....	99	NPF-37.5-Q.....	119	OCC28.....	54	RAFOB-6050.....	93
FJINT500-6W.....	99	NPF-44-L.....	120	OCC29.....	54	RAFOB-6055.....	93
HD3.....	68	NPF-44-Q.....	119	OCCR3-2.....	60	RAFOB-6065.....	93
HD5.....	68	NPF-50-L.....	120	OCCR5.....	60	RAFOB-6080.....	93
HD6.....	68	NPF-50-Q.....	119	OCCR7.....	60	RAFOB-6085.....	93
HD7.....	68	NPT500A.....	114	OCCR8.....	60	RAFOB-6100.....	93
HD8.....	68	NPT500B.....	114	OCCR9.....	60	RB319.....	86
HD9.....	68	NPT523-0909.....	114	OCCR10.....	60	RB341.....	86
HD10.....	68	NPT523-0925.....	114	OCCR11.....	60	RB563.....	86
HD11.....	68	NWP-3.....	124	OCCR12.....	60	RBCLLA4/0N.....	113
HD12.....	68	NWP-4.....	124	OCCR13.....	60	RBCLLA250N.....	113, 115
HD13.....	68	NWP-5.....	124	OCCR14.....	60	RBCLLA300N.....	113
HD14.....	68	NWP-6.....	124	OCCR15.....	60	RBCLLA350N.....	113
HD15.....	68	NWP-7.....	124	OCCR18.....	60	RBCLLA400N.....	113
HD16.....	68	OATC7.....	40	OCCR23.....	60	RBCLLA500N.....	113
HD17.....	68	OATC9.....	40, 41	OCCR28.....	60	RBCLLA750N.....	113
HD18.....	68	OATC10.....	40	OCCR29.....	60	RBLTE-1.....	139
HD19.....	68	OATC11.....	40	OTCC3.....	55	RBLTE-2.....	139
HD20.....	68	OATC12.....	40, 41	OTCC5.....	55	RBWC-L-9.....	87
HD21.....	68	OATC13.....	40, 41	OTCC7.....	55	RBWC-L-9-5.....	87
HD23.....	68	OATC14.....	40	OTCC8.....	55	RBWC-L-9-7.....	87
HD24.....	68	OATC15.....	40, 41	OTCC9.....	55	RBWC-M-5/8-5.....	87
HD25.....	68	OATC16.....	40	OTCC10.....	55	RBWC-M-5/8-7.....	87
HD28.....	68	OATC18.....	40, 41	OTCC11.....	55	RBWC-M-5/8-9.....	87
HD32.....	68	OATC20.....	40, 41	OTCC12.....	55	RCG395.....	142

INDEX

(continued)



RCSG182.....	143	RSS33.....	65	SALC30.....	37	SCL30-4N.....	18
RCSG182-1.....	143	RST-275.....	85	SALC31.....	37	SCL32.....	18
RDE-101.....	84	RST-356.....	85	SALC32.....	37	SCL32-2N.....	18
RDL-FA500.....	117	RTB071330.....	147	SCC3.....	51	SCL32-4N.....	18
RDL-UA500.....	117	RTG512.....	81	SCC4.....	51	SDC495.....	83
RDL-US500.....	117	RTG512-F.....	81	SCC5.....	51	SEC3-12.....	83
RENUT-1.....	139	RTG512-F-3/8.....	81	SCC7.....	51	SJ4/0-(6)1/0.....	104
RENUT-2.....	139	RTG512-M.....	81	SCC8.....	51	SJ350AL-4/0-8W.....	104
RFB1.....	94	RTG512-XL.....	81	SCC9.....	51	SJ573-0171.....	104
RFB2.....	94	RTMBE-1.....	139	SCC10.....	51	SJ573-0346.....	104
RGG122.....	142	RTMBE-2.....	139	SCC11.....	51	SJ573-0536.....	104
RGG122-15/16.....	142	RTMBL-1.....	139	SCC12.....	51	SJ573-0551.....	104
RGH133.....	145	RTMBL-2.....	139	SCC13.....	51	SJ573-0569.....	104
RGH133-AX.....	145	RWP2.....	155	SCC14.....	51	SJ573-0668.....	104
RGH135.....	145	RWP3.....	155	SCC15.....	51	SJ573-0676.....	104
RHDC176.....	150	RWP4.....	155	SCC16.....	51	SJ573-0692.....	104
RJH18666.....	140	RWP5.....	155	SCC18.....	51	SJ1420.....	104
RJH18667.....	140	SAL3.....	3	SCC20.....	51	SRA-4.....	131
RJH18668.....	140	SAL5.....	3	SCC23.....	51	SRA-7.....	131
RJH18669.....	140	SAL7.....	3	SCC28.....	51	SRA-10.....	131
RJH18670.....	140	SAL8.....	3	SCC29.....	51	SRA-14.....	131
RLH-1.....	134	SAL9.....	3	SCC30.....	51	SSCRW10-12-1.....	127
RLH-2.....	134	SAL9-2N.....	3	SCC32.....	51	ST1.....	69
RLH-3.....	134	SAL10.....	3	SCC33.....	51	ST2.....	69
RLH-4.....	134	SAL10-2N.....	3	SCL3.....	17	ST3.....	69
RM124036-6WAY.....	92	SAL11.....	3	SCL3-1/4.....	17	ST5.....	69
RM124036-8WAY.....	92	SAL11-2N.....	3	SCL3-5/16.....	17	ST6.....	69
RML4/0.....	105	SAL12.....	3	SCL5.....	17	ST7.....	69
RML500.....	105	SAL12-2N.....	3	SCL5-1/4.....	17	ST8.....	69
RMLA4/0.....	105	SAL13.....	3	SCL5-3/8.....	17	ST9.....	69
RMLA500.....	105	SAL13-2N.....	3	SCL7-1/4.....	17	ST10.....	69
RMLSHELL-4/0.....	105	SAL14.....	3	SCL7-2(3/8).....	17	ST11.....	69
RMLSHELL-500.....	105	SAL14-2N.....	3	SCL7-3/8.....	17	ST12.....	69
RMLSLV-4/0.....	105	SAL15.....	3	SCL7-5/16.....	17	ST13.....	69
RMLSLV-500.....	105	SAL15-2N.....	3	SCL7-390.....	17	ST14.....	69
RPEP88.....	144	SAL16.....	3	SCL8-5/16.....	17	ST15.....	69
RPTA529.....	148	SAL16-2N.....	3	SCL9-2(5/16).....	17	ST16.....	69
RSC1204.....	149	SAL18.....	3	SCL9-3/8.....	17	ST17.....	69
RSD262.....	82	SAL18-2N.....	3	SCL9-5/16.....	17	ST18.....	69
RSD262C.....	82	SAL20.....	4	SCL10.....	17	ST19.....	69
RSPTAP.....	84	SAL20-2N.....	4	SCL10-2(1/4).....	17	ST20.....	69
RSS3.....	65	SAL22.....	4	SCL10-2(3/8).....	17	ST21.....	69
RSS5.....	65	SAL23-2N.....	4	SCL10-2N.....	17	ST22.....	69
RSS7.....	65	SAL24.....	4	SCL10-3/8.....	17	ST23.....	69
RSS8.....	65	SAL24-2N.....	4	SCL11-2(3/8).....	18	ST24.....	69
RSS9.....	65	SAL28.....	4	SCL11-2N.....	18	ST26.....	69
RSS10.....	65	SAL28-2N.....	4	SCL11-3/8.....	18	ST28.....	69
RSS11.....	65	SAL30.....	4	SCL12.....	18	ST29.....	69
RSS12.....	65	SAL30-2N.....	4	SCL12-2N.....	18	ST30.....	69
RSS13.....	65	SAL32.....	4	SCL12-3/8.....	18	ST31.....	69
RSS14.....	65	SAL32-2N.....	4	SCL13.....	18	ST32.....	69
RSS15.....	65	SALC3.....	37	SCL13-2N.....	18	ST33.....	69
RSS16.....	65	SALC5.....	37	SCL14.....	18	TAL5.....	11
RSS17.....	65	SALC7.....	37	SCL14-2N.....	18	TAL7.....	11
RSS18.....	65	SALC8.....	37	SCL15.....	18	TAL8.....	11
RSS19.....	65	SALC9.....	37	SCL15-2N.....	18	TAL9.....	11
RSS20.....	65	SALC10.....	37	SCL16.....	18	TAL9-2N.....	11
RSS21.....	65	SALC11.....	37	SCL16-2N.....	18	TAL10.....	11
RSS22.....	65	SALC12.....	37	SCL18.....	18	TAL10-2N.....	11
RSS23.....	65	SALC13.....	37	SCL18-2N.....	18	TAL11.....	11
RSS24.....	65	SALC14.....	37	SCL20.....	18	TAL11-2N.....	11
RSS25.....	65	SALC15.....	37	SCL20-2N.....	18	TAL12.....	11
RSS26.....	65	SALC16.....	37	SCL23.....	18	TAL12-2N.....	11
RSS27.....	65	SALC18.....	37	SCL23-2N.....	18	TAL13.....	11
RSS28.....	65	SALC20.....	37	SCL28.....	18	TAL13-2N.....	11
RSS29.....	65	SALC23.....	37	SCL28-2N.....	18	TAL14.....	12
RSS30.....	65	SALC24.....	37	SCL28-4N.....	18	TAL14-2N.....	12
RSS31.....	65	SALC28.....	37	SCL30.....	18	TAL15.....	12
RSS32.....	65	SALC29.....	37	SCL30-2N.....	18	TAL15-2N.....	12

INDEX

(continued)

TAL16-2N.....	12	TCCT16.....	57	VC10.....	73
TAL18-2N.....	12	TCCT16-9.....	57	VC10S.....	73
TAL20-2N.....	12	TCCT16-10.....	57	VC10S-H.....	80
TAL23-2N.....	12	TCCT16-12.....	57	VC12.....	73
TAL24-2N.....	12	TCCT16-13.....	57	VC12-H.....	80
TAL28-2N.....	12	TCCT16-14.....	57	VC15.....	73
TAL30-2N.....	12	TCCT16-15.....	57	VC18.....	73
TAL32-2N.....	12	TCCT18.....	57	VC-8002.....	88
TCC3.....	53	TCCT18-9.....	57	VC-8010.....	88
TCC5.....	53	TCCT18-10.....	57	VC-8020.....	88
TCC7.....	53	TCCT18-12.....	57	VC-8058-SH.....	88
TCC8.....	53	TCCT18-13.....	57	ZE.....	114
TCC9.....	53	TCCT18-15.....	57		
TCC10.....	53	TCCT18-16.....	57		
TCC11.....	53	TCCT20.....	57		
TCC12.....	53	TCCT20-10.....	57		
TCC13.....	53	TCCT20-12.....	57		
TCC14.....	53	TCCT20-13.....	57		
TCC15.....	53	TCCT20-18.....	57		
TCC16.....	53	TCCT23.....	57		
TCC18.....	53	TCCT23-15.....	57		
TCC20.....	53	TCCT23-18.....	57		
TCC23.....	53	TCCT28.....	57		
TCC28.....	53	TCCT28-18.....	57		
TCC29.....	53	TCCT28-20.....	57		
TCC30.....	53	TCCT28-23.....	57		
TCC32.....	53	TCL5.....	25		
TCC33.....	53	TCL7.....	25		
TCCR3-2.....	59	TCL8.....	25		
TCCR5.....	59	TCL9.....	25		
TCCR7.....	59	TCL9-2N.....	25		
TCCR8.....	59	TCL10.....	25		
TCCR9.....	59	TCL10-2N.....	25		
TCCR10.....	59	TCL11.....	25		
TCCR11.....	59	TCL11-2N.....	25		
TCCR12.....	59	TCL12.....	25		
TCCR13.....	59	TCL12-2N.....	25		
TCCR14.....	59	TCL13.....	25		
TCCR15.....	59	TCL13-2N.....	25		
TCCR18.....	59	TCL14.....	26		
TCCR23.....	59	TCL14-2N.....	26		
TCCR28.....	59	TCL15.....	26		
TCCR29.....	59	TCL15-2N.....	26		
TCCT9.....	57	TCL16-2N.....	26		
TCCT9-3.....	57	TCL18-2N.....	26		
TCCT9-5.....	57	TCL20-2N.....	26		
TCCT9-7.....	57	TCL23-2N.....	26		
TCCT9-8.....	57	TCL24-2N.....	26		
TCCT10.....	57	TCL28-2N.....	26		
TCCT10-3.....	57	TRSS-A200.....	126		
TCCT10-5.....	57	TRSS-A201.....	126		
TCCT10-7.....	57	TRSS-C100.....	126		
TCCT10-8.....	57	TRSS-C101.....	126		
TCCT10-9.....	57	TRSS-C102.....	126		
TCCT12.....	57	TWJ4/0-5*.....	100		
TCCT12-7.....	57	TWJ500-3.....	100		
TCCT12-8.....	57	TWJ500-5.....	100		
TCCT12-9.....	57	TWJC4/0.....	102		
TCCT12-10.....	57	TWJC500-3.....	102		
TCCT13.....	57	TWJC500-5.....	102		
TCCT13-7.....	57	TWJS4/0.....	102		
TCCT13-8.....	57	TWJS500-3.....	102		
TCCT13-9.....	57	TWJS500-5.....	102		
TCCT13-10.....	57	VC3.....	73		
TCCT13-12.....	57	VC3-H.....	80		
TCCT15.....	57	VC5.....	73		
TCCT15-9.....	57	VC5-H.....	80		
TCCT15-10.....	57	VC7.....	73		
TCCT15-12.....	57	VC7-H.....	80		





517 Lyons Avenue, Irvington, NJ 07111
973.371.1771 | www.Richards-Mfg.com