



a·light  
elements


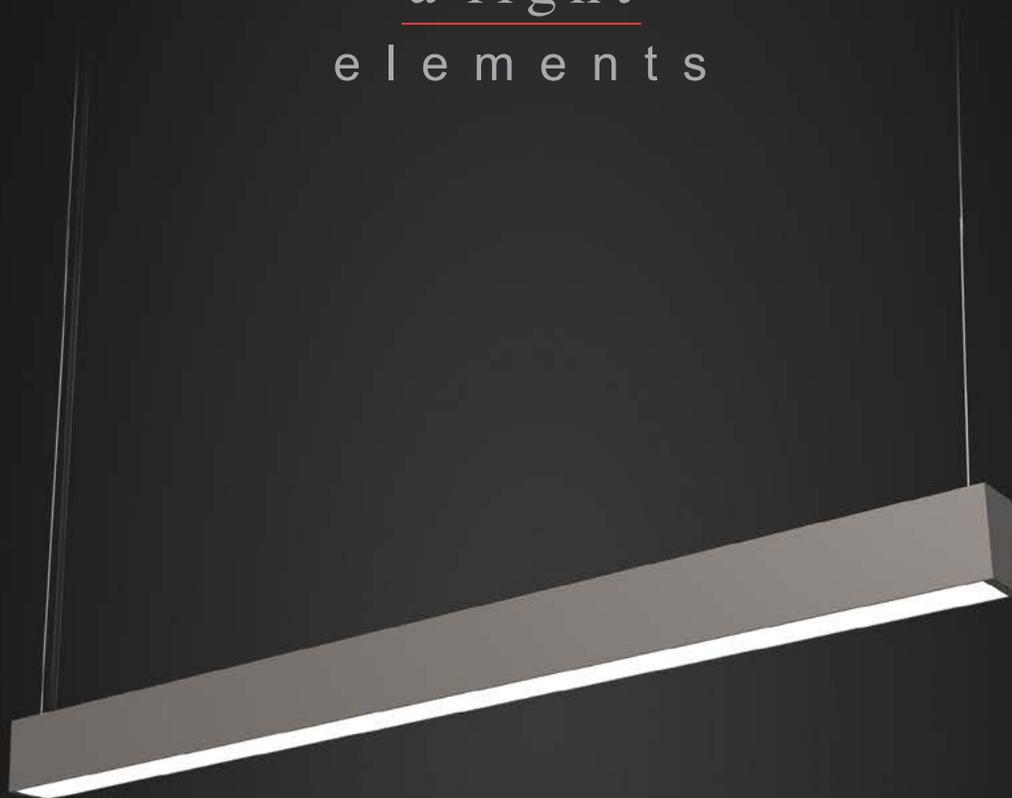


accoLED<sup>3</sup>  
suspended | wall | ceiling

direct

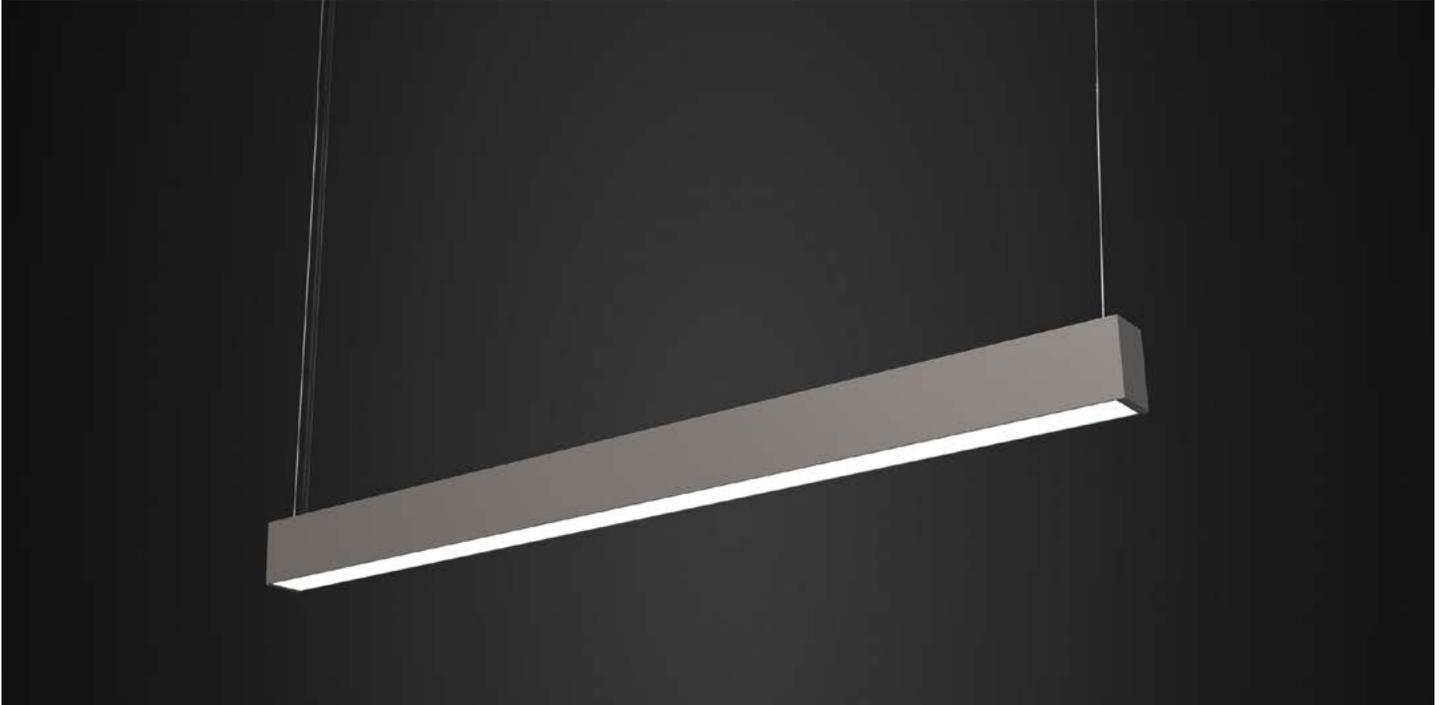

suspended 2.25"

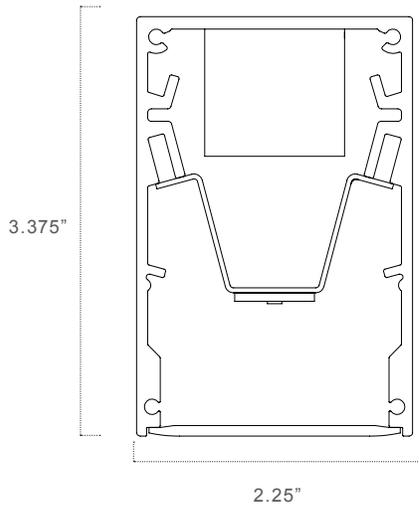


Delivered Lumens Pending Test Results.

Available Light Platforms:



Available Mounting:



**Length:**

All length dimensions are nominal, used for general length identification purposes. Actual lengths may vary by several inches. Lengths to 12' are individual fixtures and do not connect. Lengths beginning with "R" designate standard, nominal rows comprised of 4' and/or 8' sections.

Specify all modifications with the "integrations" specification sheet: nominal lengths other than the standards available here, rows longer than 24', exact lengths, patterns, span mount, mullion mount, etc.

**Mounting:**

*Single Cable:* (1) 4', 1mm stainless steel aircraft cable w/ fully adjustable grippers and locking device. 5' plastic-coated, silver-braided, flexible cord. Satin white, square canopy is standard.

*Wall Blocks:* Precisely milled aluminum block mounts provide minimalistic appearance. 1/2" or 1" deep. ADA compliant. (2) blocks provided per fixture, lengths 8ft or less; (3) blocks per 12ft.

*Ceiling/Surface Mount:* Fixture mounts directly to ceiling, power connects inside fixture using BX or MX style wiring.

**LED:**

5yr warranty. >60,000hr LED life. Tested to LM-79 and LM-80. See wattage/lumen table for specifications per foot. All specifications are subject to change.

**Construction:**

60% recycled aluminum extruded housing. Precision milled endcaps.

**Finish:**


Electrostatically applied powder coat finish.

**Listing:**


UL/CUL. Damp Location.

**Wet Label:**

Specify in Options.



Wet label standards ACL3:



Fixture is gasketed on endcaps with drilled weep holes.

R16, R20, R24

Fixture is gasketed on endcaps, with drilled weep holes. Gasketing at each section is not required for direct applications. **Consult factory if you are using this in an indirect application.**

**Family Luminaires:**

ACL1 suspended, ACL2 suspended/wall, ACL4 wall, ACL5 recessed

**Companion Luminaires:**

D1 suspended, D2 suspended/wall, D4 wall, D5 recessed

**Legend:**

- 1. Contact Factory for available Multi-circuit options.

Series: ACL3

Dimension: \_\_\_\_\_

- nominal 4'
- nominal 8'
- nominal 12'
- nominal 16' row
- nominal 20' row
- nominal 24' row

- 4
- 8
- 12
- R16
- R20
- R24

Mounting: \_\_\_\_\_

- single aircraft cable
- pendant / rigid stem - indicate stem length
- pendant / rigid stem for earthquake zone - indicate stem length
- wall mount blocks 1"
- wall mount blocks 1/2"
- ceiling/surface mount

- S
- P\_\_\_\_\_
- PV\_\_\_\_\_
- M1
- M5
- F

Lamping: \_\_\_\_\_

- LED standard output
- LED high output

- LS
- LH

LED Temp: \_\_\_\_\_

- 3000k
- 3500k
- 4000k

- 30
- 35
- 40

Voltage: \_\_\_\_\_

- universal 120V - 277V

- U

Optics: \_\_\_\_\_

- High Efficiency WISP™ lens (*recommended*) *patent pending*
- WISP™ lens
- HTLO™ lens
- HTLO™ vertical
- HTLO™ vertical + horizontal

- HE
- S
- H
- HV
- HVH

Finish: \_\_\_\_\_

- a-lightanium™
- satin white
- satin black
- other - specify RAL#

- T
- W
- B
- O

Options: \_\_\_\_\_

- dimming - specify manufacturer, model/series and voltage
- emergency - IOTA IPL-SL-CP12 only
- external fusing
- multi-circuit <sup>1</sup>
- new york city code
- occupancy sensor <sup>2</sup>
- photocell/daylight sensor <sup>3</sup>
- natatorium application
- wet label

- D
- E
- F
- M
- N
- O
- P
- K
- Q

recessed