


# ARTEMIS 5 A

RECESSED ADJUSTABLE LED DOWNLIGHT

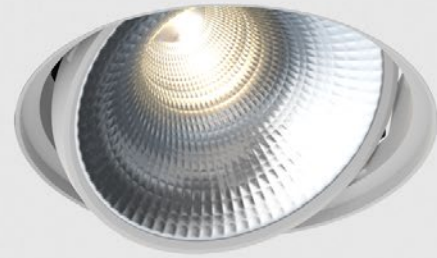

**Artemis - Recessed Adjustable LED Downlight.** Artemis 5 A features SENSO-designed reflectors and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

## Ordering Code

Fixture	<b>AR5A</b>								
	1	2	3	4	5	6	7	8	9
Driver		<b>AR5A</b>	--			--	--	--	
	1	2	3	4	5	6	7	8	

## Product Specifications

**SAMPLE:** Fixture **AR5A - TL - A90 - 610 - 25 - 15 - DL - 02 - 08** | Driver **910 - AR5A - TL - STD - 120 - A90 - 07 - 08**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
<b>AR5A</b> · Artemis 5 Adjustable	<b>FL</b> · Flanged <b>TL</b> · Trimless	<b>A90</b> · 93+ CRI Accuracy	<b>610</b> · 10° <b>618</b> · 18° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>15</b> · 1500 (13.7W) <b>20</b> · 2000 (19W) <b>30</b> · 3000 (26.8W) <b>40</b> · 4000 (37.2W) <b>50</b> · 5000 (50.2W) <b>60</b> · 6000 (66.6W)	<b>00</b> · No Accessory <b>DL</b> · Diffusing Lens <b>HO</b> · Honeycomb	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom

9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level	
<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>910</b> · Remote <b>915</b> · New Construction	Same as Fixture	Same as Fixture	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase <sup>1/2</sup> <b>ELDOLC</b> · EldoLED 0 - 10 Volt <sup>3</sup> <b>DALI</b> · Dali Protocol <sup>13</sup>	N/A 1% 10% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital <sup>13</sup> <b>LUT2W</b> · 2 Wire for phase <sup>2</sup> <b>DMX</b> · SENSO <sup>3</sup> <b>EMG</b> · Emergency Driver <sup>3/5/6</sup> <b>CSMB</b> · Casambi Wireless Control <sup>15/6</sup>	1% 1%

5 - Voltage	6 - LED	7 - Lumen	8 - Baffle Color <sup>7</sup>
<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V	Same as Fixture	Same as Fixture	Same as Fixture

\*1 Only available in 1500lm and 2000lm  
\*2 120V only  
\*3 Only available up to 4000lm  
\*4 Only available up to 3000lm  
\*5 Requires remote housing  
\*6 Specified separately  
\*7 Only needed for Trimless

Project : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Type : \_\_\_\_\_  
Notes : \_\_\_\_\_

# ARTEMIS 5 A

RECESSED ADJUSTABLE LED DOWNLIGHT

## LED Module Performance

- Output:** up to 6000lm
- High Efficacy:** up to 117 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & 50+ R9 Value

## Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations



<b>Lumen Option</b>	1500lm	2000lm	3000lm	4000lm	5000lm	6000lm
<b>Fixture Wattage</b>	13.7W	19W	26.8W	37.2W	50.2W	66.6W
<b>Delivered Lumen</b>	1612lm	2178lm	3080lm	4081lm	5097lm	6097lm

## Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- 0° to 30° adjustable tilt angle

## Construction / Finish


- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

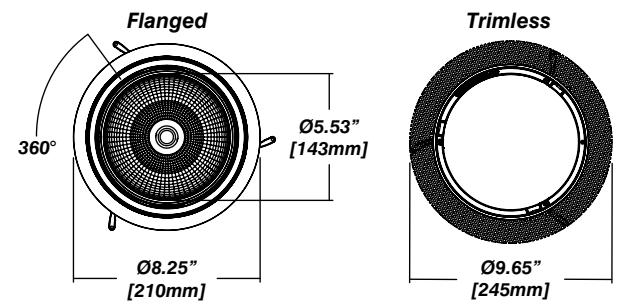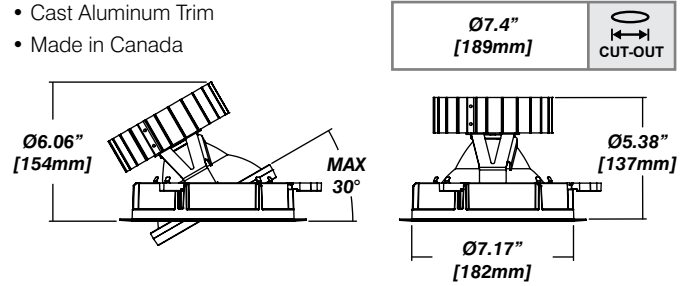

## Accessories


*Diffusing Lens*

*Honeycomb Mesh*

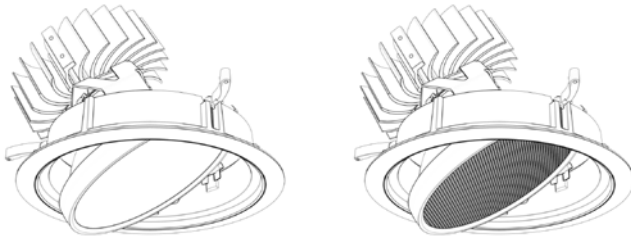

## Reflector

*Faceted Reflector*


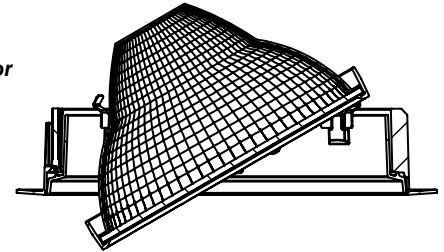


# ARTEMIS 5 A


RECESSED ADJUSTABLE LED DOWNLIGHT

## Housing Options

### Standard Senso Housing - 910



### Dimension

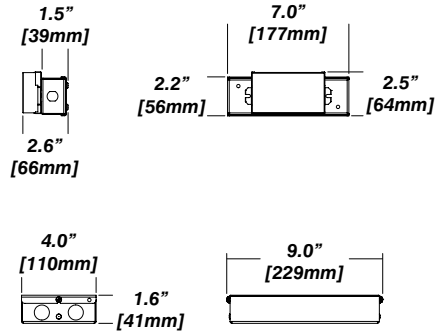

### Included

Unless specified otherwise, this is provided as standard


#### Driver with enclosure

- Galvanized steel enclosure


#### Installation

- Laying on top of ceiling
- Remote from fixture
- Hanger bar and mount included

### New Construction - 915

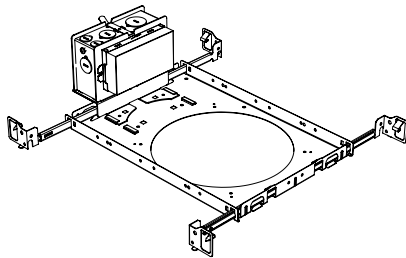

### Dimension

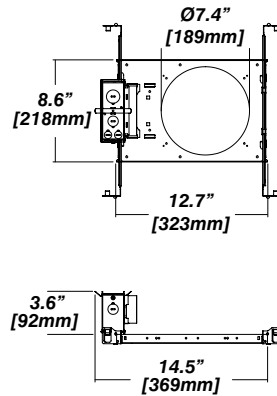

### Included

#### Plaster Frame

- Galvanized steel construction with cut-out

#### Bar hanger

- Length: from 14-3/16" to 26"

#### Outlet Box

- Outlet Box Included