












L'ARTE  LUCE®

2022
CATALOGUE
ARCHITECTURAL LIGHTING

CATALOGUE

SYMBOLS







	Complies with the European standard EN 60598-1
	CLASS III-Devices powered by safe voltage under 50V
	Device suitable for use in furniture
	Device suitable for mounting on normal flammable surfaces
	Correct disposal of this product (waste electrical & electronic equipment)
	Device can withstand weight up to Kg/cm ² ...
	Walk over device
	Hole size
	Gross weight of the product in kg
	Use the protective shield and replace when cracked
	ios / android usb charger

IP RATING





The IP rating (International Protection) is regulation defined by the EN 60529 norm (recognized by the CEI organization as 70-1) which explains the protection of electric and electronic devices from external solid or liquid agent. The prefix IP is followed by two numbers.























1 The first number identifies the protection degree against the entry of solid foreign objects.

-  Protected from the entry of solid objects bigger than 50mm
-  Protected from the entry of solid objects bigger than 12mm
-  Protected from the entry of solid objects bigger than 2.5mm
-  Protected from the entry of solid objects bigger than 1mm
-  Protected from the entry of dust
-  Completely protected from the entry of dust

2 The second number identifies the protection degree against the entry of liquids.

-  Unprotected
-  Protected from water drops falling vertically
-  Protected from water falling with a maximum inclination of 15°
-  Protected from rain
-  Protected from sprinklings
-  Protected from water jets
-  Protected from wave
-  Protected against temporary immersion
-  Protected against permanent immersion (maximum depth 3 meters)

DIMMING CONTROL

		Connecting and disconnecting the power supply.
		It uses FPC or RPC technology to achieve dimming, so it is also called controllable silicon dimming.
		Dali standard has defined a Dali network, including the largest 64 units (independent address), 16 groups and 16 scenarios.
		Use analog signal to control, drive output signal, adjust panel and system, then return signal to drive, drive to adjust output through signal reception.
		DIM TO WARM further deepens the color temperature by using the dimming principle through a specific light source and adjusts the range.
		DIM PUSH is designed by driving or specific electronic components so that luminaires can be dimmed and controlled by pressing buttons.
		TOUCH DIM Through the design of specific electronic components, so that the lamps and lanterns have convenient dimming function, the lamps and lanterns and dimming are integrated into one.
		Using TUYA chip technology, the lamps can be switched and dimmed through the mobile phone APP; support remote control and scene mode changing, and compatible with smart speakers.
		Adopting DALI protocol to realize the adjustment of lamps in both brightness and color temperature smoothly.
		The color temperature of lamp is adjusted by continuously turning on and off the light, while the brightness adjusted by edge phase controlling.
		Adopting pulse width modulation signal to realize the adjustment of lamps in both brightness and color temperature smoothly, compatible with a variety of PWM output drivers or protocols.
		Using TUYA chip technology, the lamps can be switched and dimmed through the mobile phone APP; support remote control and scene mode changing, and compatible with smart speakers.
		Connecting and disconnecting the power supply.
		Use pulse width modulation signal to realize RGB color control of lamps, compatible with a variety of PWM output drivers or protocols.
		Through DMX512 protocol to control the RGB color of the lamp, which needs to be used with a decoder.
		CS-3 has a more convenient way to use. it does not need to change the original electrical circuit, and it can have the function of lighting switch in sections.

LED COLOURS

Color temperature

Warm White: 2700K, 3000K, 3500K
 Neutral White: 4000K
 Cool White: 5000K, 5700K, 6000K

Other colors

Blue
 Red
 Green
 Amber

Full color

RGB
 RGB
 RGB (R-G-B)
 RGB (R-G-B)
 RGB (R-G-B)
 RGB (R-G-B)

PECIAL LIGHTBEAM

C Clear
 W White
 A Adjustable beam 20-60°
 P Asymmetric beam
 L 180°
 D Diffused beam
 I Diamond Light
 O1 Oval beam
 O2 Oval beam
 R Radial

DIMMING CONTROL

Powder spray

PAW Sandy White
 PAB Sandy Black

PCS Sandy Coffee

PCY Plain Champagne Yellow

PBK Plain Black

PSV Sandy Silver

PGY Sandy Dark Grey

PGN Plain Green

WLG Champagne Gold

Spray paint (Liquid)

WWP Sandy White
 WBP Sandy Black

WCP Sandy Coffee

WSG Glossy Silver

WGL Plain Gold

WOG Orange

WBR Matte Brown

WBL Black

Anodized

ABS Sandy Black
 ACS Sandy Silver
 AMB Sandy Black


Stainless steel

SSS Stainless Steel Primary

Electroplate

24K Gold
 Rose Gold
 Black Chrome
 Chrome Plain
 Sand Chrome

Dimming And Color Matching 2000K-3000K

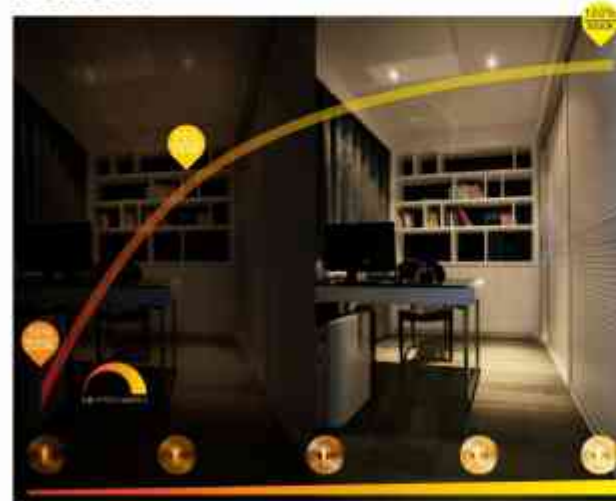

Color Temperature Adjustable 2700K-5700K



Day/Night

Summer / Winter


FLICKER

SVM: Stroboscopic Effect Visibility Measure

SVM < 1, stroboscopic invisible;
SVM ≥ 1, stroboscopic visible.

FI: Flicker Index


The stroboscopic index refers to the area above and below the average output of optical signal in a period of fluctuation, A1 and A2 respectively. IES recommends FI below 0.1 to ensure good lighting.
Calculation formula: $FI = A1 / (A1 + A2)$

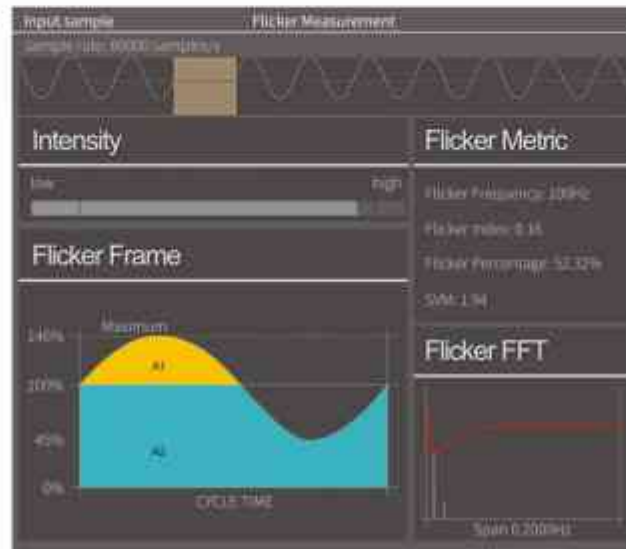

23

SDCM

SMD

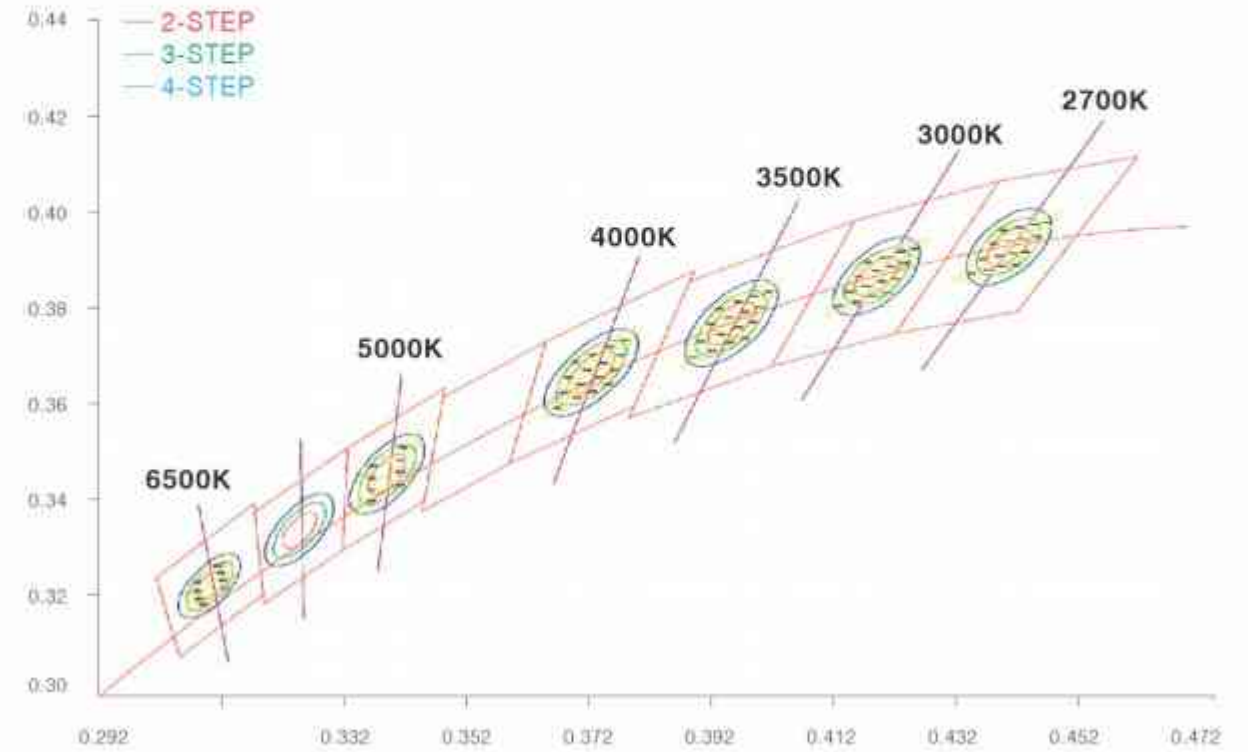


24

PF: Flicker Percent

The stroboscopic percentage refers to the amplitude and depth of the fluctuation in the standard brightness during a period of fluctuation.


Calculation formula: $PF = (Y_{max} - Y_{min}) / (Y_{max} + Y_{min})$

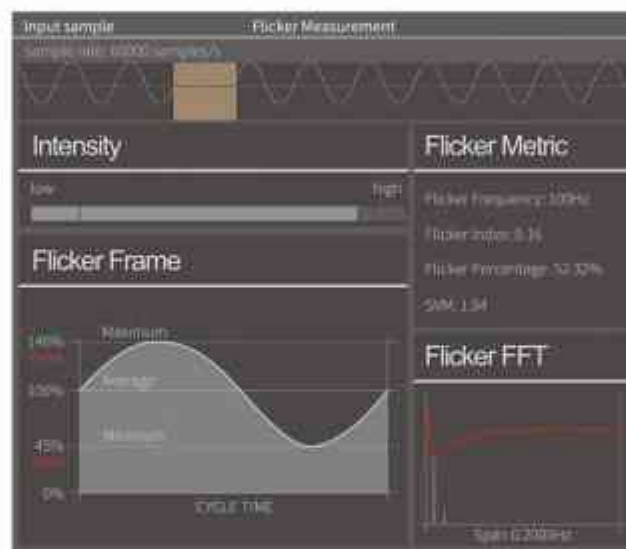

FF: Flicker Frequency

The stroboscopic frequency refers to the number of stroboscopic fluctuations per second of lamps in seconds. Since the Fps of our eyes are 24 fps, we can't detect whether the lamps are flashing or not. For a variety of instruments and equipment, we provide stroboscopic frequency for technical personnel to refer to.

COB

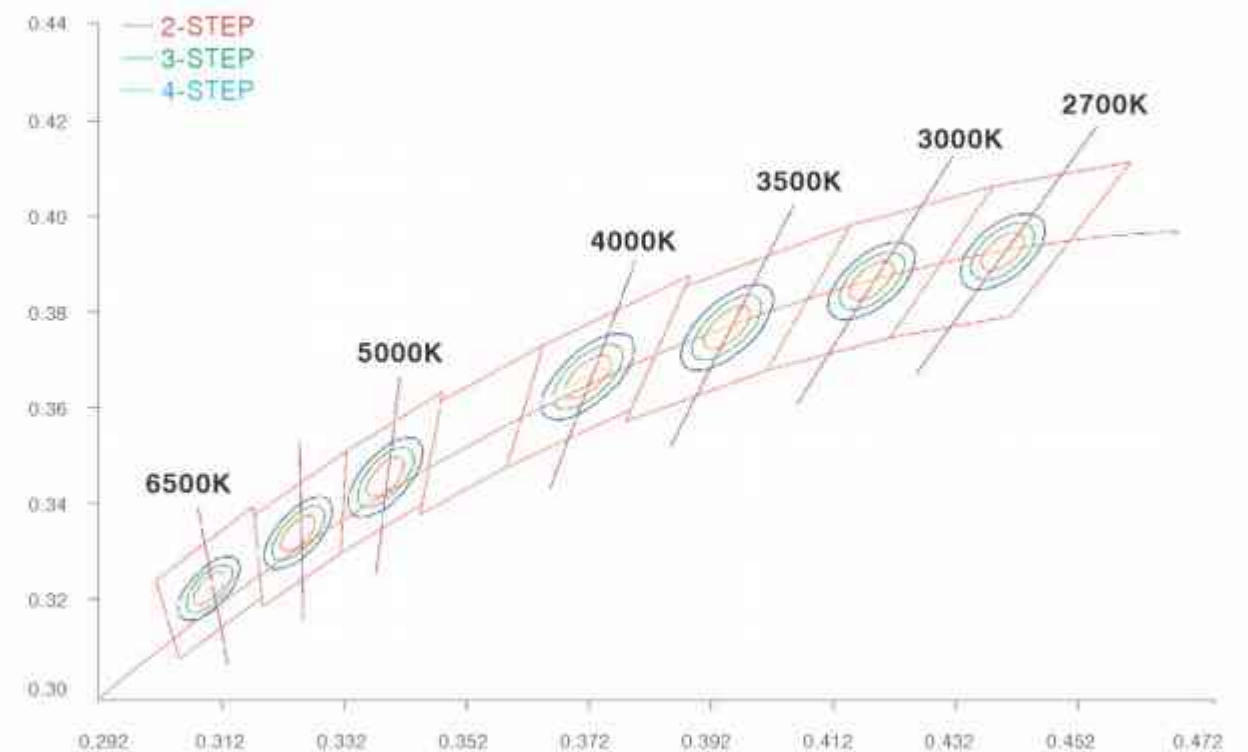








INTERIOR








EXTERIOR










INTERIOR PROFESSIONAL LIGHTING

192-272	SPOTLIGHT	
41-100	DOWNLIGHT	
305-154	TRACK LIGHT	
275-304	CEILING LIGHT	
499-542	LINEA LIGHTING	
457-488	WALLLIGHT	
545-548	LED STRIP	

INTERIOR INSPIRATION LIGHTING

575-754	PENDANT LAMP	
757-878	WALL LAMP	
878-910	TABLE LAMP	
913-924	FLOOR LAMP	
549-740	CEILING LAMP	

EXTERIOR LIGHTING

935-1009	INGROUND LAMP	
1011-1070	SPOT LAMP	
1113-1189	WALL LAMP	
1073-1110	LAWN LAMP	
1181-1193	LINEAR LAMP	
1189-1208	LINEAR WALL WASHER	
1211-1212	LED STRIP	

ELECTRONIC COMPONENT

1215-1223	ELECTRICAL SYSTEM	
1224-1228	ELECTRONIC COMPONENT	



PERFORM YOUR LIGHT






















PROFESSIONAL LIGHTING

Upgrade

NEW New Product
















Indicates That The Series Or Series Contains Waterproof Products

DOWN LIGHT

					
COMET 41-44	DORIS 45-48	FOCUS 49-68	IRIS 69-70	KEEN 71-78	KUBIK 79-82
					
LAX 83-94	META 95-100	MORRIS 101-102	NIA 103-106	NIC 107-124	NICO 125-130
					
RAY 131-136	SATELLITE 137-142	SILY 143-150	SLIM 151-154	TYLER 155-156	VESTA 157-164
					
VIEYA 165-170	VISOR 171-186	WANA 187-190			

29

SPOT LIGHT

					
ABACO 193-198	CARTER 199-204	ELLEN 205-208	FAVOR 209-222	GEN 223-230	IRIS 231-234
					
LOOP IN 235-238	LUXURY 239-242	METEOR 243-246	NIC 247-248	NORMO 249-252	ORIAN 253-256
					
PEBUK 259-262	TURN 263-266	VIKA 269-272			

30

CEILING LIGHT

		
FLAT 275-284	MESO 285-294	MOONY 295-304

TRACK LIGHT

				
ARMO TRACK 443-454	LUCA SS TRACK 431-442	LUNA S TRACK 371-400	LUNA M TRACK 401-430	ULTRA TRACK 305-370

WALL LIGHT

					
CARD 457-460	DANAS 461-464	PROSER 465-470	SLIDE 471-478	SNOW 479-482	TONE 483-486


PROFESSIONAL LIGHTING

Upgrade

NEW New Product

Indicates That The Series Or Series Contains Waterproof Products

LINEAR LIGHT

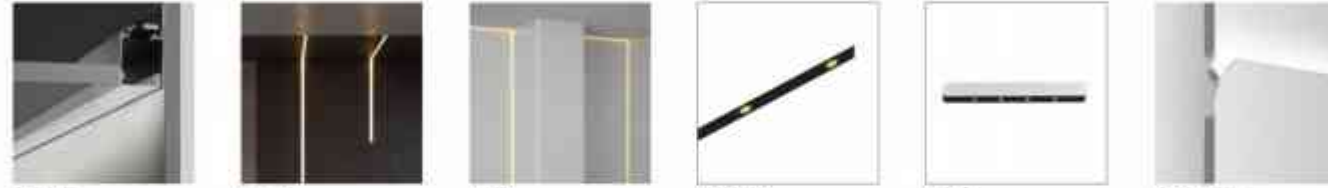

HEBE 489-492 **LARI** 493-498 **LINE** 499-502 **LOCUS** 503-506 **LOE** 507-510 **PROFILE** 511-530



RADIAL 531-536 **RIGA** 537-542

LED STRIP




LED STRIP 545-546

PENDANT LAMP



ARTE C 575-586 **ARTE P** 575-586 **ATHENA** 587-590 **BERT** 591-598 **CLASSIC** 599-608 **CLIP** 609-612

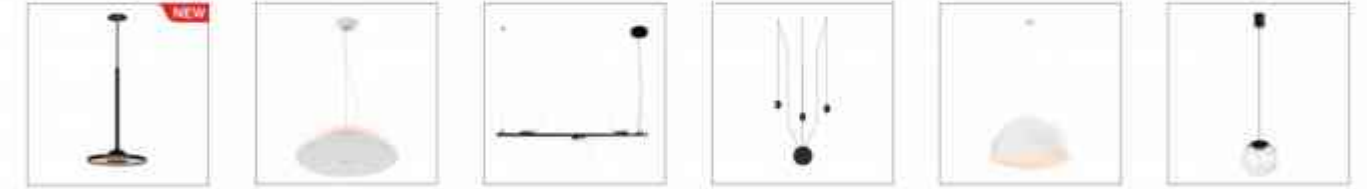


COBIN 613-618 **COMET P** 619-620 **CORONA** 621-624 **DARDY** 625-632 **ELISA** 633-638 **FAIRY** 639-642



FILOLUCE 643-650 **FLASH** 651-660 **FORMULIA** 661-670 **GESSO** 671-680 **HOPPER** 681-688 **LINK** 689-696



LISSO 697-700 **LYNX** 701-710 **MELA** 711-714 **MIA** 715-718 **PALLAS** 719-722 **PAPER P** 723-732

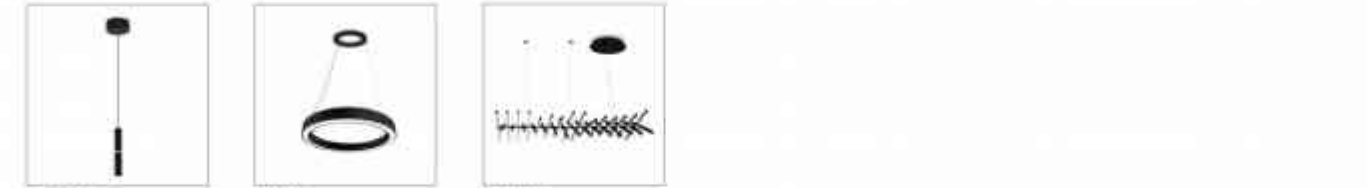

PROMEO 733-734 **RING** 735-740 **WAVE** 741-754

INSPIRATION LIGHTING

CEILING LAMP



DOMO 549-570 **PAPER** 723-732 **RING** 735-740

INSPIRATION LIGHTING

Upgrade

NEW New Product

Indicates That The Series Or Series Contains Waterproof Products

WALL LAMP









































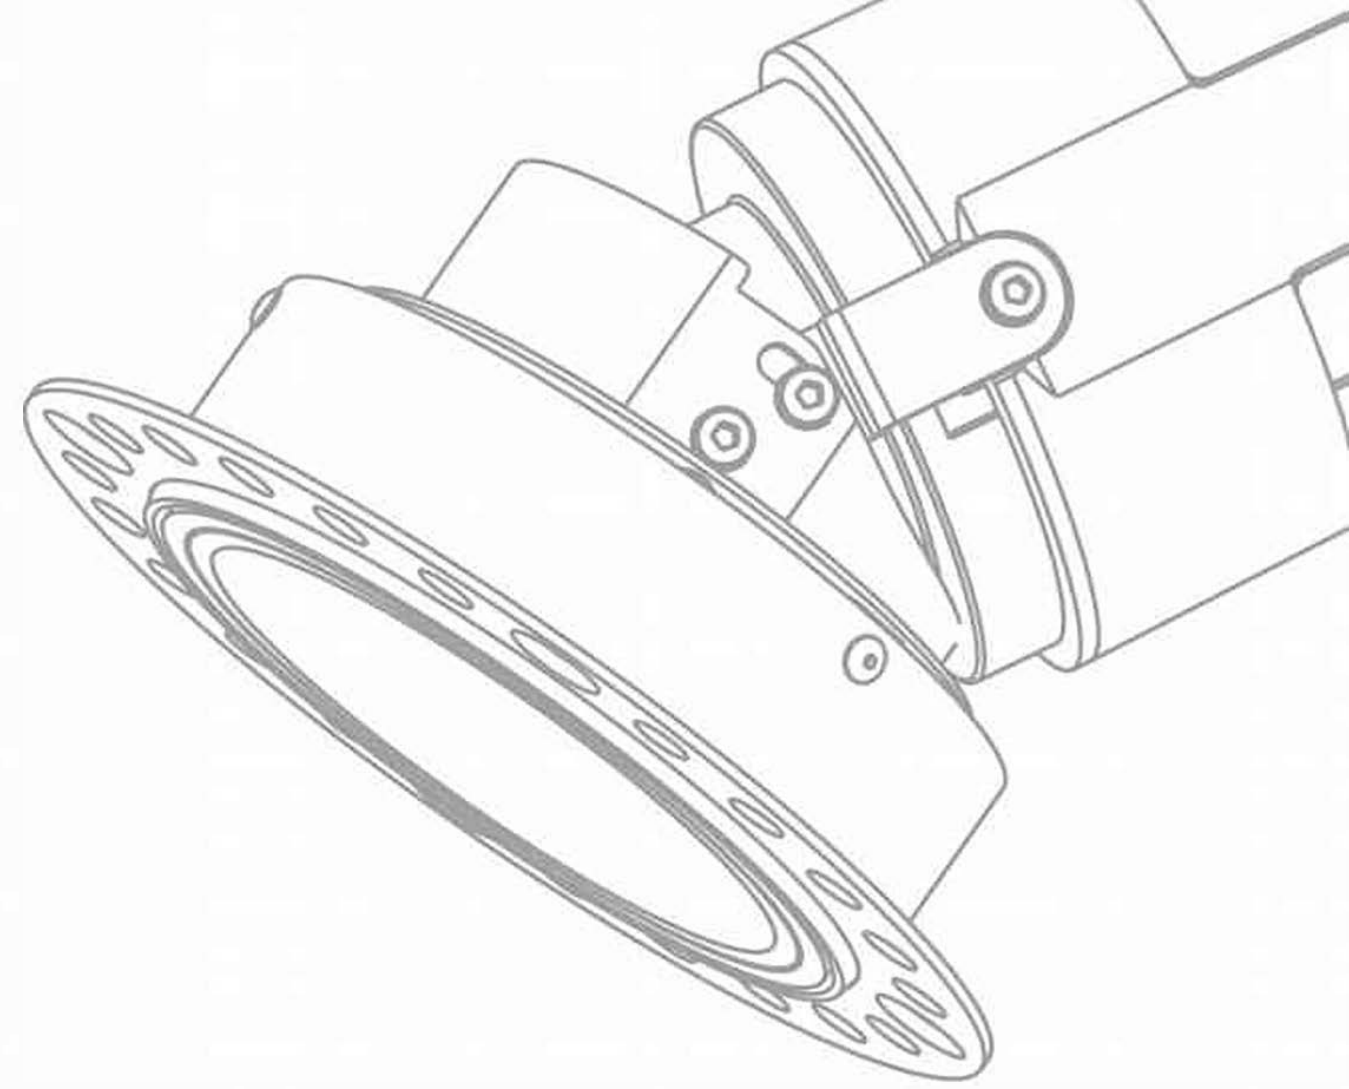
					
ADRAY 757-758	AKALI 759-762	ARTE W 575-586	ASTRA 763-766	AUREOLE 767-768	AVVOLGO 769-774
					
BALANCE 775-778	BEETLE 779-782	BEL 783-786	BOW 787-790	CONSTELL 791-796	CUBO 797-800
					
CURES 801-804	DONNA 805-808	DREAM 809-810	ELF 811-812	FILOLUCE 843-850	GEMO 813-814
					
HEMLINE 815-816	HOPPER 821-828	HYPNOS 817-820	KARINA 821-826	LEGGO 827-830	LUXURY 831-834
					
MIRO 835-840	OTLY 841-844	ROSA 845-846	SET 847-848	SHELL 849-850	SIKA H 851-856
					
SONG 857-860	TATOU 861-864	TV 865-868	VIKA WALL 869-872	WING 873-876	

TABLE LAMP











































					
AGARIC 879-880	BRELLA 881-884	COLUMN 885-892	COSMOS 893-896	FLOAT 897-900	PALLA 901-906
					
SEPHORA 907-910					

FLOOR LAMP











































					
ATLAS 913-910	CIDA 911-912	COLUMN 913-916	FISHING 917-920	HARI 921-922	STAND 923-924



DOWNLIGHT

					
COMET RO 42	COMET RO TRIMLESS 42	COMET SQ 42	COMET AD 42	COMET IN 43	DORIS 47
					
FOCUS S / S+ / S14 1.1 55	FOCUS S AD / S+ AD / S14 AD 1.1 57	FOCUS S AD TRIMLESS/ S+AD TRIMLESS/ S14 AD TRIMLESS 1.1 59	FOCUS S DO 52	FOCUS S AD DO 53	FOCUS AD TRIMLESS DO 54
					
FOCUS 55 1.1 / 55+ 1.1 61	FOCUS 55 AD 65	FOCUS 55 AD TRIMLESS 66	FOCUS 75 1.1 / 75+ 1.1 63	FOCUS 80 51	IRIS IN 70
					
KEEN 55/55+ AD 73	KEEN 75/75+ AD 74	KEEN 95/95+ AD 75	KEEN 105 AD 76	KUBIK IN M SINGLE / IN M+ SINGLE 81-82	KUBIK IN M DOUBLE / IN M+ DOUBLE 81-82
					
KUBIK IN M TRIPLE / IN M+ TRIPLE 81-82	LAX S RO 87	LAX M RO 87	LAX M RGB 88	LAX S SQ 87	LAX M SQ 88
					
META RO 1.1 97-98	META RO TRIMLESS 1.1 97-98	META RO AD 97-98	META RO AD TRIMLESS 97-98	META SQ 1.1 97-98	META SQ TRIMLESS 1.1 97-98
					
META SQ AD 97-98	META SQ AD TRIMLESS 97-98	MORRIS 102	NIA S/S+AD 2.0 105	NIA M/M+ AD 2.0 106	NIC S 2.0 111-112

DOWNLIGHT

					
NIC S AD 2.0 113	NIC S / S+ DEEP AD 111-112	NIC S / S+ DEEP 111-112	NIC S / S+ SQ DEEP 111-112	NIC 80 110	NIC M/M+ 115-118
					
NIC M/M+ AD 115-118	NIC M/M+ AD SQUARE 115-118	NIC M/M+ DEEP 115-118	NIC M DEEP AD 115-118	NIC M DEEP AD DOUBLE 115-118	NICO S/S AISI316 127
					
NICO S AD / S AD AISI316 129	NICO M/M AISI316 128	NICO M AD / M AD AISI316 129	RAY AISI316D 132-133	SATELLITE IN MT 139-140	SATELLITE IN 139-140
					
SATELLITE IN TRIMLESS 139-140	SILY S DEEP AD 145	SILY M DEEP AD 146	SILY S 147-148	SILY M 147-148	SILY M DEEP 152
					
SLIM RGB DC / RGB F DC 153	TYLER 156	VESTA S 159-160	VESTA S AD 159-160	VESTA S TRIMLESS 159-160	VESTA S AD TRIMLESS 159-160
					
VESTA M 161-162	VESTA M AD 161-162	VESTA M TRIMLESS 161-162	VESTA M AD TRIMLESS 161-162	VIEYA 167-168	VIEYA TRIMLESS 167-168
					
VIEYA RGB 167-168	VIEYA RGB TRIMLESS 167-168	VISOR S TRIMLESS 173	VISOR M TRIMLESS 174	VISOR M SQUARE TRIMLESS 174	VISOR M ANGLE TRIMLESS 175

DOWNIGHT



VISOR M SQUARE
ANGLE TRIMLESS
175



VISOR L TRIMLESS
176



VISOR L SQUARE
TRIMLESS
176



VISOR L ANGLE
TRIMLESS
177



VISOR L SQUARE
ANGLE TRIMLESS
177



VISOR NB
179



VISOR 55 / 55+ 1.1
181



VISOR 75 / 75+
187



VISOR 56
187



VISOR S
184



VISOR M
185



WANA RO
188



WANA RO AD
189

COMET

This marvelous spot is presented with various selections: with or without frame, direct or adjustable, ceiling recessed, surfaced mounted or pendant versions. Deeply installed LED source provides perfect anti-glare effect. Thanks to narrow beam angle, just 1.5°, COMET creates special atmosphere to any environment, playing with light and shade.









COLOR FINISHINGS:



RO TRIMLESS



RO



SQ



AD

DOWNLIGHT

COMET RO / RO TRIMLESS / SQ / AD 

SYSTEM POWER: 7.5W
 SYSTEM OUTPUT: 285LM 3000K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 27x27x53.8mm
 HOLE SIZE: 2700mm




RECOMMEND: OTHER VERSIONS:




ANGLE 1.5°



7.5W 15° 3000K

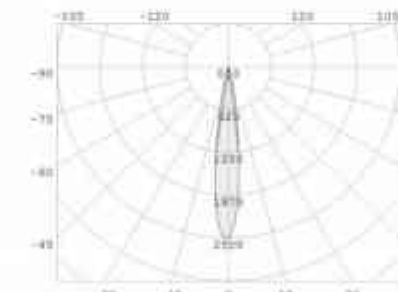

7.5W 15° 3000K





IN



COMET IN 
 SYSTEM POWER: 7.5W
 SYSTEM OUTPUT: 280lm@3000K
 INPUT: 200-240VAC, 50/60Hz
 CR: 90
 DIMENSION: Ø60*134.50mm
 HOLE SIZE: Ø50mm



RECOMMEND: OTHER VERSIONS:



ANGLE 10°

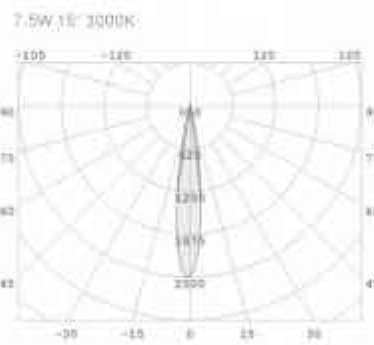

DORIS

DORIS, as a new wall washer downlight, with perfect lighting performance. It has DALI and DIM TRIAC version for selection. The ring can be easily maintained and adjusted to different performance.


CE IP20 DIM TRIAC DIM 1-10V DALI

COLOR FINISHINGS:



DORIS

LED POWER: 8W
 LED OUTPUT: 1064lm/3000K
 SYSTEM POWER: 11W
 SYSTEM OUTPUT: 430lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: 142x58mm
 HOLE SIZE: Ø65




RECOMMEND: OTHER VERSIONS:




ANGLE P





8W P/40°/34°/9°/3000K

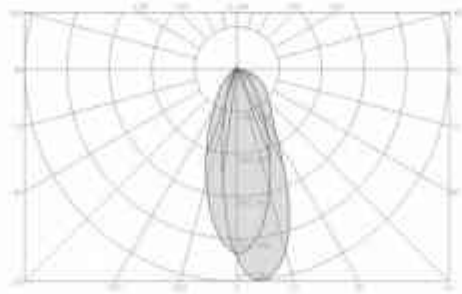

9W P/40°/34°/9°/3000K

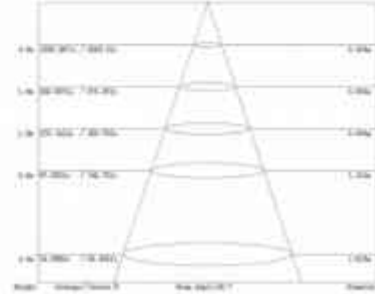

INSTALLATION INSTRUCTIONS

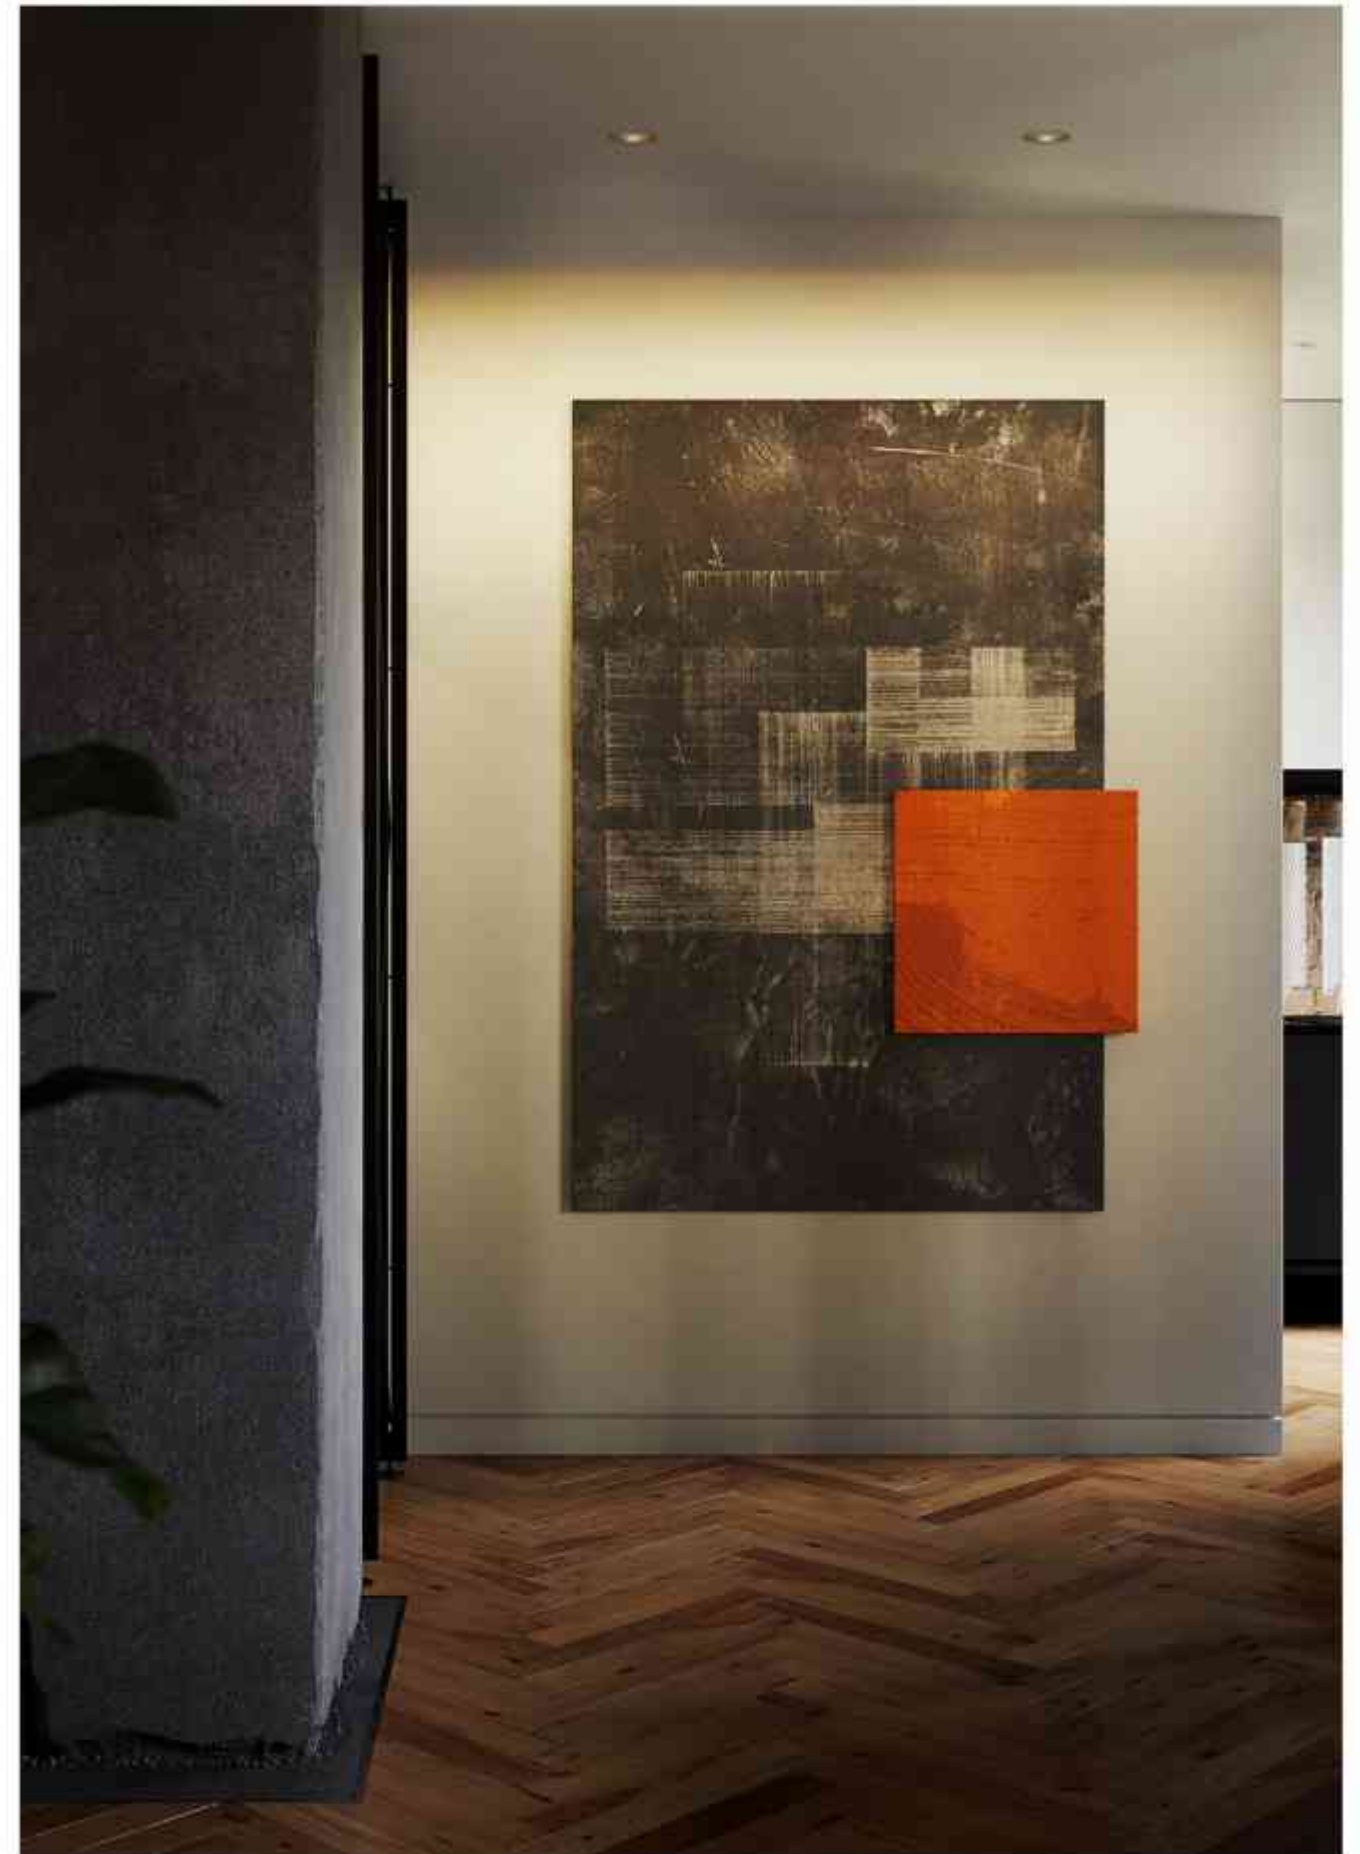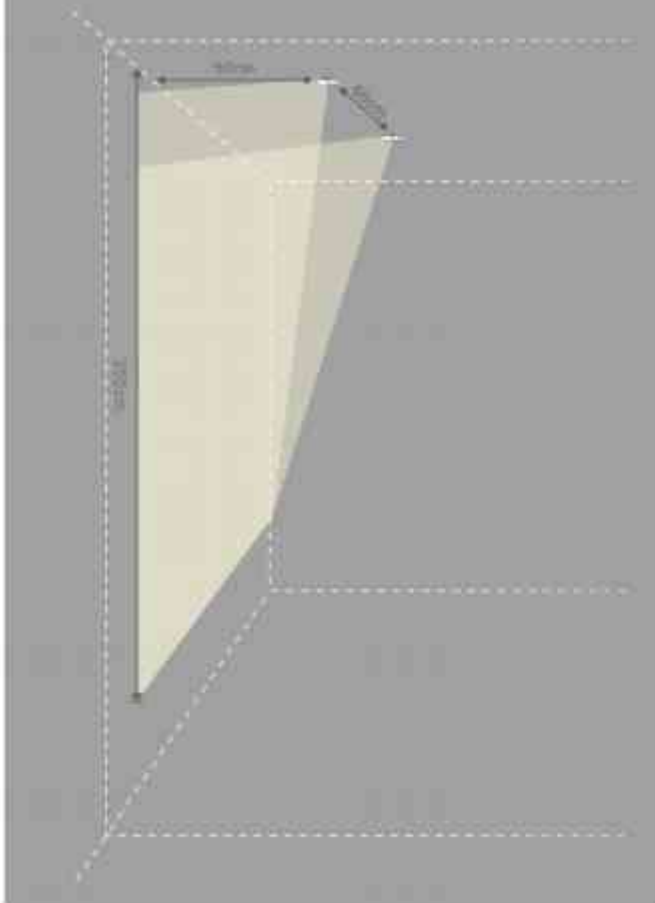




FOCUS


This miniature elegant downlight is created specially to answer almost all lighting demand. FOCUS is presented in adjustable, direct and trimless versions. All of them have one feature in common: light source is deeply placed into the fitting, providing perfect anti-glare effect. Thanks to FOCUS structure, the inner ring can be easily changed, so, different color combinations could be easily created whenever necessary.

© CE IP20 IP54 220-240VAC DIM TRIAC DIM 1-10V DALI

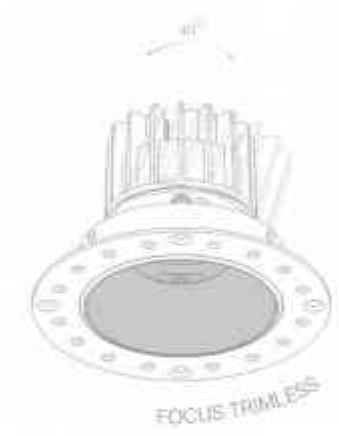



80

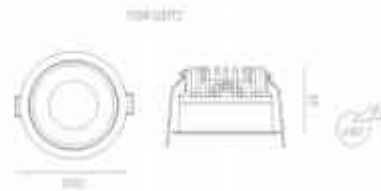

FOCUS 80

LED POWER: 14.4W
 LED OUTPUT: 1
 SYSTEM POWER: 19W
 SYSTEM OUTPUT: 894lm/2700K-6500K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 290x50mm
 HOLE SIZE: 270mm



RECOMMEND: OTHER VERSIONS:



PS: this is the Hvac dimming mode

FOCUS D0

ANGLE 34°

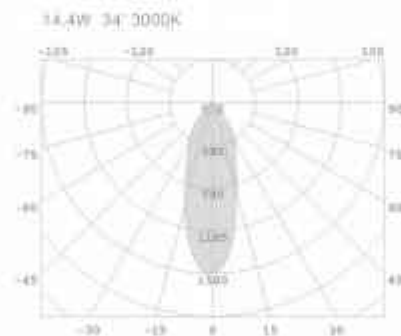

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



S D0



FOCUS D0


LED POWER: 9.6W
 LED OUTPUT: 620lm
 SYSTEM POWER: 13W
 SYSTEM OUTPUT: 320lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 290x50mm
 HOLE SIZE: 270mm

RECOMMEND: OTHER VERSIONS:



FOCUS S14-AD TRIMLESS 1.1

ANGLE 21°




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



S AD DO



FOCUS S AD DO

LED POWER: 9.6W
 LED OUTPUT: 830lm
 SYSTEM POWER: 13W
 SYSTEM OUTPUT: 320lm/3000K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø80*73mm
 HOLE SIZE: Ø75mm

RECOMMEND: OTHER VERSIONS:




Ø80*73
11478E0A2



Ø80*73
11478E0A1



S AD TRIMLESS DO



FOCUS S AD TRIMLESS DO

LED POWER: 9.6W
 LED OUTPUT: 830lm
 SYSTEM POWER: 13W
 SYSTEM OUTPUT: 320lm/3000K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø110*73mm
 HOLE SIZE: Ø100mm

RECOMMEND: OTHER VERSIONS:



Ø110*73
11478E0A2




Ø110*73
11478E0A1

FOCUS S AD DO


ANGLE 21°



12.3W 21° 2700K-6500K

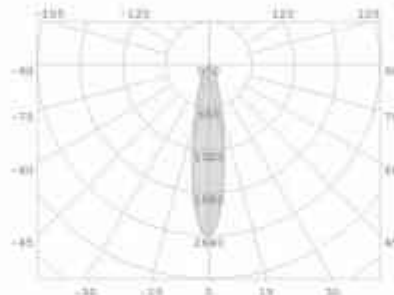

12.3W 21° 2700K-6500K



OTHER VERSIONS:



2700K-6500K




2700K-6500K


For more information, please visit our website or contact our sales representative.

FOCUS S AD TRIMLESS DO


ANGLE 21°



12.3W 21° 2700K-6500K

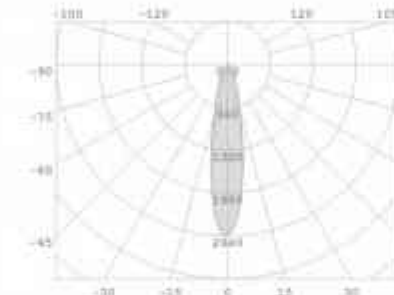

12.3W 21° 2700K-6500K



OTHER VERSIONS:



2700K-6500K




2700K-6500K

For more information, please visit our website or contact our sales representative.



S11 / S+11 / S14



FOCUS C 1.1

LED POWER: 7.5W
LED OUTPUT: 474lm
SYSTEM POWER: 9W
SYSTEM OUTPUT: 353lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø90x50mm
HOLE SIZE: Ø70mm

FOCUS C+1.1

LED POWER: 10.2W
LED OUTPUT: 618lm
SYSTEM POWER: 12W
SYSTEM OUTPUT: 518lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø90x50mm
HOLE SIZE: Ø70mm

FOCUS C 14.1.1

LED POWER: 12.3W
LED OUTPUT: 718lm
SYSTEM POWER: 14.8W
SYSTEM OUTPUT: 618lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø90x50mm
HOLE SIZE: Ø70mm

RECOMMEND:




OTHER VERSIONS:






OTHER ACCESSORIES:

For more information, please visit our website or contact our sales representative.



FOCUS C 1.1

ANGLE 20°

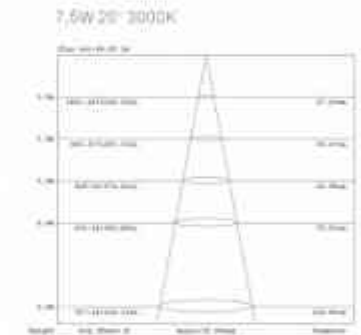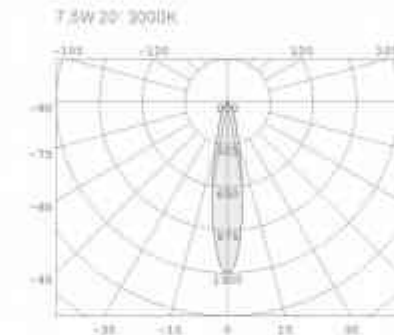




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.

FOCUS C+1.1

ANGLE 20°

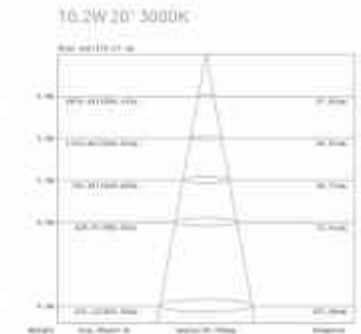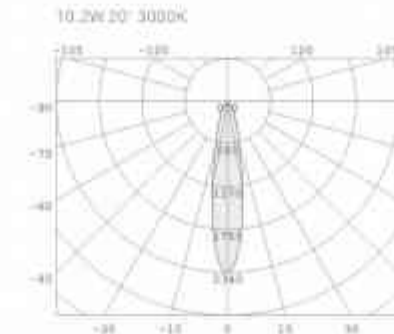




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.

FOCUS C 14.1.1


ANGLE 20°

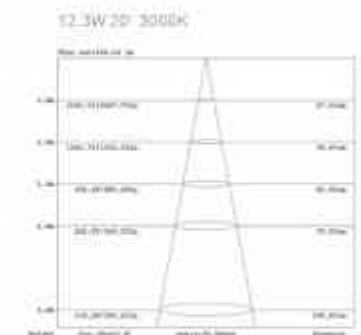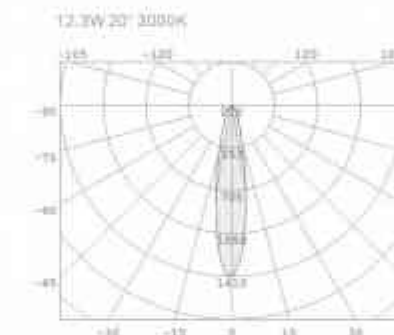

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



S AD 1.1 / S+ AD 1.1 / S14 AD 1.1

FOCUS S AD 1.1

LED POWER: 7.5W
LED OUTPUT: 474lm
SYSTEM POWER: 8.5W
SYSTEM OUTPUT: 418lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø90*70mm
HOLE SIZE: Ø75

FOCUS S+ AD 1.1

LED POWER: 10.1W
LED OUTPUT: 621lm
SYSTEM POWER: 12W
SYSTEM OUTPUT: 618lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø90*70mm
HOLE SIZE: Ø75

FOCUS S14 AD 1.1

LED POWER: 12.3W
LED OUTPUT: 677lm
SYSTEM POWER: 14.5W
SYSTEM OUTPUT: 638lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø90*70mm
HOLE SIZE: Ø75

RECOMMEND:






OTHER VERSIONS:



OTHER ACCESSORIES:



FOCUS C AD 1.1

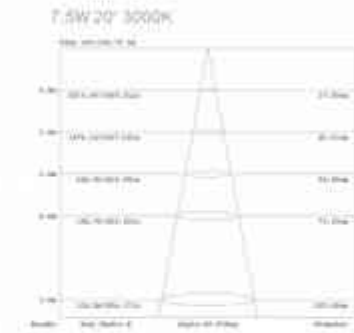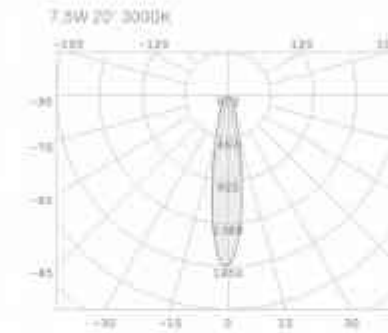



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FOCUS S+ AD 1.1

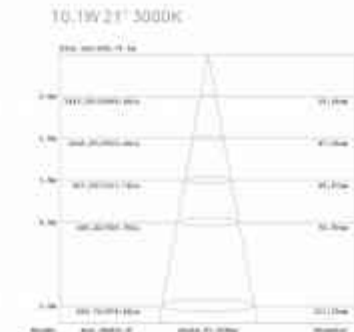
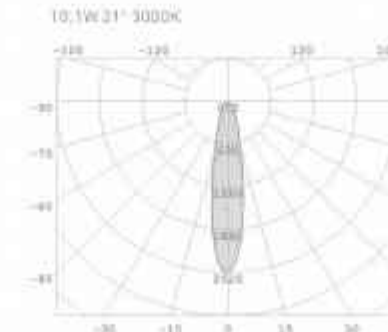


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FOCUS S14 AD 1.1

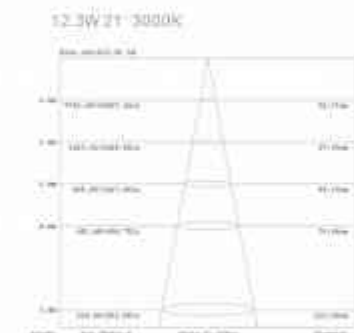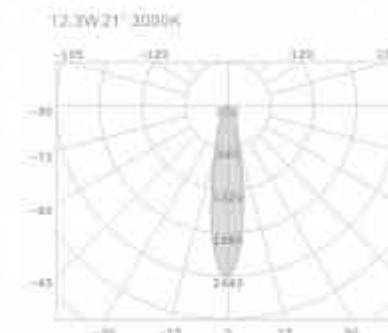


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



S AD TRIMLESS 1:1 /
S+ AD TRIMLESS 1:1 /
S14 AD TRIMLESS 1:1



FOCUS S AD TRIMLESS 1:1

LED POWER: 7.5W
LED OUTPUT: 474lm
SYSTEM POWER: 8.5W
SYSTEM OUTPUT: 418lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø110/78mm
HOLE SIZE: Ø90mm

FOCUS S+ AD TRIMLESS 1:1

LED POWER: 10.5W
LED OUTPUT: 1031lm
SYSTEM POWER: 12W
SYSTEM OUTPUT: 618lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø110/78mm
HOLE SIZE: Ø90mm

FOCUS S14 AD TRIMLESS 1:1

LED POWER: 12.3W
LED OUTPUT: 877lm
SYSTEM POWER: 14.5W
SYSTEM OUTPUT: 635lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø110/78mm
HOLE SIZE: Ø90mm


RECOMMEND:






OTHER VERSIONS:



OTHER ACCESSORIES:

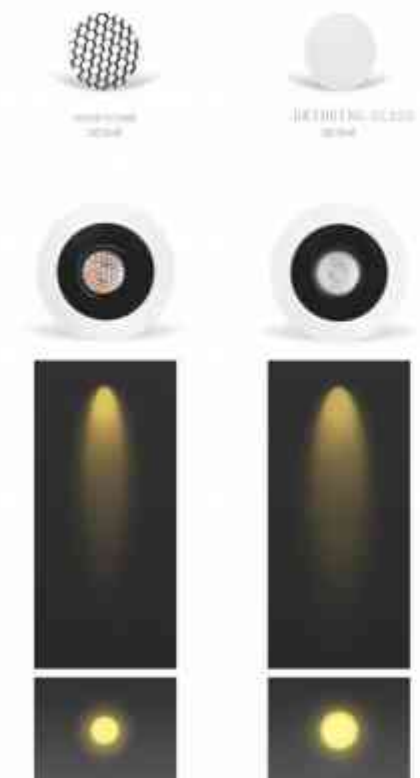

FOCUS S AD TRIMLESS 1:1

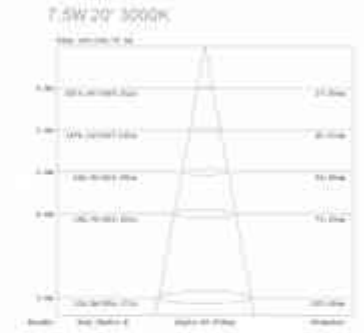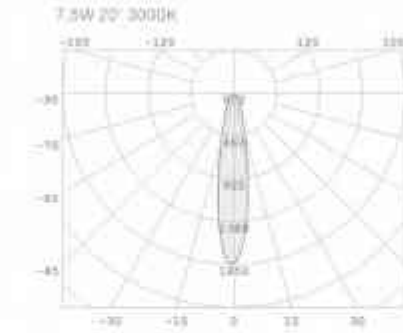



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FOCUS S+ AD TRIMLESS 1:1

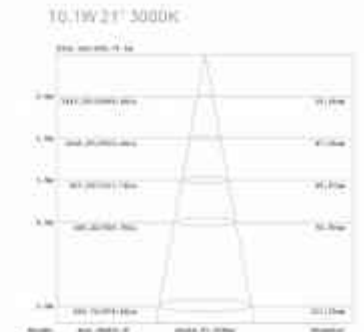
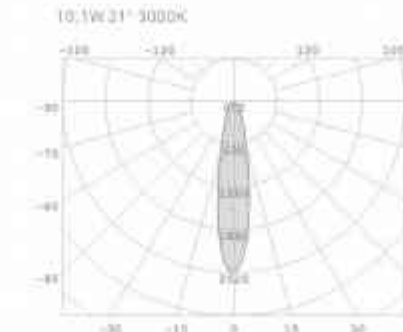


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FOCUS S14 AD TRIMLESS 1:1

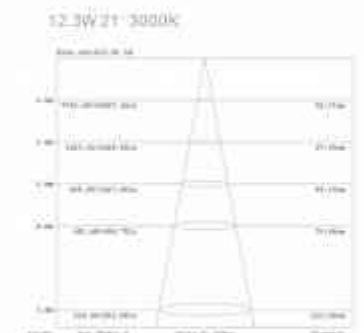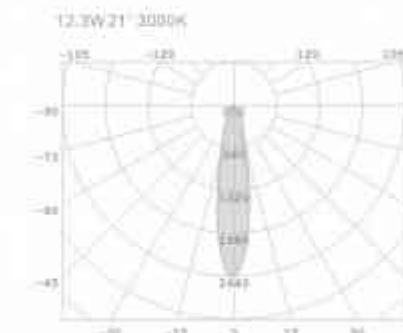

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



55 1.1 / 55+ 1.1



FOCUS 55 1.1

LED POWER: 6.3W
LED OUTPUT: 705lm
SYSTEM POWER: 8.2W
SYSTEM OUTPUT: 395lm/3000K
INPUT: 100-240VAC, 50/60Hz
CRI: 90
DIMENSION: 52x53mm
HOLE SIZE: Ø50mm

FOCUS 55+ 1.1

LED POWER: 9W
LED OUTPUT: 957lm
SYSTEM POWER: 12.5W
SYSTEM OUTPUT: 562lm/3000K
INPUT: 100-240VAC, 50/60Hz
CRI: 90
DIMENSION: 60x63mm
HOLE SIZE: Ø55mm

RECOMMEND:



OTHER VERSIONS:



OTHER ACCESSORIES:



000634



90L



90V




90B




CHROME-PLATE

FOCUS 55 1.1


ANGLE 22°



6.3W 22° 3000K

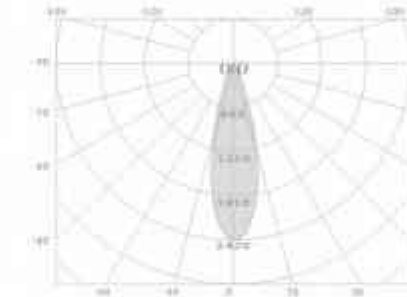

6.3W 22° 3000K

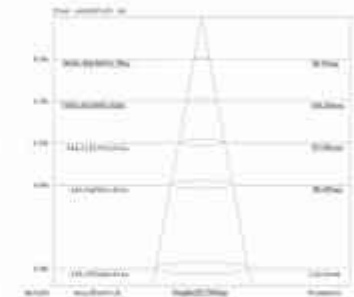


OTHER VERSIONS:




For more information please visit our website or contact our sales representative

FOCUS 55+ 1.1


ANGLE 26°



6.3W 26° 3000K

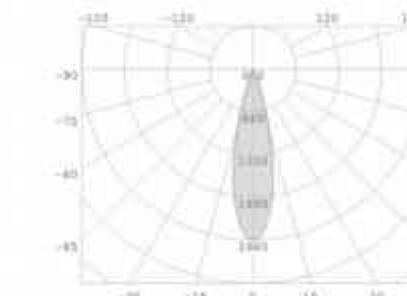

6.3W 26° 3000K

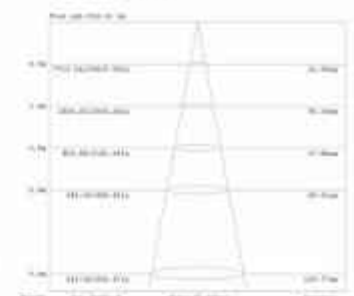

OTHER VERSIONS:



For more information please visit our website or contact our sales representative



75 1.1 / 75+ 1.1



FOCUS 75 1.1

LED POWER: 7.2W
LED OUTPUT: 900lm
SYSTEM POWER: 11W
SYSTEM OUTPUT: 850lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø195*10mm
HOLE SIZE: Ø195mm

FOCUS 75+ 1.1

LED POWER: 12.6W
LED OUTPUT: 1810lm
SYSTEM POWER: 14.5W
SYSTEM OUTPUT: 1520lm/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø215*10mm
HOLE SIZE: Ø215mm

RECOMMEND:



OTHER VERSIONS:



OTHER ACCESSORIES:



000036



1601



1602






1603



CHROME-PLATE

FOCUS 75 1.1

ANGLE 23°

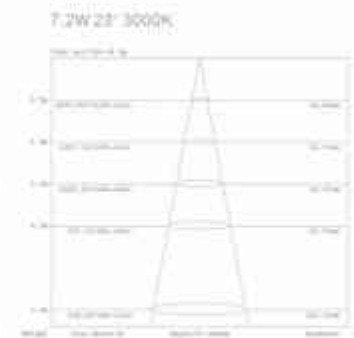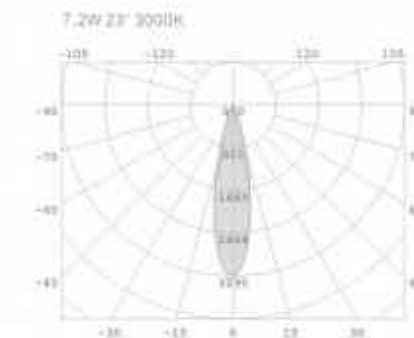



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FOCUS 75+ 1.1

ANGLE 34°

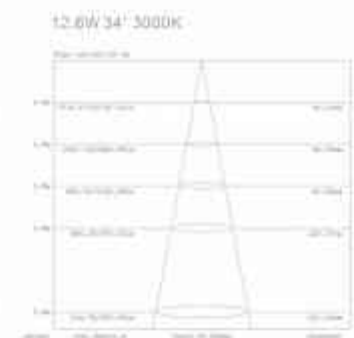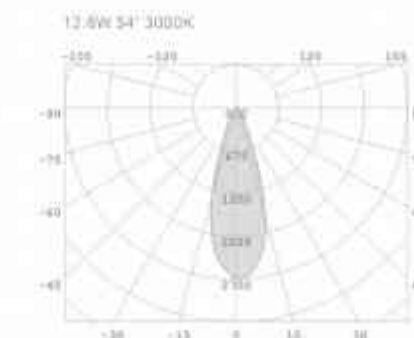


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



55 AD



FOCUS 55 AD

LED POWER: 8.3W
LED OUTPUT: 700lm
SYSTEM POWER: 1.4W
SYSTEM OUTPUT: 500lm/3000K
INPUT: 100-240VAC/50/60Hz
CRI: 90
DIMENSION: 253x58.5mm
HOLE SIZE: Ø53mm

RECOMMEND: OTHER VERSIONS:





OTHER ACCESSORIES:



FOCUS 55 AD

ANGLE 17°

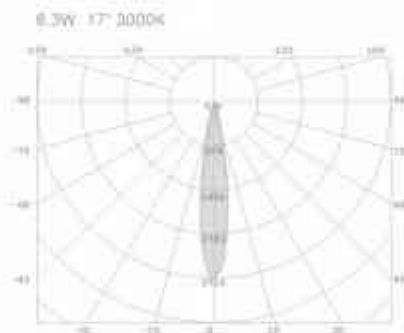


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



55 AD TRIMLESS



FOCUS 55 AD TRIMLESS


LED POWER: 8.3W
LED OUTPUT: 610lm
SYSTEM POWER: 1.3W
SYSTEM OUTPUT: 420lm/3000K
INPUT: 100-240VAC/50/60Hz
CRI: 90
DIMENSION: 256x50
HOLE SIZE: Ø50mm

RECOMMEND: OTHER VERSIONS:



FOCUS 55 AD TRIMLESS



ANGLE 17°

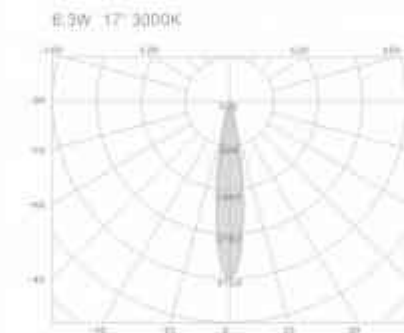


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

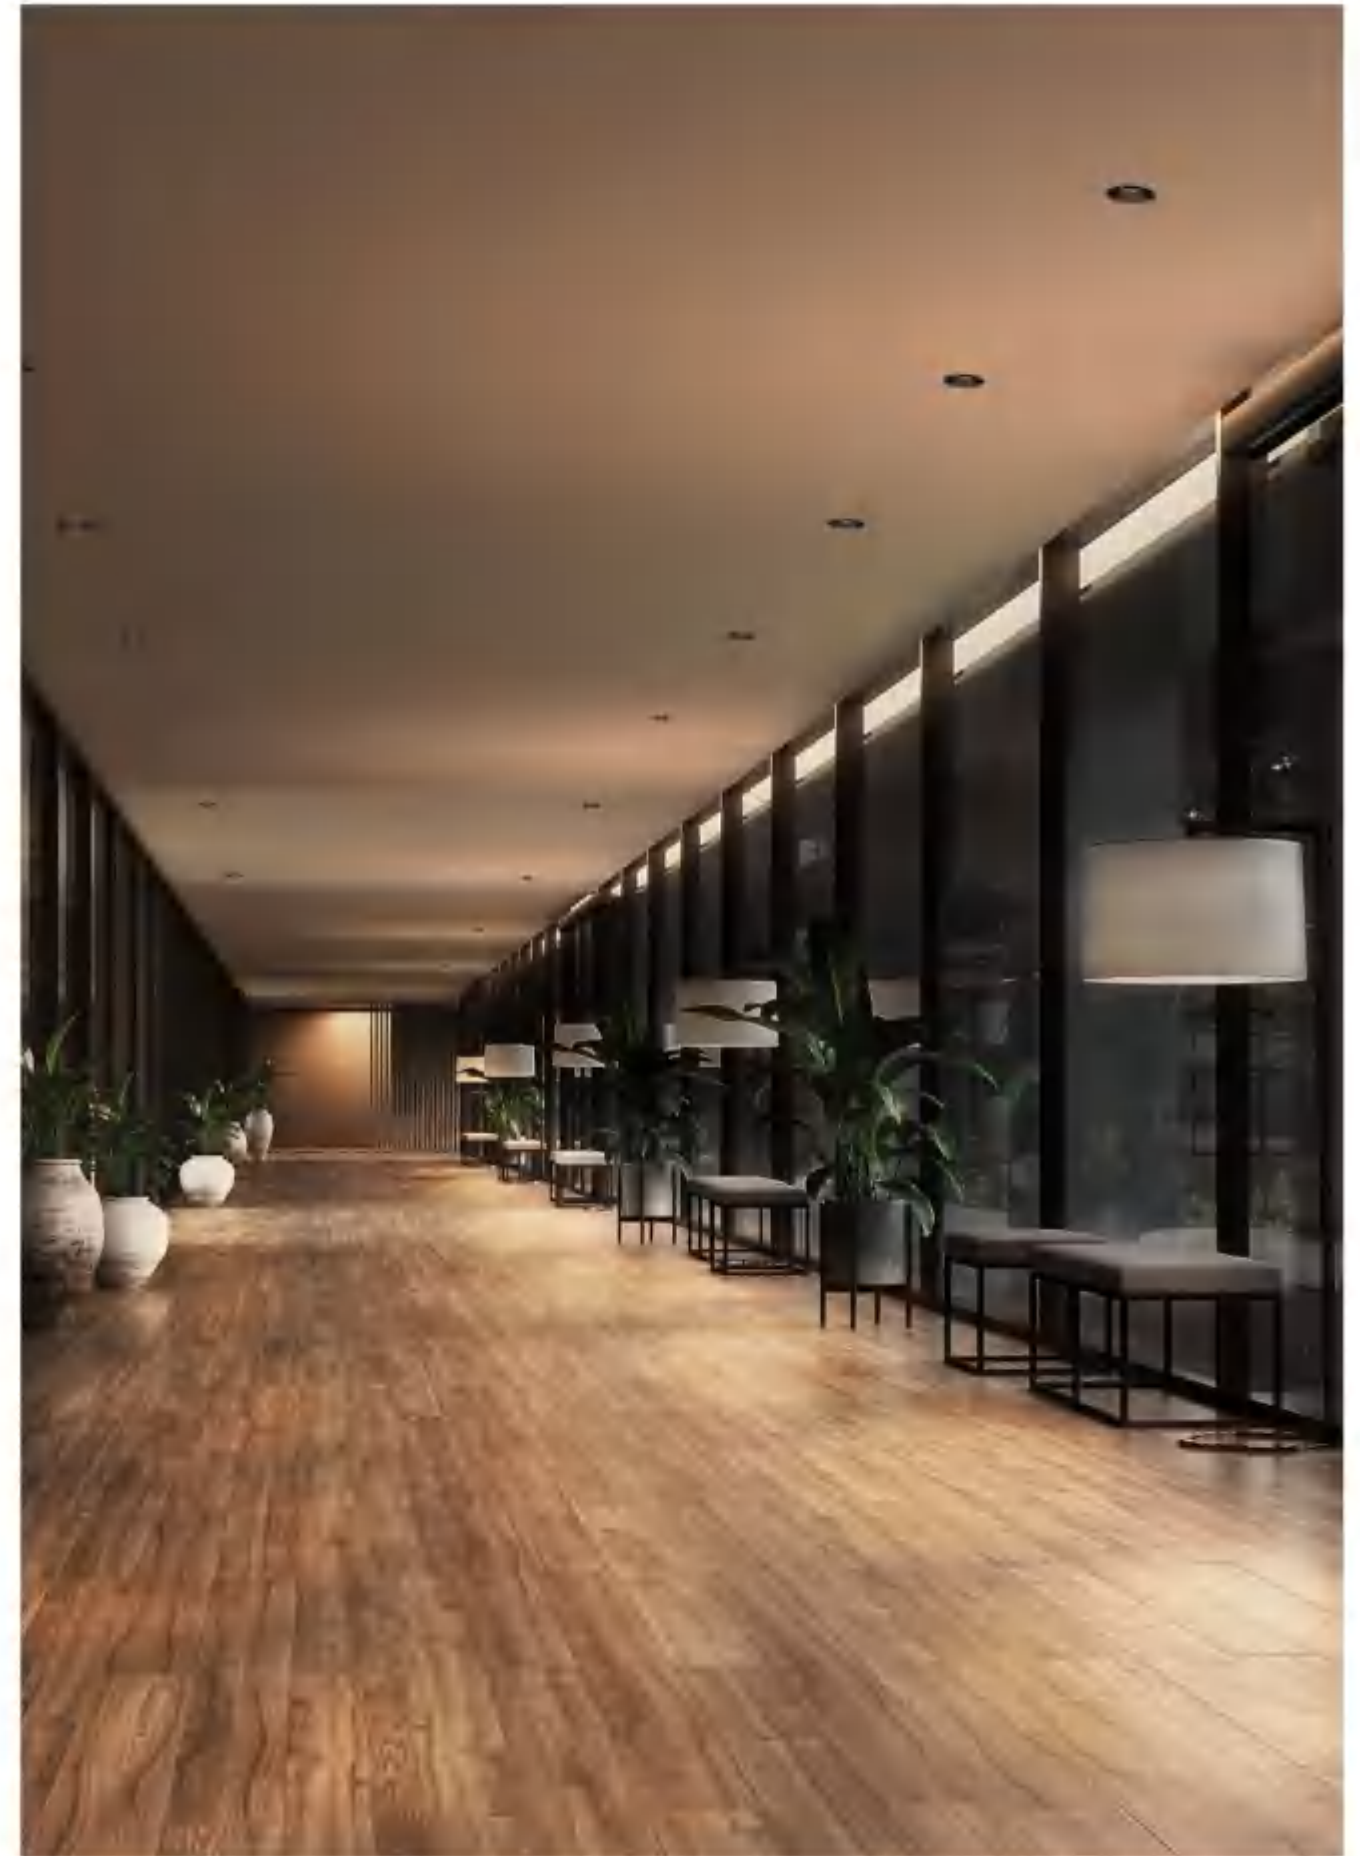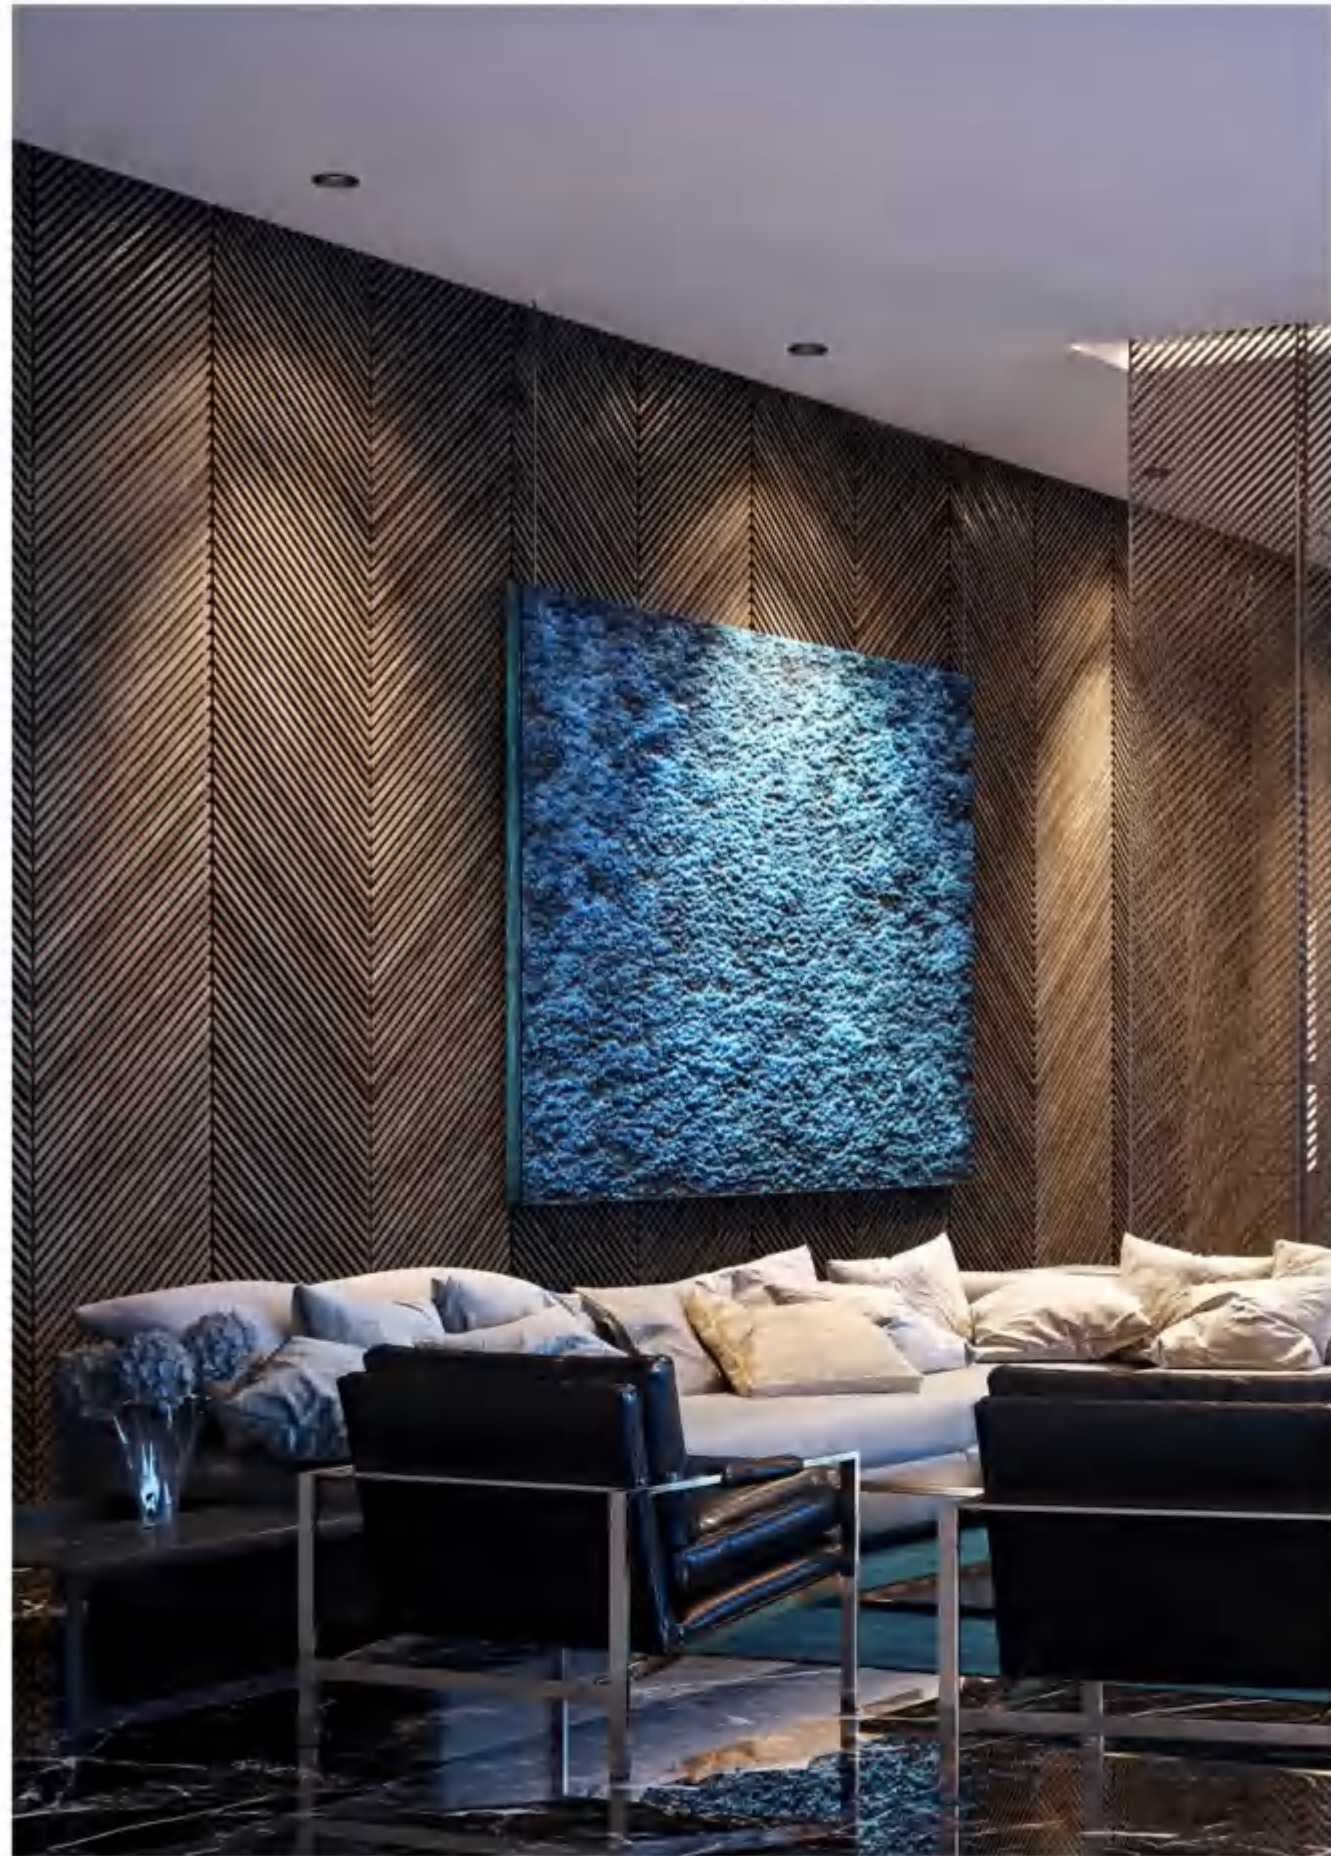

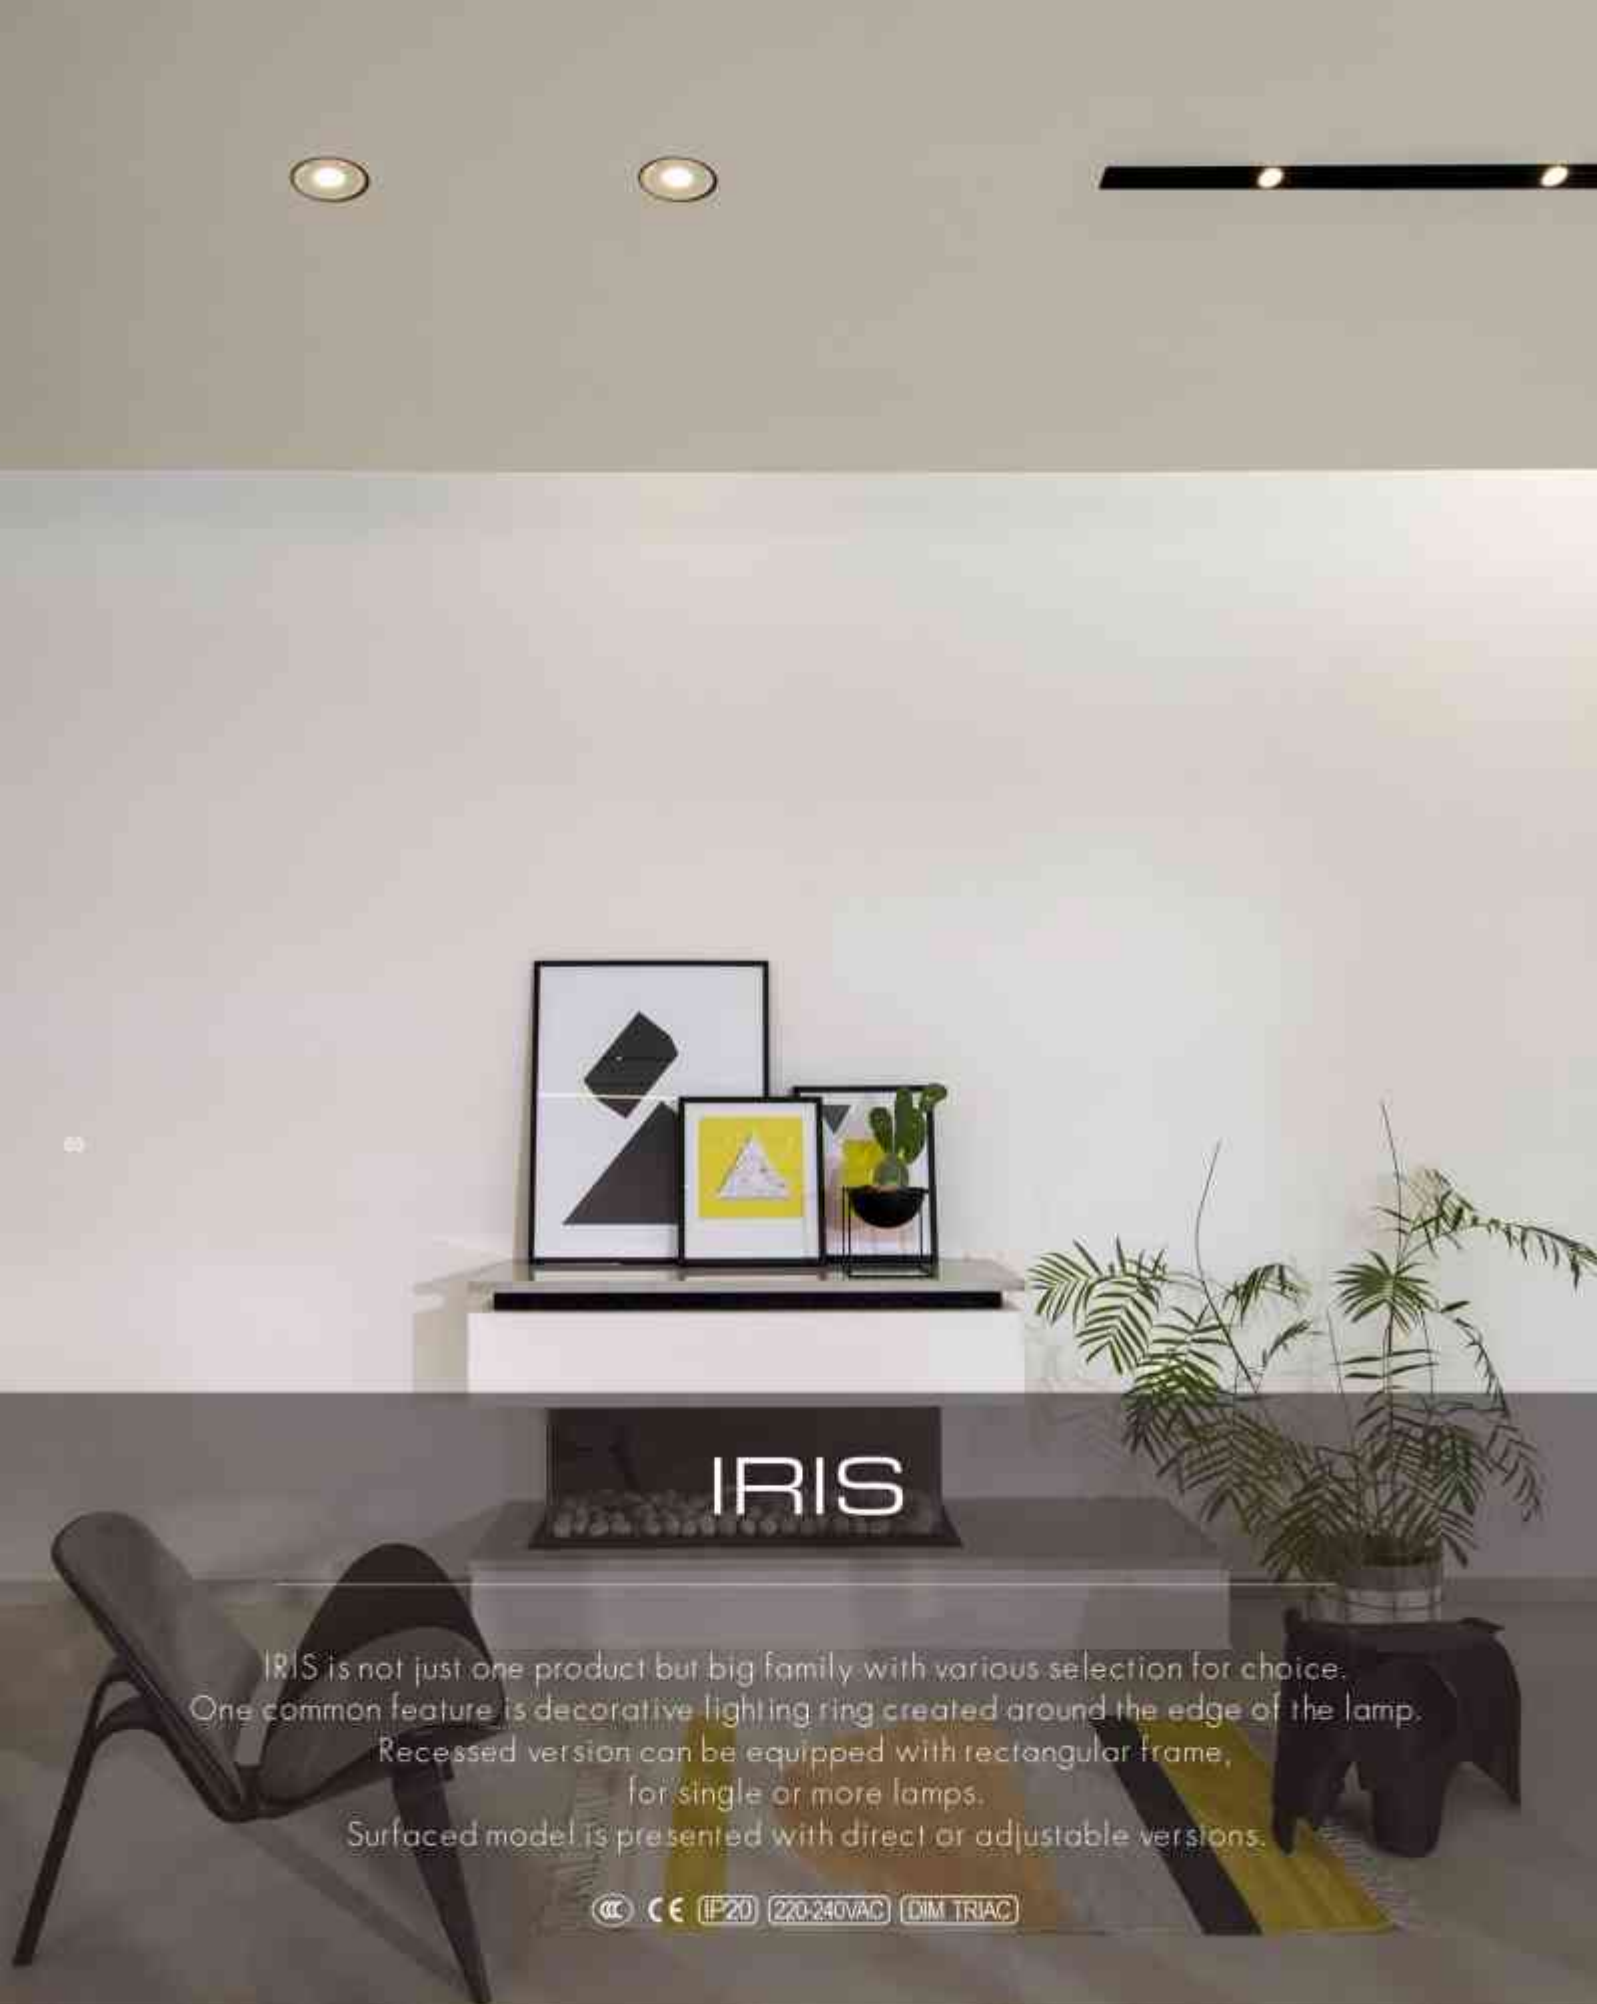

IRIS

IRIS is not just one product but big family with various selection for choice.
 One common feature is decorative lighting ring created around the edge of the lamp.
 Recessed version can be equipped with rectangular frame,
 for single or more lamps.
 Surfaced model is presented with direct or adjustable versions.



S IN 2.1

IRIS IN 2.1


LED POWER 12.6W
 CRI: 90
 SYSTEM POWER 14.3W
 OUTPUT: 350 LM/3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 112x70mm
 HOLE SIZE: 100mm




ANGLE 34°



12.6W 34° 3000K



12.6W 34° 3000K



OTHER VERSIONS:

2700K-3000K
 34°


For more information, please visit our website or contact our sales representative



KEEN

Specially designed for museum art showcase, embedded into the top of the showcases and illuminates from the above to highlight the three-dimensional sense of the exhibits. KEEN gives a high quality and harmless lighting to the objects, at the same time provides an anti-glare light environment for visitors.

© CE IP20 220MA

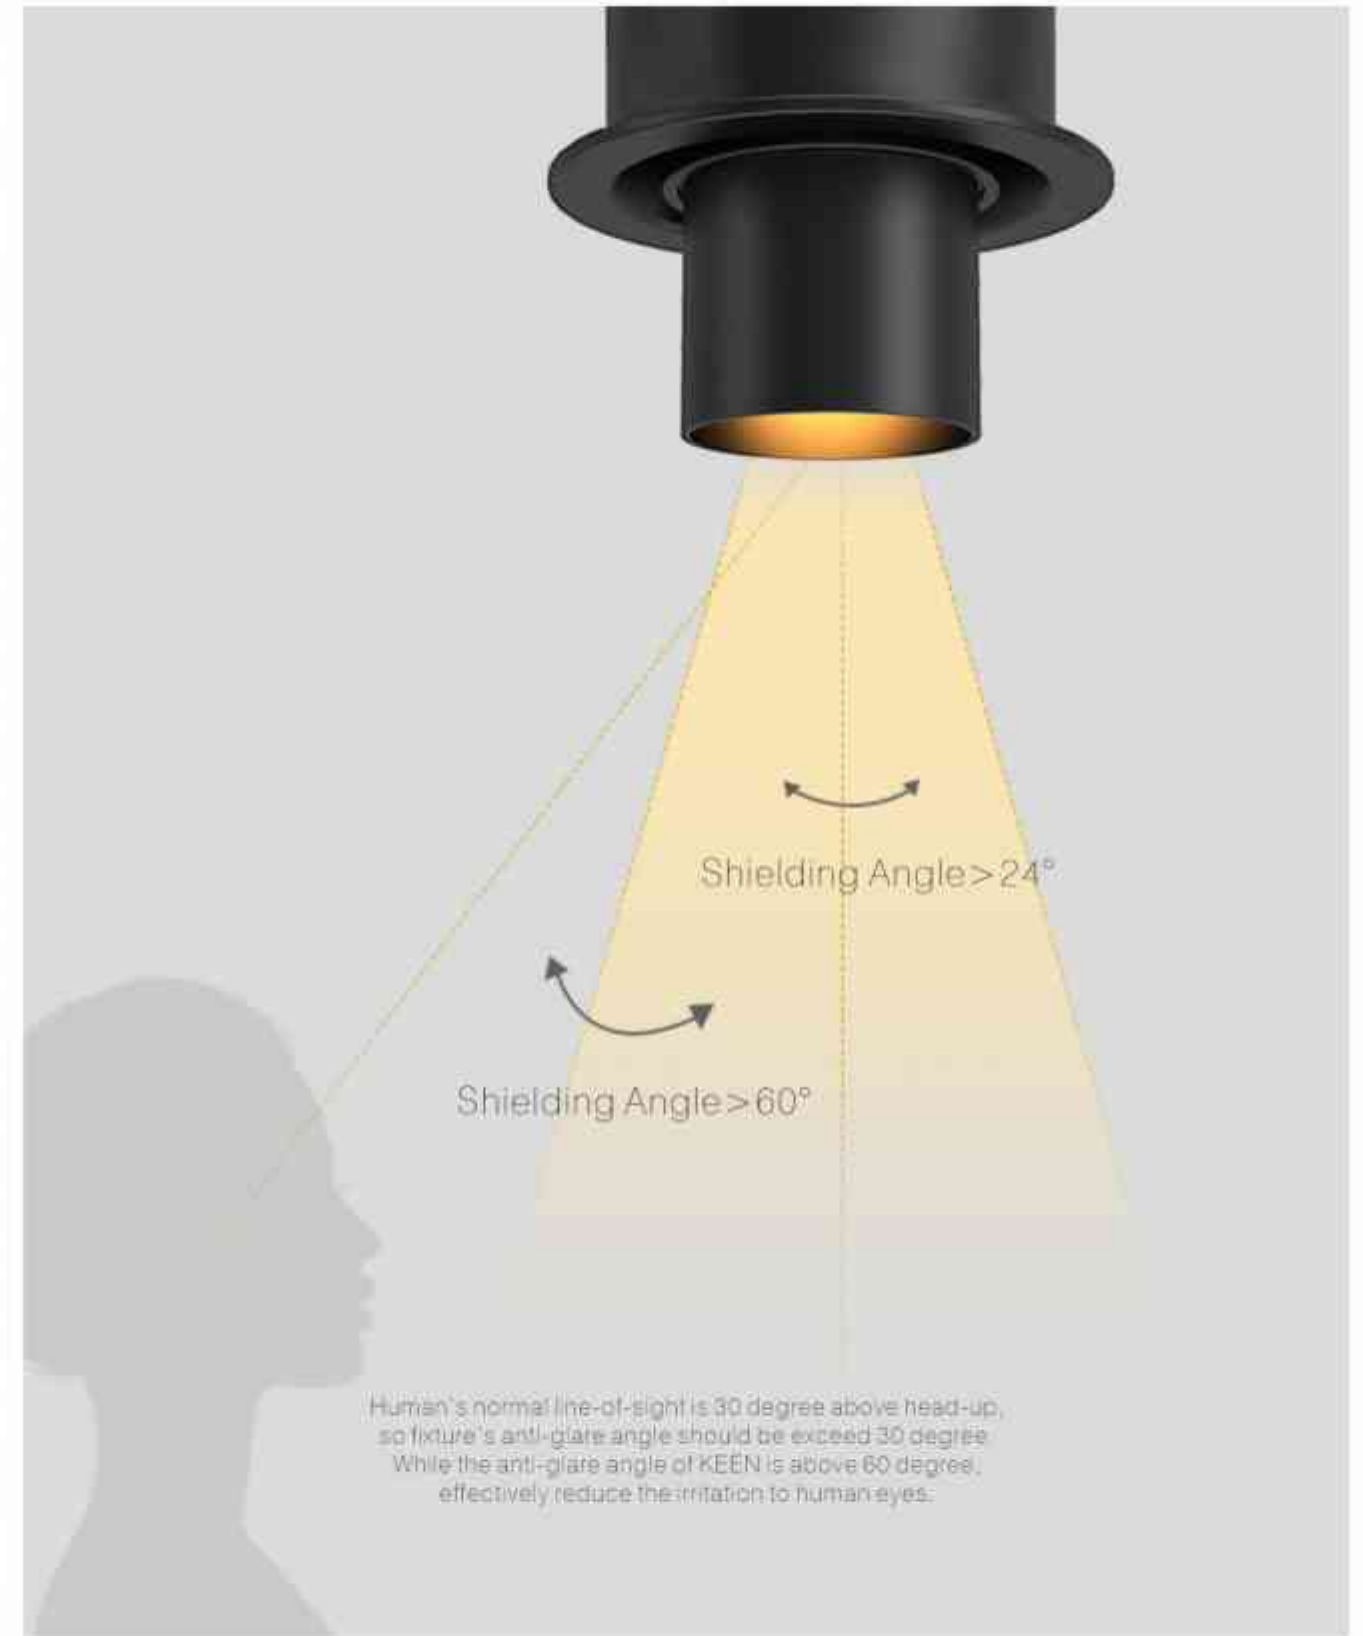

COLOR FINISHINGS:





KEEN 55/55+ AD BODY



KEEN 75/75+ AD BODY

KEEN 55/55+ AD BODY

LED POWER: 3.3W/6W
 LED OUTPUT: 450LM
 SYSTEM POWER: 3.3W/6W
 SYSTEM OUTPUT: 180LM/300LM
 INPUT: 200-250mA, 100-47Hz
 CRI: 90
 DIMENSION: 27x75mm
 HOLE SIZE: 27mm





KEEN 75/75+ AD BODY



LED POWER: 7W/10.7W
 LED OUTPUT: 1100LM
 SYSTEM POWER: 7W/10.7W
 SYSTEM OUTPUT: 280LM/300LM
 INPUT: 200-250mA
 CRI: 90
 DIMENSION: 27x75mm
 HOLE SIZE: 27mm



ANGLE(18°-40°)

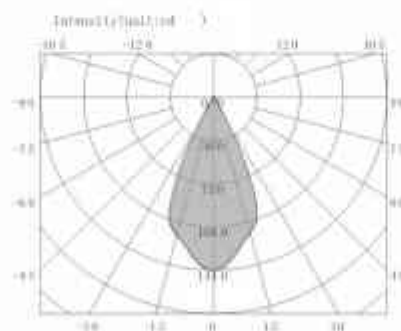

ANGLE(16°-39°)

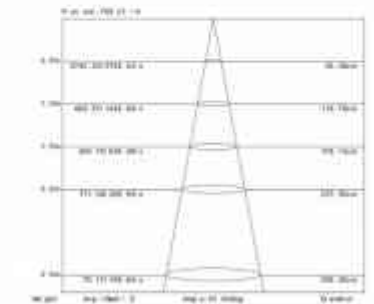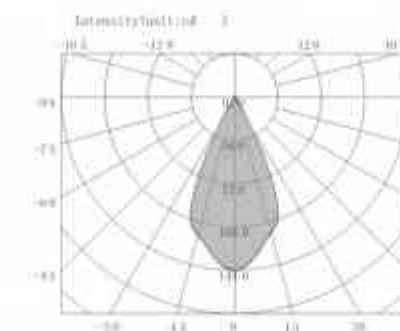



KEEN 95/95+ AD BODY



KEEN 105 AD BODY

KEEN 95/95+ AD BODY

LED POWER: 12.3W/18.2W
 LED OUTPUT: 2280LM
 SYSTEM POWER: 12.3W/18W
 SYSTEM OUTPUT: 2850LM/3000K
 INPUT: 220-240VAC
 CRI: 90
 DIMENSION: Ø112x56mm
 HOLE SIZE: Ø85mm




KEEN 105 AD BODY

LED POWER: 16.6W
 LED OUTPUT: 2995LM
 SYSTEM POWER: 15.6W
 SYSTEM OUTPUT: 3675LM/3000K
 INPUT: 220-240VAC
 CRI: 90
 DIMENSION: Ø125.5x220mm
 HOLE SIZE: Ø85mm




ANGLE(18°-81°)

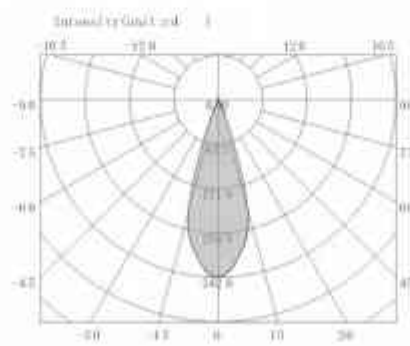

Beam angle	Beam diameter (mm)	Beam diameter (mm)
18°	140.0	140.0
30°	180.0	180.0
45°	245.0	245.0
60°	320.0	320.0
75°	405.0	405.0
81°	440.0	440.0

ANGLE(16°-45°)

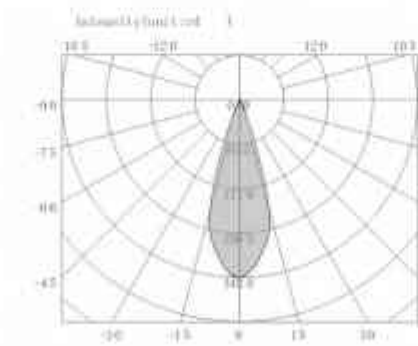

Beam angle	Beam diameter (mm)	Beam diameter (mm)
16°	110.0	110.0
30°	150.0	150.0
45°	195.0	195.0



KUBIK

Pure geometry with sharp-edged cube form makes KUBIK remarkable and unique collection. In the KUBIK range you can choose between recessed or surface mounted versions, single or multiple light sources. Each of them are available in wide range of color combinations. Wall mounted version is a good addition to KUBIK design concept. KUBIK ON has IP54 rate.

© CE IP20 220-240VAC DIM TRIAC DIM 1-10V DIM TO WARM DALI

KUBIK

DOWNLIGHT



KUBIK IN M SINGLE


LED POWER: 9.35W
LED OUTPUT: 1000lm/3000K
SYSTEM POWER: 11.12W
SYSTEM OUTPUT: 851lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 90*90*55mm
HOLE SIZE: 70*70mm




ANGLE 31°



9.35W 31° 3000K



9.35W 31° 3000K



OPTICS:



RECOMMEND: OTHER VERSIONS:



KUBIK IN M DOUBLE


LED POWER: 2*9.35W
LED OUTPUT: 1000lm/3000K
SYSTEM POWER: 22.24W
SYSTEM OUTPUT: 1302lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 177*90*55mm
HOLE SIZE: 150*70mm




ANGLE 31°



9.35W 31° 3000K



9.35W 31° 3000K



OPTICS:



RECOMMEND: OTHER VERSIONS:




KUBIK IN M TRIPLE


LED POWER: 3*9.35W
LED OUTPUT: 1000lm/3000K
SYSTEM POWER: 33.4W
SYSTEM OUTPUT: 1355lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 255*90*55mm
HOLE SIZE: 230*70mm




ANGLE 31°



9.35W 31° 3000K



9.35W 31° 3000K



OPTICS:



RECOMMEND: OTHER VERSIONS:




KUBIK IN M+ SINGLE


LED POWER: 15.47W
LED OUTPUT: 1750lm/3000K
SYSTEM POWER: 18.2W
SYSTEM OUTPUT: 1021lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 90*90*62mm
HOLE SIZE: 70*70mm




ANGLE 36°



15.47W 36° 3000K



15.47W 36° 3000K



OPTICS:



RECOMMEND: OTHER VERSIONS:



KUBIK IN M+ DOUBLE


LED POWER: 2*15.47W
LED OUTPUT: 1750lm/3000K
SYSTEM POWER: 36.4W
SYSTEM OUTPUT: 2042lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 177*90*62mm
HOLE SIZE: 150*70mm




ANGLE 36°



15.47W 36° 3000K



15.47W 36° 3000K



OPTICS:



RECOMMEND: OTHER VERSIONS:



KUBIK IN M+ TRIPLE


LED POWER: 3*15.47W
LED OUTPUT: 1750lm/3000K
SYSTEM POWER: 54.6W
SYSTEM OUTPUT: 3063lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 255*90*62mm
HOLE SIZE: 230*70mm




ANGLE 36°



15.47W 36° 3000K



15.47W 36° 3000K




OPTICS:



RECOMMEND: OTHER VERSIONS:





GYPSUM LIGHTING 

LAX

This miniature new downlight is the best example of functionality and design.
Thanks to plaster material,
LAX gives special design effect that the light is coming directly from the ceiling.
Due to its construction,
LAX can be easily maintained.
This downlight is available in round and square versions.
Round version can be selected with RGB as a choice.

  IP20 DIM TRIAC DIM 1-10V DALI



85



S RD00



M RD00



86




M RG6




LAX G GO

LED POWER: 5.4W
LED OUTPUT: 7
SYSTEM POWER: 7W
SYSTEM OUTPUT: 448lm/3000K
INPUT: 100-240VAC
CRI: 90
DIMENSION: Ø118*32mm
HOLE SIZE: Ø100mm



LAX G RO

LED POWER: 5.4W
LED OUTPUT: 7
SYSTEM POWER: 7W
SYSTEM OUTPUT: 448lm/3000K
INPUT: 100-240VAC
CRI: 90
DIMENSION: Ø160*32mm
HOLE SIZE: Ø150mm




RECOMMEND: OTHER VERSIONS:




ANGLE 38°




5.4W 38° 3000K




5.4W 38° 3000K




ANGLE 38°



5.4W 38° 3000K




5.4W 38° 3000K



LAX M GO


LED POWER: 9.45W
LED OUTPUT: 11
SYSTEM POWER: 11.7W
SYSTEM OUTPUT: 880lm/3000K
INPUT: 220-240VAC
CRI: 90
DIMENSION: 118*118*32.5mm
HOLE SIZE: 120*120mm

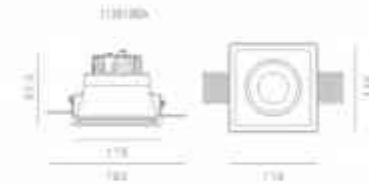


RECOMMEND: OTHER VERSIONS:




ANGLE 60°



9.45W 60° 3000K




9.45W 60° 3000K



LAX M RO


LED POWER: 9.45W
LED OUTPUT: 11
SYSTEM POWER: 11.7W
SYSTEM OUTPUT: 880lm/3000K
INPUT: 220-240VAC
CRI: 90
DIMENSION: Ø118*32.5mm
HOLE SIZE: Ø130mm




RECOMMEND: OTHER VERSIONS:




ANGLE 60°



9.45W 60° 3000K




9.45W 60° 3000K



LAX M RGB

LED POWER: 4.8W+5.7W
LED OUTPUT: 7
SYSTEM POWER: 6.7W+3.7W
SYSTEM OUTPUT: 305lm/3000K+RGB
INPUT: 100-240VAC+24VDC
CRI: 90
DIMENSION: Ø128*105mm
HOLE SIZE: Ø140mm

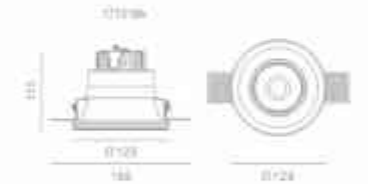


RECOMMEND: OTHER VERSIONS:




ANGLE 20°



4.8W 20° 3000K



4.8W 20° 3000K





TAKE OUT

REPLACE

INSTALL


3000K

4000K

Users can change the color temp. with different color temperature modules to their specifications.
 The default color temperature of the product is 3000K.
 Other color temperature head to be substituted.



M RGB

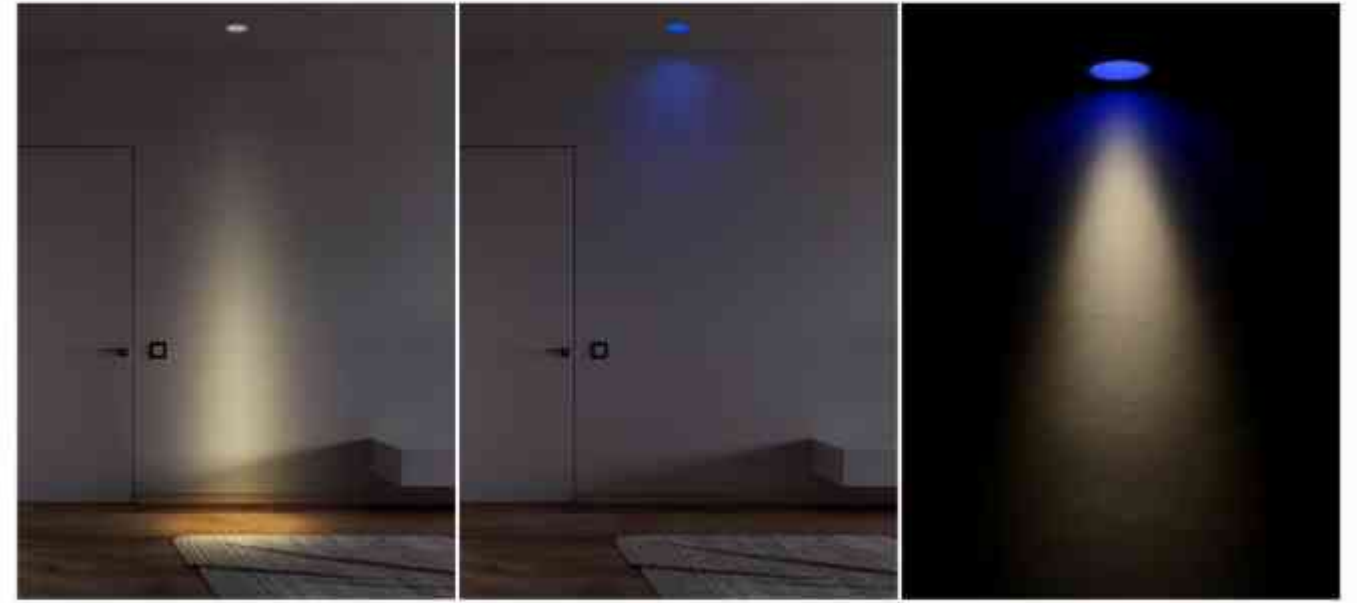


CH.1 OPENING




CH.2 OPENING



DOUBLE CHANNEL OPEN

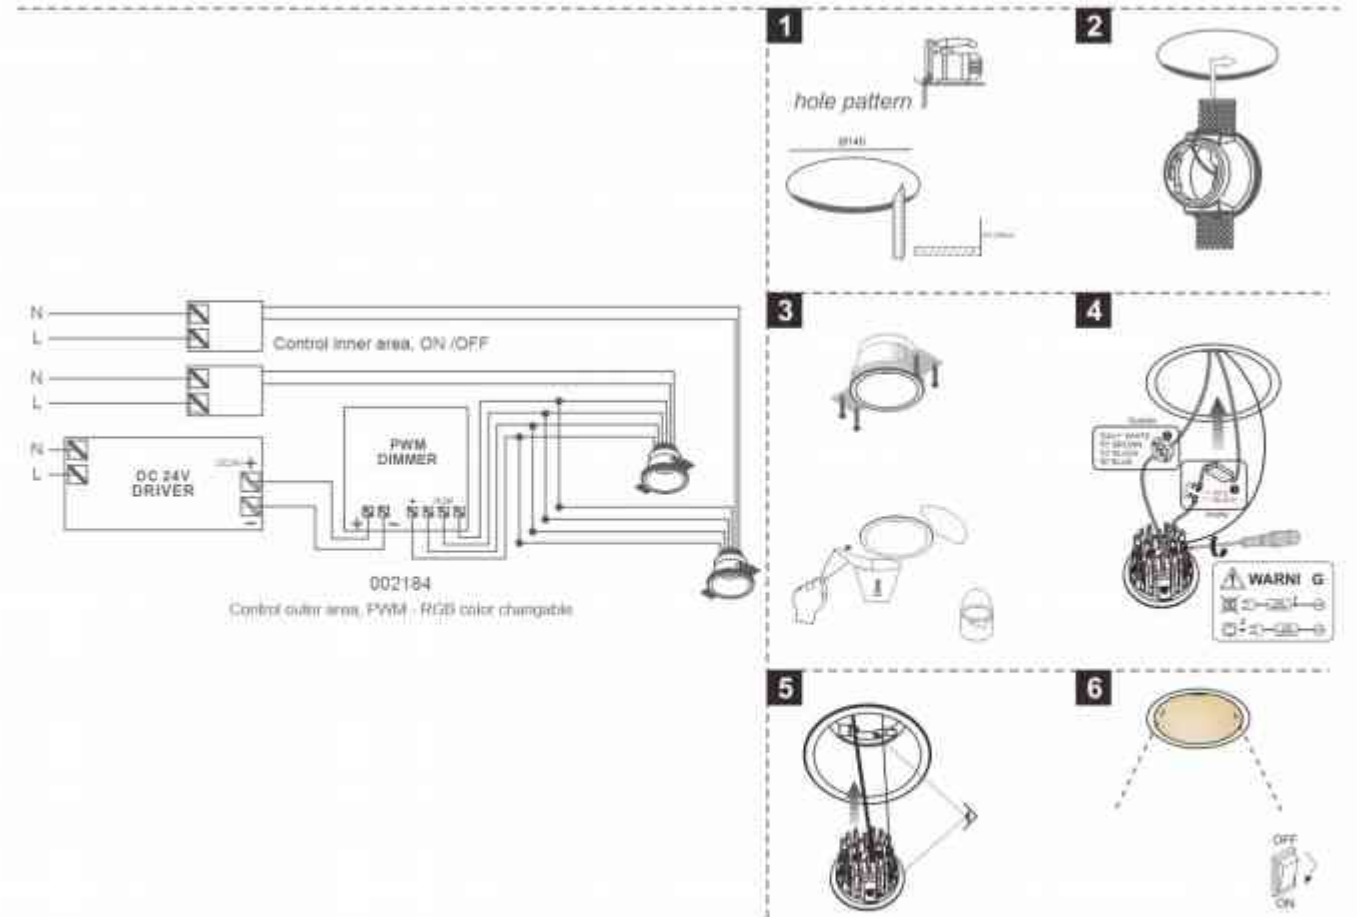

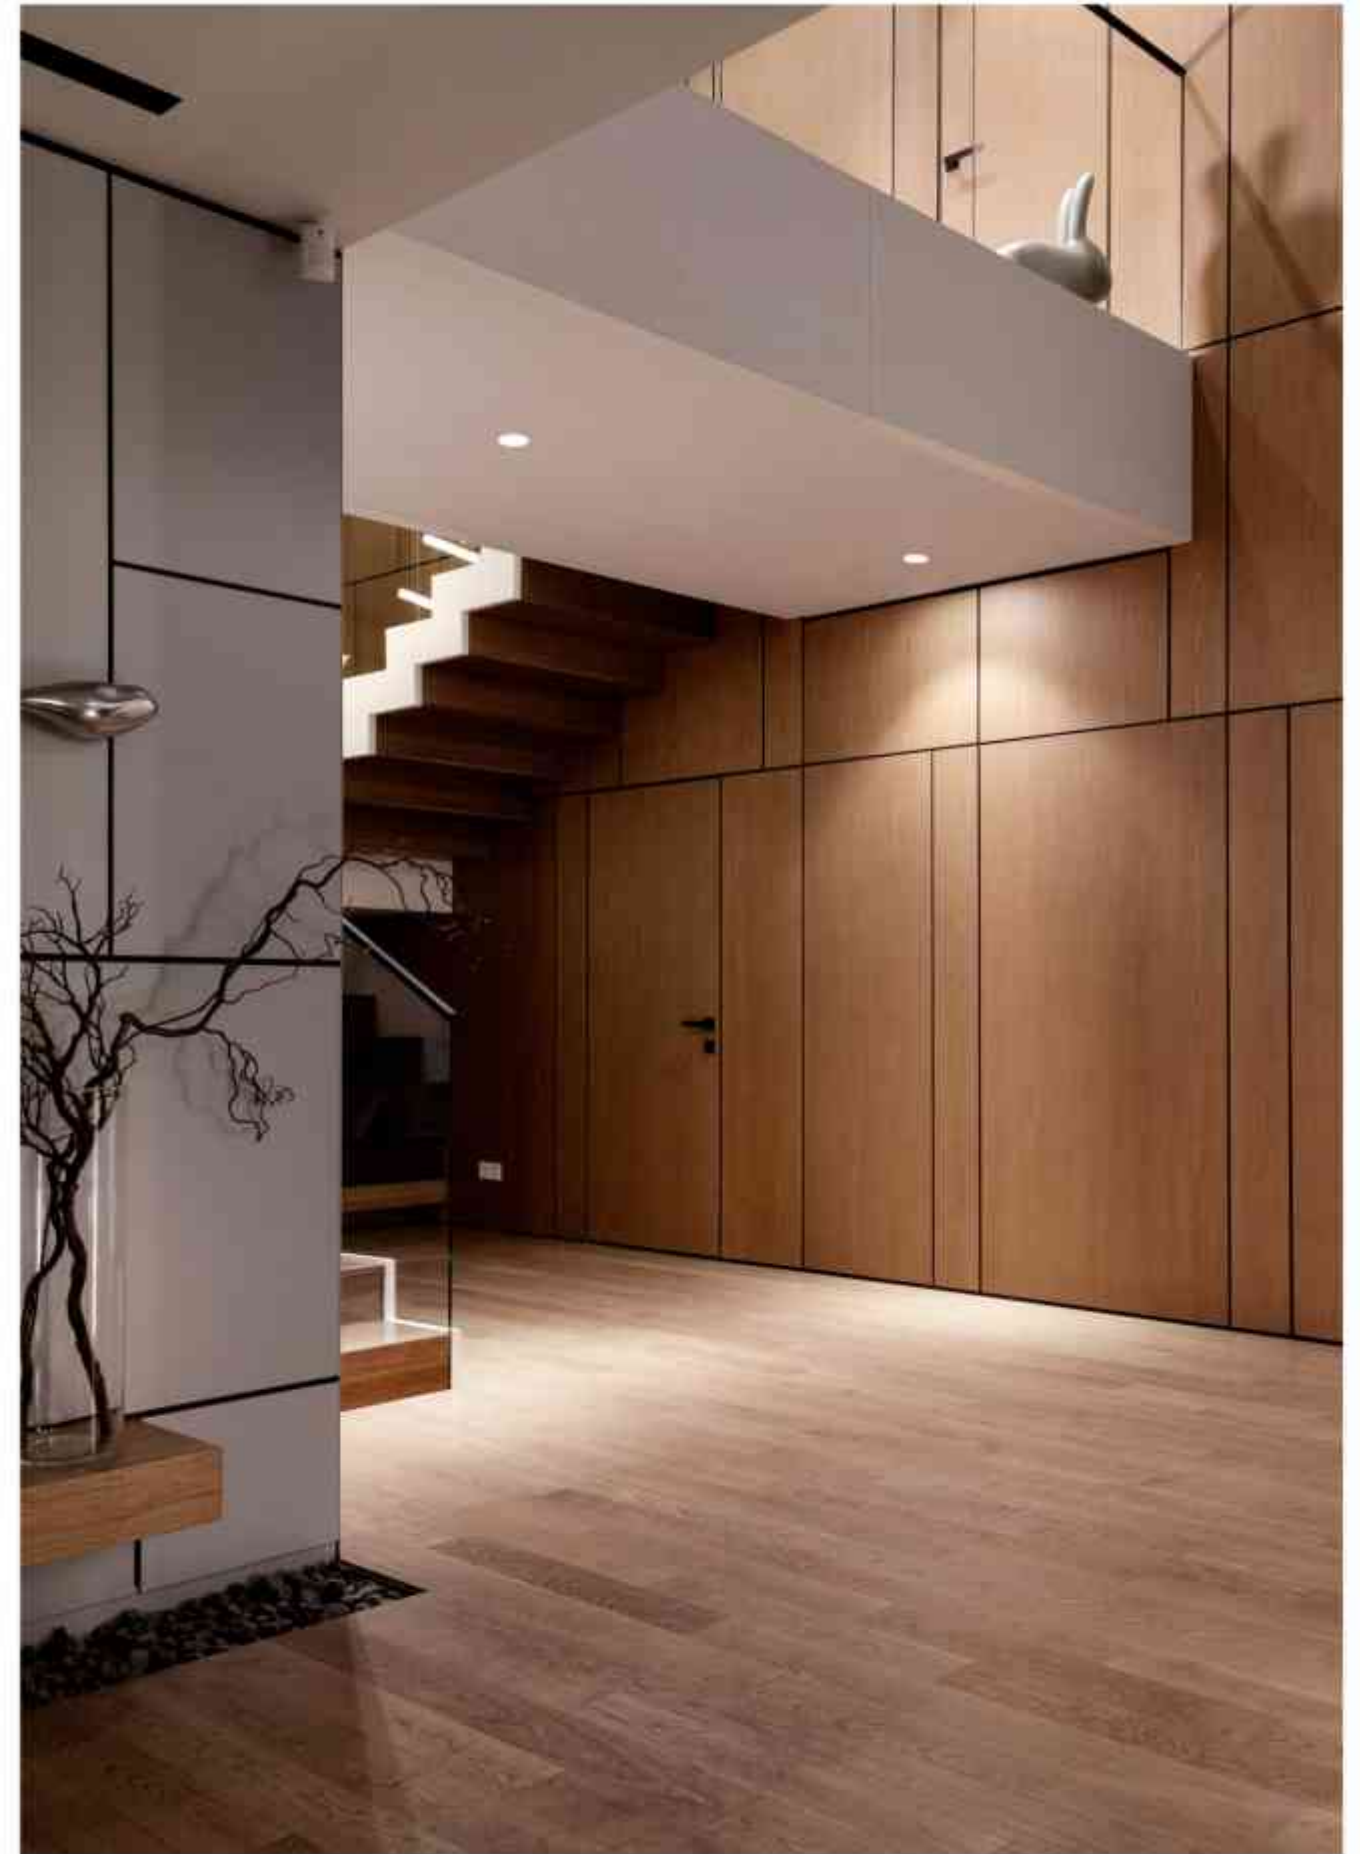




META

New concept of downlight. This miniature objects can create amazing lighting pattern for any room. With IP54 grade, META can be used in the bathroom or other areas where water proof standard is required.

META is more than just a lamp, it is a wide product family with round and square shapes, fixed and adjustable, trim and trimless. Its PC plastic body, META light is lighter. Reflectors can be easily changed. Black, white, silver and golden colors are available for choice.

© CE IP54 DIM TRIAC DIM 1-10V DALI

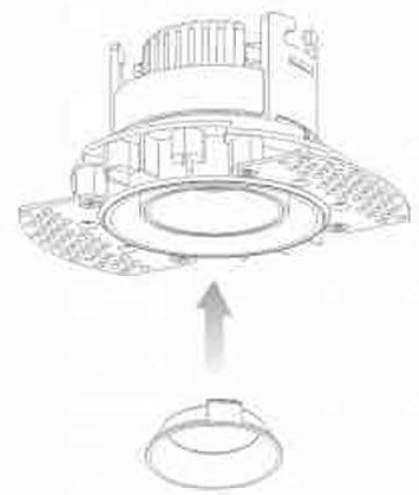

SQ AD TRIMLESS




RO AD



RO TRIMLESS


COLOR FINISHINGS:



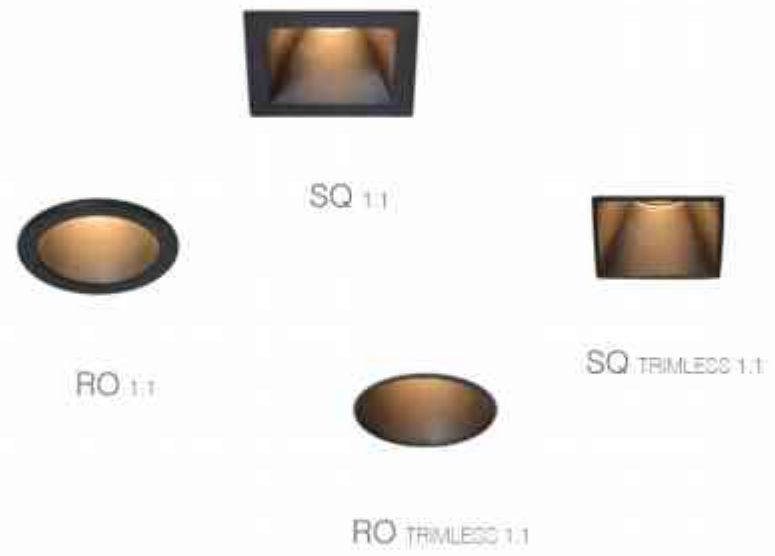


META RO 1:1 / RO TRIMLESS 1:1
 META SQ 1:1 / SQ TRIMLESS 1:1

LED POWER: 5.6W
 LED OUTPUT: 641lm
 SYSTEM POWER: 7.9W
 SYSTEM OUTPUT: 380lm/3000K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø207x66mm/Ø114x63mm/Ø130x60mm/Ø134x63mm/Ø143x65mm
 HOLE SIZE: Ø240mm/Ø249mm/Ø261mm/Ø271mm

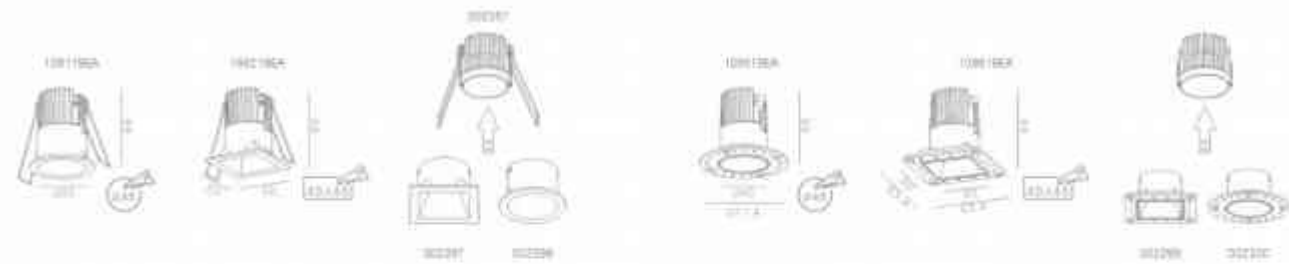

RECOMMEND: OTHER VERSIONS:

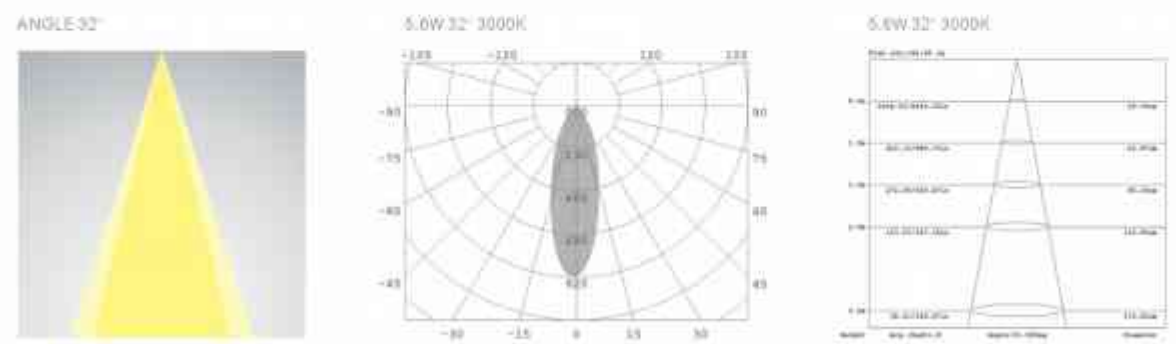






META RO AD / RO AD TRIMLESS
 META SQ AD / SQ AD TRIMLESS

LED POWER: 5.6W
 LED OUTPUT: 641lm
 SYSTEM POWER: 7.9W
 SYSTEM OUTPUT: 451lm/3000K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø243x48.5mm/120°/135°x48.5mm/85°x48.5mm/120°/135°x48.5mm
 HOLE SIZE: Ø260mm/Ø275mm/Ø290mm/297mm



RECOMMEND: OTHER VERSIONS:

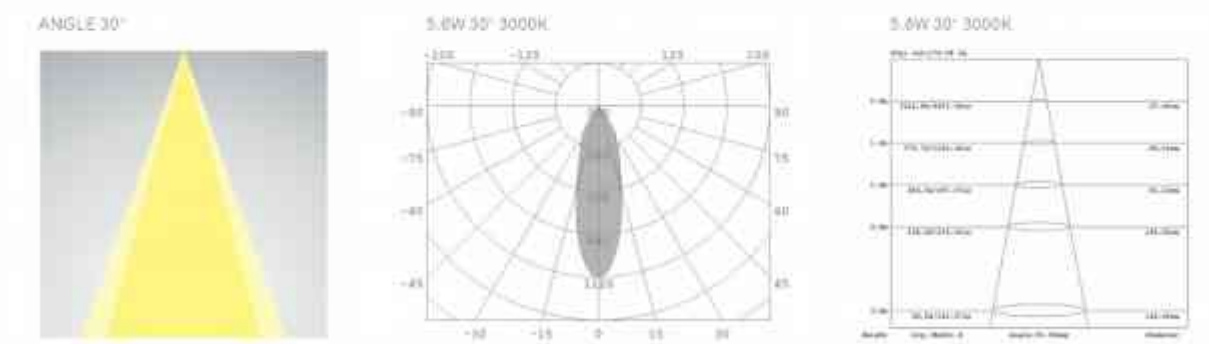

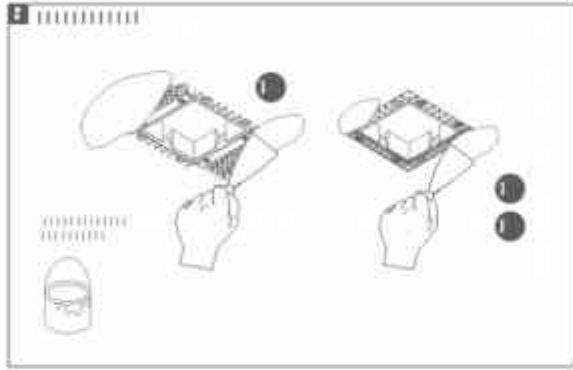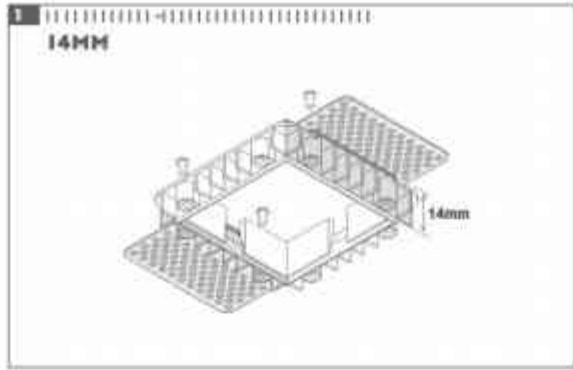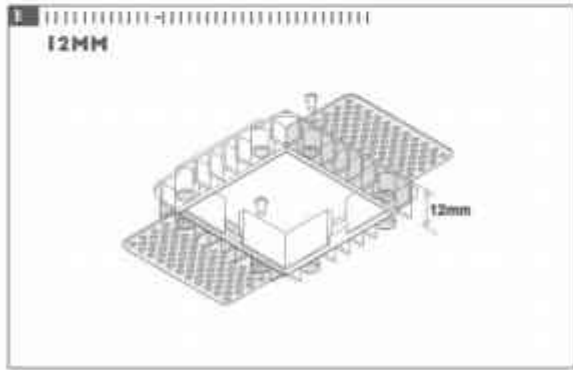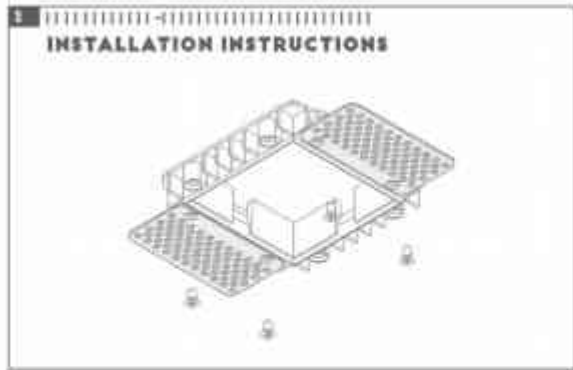

MORRIS

This miniature square shaped downlight is the best example of simplicity and elegance. Nicely combined white and black colors creates additional decorative element for the ceiling. Be it residential or hotel, restaurant or coffee shop, MORRIS easily caters for most applications.










MORRIS

MORRIS


LED POWER: 10.9W
 LED OUTPUT: 1300lm/3000K
 SYSTEM POWER: 13.4W
 SYSTEM OUTPUT: 960lm
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSIONS: 79*79*58mm
 HOLE SIZE: 75*75mm




ANGLE 36°



13.4W 36° 3000K

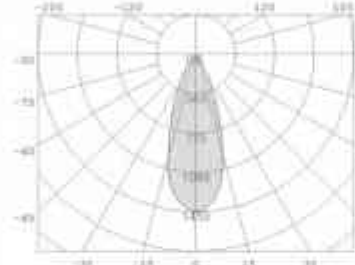

13.4W 36° 3000K



OPTICS:



RECOMMEND:




OTHER VERSIONS:



NIA

This simple recessed downlight has become popular collection thanks to its functionality. Thanks to IP 54 rate and adjustable structure, NIA is the best choice for rooms where water resistance is demanded. NIA has two sizes 7.5W and 15W for choice. Both provides perfect anti-glare effect.

CCC CE IP54 220-240VAC DIM TRIAC DIM 1-10V DIM TO WARM DALI

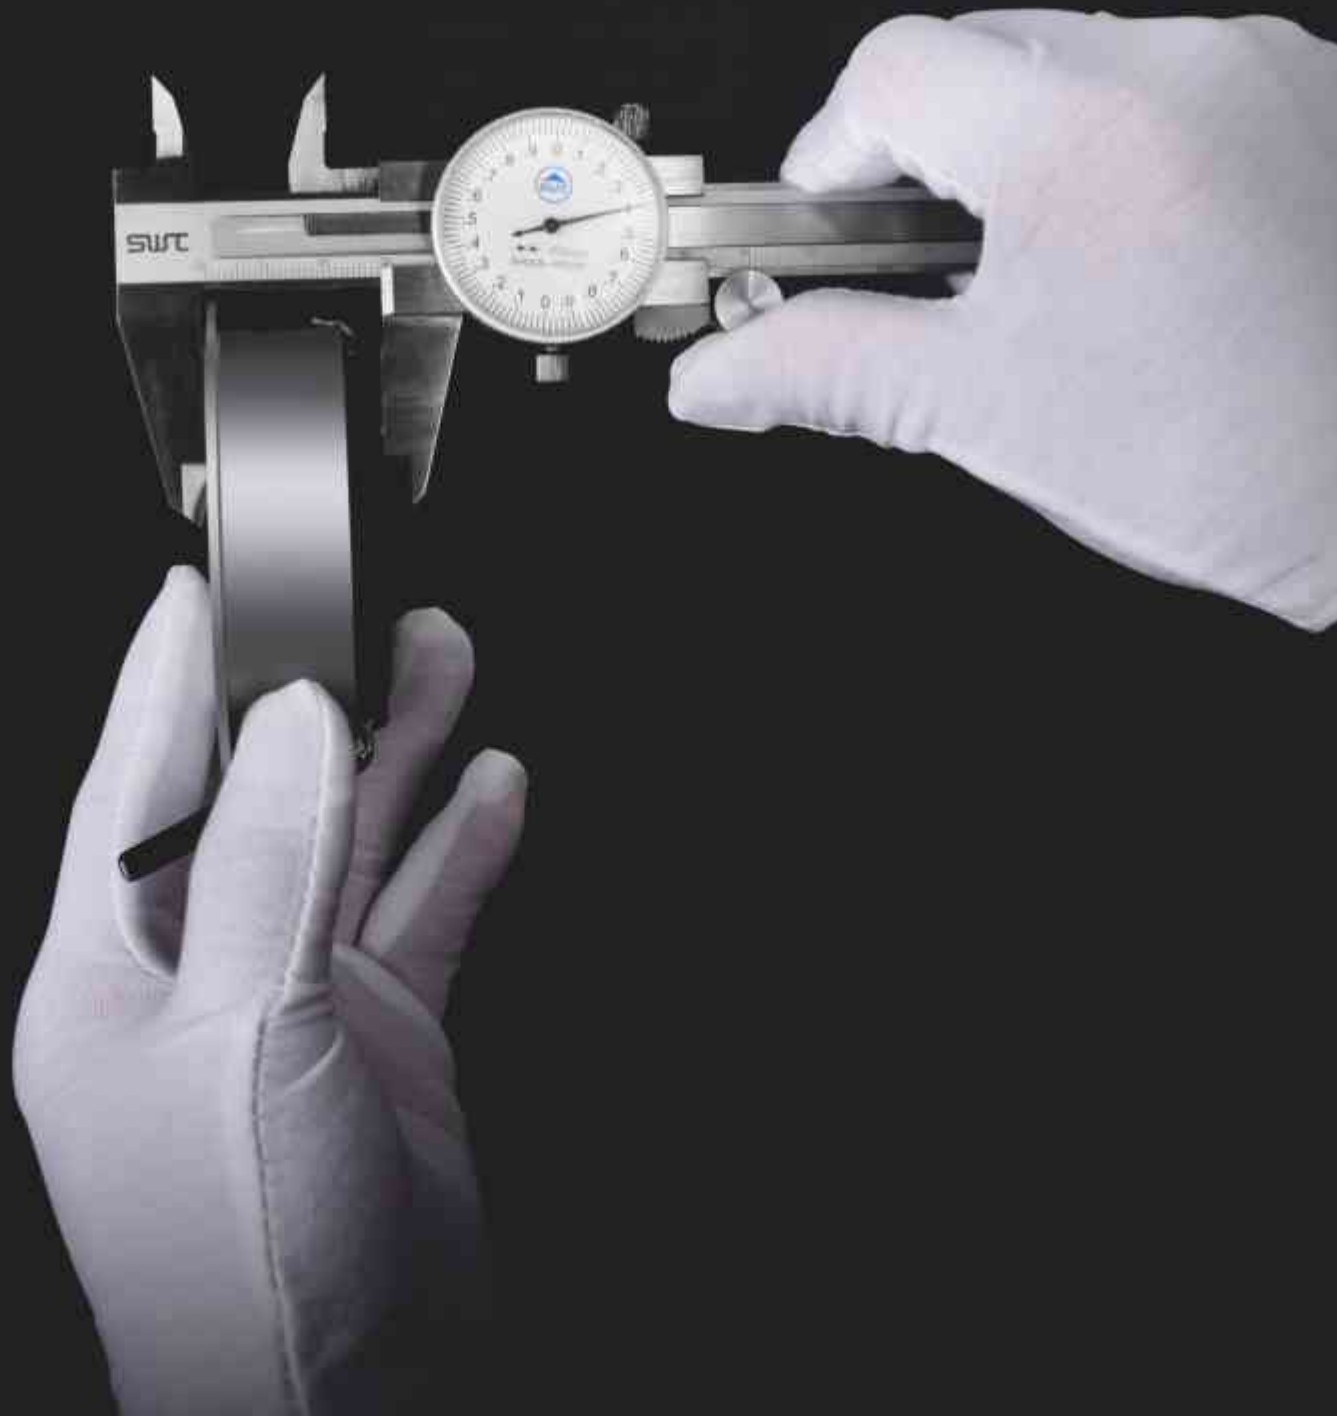

103

NIA



DOWNLIGHT

104



S AD/S+ AD 2.0



M AD/M+ AD 2.0

NIA S AD 2.0

LED POWER: 3.4W
LED OUTPUT: 847lm
SYSTEM POWER: 3.4W
SYSTEM OUTPUT: 210lm/3000K
INPUT: 300mA, 50/60Hz
CRI: 90
DIMENSION: 260*21mm
HOLE SIZE: 255mm



NIA S+ AD 2.0

LED POWER: 3.4W
LED OUTPUT: 814lm
SYSTEM POWER: 4.2W
SYSTEM OUTPUT: 313lm/3000K
INPUT: 300mA, 50/60Hz
CRI: 90
DIMENSION: 260*30mm
HOLE SIZE: 255mm



NIA M AD 2.0

LED POWER: 7.8W
LED OUTPUT: 835lm
SYSTEM POWER: 10W
SYSTEM OUTPUT: 330lm/3000K
INPUT: 220-240VAC, 50/60Hz
CRI: 90
DIMENSION: 280*30mm
HOLE SIZE: 280mm



NIA M+ AD 2.0


LED POWER: 10.5W
LED OUTPUT: 1067lm
SYSTEM POWER: 12W
SYSTEM OUTPUT: 623lm/3000K
INPUT: 220-240VAC, 50/60Hz
CRI: 90
DIMENSION: 320*30mm
HOLE SIZE: 280mm




RECOMMEND:




ANGLE 18°



3.4W 18° 3000K

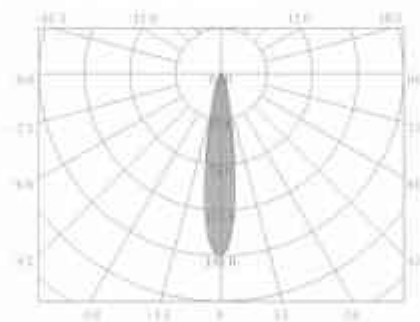

3.4W 18° 3000K

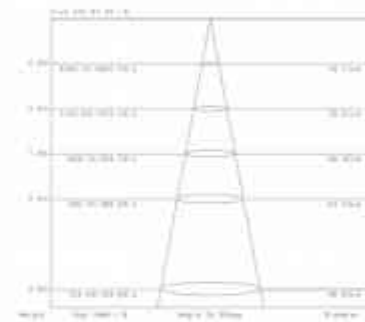

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.

RECOMMEND:



RECOMMEND:




OTHER VERSIONS:



ANGLE 19°



7.8W 18° 3000K

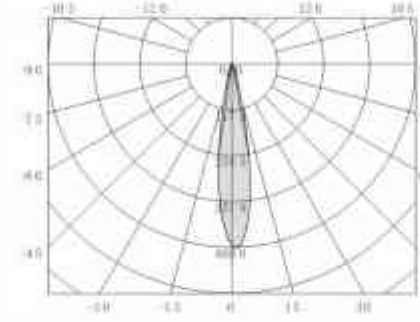


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.

COLOR FINISHINGS:



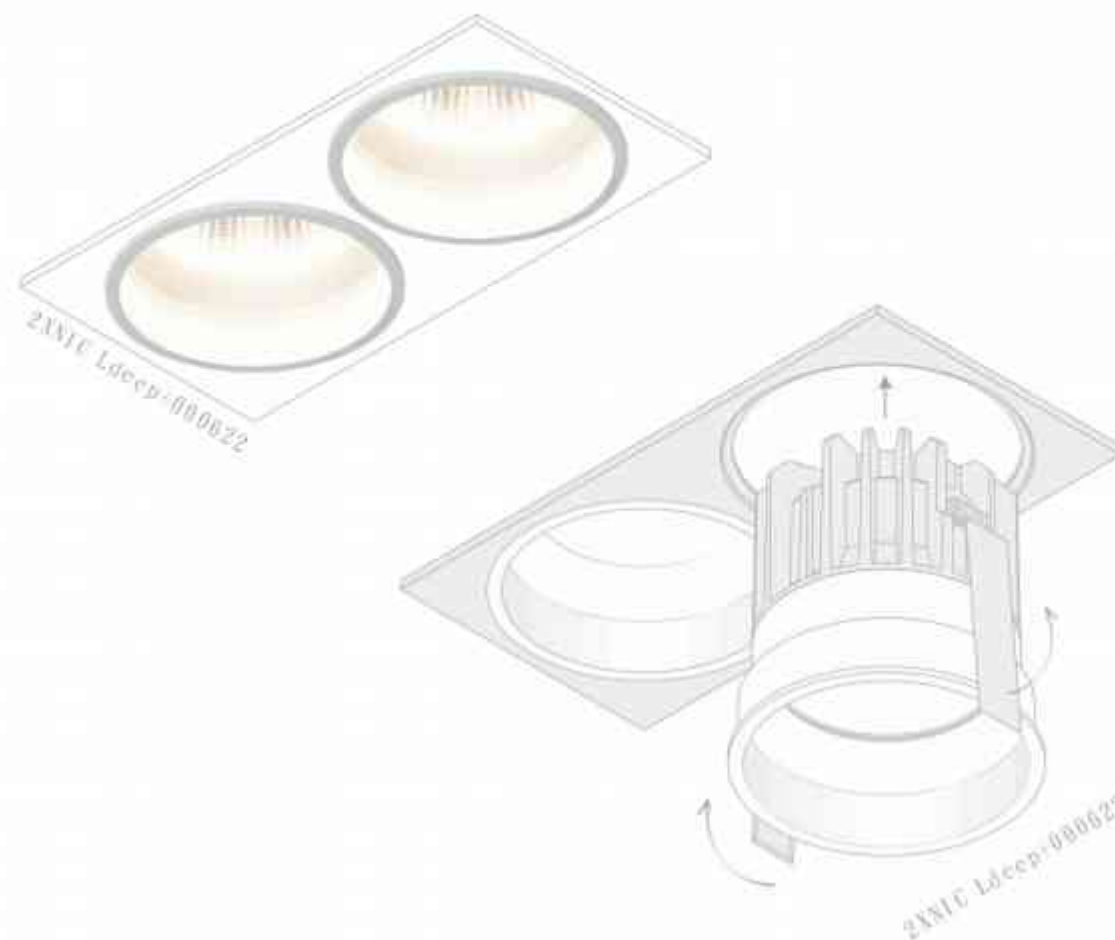

NIC

NIC is the biggest product family in FLUA collection, giving answer to almost all lighting requirements.

Various selections are available for choice:


from smallest member NIC S 6W up to biggest NIC L 42W.

This big collection provides unlimited number of choices from recessed to surface mounted versions,

from direct to adjustable, with or without mounting frame, single or double lamp.

To extend NIC series NIC DEEP version could be chosen for the projects where additional anti-glare function is demanded.

© CE IP20 220-240VAC DIM TRIAC DIM 1-10V DIM TO WARM DALI

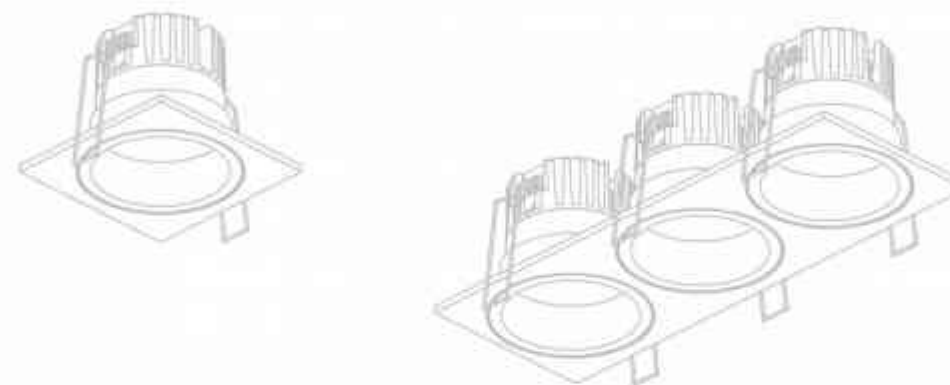

COLOR FINISHINGS:






80

NIC 80

LED POWER: 14.4W
 LED OUTPUT:
 SYSTEM POWER: 18W
 SYSTEM OUTPUT: 85LM/2700K-4000K
 INPUT: 200-240VAC 50/60Hz
 CR: 90
 DIMENSION: 250x54mm
 HOLE SIZE: 260mm



RECOMMEND:



DALI8
 10A1120A2




DALI8
 10A1120A2

PS this is the true dimming mode


ANGLE 30°



14.4W 30° 3000K

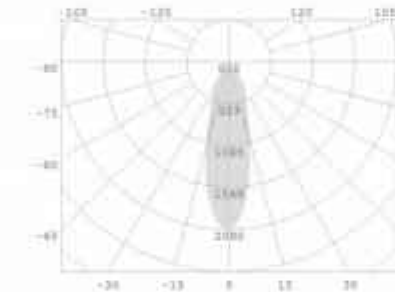

14.4W 30° 3000K

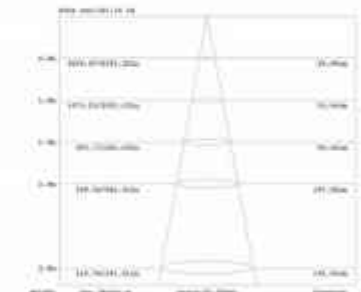

OTHER VERSIONS:



42°



80°

For more information, please visit our website or contact our sales representative.



S DEEP / S+ DEEP



S CQ DEEP / S+ CQ DEEP



S DEEP AD / S+ DEEP AD





NIC S DEEP / S CQ DEEP / S DEEP AD

LED POWER: 8.4W
LED OUTPUT: 823LM
SYSTEM POWER: 7.4W
SYSTEM OUTPUT: 402lm/3000K
430lm/4000K
INPUT: 220-240VAC/50/60HZ
CRI: 90
DIMENSION: 210*50mm/210*50mm/27*13mm
HOLE SIZE: 210mm/50*50mm/27*13mm

NIC S+ DEEP / S+ CQ DEEP / S+ DEEP AD


LED POWER: 9.12W
LED OUTPUT: 857LM
SYSTEM POWER: 7.9W
SYSTEM OUTPUT: 406lm/3000K
540lm/4000K
INPUT: 220-240VAC/50/60HZ
CRI: 90
DIMENSION: 210*50mm/210*50mm/27*13mm
HOLE SIZE: 210mm/50*50mm/27*13mm

RECOMMEND: OTHER VERSIONS:




NIC S DEEP / S CQ DEEP / S DEEP AD


ANGLE 26°



6.4W 26° 3000K

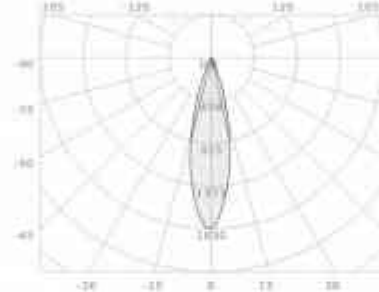

6.4W 26° 3000K




OTHER VERSIONS:




For more information, please visit our website or contact our sales representative

NIC S+ DEEP / S+ CQ DEEP / S+ DEEP AD


ANGLE 36°



9.12W 36° 3000K

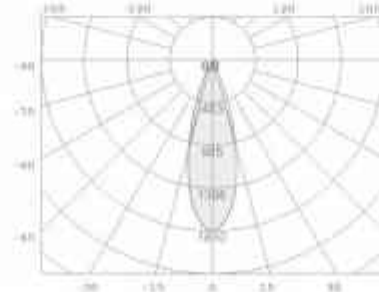

9.12W 36° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



S / S+ DEEP 1



S / S+ CQ DEEP 1



S / S+ DEEP 2



S / S+ CQ DEEP 2



S / S+ DEEP 3



S / S+ CQ DEEP 3



S AD 1.1



M AD



M AD SQUARE

NIC S 1.1 / NIC S AD 1.1

LED POWER: 8.3W
 LED OUTPUT: 577lm
 SYSTEM POWER: 9.3W
 SYSTEM OUTPUT: 368lm/3000K
 INPUT: 100-240VAC/50-60Hz
 CRI: 90
 DIMENSION: Ø82x54 mm
 HOLE SIZE: Ø70mm




RECOMMEND: OTHER VERSIONS:




ANGLE 28°



8.3W 28° 3000K


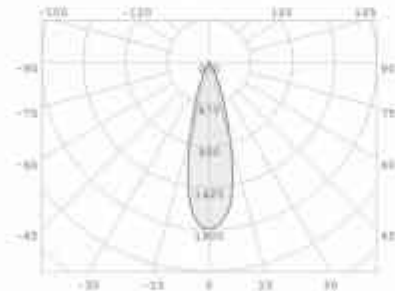


8.3W 28° 3000K



NIC M AD / M AD SQUARED

LED POWER: 9.35W
 LED OUTPUT: 1009lm
 SYSTEM POWER: 11.12W
 SYSTEM OUTPUT: 698lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø100x42mm/100x42mm
 HOLE SIZE: Ø95mm/Ø95mm



RECOMMEND: OTHER VERSIONS:




NIC M AD / M AD SQUARED


ANGLE 31°



9.35W 31° 3000K

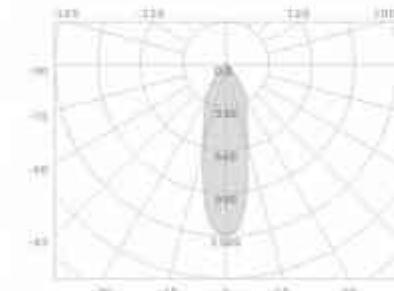

9.35W 31° 3000K

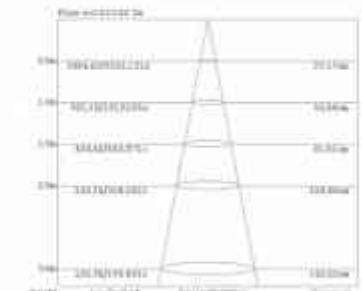

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative




M




M DEEP

NIC M 
 LED POWER: 9.35W
 LED OUTPUT: 1029lm
 SYSTEM POWER: 11.12W
 SYSTEM OUTPUT: 887lm @3000K
 747lm @3000K
 INPUT: 200-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 262x26mm
 HOLE SIZE: Ø70mm

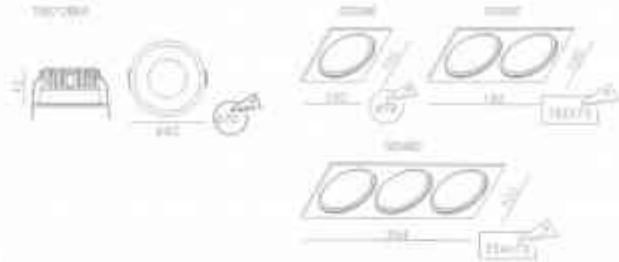


RECOMMEND: **OTHER VERSIONS:**

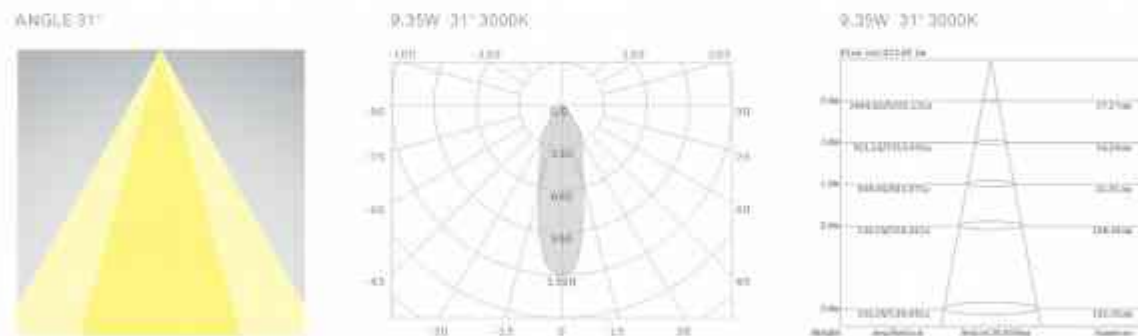


For more information, please visit our website or contact our sales representative

NIC M DEEP 
 LED POWER: 9.35W
 LED OUTPUT: 1029lm
 SYSTEM POWER: 11.12W
 SYSTEM OUTPUT: 887lm @3000K
 747lm @3000K
 INPUT: 200-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 262x26mm
 HOLE SIZE: Ø70mm

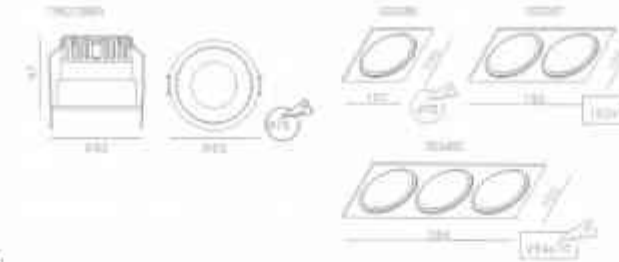

RECOMMEND: **OTHER VERSIONS:**

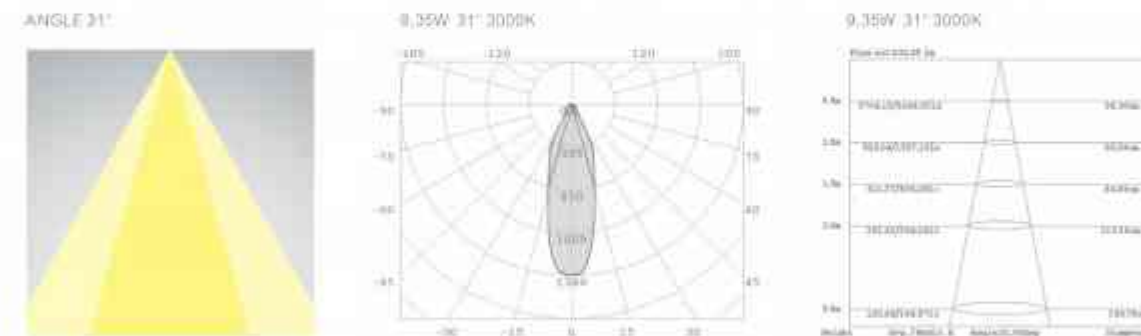

For more information, please visit our website or contact our sales representative



M+ DEEP




M+ AD



M+ AD SQUARE

NIC M+ DEEP

LED POWER: 15.54W
 LED OUTPUT: 1756lm
 SYSTEM POWER: 18.29W
 SYSTEM OUTPUT: 1036lm/3000K
 1104lm/4000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: 282*70mm
 HOLE SIZE: Ø75mm

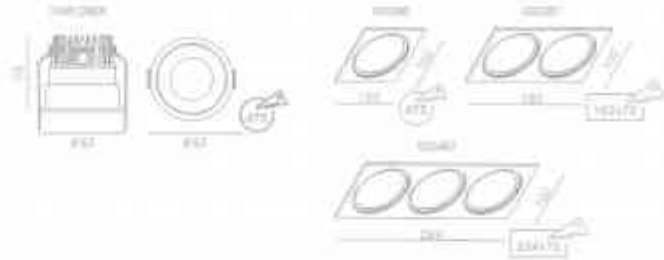


RECOMMEND: OTHER VERSIONS:




ANGLE 37°



15.54W 37° 3000K

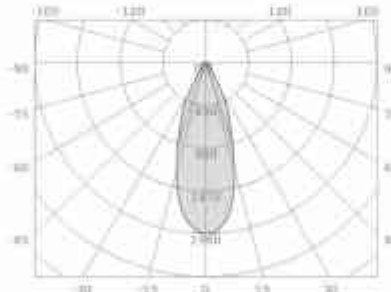

15.54W 37° 3000K




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

NIC M+ AD / M+ AD SQUARED

LED POWER: 15.54W
 LED OUTPUT: 1756lm
 SYSTEM POWER: 18.29W
 SYSTEM OUTPUT: 1125lm/3000K
 1200lm/4000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø100/80mm/100*100*30mm
 HOLE SIZE: Ø75mm/Ø85mm

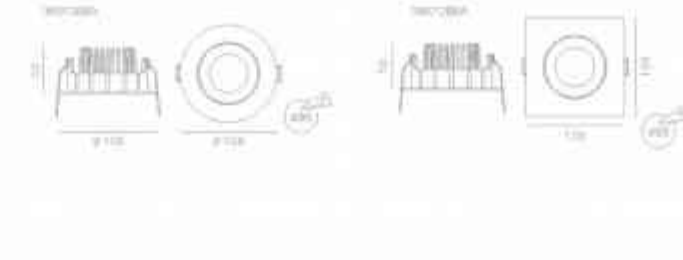

RECOMMEND: OTHER VERSIONS:




NIC M+ AD / M+ AD SQUARED


ANGLE 37°



15.54W 37° 3000K

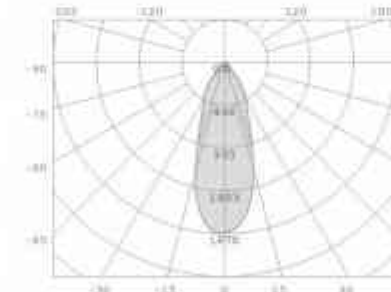

15.54W 37° 3000K

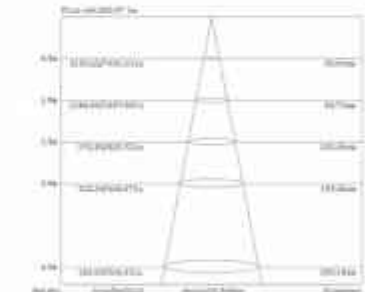


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



M DEEP AD



M DEEP AD DOUBLE



L

NIC M DEEP AD

LED POWER: 10.6W
 LED OUTPUT: 1306lm
 SYSTEM POWER: 12.5W
 SYSTEM OUTPUT: 820lm/3000K
 877lm/4000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 282*98mm
 HOLE SIZE: Ø76mm



NIC M DEEP AD DOUBLE

LED POWER: 2*10.6W
 LED OUTPUT: 1306lm
 SYSTEM POWER: 25W
 SYSTEM OUTPUT: 1640lm/3000K
 1754lm/4000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 167*22*98mm
 HOLE SIZE: 157*76mm




RECOMMEND: OTHER VERSIONS:




ANGLE 35°



10.6W 35° 3000K

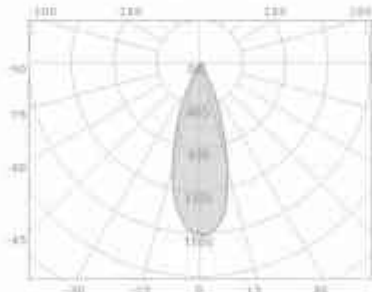

10.6W 35° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

NIC L

LED POWER: 38W
 LED OUTPUT: 3819lm
 SYSTEM POWER: 43W
 SYSTEM OUTPUT: 2973lm/3000K
 3187lm/4000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 SYSTEM OUTPUT: 4117lm/3000K
 CRI: 80
 DIMENSION: Ø125*100mm
 HOLE SIZE: Ø110mm




RECOMMEND: OTHER VERSIONS:




ANGLE 20°



38W 20° 3000K

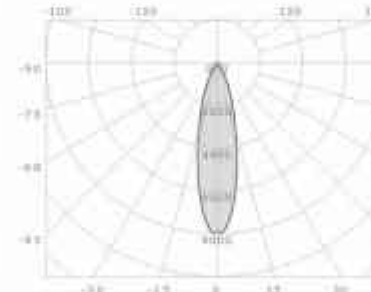

38W 20° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative




L DEEP



L AD

NIC L DEEP

LED POWER: 38W
 LED OUTPUT: 3819Lm
 SYSTEM POWER: 42W
 SYSTEM OUTPUT: 2764lm/3000K
 2950lm/4000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 SYSTEM OUTPUT: 3828lm/5000K
 CRI: 80
 DIMENSION: Ø125*125mm
 HOLE SIZE: Ø120mm

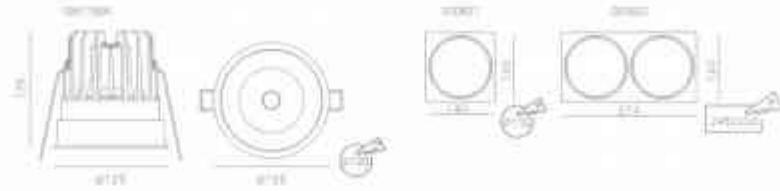


RECOMMEND: OTHER VERSIONS:




ANGLE 20°



38W 20° 3000K

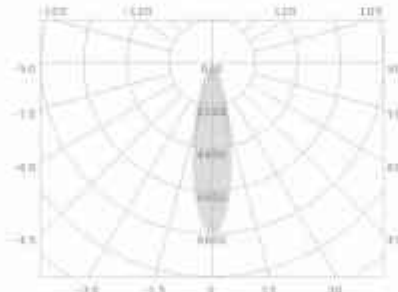

38W 20° 3000K




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

NIC L AD

LED POWER: 38W
 LED OUTPUT: 3819Lm
 SYSTEM POWER: 42W
 SYSTEM OUTPUT: 2773lm/3000K
 3181lm/4000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 SYSTEM OUTPUT: 4117lm/5000K
 CRI: 80
 DIMENSION: Ø160*103mm
 HOLE SIZE: Ø140mm




RECOMMEND: OTHER VERSIONS:




ANGLE 20°



38W 20° 3000K

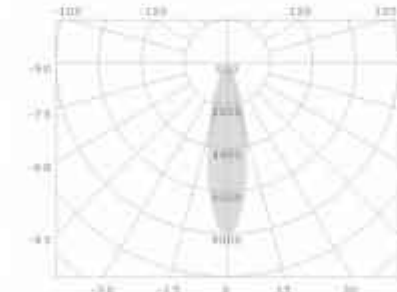





























38W 20° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

								
ITEM CODE	A	DT	DX	DS	DA	DO	DT2	DA2
 NIC S DEEP	•	•	•		•			
 NIC S+ DEEP	•	•	•		•			
 NIC S SQ DEEP	•	•	•		•			
 NIC S+ SQ DEEP	•	•	•		•			
 NIC S DEEP AD	•	•	•		•			
 NIC S+ DEEP AD	•	•	•		•			
 NIC S AD 1	•	•	•		•			
 NIC M AD	•	•	•	•	•			
 NIC M AD SQUARED	•	•	•	•	•			
 NIC M	•	•	•	•	•			
 NIC M DEEP	•	•	•	•	•			
 NIC M+ DEEP	•	•	•	•	•			
 NIC M+ AD	•	•	•	•	•			
 NIC M+ AD SQUARED	•	•	•	•	•			
 NIC M DEEP AD	•	•	•	•	•			
 NIC M DEEP AD DOUBLE	•	•	•	•	•			
 NIC L	•	•	•		•			
 NIC L DEEP	•	•	•		•			
 NIC L AD	•	•	•		•			
 NIC DO							•	•





NICO

NICO is the ultrathin architectural spotlight for interior spaces, with a thickness of 19mm only. It is designed for the accent lighting for planar or solid objects.

Adapts to scenarios from residential space like wardrobe and cupboard, to commercial space like clothing store and retail store, etc..

Directly light or adjust, IP54 grade, 316 stainless steel ensure NICO adapting to various harsh environments.

S version is applies to space with height less than 1m, while M version is applies to space with higher height..

© CE IP54 100/220-240VAC DIM TRIAC





NICO S/S AD

LED POWER: 3.5W
 SYSTEM POWER: 4.8W
 SYSTEM OUTPUT: 310lm@3000K
 INPUT: 100-240VAC 50/60Hz
 CR: 90
 DIMENSION: Ø54*18mm/Ø62*18mm
 HOLE SIZE: Ø45mm/Ø50mm



NICO M/M AD



LED POWER: 5.4W
 SYSTEM POWER: 7.8W
 SYSTEM OUTPUT: 510lm@3000K
 INPUT: 100-240VAC 50/60Hz
 CR: 90
 DIMENSION: Ø67.5*18mm/Ø72*18mm
 HOLE SIZE: Ø58mm/Ø63mm



RECOMMEND:



ANGLE 24°

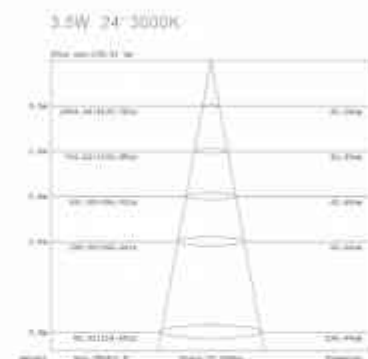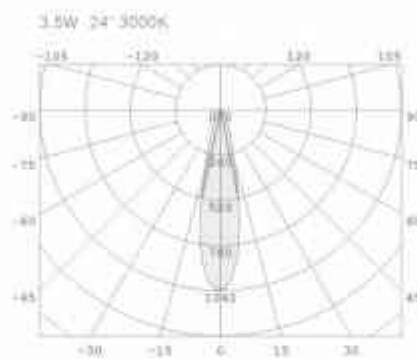

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

COLOR FINISHINGS:





RECOMMEND:



OTHER VERSIONS:



ANGLE 18°

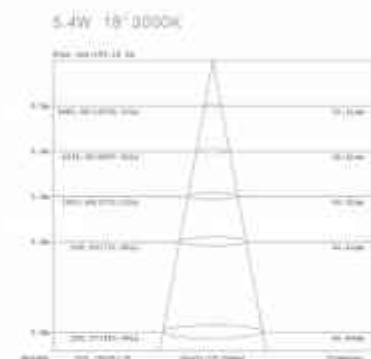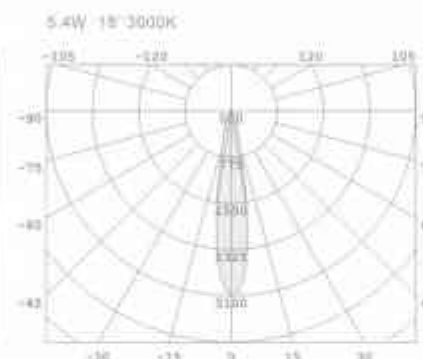

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

COLOR FINISHINGS:





NICO S/S AD AIG316

LED POWER: 3.5W
 SYSTEM POWER: 4.8W
 SYSTEM OUTPUT: 310lm@3000K
 INPUT: 100-240VAC 50/60Hz
 CR: 90
 DIMENSION: Ø54*18mm/Ø62*18mm
 HOLE SIZE: Ø45mm/Ø55mm



NICO M/M AD AIG318



LED POWER: 5.4W
 SYSTEM POWER: 7.8W
 SYSTEM OUTPUT: 510lm@3000K
 INPUT: 100-240VAC 50/60Hz
 CR: 90
 DIMENSION: Ø67.5*18mm/Ø72*18mm
 HOLE SIZE: Ø58mm/Ø68mm



RECOMMEND:



ANGLE 24°

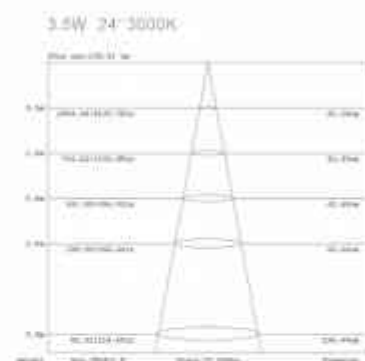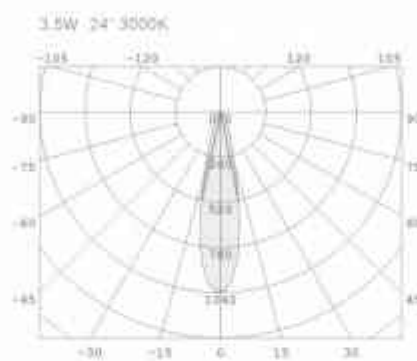

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

COLOR FINISHINGS:



003




RECOMMEND:



OTHER VERSIONS:



ANGLE 18°

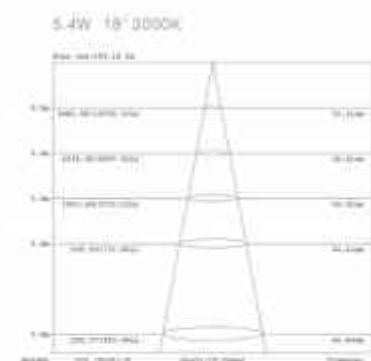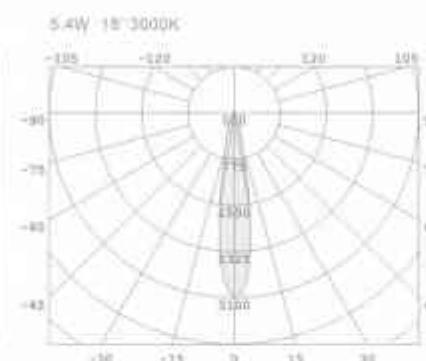

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative





COLOR FINISHINGS:



003

RAY

Low-power spotlights. Contains 1W-2.2W; spotlighted small angle, diffusion irradiation; fixed and adjustable version; normal and waterproof version; a wide range of applications; you can select the corresponding version based on your specific needs for cabinets, ceilings, and even floor (stainless steel version).





AISI316 1.1

RAY AISI316 1.1  
 LED POWER: 1.2W /
 LED OUTPUT: 170LM
 SYSTEM POWER: 3.7W
 SYSTEM OUTPUT: 38LM/3000K
 INPUT: 100-240VAC 50/60HZ
 CRI: 90
 DIMENSION: Ø31*35mm/31*31*35mm
 HOLE SIZE: Ø30mm/Ø33mm



RAY AISI316 1.1
 ANGLE 16°

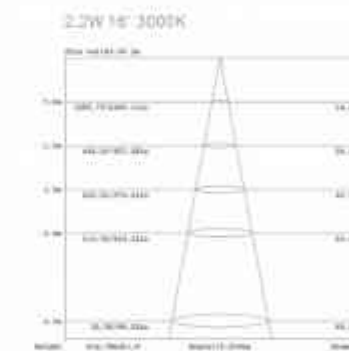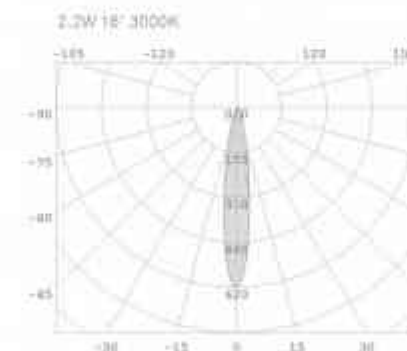

OTHER VERSIONS:



3000K

For more information, please visit our website or contact our sales representative



AISI316 D



RAY AISI316 D  IP65

LED POWER: 2.2W
 LED OUTPUT: 168LM
 SYSTEM POWER: 4.3W
 SYSTEM OUTPUT: 38LM/3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø37.38mmx37.37x35mm
 HOLE SIZE: Ø30mmx33mm



RAY AISI316 D

ANGLED

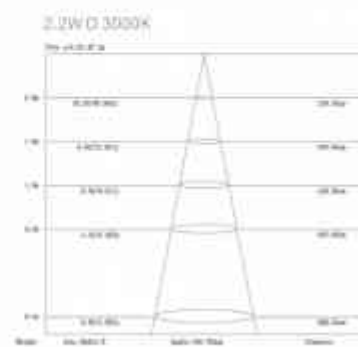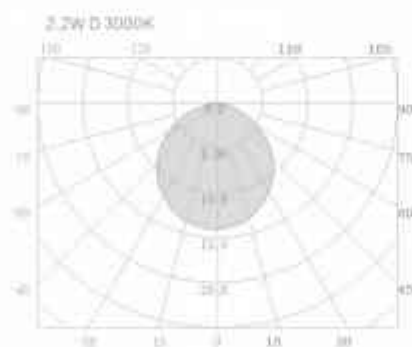

IP65








SATELLITE

SATELLITE, thanks its unique design has already become classic product. Enigmatical design in accordance with functionality and various color combinations all together make SATELLITE one of the most popular collections. SATELLITE is a great example of flexibility and design, presented with trim and trimless versions, as long as surfaced mounted with single or double lamps, in addition, suspended model is also available for choice. In order to extend SATELLITE collection, diffused version was specially created.

CE IP20 220-240VAC DIM TRIAC DIM 1-10V DALI



IN MT



IN trimless



IN

COLOR FINISHINGS:






PAW - WS




PAW - WS

SATELLITE IN MT  **Micro-adjustable rotation**
 LED POWER: 15.7W
 LED OUTPUT: 1750lm/3000K
 SYSTEM POWER: 15.9W+5W
 SYSTEM OUTPUT: 1004lm
 INPUT: 220-240VAC/50/60Hz
 CR: 90
 DIMENSION: Ø180x170mm
 HOLE SIZE: Ø170mm

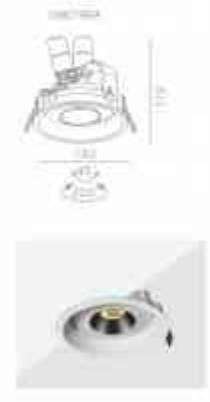



RECOMMEND:  ON/OFF (157-001A)
 OTHER VERSIONS:  DIM TMRAC (157-001T)

SATELLITE IN  **Micro-adjustable rotation**
 LED POWER: 15.7W
 LED OUTPUT: 1750lm/3000K
 SYSTEM POWER: 15.9W
 SYSTEM OUTPUT: 1004lm
 INPUT: 220-240VAC/50/60Hz
 CR: 90
 DIMENSION: Ø180x170mm
 HOLE SIZE: Ø170mm





RECOMMEND:  ON/OFF (157-001A)
 OTHER VERSIONS:  DIM TMRAC (157-001T)  DIM 1-10V (157-001D)
 DALI (157-001P)

SATELLITE IN TRIMLEGO  **Micro-adjustable rotation**
 LED POWER: 15.7W
 LED OUTPUT: 1750lm/3000K
 SYSTEM POWER: 15.9W
 SYSTEM OUTPUT: 1004lm
 INPUT: 220-240VAC/50/60Hz
 CR: 90
 DIMENSION: 220x144x78.5mm
 HOLE SIZE: Ø170mm



RECOMMEND:  ON/OFF (157-001A)
 OTHER VERSIONS:  DIM TMRAC (157-001T)  DIM 1-10V (157-001D)
 DALI (157-001P)

SATELLITE IN F  **Micro-adjustable rotation**
 LED POWER: 15W
 LED OUTPUT: 1750lm/3000K
 SYSTEM POWER: 17.8W
 SYSTEM OUTPUT: 836lm
 INPUT: 220-240VAC/50/60Hz
 CR: 90
 DIMENSION: Ø180x194mm
 HOLE SIZE: Ø170mm



RECOMMEND:  ON/OFF (157-001A)
 OTHER VERSIONS:  DIM TMRAC (157-001T)  DIM 1-10V (157-001D)
 DALI (157-001P)

SATELLITE IN F TRIMLEGO  **Micro-adjustable rotation**
 LED POWER: 15W
 LED OUTPUT: 1750lm/3000K
 SYSTEM POWER: 17.8W
 SYSTEM OUTPUT: 836lm
 INPUT: 220-240VAC/50/60Hz
 CR: 90
 DIMENSION: 220x146x101mm
 HOLE SIZE: Ø170mm




RECOMMEND:  ON/OFF (157-001A)
 OTHER VERSIONS:  DIM TMRAC (157-001T)  DIM 1-10V (157-001D)
 DALI (157-001P)





S DEEP AD

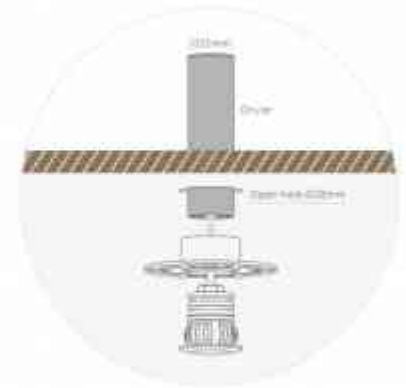

M DEEP AD



S



M



M DEEP

SILY

This miniature downlight is a great solution for extended number of projects, be it private or public areas. Thanks to its trimless construction, the project gets the effect that the light is going directly from the ceiling. In addition, the fitting can be easily maintained after installation thanks to its special construction.

© CE IP54 IP65 DIM TRIAC DIM 1-10V DALI

COLOR FINISHINGS:



BLK WH






S DEEP AD



M DEEP AD

SILY S DEEP AD (IP54)

LED POWER 4.82W
 SYSTEM POWER 6.3W
 SYSTEM OUTPUT 365lm/3000K
 INPUT: 100-240VAC/50/60Hz
 CR: 90
 DIMENSION: Ø55x57.3mm
 HOLE SIZE: Ø50mm




RECOMMEND: OTHER VERSIONS:




ANGLE 20°



4.82W 20° 3000K

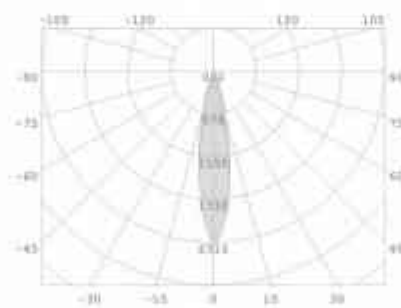


4.82W 20° 3000K



SILY M DEEP AD (IP54)

LED POWER 5.7W
 LED OUTPUT 500Lm
 SYSTEM POWER 8.8V
 SYSTEM OUTPUT 330lm/3000K
 INPUT: 100-240VAC/50/60Hz
 CR: 90
 DIMENSION: Ø72x53mm
 HOLE SIZE: Ø62mm




RECOMMEND: OTHER VERSIONS:




ANGLE 12°



5.7W 12° 3000K

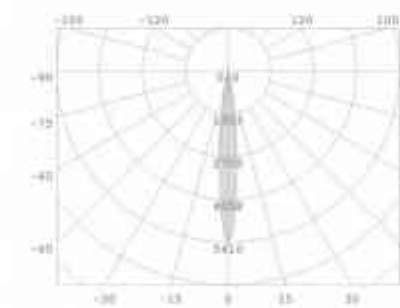

5.7W 12° 3000K

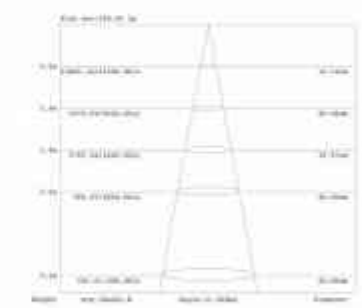

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



M




S




M DEEP

SILY C


ANGLE 28°



1.2W 28° 3000K

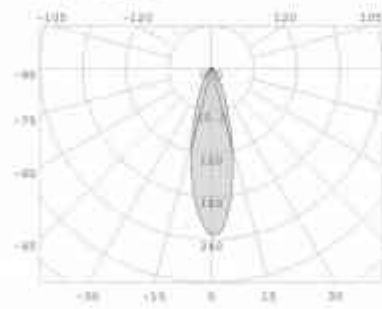


1.2W 28° 3000K

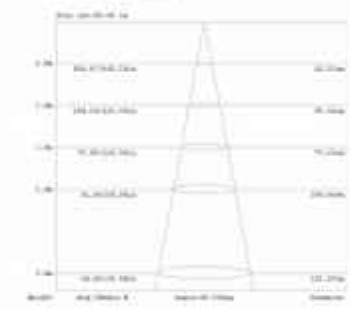


SILY M


ANGLE 18°



4.8W 18° 3000K

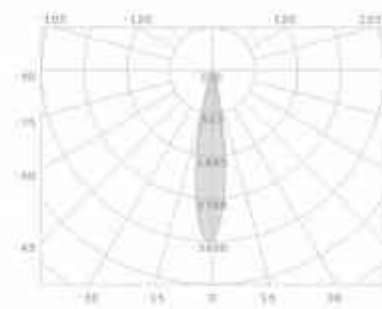

4.8W 18° 3000K

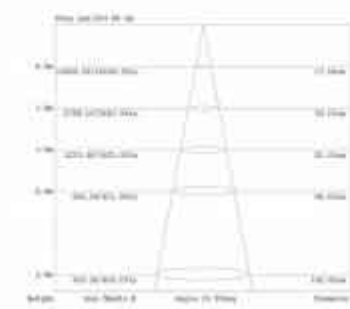


SILY M DEEP


ANGLE 20°



4.8W 20° 3000K

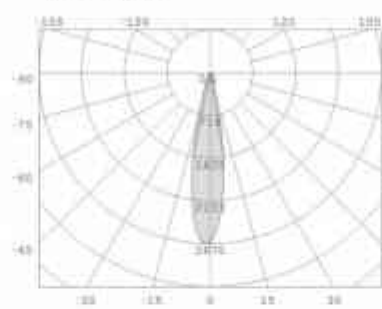

4.8W 20° 3000K

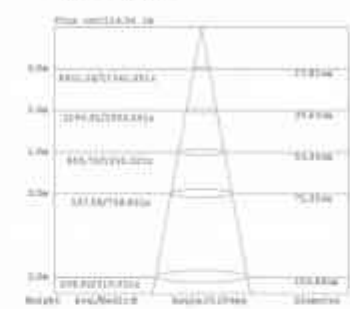

SILY C (IP65)

LED POWER: 1.2W
 SYSTEM POWER: 1.7W
 SYSTEM OUTPUT: 136lm@3000K
 INPUT: 100-240VAC, 50/60Hz
 CR: 80
 DIMENSION: 25x25mm
 HOLE SIZE: Ø28mm



SILY M (IP65)

LED POWER: 4.8W
 SYSTEM POWER: 6.4W
 SYSTEM OUTPUT: 361lm@3000K
 INPUT: 220-240VAC, 50/60Hz
 CR: 80
 DIMENSION: 27x27mm
 HOLE SIZE: Ø34mm



SILY M DEEP (IP65)

LED POWER: 4.8W
 SYSTEM POWER: 6.4W
 SYSTEM OUTPUT: 408lm@3000K
 INPUT: 220-240VAC, 50/60Hz
 CR: 80
 DIMENSION: 27x27mm
 HOLE SIZE: Ø41mm



RECOMMEND:



RECOMMEND:



OTHER VERSIONS:





RECOMMEND:



OTHER VERSIONS:



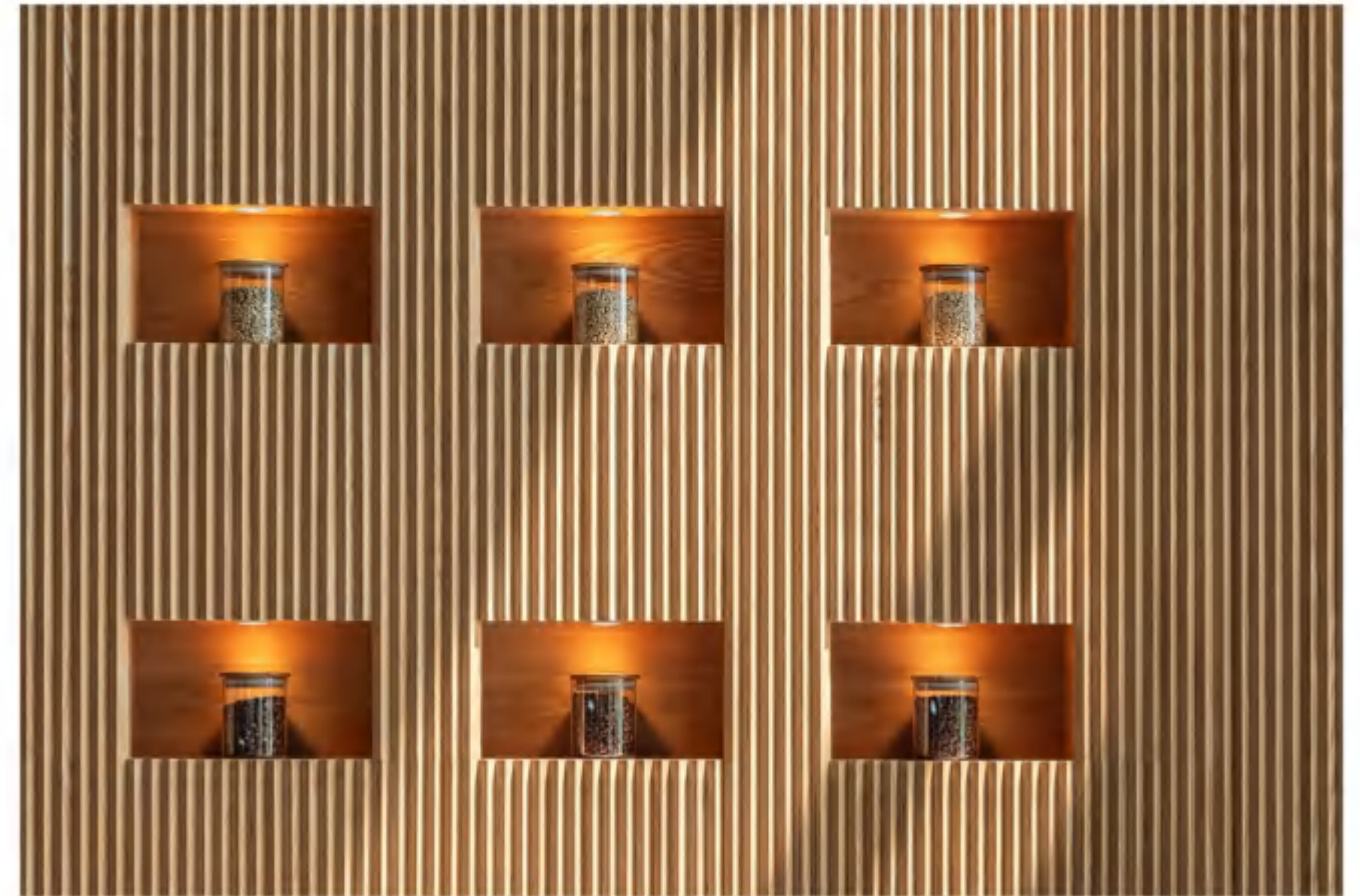

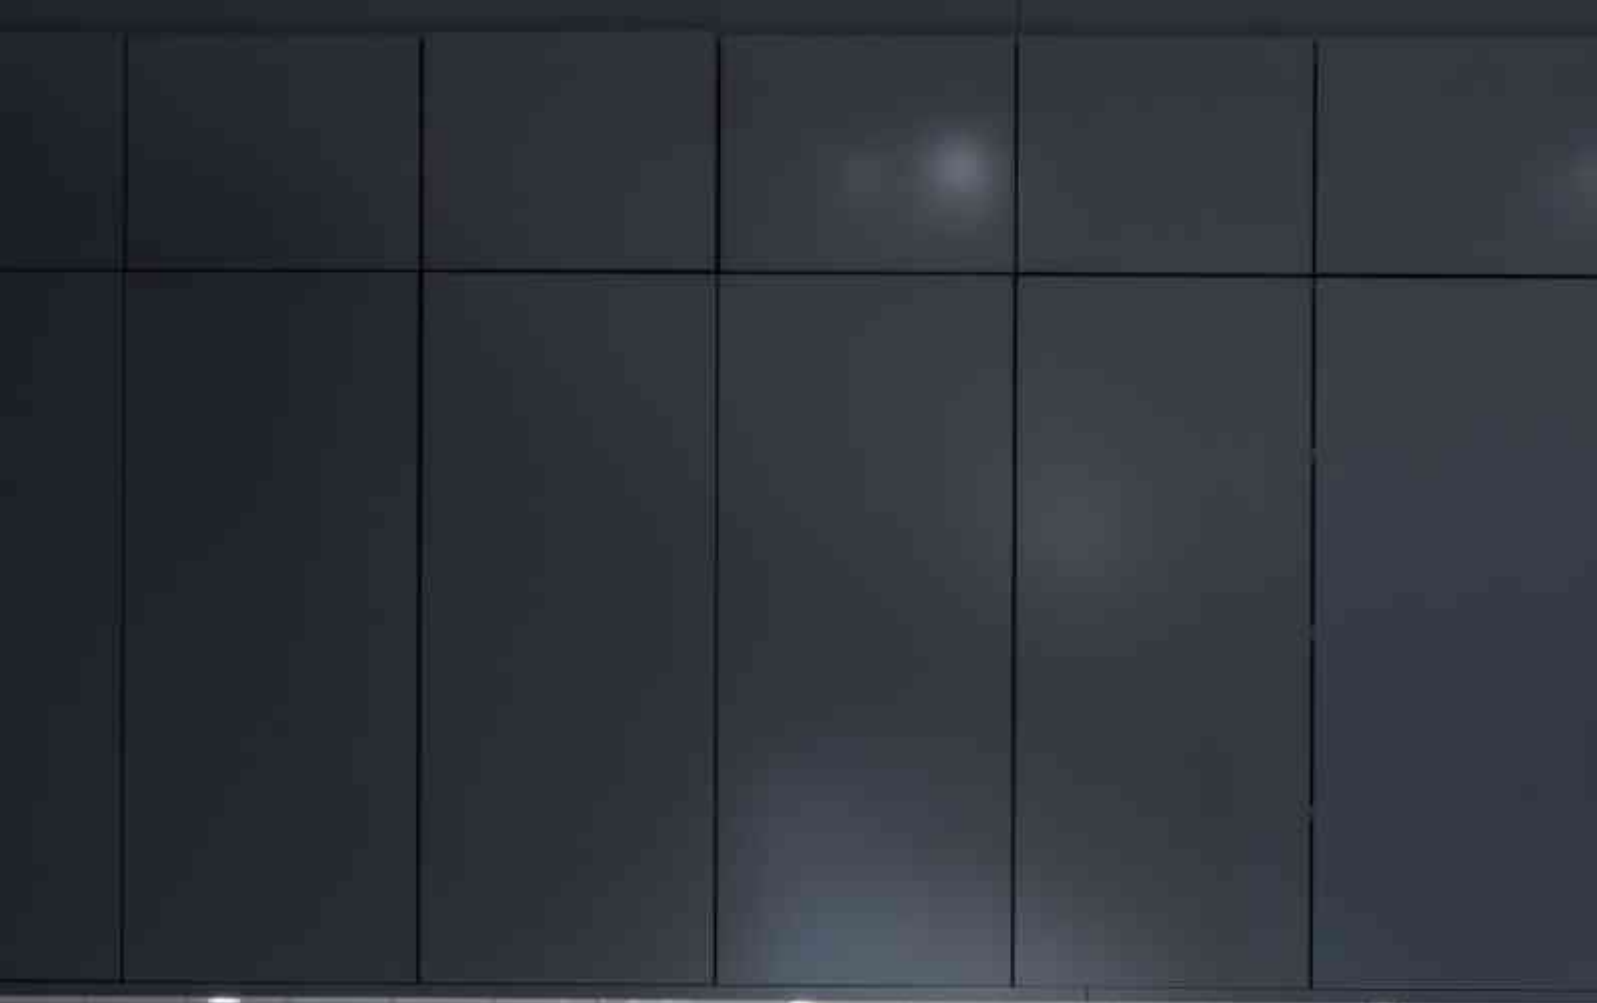

SLIM

This miniature downlight, same as its name, is extremely thin. It is making possible to install this splendid lamp in the places with limited space. Thanks to its IP54 rate, SLIM can be used in the room where water resistance is required.










SLIM

SLIM  

LED POWER: 4.2W
 LED OUTPUT: 400lm
 SYSTEM POWER: 5.4W
 SYSTEM OUTPUT: 280lm/3000K
 INPUT: 100-240VAC/50/60Hz
 CR: 90
 DIMENSION: 220*18.8mm
 HOLE SIZE: Ø55mm





RECOMMEND:



ON/OFF SWITCH

SLIM

ANGLE 22°

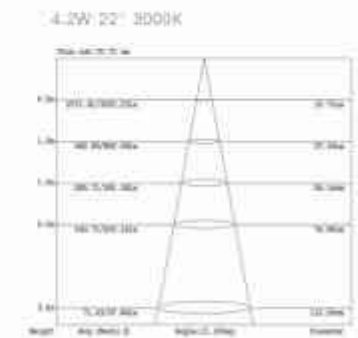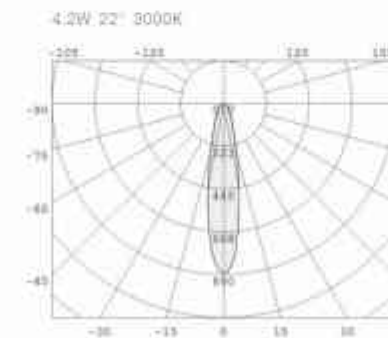



RGB DC/RGB F DC

SLIM RGB DC/RGB F DC

LED POWER: 1.38W
 LED OUTPUT /
 SYSTEM POWER: 1.75W
 SYSTEM OUTPUT: 3Lm
 INPUT: 24V/DC
 CRI: 90
 DIMENSION: Ø44*20mm
 HOLE SIZE: Ø40mm





RECOMMEND:



ANGLE L



SLIM RGB DC
 ANGLE 25°

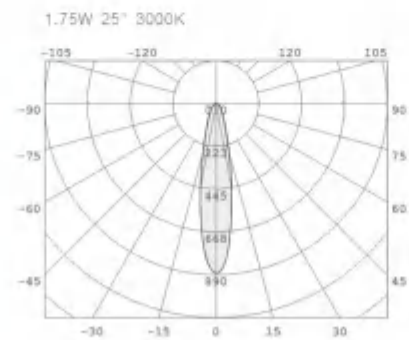








TYLER

The miniature dimensions make Tyler truly unique. This joy to the eye lighting fitting with its adjustable function provides special light effect in the room emphasizing small objects.

Tyler is the best choice for shelves and inside wall niches illumination.



TYLER

TYLER

LED POWER: 2.2W
 LED OUTPUT: 198LM/3000K
 SYSTEM POWER: 4.5W
 SYSTEM OUTPUT: 152LM
 INPUT: 220-240VAC/50/60HZ
 CRI: 80
 DIMENSION: 55x55mm
 HOLE SIZE: 34mm




RECOMMEND: OTHER VERSIONS:




ANGLE 19°



2.2W 19° 3000K

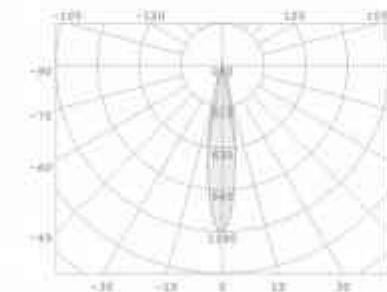

2.2W 19° 3000K

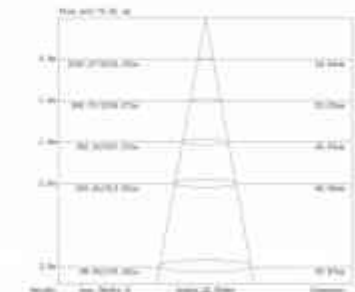



VESTA

VESTA collection is created to answer all possible design requirements. Available with big variety of colors including gold, chrome, black and sandblasting chrome. Thanks to IP54 VESTA can be used for bathroom applications and other areas where additional waterproof rate is required. VESTA has 2 sizes with 9W and 15W power. Trim and trimless versions are available for choice, both versions can be fixed or adjustable.









COLOR FINISHINGS:





S



S AD




S TRIMLESS



S AD TRIMLESS

VESTA S / S AD / S TRIMLESS / S AD TRIMLESS

LED POWER 7.46W
 LED OUTPUT: 624Lm
 SYSTEM POWER: 9.3W
 SYSTEM OUTPUT: 378lm @3000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSIONS: 27.2*103mm / 27.2*107mm / 29.2*103mm / 29.2*107mm
 HOLE SIZE: 24.5mm / 24.5mm / 24.2mm / 24.2mm

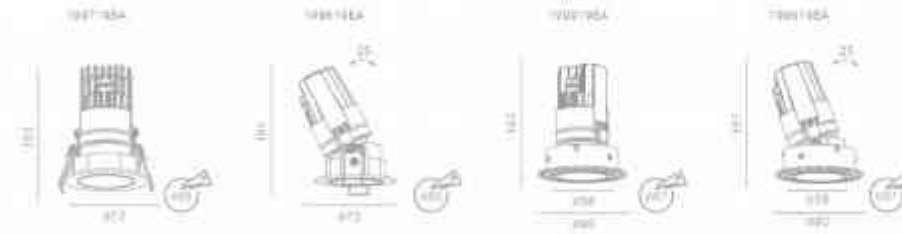

RECOMMEND: OTHER VERSIONS:






VESTA S / S AD / S TRIMLESS / S AD TRIMLESS

ANGLE 17°

7.46W 17° 3000K

7.46W 17° 3000K

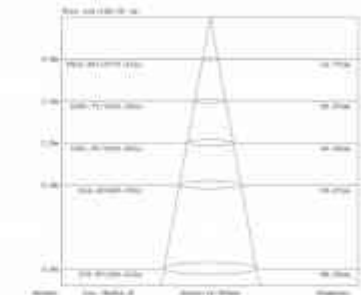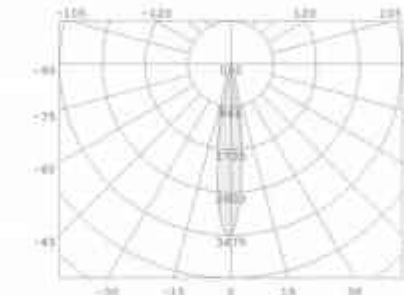

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative





M



M AD




M TRIMLESS



M AD TRIMLESS

VESTA M / M AD / M TRIMLESS / M AD TRIMLESS

LED POWER: 12.6W
 LED OUTPUT: 1382lm
 SYSTEM POWER: 15W
 SYSTEM OUTPUT: 95A Lux @ 3000K
 INPUT: 220-240VAC, 50/60Hz
 CR: 90
 DIMENSION: Ø120*128.5mm / Ø120*130mm / Ø110*128.5mm / Ø110*130mm
 HOLE SIZE: Ø120mm / Ø128.5mm / Ø110mm / Ø108mm



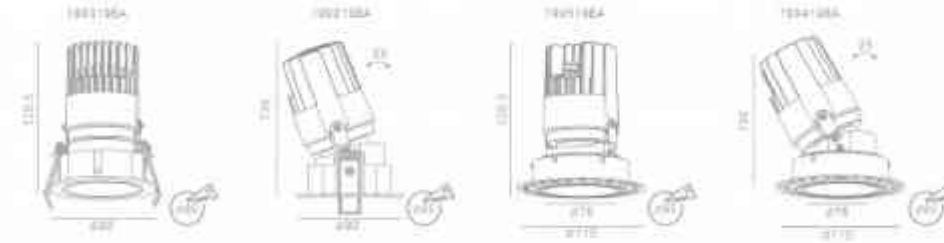


RECOMMEND: OTHER VERSIONS:



VESTA 0 / 0 AD / 0 TRIMLESS / 0 AD TRIMLESS

ANGLE 16°

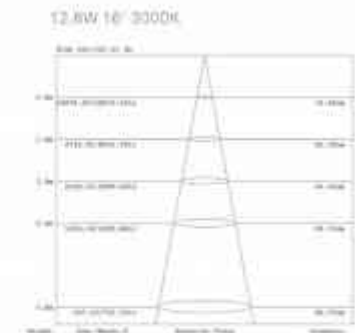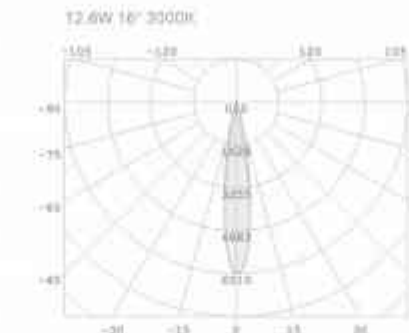

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative





VIEYA

This miniature downlight with splendid decorative circle has already become great choice for both residential and public areas, hotels, restaurants, boutiques. Thanks to its deeply installed LED source, VIEYA has perfect anti-glare effect, as long as IP54 rate makes it possible to install the fitting into the spaces where high waterproof rate is required.

© CE IP54 DIM 1-10V DIM COLOR DALI DUAL CHANNEL

165

VIEYA

DOWNLIGHT



VIEYA / VIEYA DO

OUT SIDE FLOOD LIGHT HAVE TURNABLE WHITE BY PWM



TRIMLESS / DO TRIMLESS



RGB



RGB TRIMLESS

OUT SIDE FLOOD LIGHT HAVE RGB 3IN1 BY PWM

166

COLOR FINISHINGS:





VIEYA / TRIMLESS □

DUAL CHANNEL
 LED POWER: 4.8W+6W
 LED OUTPUT
 SYSTEM POWER: 4.8W+6W
 SYSTEM OUTPUT: 300LM+220LM/3000K
 INPUT: 200-240VAC/50/60Hz
 CR: 90
 DIMENSION: 280*220mm/210*140mm
 HOLE SIZE: 270mm/280mm

VIEYA DO / DO TRIMLESS □

DUAL CHANNEL
 LED POWER: 4.8W+6W
 LED OUTPUT
 SYSTEM POWER: 4.8W+6W
 SYSTEM OUTPUT: 260LM/3000K+2100-2700K
 INPUT: 24VDC+200mA
 CR: 90
 DIMENSION: 280*220mm/210*140mm
 HOLE SIZE: 270mm/280mm



VIEYA RGB / RGB TRIMLESS □

DUAL CHANNEL
 LED POWER: 4.8W+3.6W
 LED OUTPUT
 SYSTEM POWER: 4.8W+3.6W
 SYSTEM OUTPUT: 260LM/3000K+RGB
 INPUT: 24VDC+200mA
 CR: 90
 DIMENSION: 280*220mm/210*140mm
 HOLE SIZE: 270mm/280mm





RECOMMEND: OTHER VERSIONS:


RECOMMEND:

RECOMMEND:

VIEYA / TRIMLESS / DO / DO TRIMLESS:

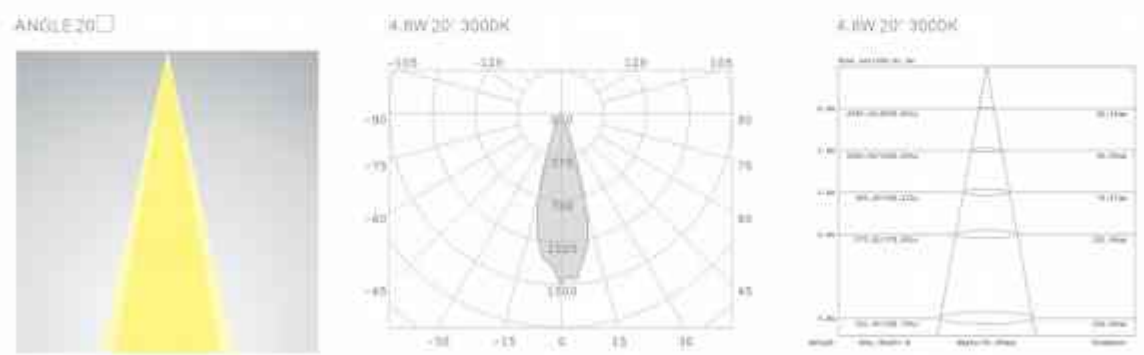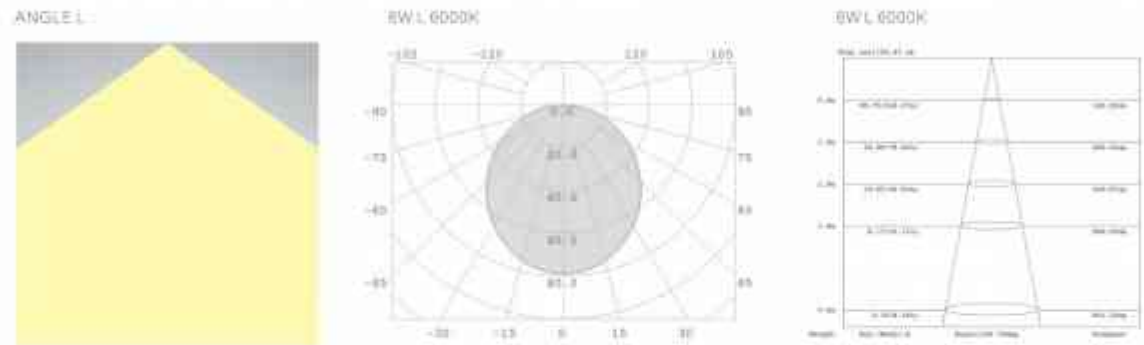

VIEYA RGB / RGB TRIMLESS:

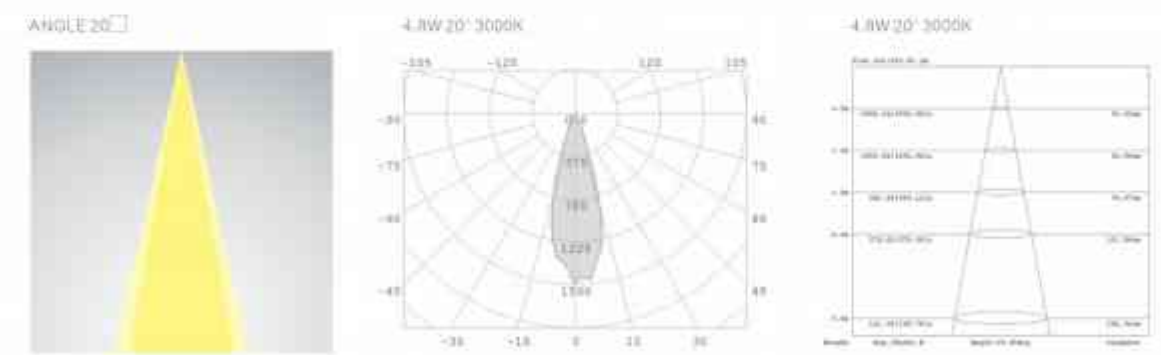

VIEYA / TRIMLESS / DO / DO TRIMLESS



CH.1 OPENING



CH.2 OPENING





DOUBLE CHANNEL OPEN



CH.1 OPENING


CH.2 OPENING

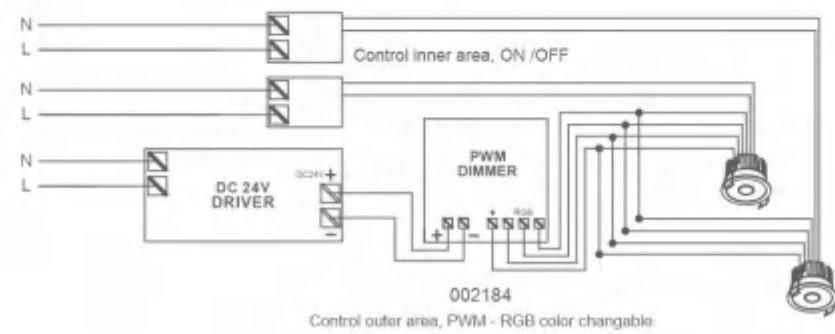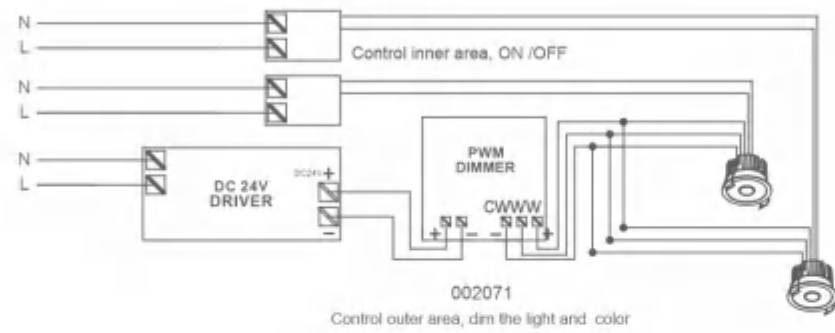

VIEYA DO

Warm White

Cool White

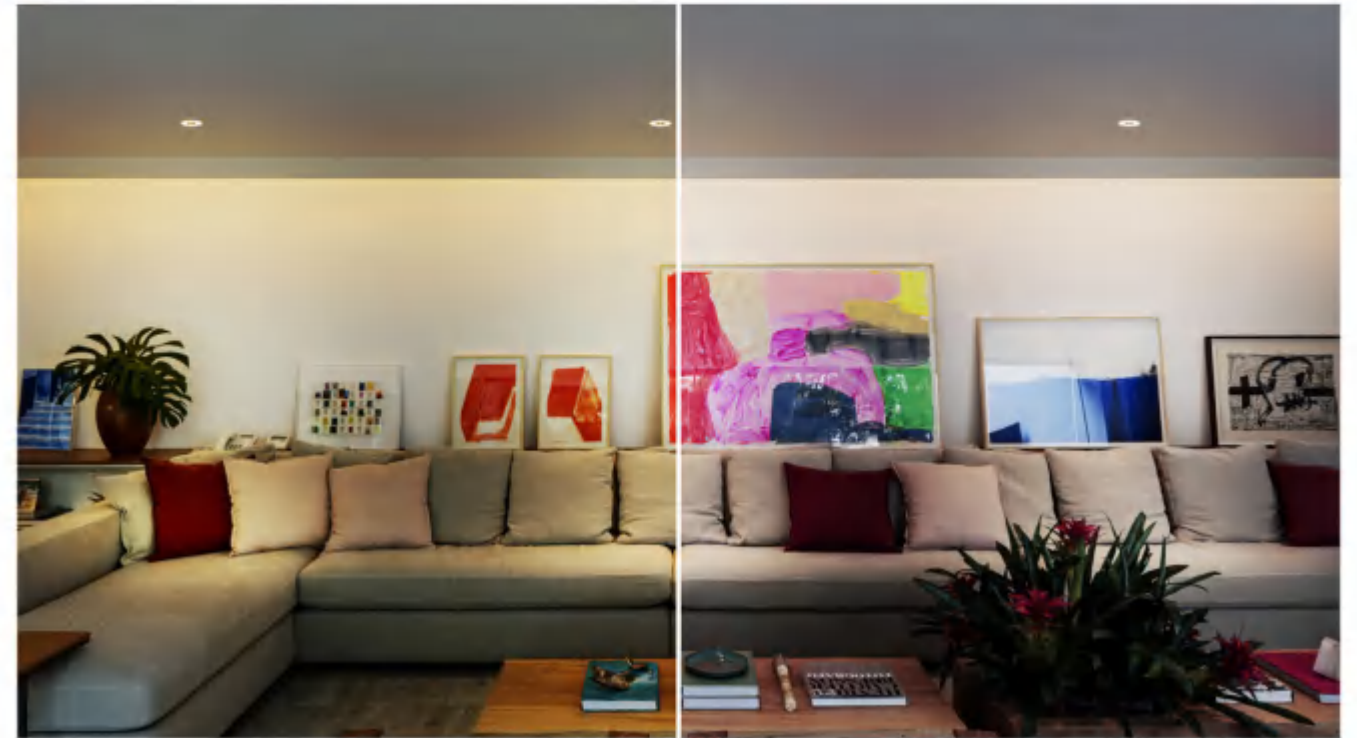


VIEYA RGB

RED

GREEN

BLUE

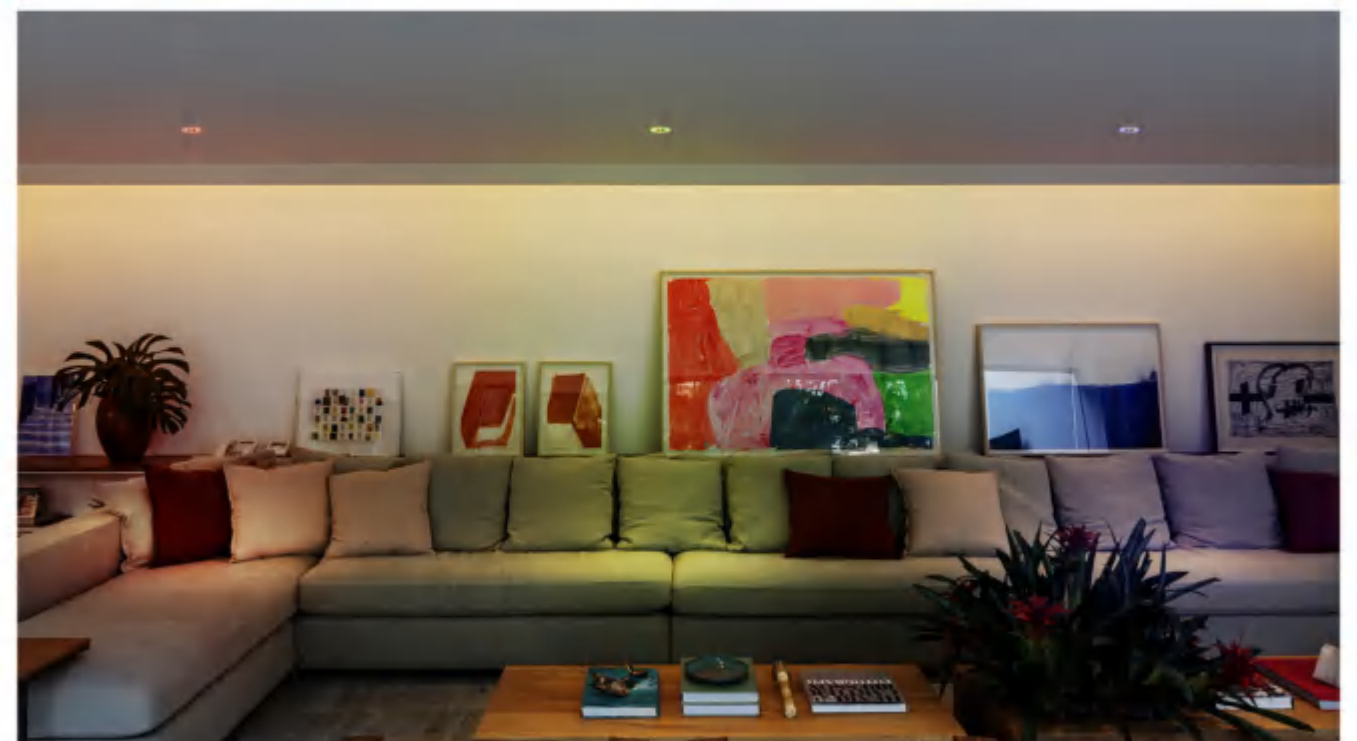

VISOR

VISOR is more than just a product,
it's a product family which can give the answer
to almost all lighting requirements from residential to hotels,
from restaurants to retail.

This splendid downlight, be it round or square version,
delivers a hardly visible transition from intense light with the ceiling,
giving to the space extra dimension.

CCC CE IP20 220-240VAC DIM TRIAC DIM 1-10V DALI

COLOR FINISHINGS:



PA8



S TRIMLESS

VISOR S TRIMLESS

LED POWER: 6.2W
 LED OUTPUT: 700lm
 SYSTEM POWER: 7.4W
 SYSTEM OUTPUT: 480lm/3000K
 523lm/4000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 27x110x25mm
 HOLE SIZE: 26mm

RECOMMEND: OTHER VERSIONS:



VISOR S TRIMLESS


ANGLE 23°



6.2W 23° 3000K



6.2W 23° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



M TRIMLESS



M SQUARED TRIMLESS

VISOR M TRIMLESS / M SQUARED TRIMLESS


LED POWER: 12.9W
 LED OUTPUT: 1290lm
 SYSTEM POWER: 14.5W
 SYSTEM OUTPUT: 810lm/3000K
 1071lm/4000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 158x102x105mm/162x105x105mm
 HOLE SIZE: 121.5mm/112x110mm

RECOMMEND: OTHER VERSIONS:




VISOR M TRIMLESS/M SQUARED TRIMLESS


ANGLE 38°



12.9W 38° 3000K

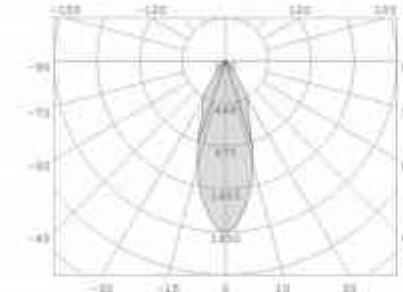

12.9W 38° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



M ANGLE TRIMLESS



M SQUARED ANGLE TRIMLESS



L TRIMLESS



L SQUARED TRIMLESS

VISOR M ANGLE TRIMLESS / M SQUARED ANGLE TRIMLESS

LED POWER: 12.9W
 LED OUTPUT: 1290LM
 SYSTEM POWER: 15.7W
 SYSTEM OUTPUT: 806 LM 3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 188*136*114mm/162*100*117mm
 HOLE SIZE: Ø115mm/110*110mm

RECOMMEND: ON/OFF A

OTHER VERSIONS: DIM TRIAC D1, DIM 1-10V D2, DALI D3


VISOR L TRIMLESS / L SQUARED TRIMLESS

LED POWER: 37.8W
 LED OUTPUT: 2816LM
 SYSTEM POWER: 44W
 SYSTEM OUTPUT: 2824 LM 3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 221*137*143mm/258*162*145mm
 HOLE SIZE: Ø170mm/170*170mm

RECOMMEND: ON/OFF A

OTHER VERSIONS: DIM TRIAC D1, DIM 1-10V D2, DALI D3


VISOR M ANGLE TRIMLESS/M SQUARED ANGLE TRIMLESS

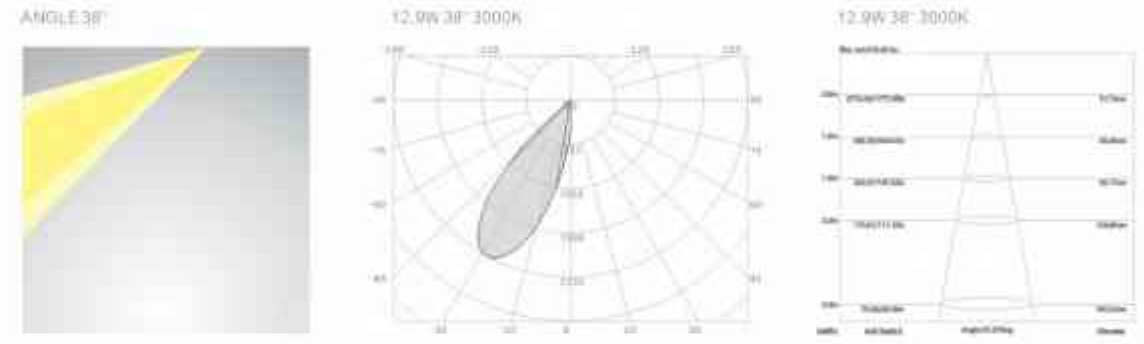

OTHER VERSIONS: 2700K/4000K

For more information, please visit our website or contact our sales representative

VISOR L TRIMLESS/L SQUARED TRIMLESS

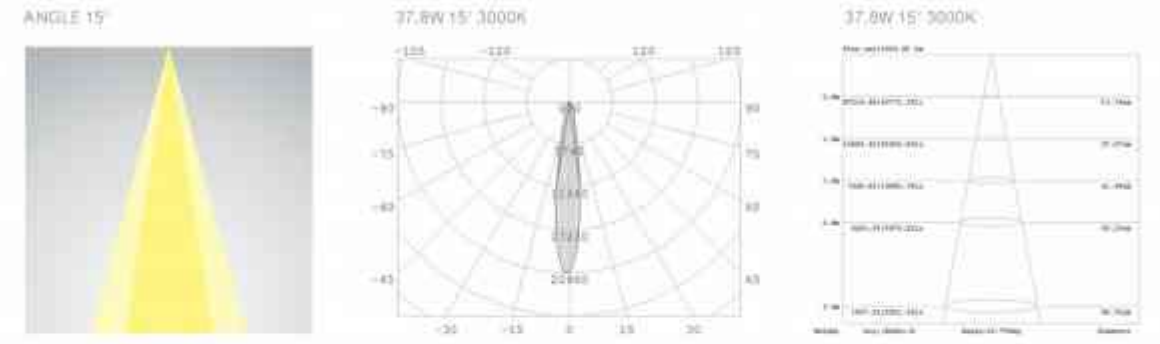

OTHER VERSIONS: 2700K/4000K

For more information, please visit our website or contact our sales representative




VISOR L ANGLE TRIMLESS / L SQUARED ANGLE TRIMLESS

LED POWER: 37.8W
 LED OUTPUT: 2819LM
 SYSTEM POWER: 44W
 SYSTEM OUTPUT: 2755LM/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: 221*196*142mm/240*163*170mm
 HOLE SIZE: Ø170mm/170*170mm

RECOMMEND: OTHER VERSIONS:



VISOR L ANGLE TRIMLESS / SQUARED ANGLE TRIMLESS

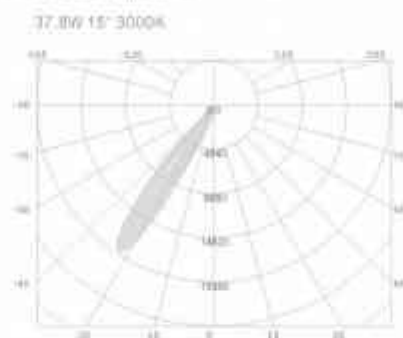

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative





NB



VISOR NB

LED POWER: 6.5W
 LED OUTPUT: 440lm/3000K
 SYSTEM POWER: 11.5W
 SYSTEM OUTPUT: 880lm
 INPUT: 200-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 67.5x41.5mm
 HOLE SIZE: 67.2mm

RECOMMEND:



OSRAM OPTO SYSTEM

OTHER VERSIONS:



OSRAM 115W AC





OSRAM 115W DC



DALI

VISOR NB

ANGLE 8°

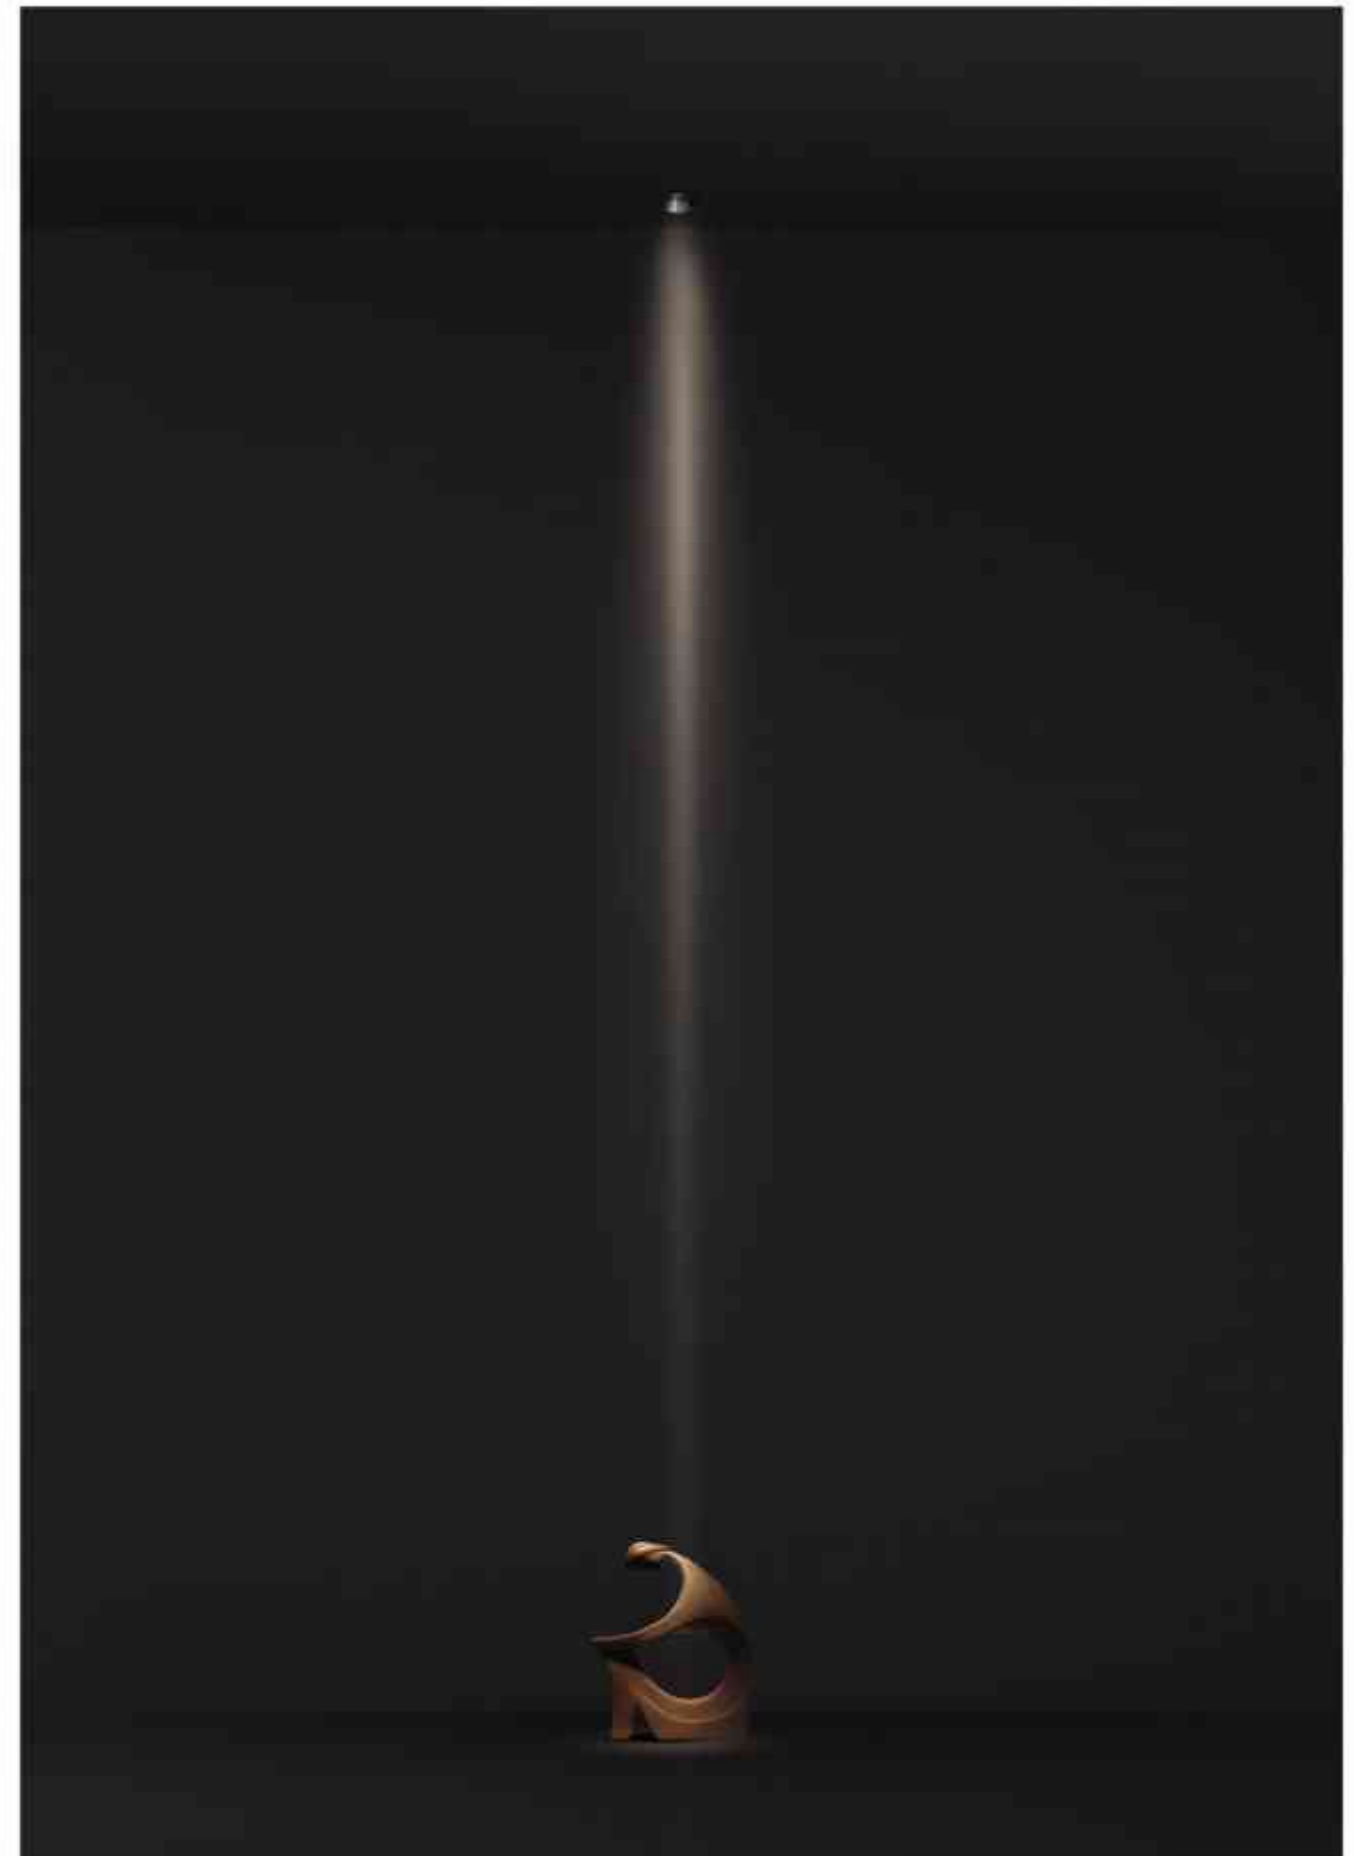



55 1.1/55+ 1.1

VISOR 55 1.1  

LED POWER: 6.3W
LED OUTPUT: 70lm
SYSTEM POWER: 8.2W
SYSTEM OUTPUT: 430lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 260x52mm
HOLE SIZE: Ø55mm

VISOR 55+ 1.1  



LED POWER: 8W
LED OUTPUT: 85lm
SYSTEM POWER: 12.2W
SYSTEM OUTPUT: 460lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 260x52mm
HOLE SIZE: Ø55mm

RECOMMEND: OTHER VERSIONS:



VISOR 55 1.1

ANGLE 22°

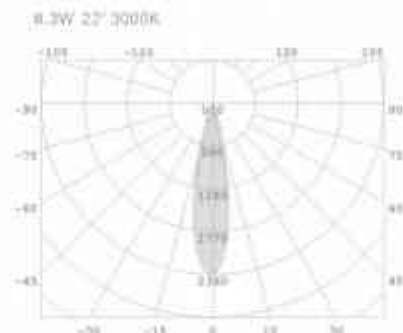



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.

VISOR 55+ 1.1

ANGLE 26°

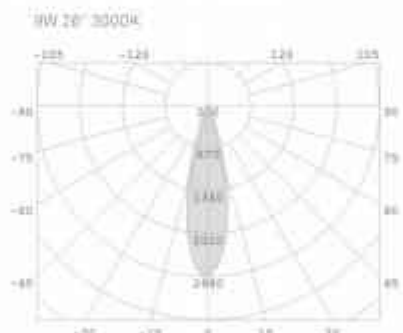


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



75/75+

VISOR 75 

LED POWER: 9.3W
LED OUTPUT: 108lm
SYSTEM POWER: 11.4W
SYSTEM OUTPUT: 740lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 260x57mm
HOLE SIZE: Ø75mm

VISOR 75+ 



LED POWER: 13.6W
LED OUTPUT: 148lm
SYSTEM POWER: 16.4W
SYSTEM OUTPUT: 1070lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 260x57mm
HOLE SIZE: Ø75mm

RECOMMEND: OTHER VERSIONS:



VISOR 75

ANGLE 30°

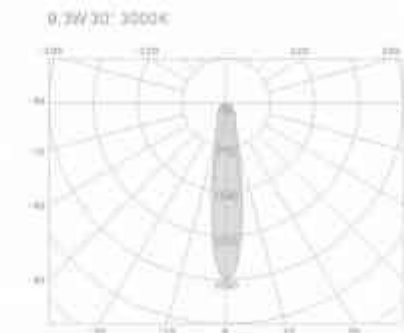



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.

VISOR 75+

ANGLE 30°

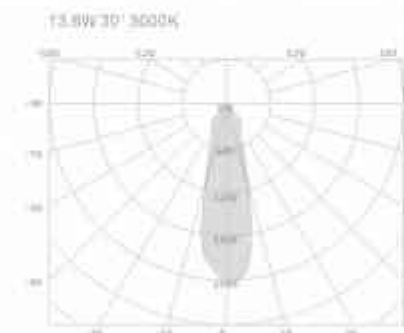

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



SS



VISOR



LED POWER: 4.7W
 LED OUTPUT: 486lm
 SYSTEM POWER: 3.5W
 SYSTEM OUTPUT: 373lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: Ø67.5mm
 HOLE SIZE: Ø73mm

RECOMMEND: OTHER VERSIONS:



VISOR SS

ANGLE 34°

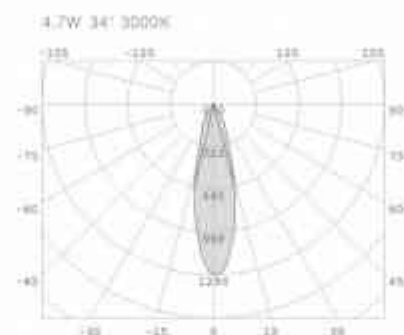

For more information, please visit our website or contact our sales representative



S



VISOR


LED POWER: 8.1W
 LED OUTPUT: 867lm
 SYSTEM POWER: 6.7W
 SYSTEM OUTPUT: 667lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: Ø73mm
 HOLE SIZE: Ø80mm

RECOMMEND: OTHER VERSIONS:



VISOR S

ANGLE 24°





M



VISOR M



LED POWER: 12.7W
 LED OUTPUT: 1485LM
 SYSTEM POWER: 16.1W
 SYSTEM OUTPUT: 1057 LM/3000K
 - 1110 LM/4000K
 INPUT: 220-240VAC, 50/60Hz
 CR: 90
 DIMENSION: 2710x96mm
 HOLE SIZE: 2700mm

RECOMMEND: OTHER VERSIONS:



VISOR M

ANGLE 30°

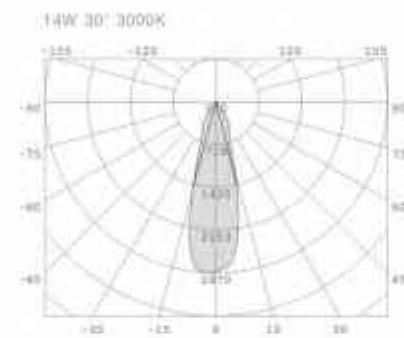


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



ITEM CODE	A	DT	DX	DS	DA	DO
VISOR S TRIMLESS	•	•	•		•	
VISOR M TRIMLESS	•	•	•		•	
VISOR M SQUARED TRIMLESS	•	•	•		•	
VISOR M ANGLE TRIMLESS	•	•	•		•	
VISOR M SQUARED ANGLE TRIMLESS	•	•	•		•	
VISOR L TRIMLESS	•	•	•		•	
VISOR L SQUARED TRIMLESS	•	•	•		•	
VISOR L ANGLE TRIMLESS	•	•	•		•	
VISOR L SQUARED ANGLE TRIMLESS	•	•	•		•	
VISOR 40	•	•	•		•	
VISOR 55 1:1	•	•	•		•	
VISOR 55+ 1:1		•	•		•	
VISOR 75	•	•	•		•	
VISOR 75+	•	•	•		•	
VISOR SS	•		•		•	
VISOR S	•	•	•		•	
VISOR M	•	•	•		•	

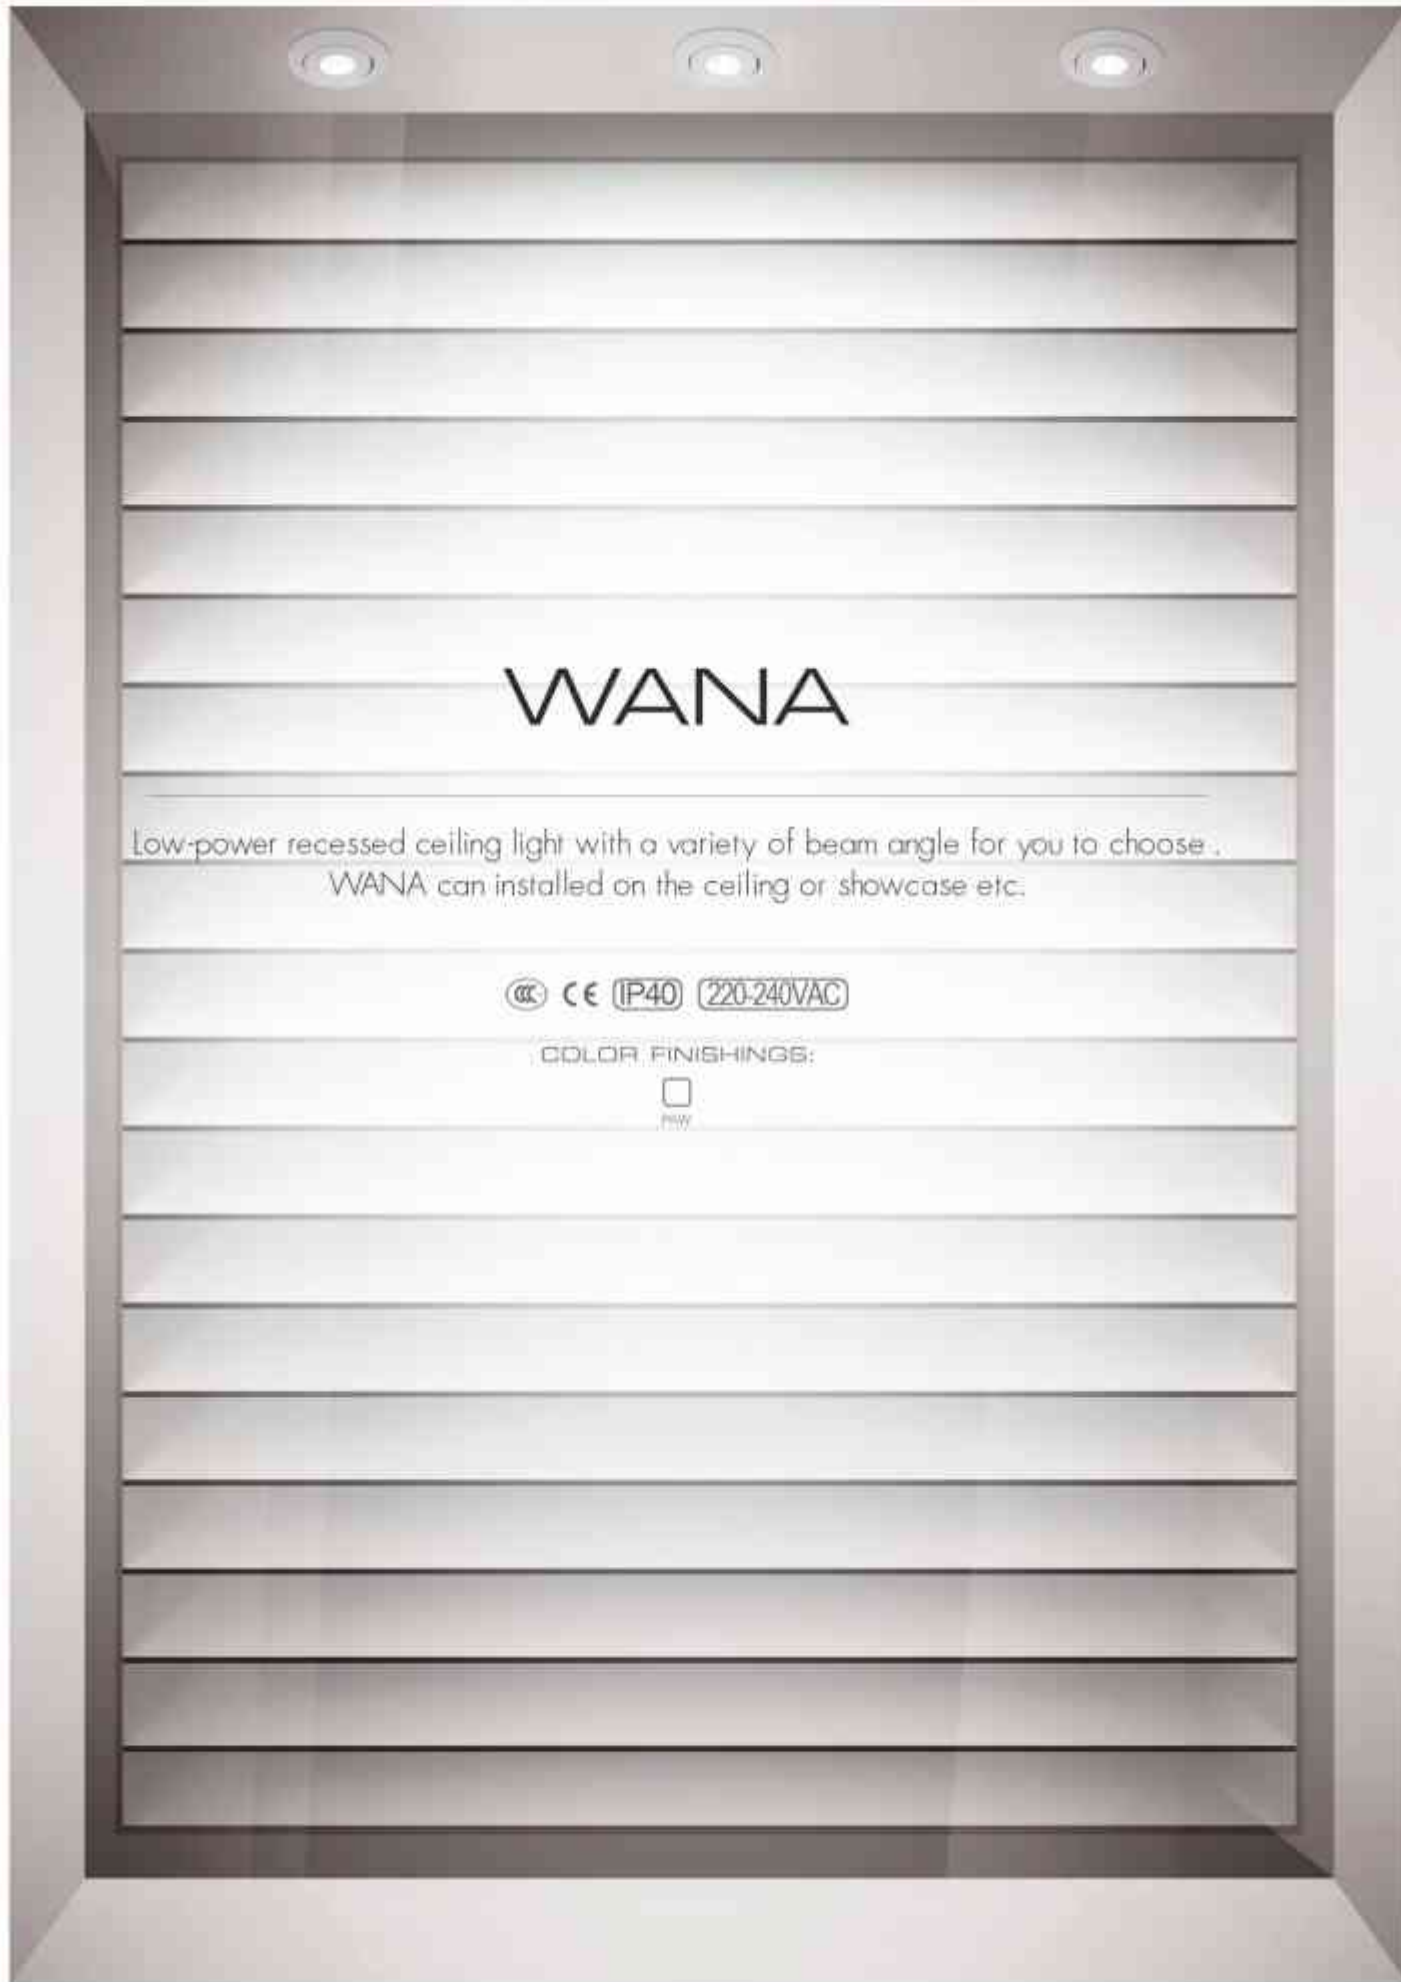

WANA

Low-power recessed ceiling light with a variety of beam angle for you to choose.
WANA can installed on the ceiling or showcase etc.

CE IP40 220-240VAC

COLOR FINISHINGS:



RO

WANA RO


LED POWER: 2.2W
SYSTEM POWER: 4W
SYSTEM OUTPUT: 110LM/3000K
INPUT: 220-240VAC/50/60Hz
CRI: 90
DIMENSION: 240*240*240*30mm/48°/30mm
HOLE SIZE: 238mm/238mm/238mm




ANGLE 20°



2.2W 20° 3000K

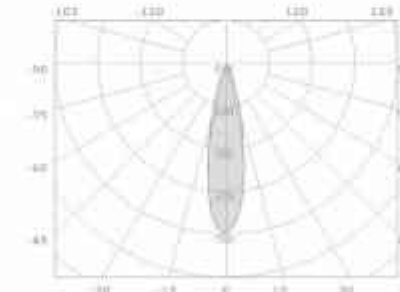

2.2W 20° 3000K

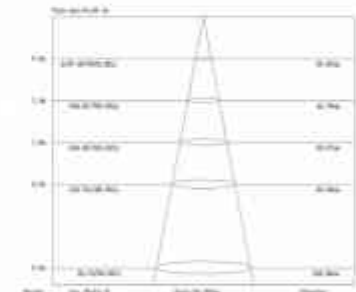

OTHER VERSIONS:




For more information, please visit our website or contact our sales representative.



RO AD

WANA RO AD 
 LED POWER: 2.0W
 SYSTEM POWER: 4.5W
 SYSTEM OUTPUT: 170LM/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSIONS: Ø152*34mm/Ø152*34mm/32*52*34mm
 HOLE SIZE: Ø145mm/Ø145mm/Ø145mm




WANA RO AD


ANGLE 20°



2.2W 20° 3000K

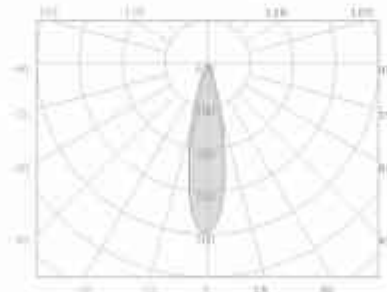

2.2W 20° 3000K



OTHER VERSIONS:



3000K













































3000K

For more information, please visit our website or contact our sales representative



SPOTLIGHT

					
ABACO IN 106	ABACO ON 108	CARTER S 200	CARTER L 201	ELLEN IN 206	FAVOR INS R 211
					
FAVOR INS R TRIMLESS 211	FAVOR INM R 213	FAVOR INM R TRIMLESS 213	FAVOR INS S 212	FAVOR INS S TRIMLESS 212	FAVOR INM S 214
					
FAVOR INM S TRIMLESS 214	FAVOR INM BOX S2 219	FAVOR INM BOX S3 219	FAVOR INS 215	FAVOR INM 216	FAVOR INL 18 217
					
FAVOR INL 25 218	FAVOR ONM ER 220	GEN ON SS 225	GEN ON S 226	GEN ON M 227	GEN ON L 228
					
GEN IN SS 225	GEN IN S 226	GEN IN M 227	GEN IN L 228	IRIS ON AD 2 233-234	LUXURY ON SINGLE 240
					
LUXURY ON DOUBLE 240	LUXURY ON LONG 240	NIC ON AD 248	NORMO ONS 250	NORMO ONM 251	ORIAN IN SS 254
					
ORIAN IN S 255	ORIAN IN M 256	ORIAN IN L 257	ORIAN ON SS 254	ORIAN ON S 255	ORIAN ON M 256

SPOTLIGHT

					
ORIAN ON L 257	PEBUK M/M DO 260	TURN ON S 265	TURN ON S SQUARED 265	TURN ON M 266	TURN ON M SQUARED 266
					
TURN ON L 267	TURN ON L SQUARED 267	VIKA S ON SINGLE 271	VIKA S ON DOUBLE 271	VIKA M ON SINGLE 272	VIKA M ON DOUBLE 272



ABACO

This multi-functional spot has already become a great choice for the museums, galleries and cultural centers where the light effect is highly required.

Thanks to special function, the light can be adjusted with the required focusing.

In addition, the light can create three different shapes for better-focused light effect.


The adapter with built-in driver makes it possible to reduce the cylinder size, making the luminaire as miniature as possible.

© CE IP20 DIM TRIAC DALI



GOBO INSTRUCTIONS:

By swinging or telescopic GOBO, you can change the shape of the light into a circle, rectangle or trapezoid.

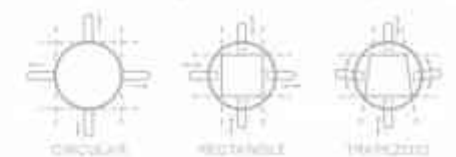



The spot is round without cutting light;

For example, our object is a picture with a diagonal size of 50CM.

We use the reference value of the maximum angle of one meter to make the reference spot "41CM".


Substitute formula: diagonal size + reference value = distance

50CM+41CM=1.22 meters, but this involves the installer's numerical requirements.

If the installer changes the installation distance to one meter, the spot cannot completely cover the object,

and if conditions permit, we recommend that the customer use the "projectile diameter (median)"

50CM+34CM=1.47 meters, at this time we can adjust the angle according to the real thing, and accurately control the lighted object.

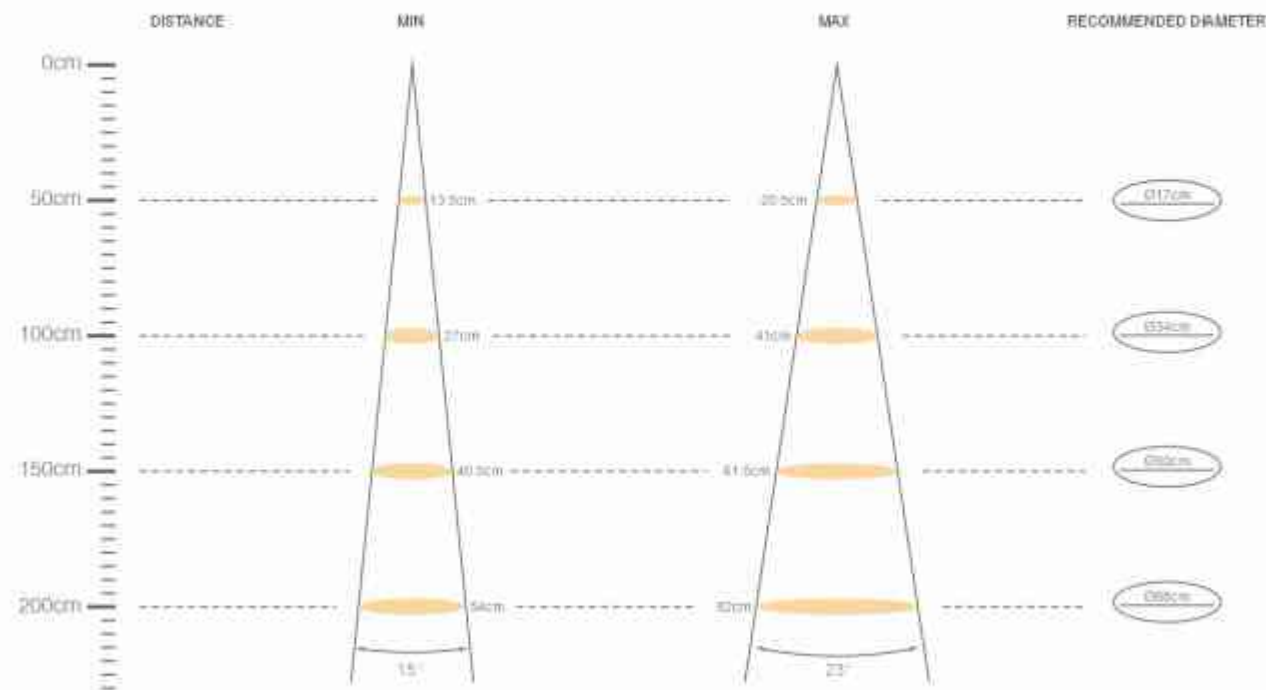


IN TRIMLESS

ON

ABACO IN TRIMLESS

LED POWER: 14.4W
 LED OUTPUT: 1450LM
 SYSTEM POWER: 17.5W
 SYSTEM OUTPUT: 840LM/3000K
 INPUT: 220-240VAC, 50/60HZ
 CRI: 90
 DIMENSION: Ø62*100mm
 HOLE SIZE: Ø90mm




RECOMMEND: OTHER VERSIONS:




ABACO IN ON

LED POWER: 14.4W
 LED OUTPUT: 1450LM
 SYSTEM POWER: 17.5W
 SYSTEM OUTPUT: 820LM/3000K
 INPUT: 220-240VAC, 50/60HZ
 CRI: 90
 DIMENSION: Ø62*104mm
 HOLE SIZE: 1



RECOMMEND:

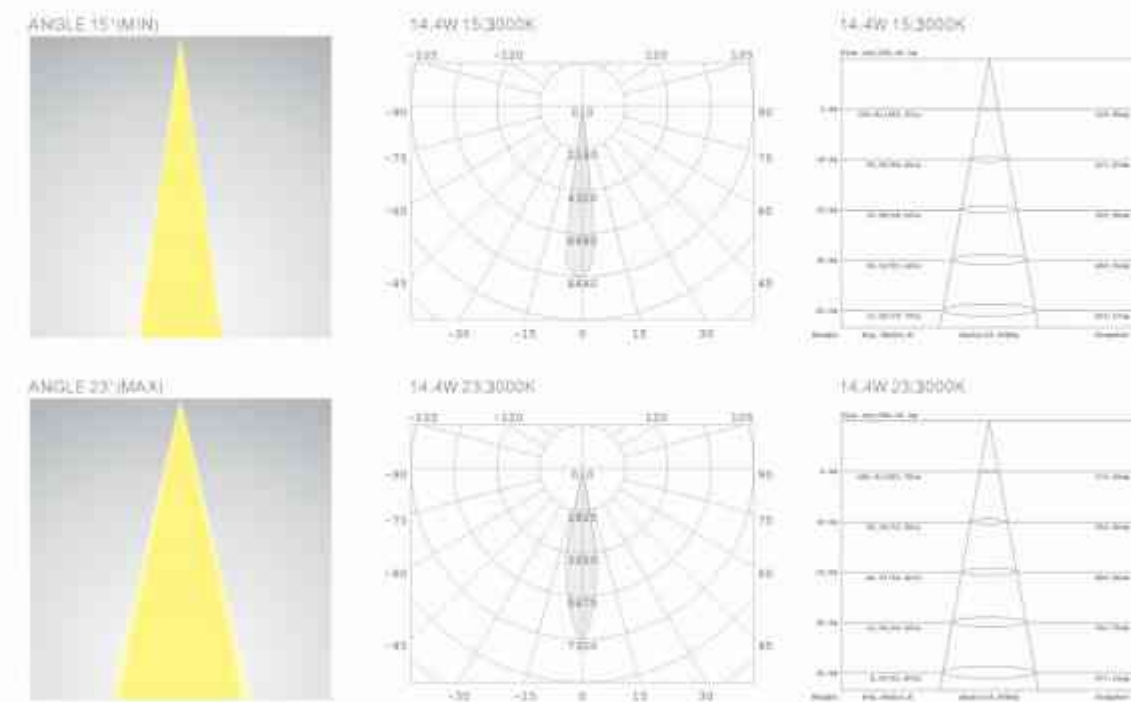





S

CARTER

This accurate sphere shaped downlight with marvelous antiglare function is the best choice for both residential and commercial spaces. The structure makes it possible to rotate the lamp up to 3.50° around. Available in two sizes: 8W and 12W.

COLOR FINISHINGS:



CARTER S

LED POWER: 6.3W
 LED OUTPUT: 1x0.1m
 SYSTEM POWER: 8.1W
 SYSTEM OUTPUT: 387lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CR: 90
 DEPTH/CH: 280/80mm
 HOLE SIZE: Ø73mm




RECOMMEND: OTHER VERSIONS:




ANGLE 35°



6.3W 38° 3000K

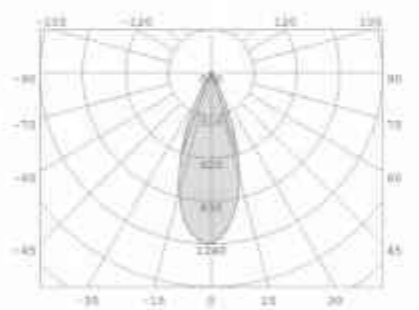

6.3W 38° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.






L


CARTER L

LED POWER: 10.5W
 LED OUTPUT: 1308LM
 SYSTEM POWER: 12.8W
 SYSTEM OUTPUT: 918LM/3000K
 INPUT: 220-240VAC/50/60HZ
 CRI: 90
 DIMENSION: 42x110x109mm
 HOLE SIZE: 470mm



RECOMMEND: **OTHER VERSIONS:**

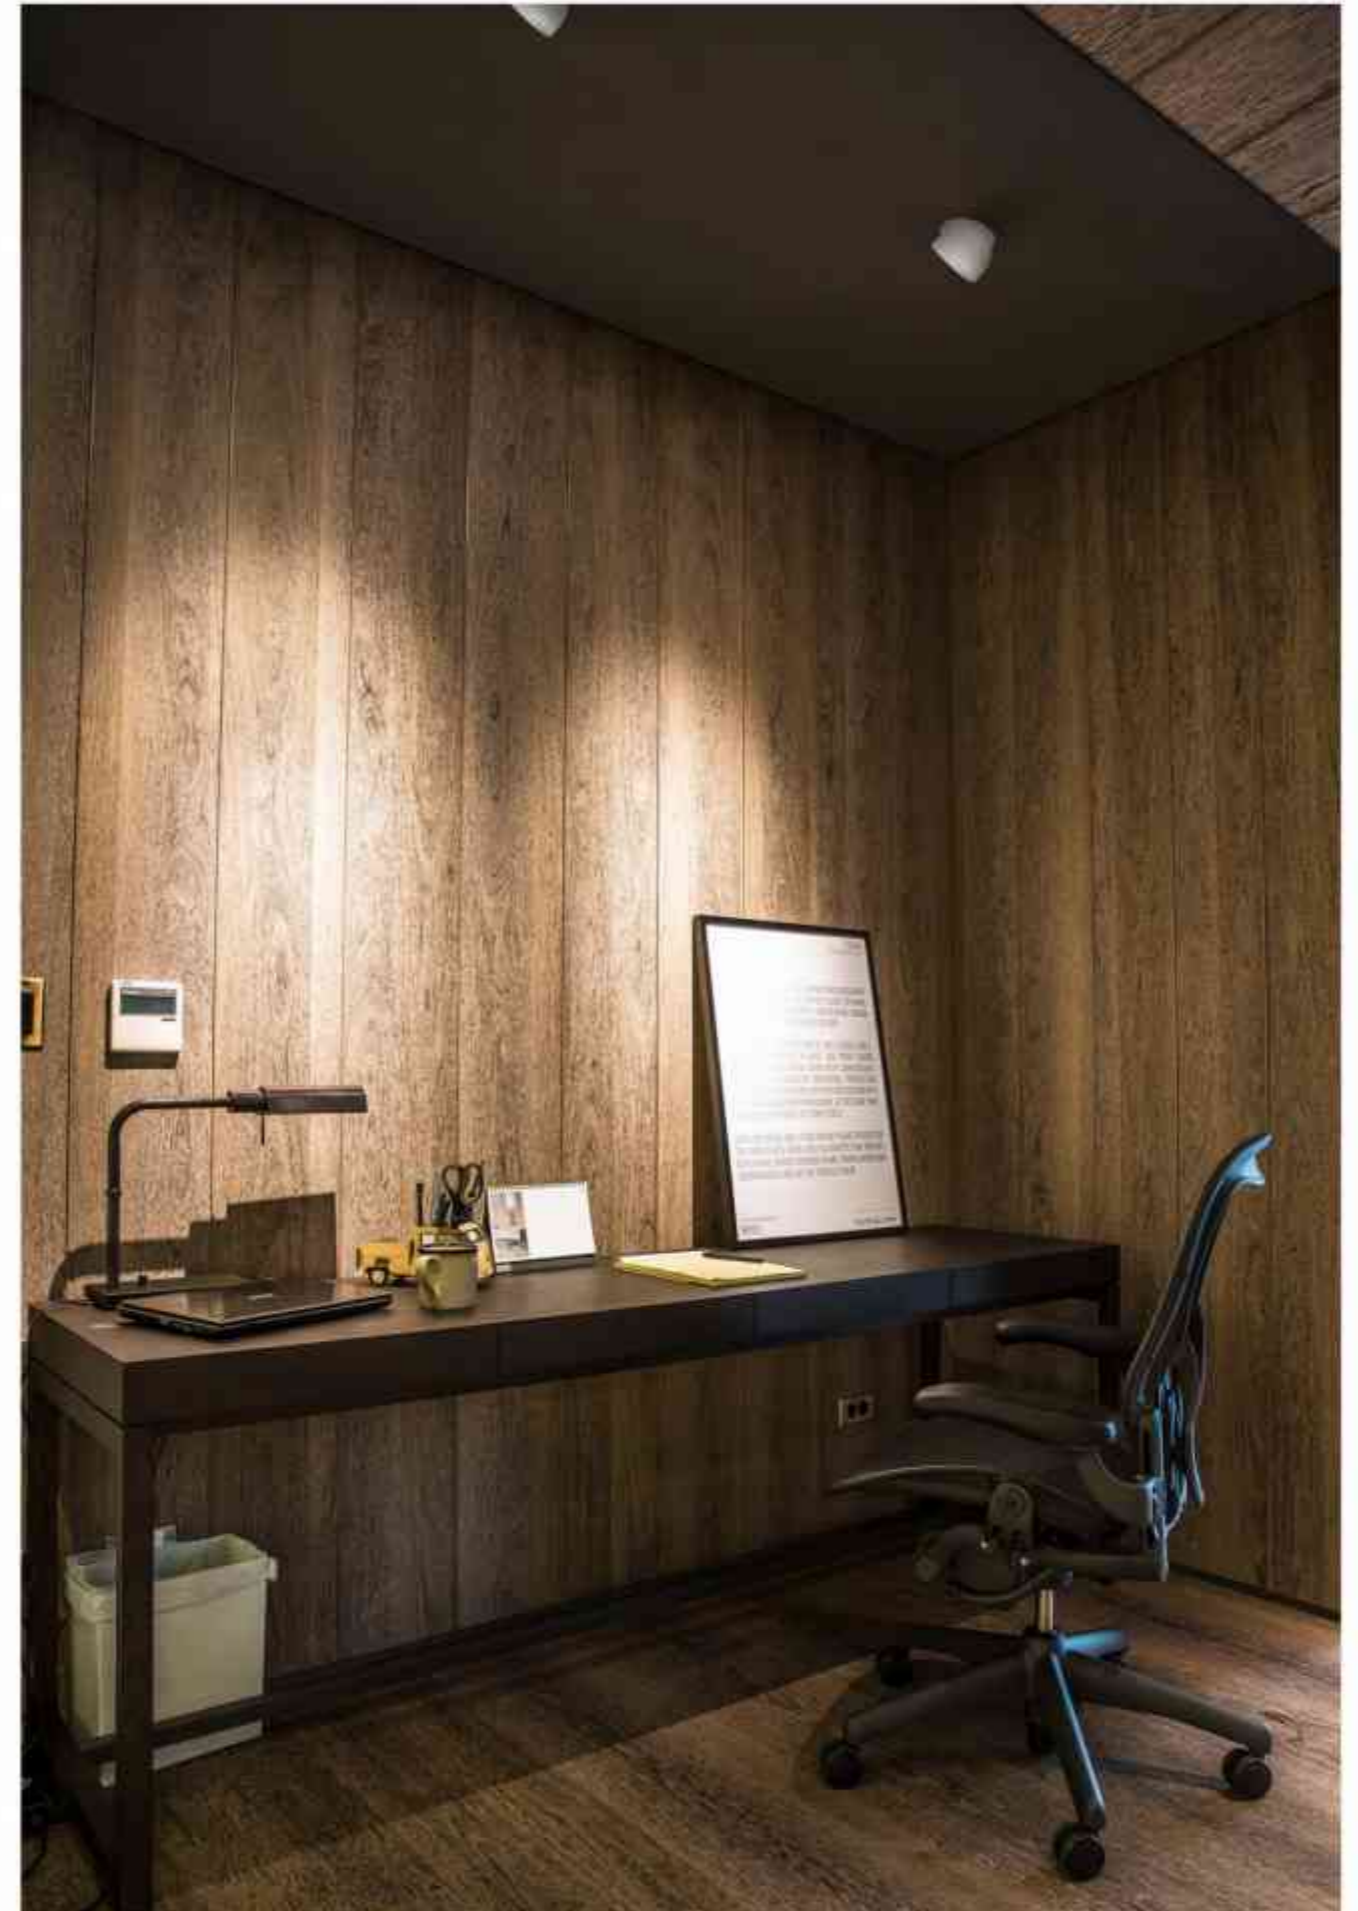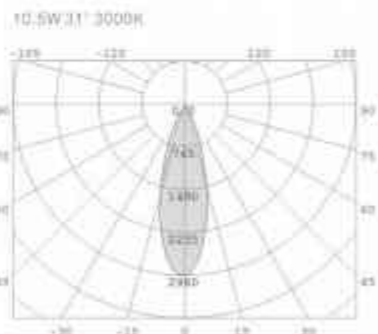

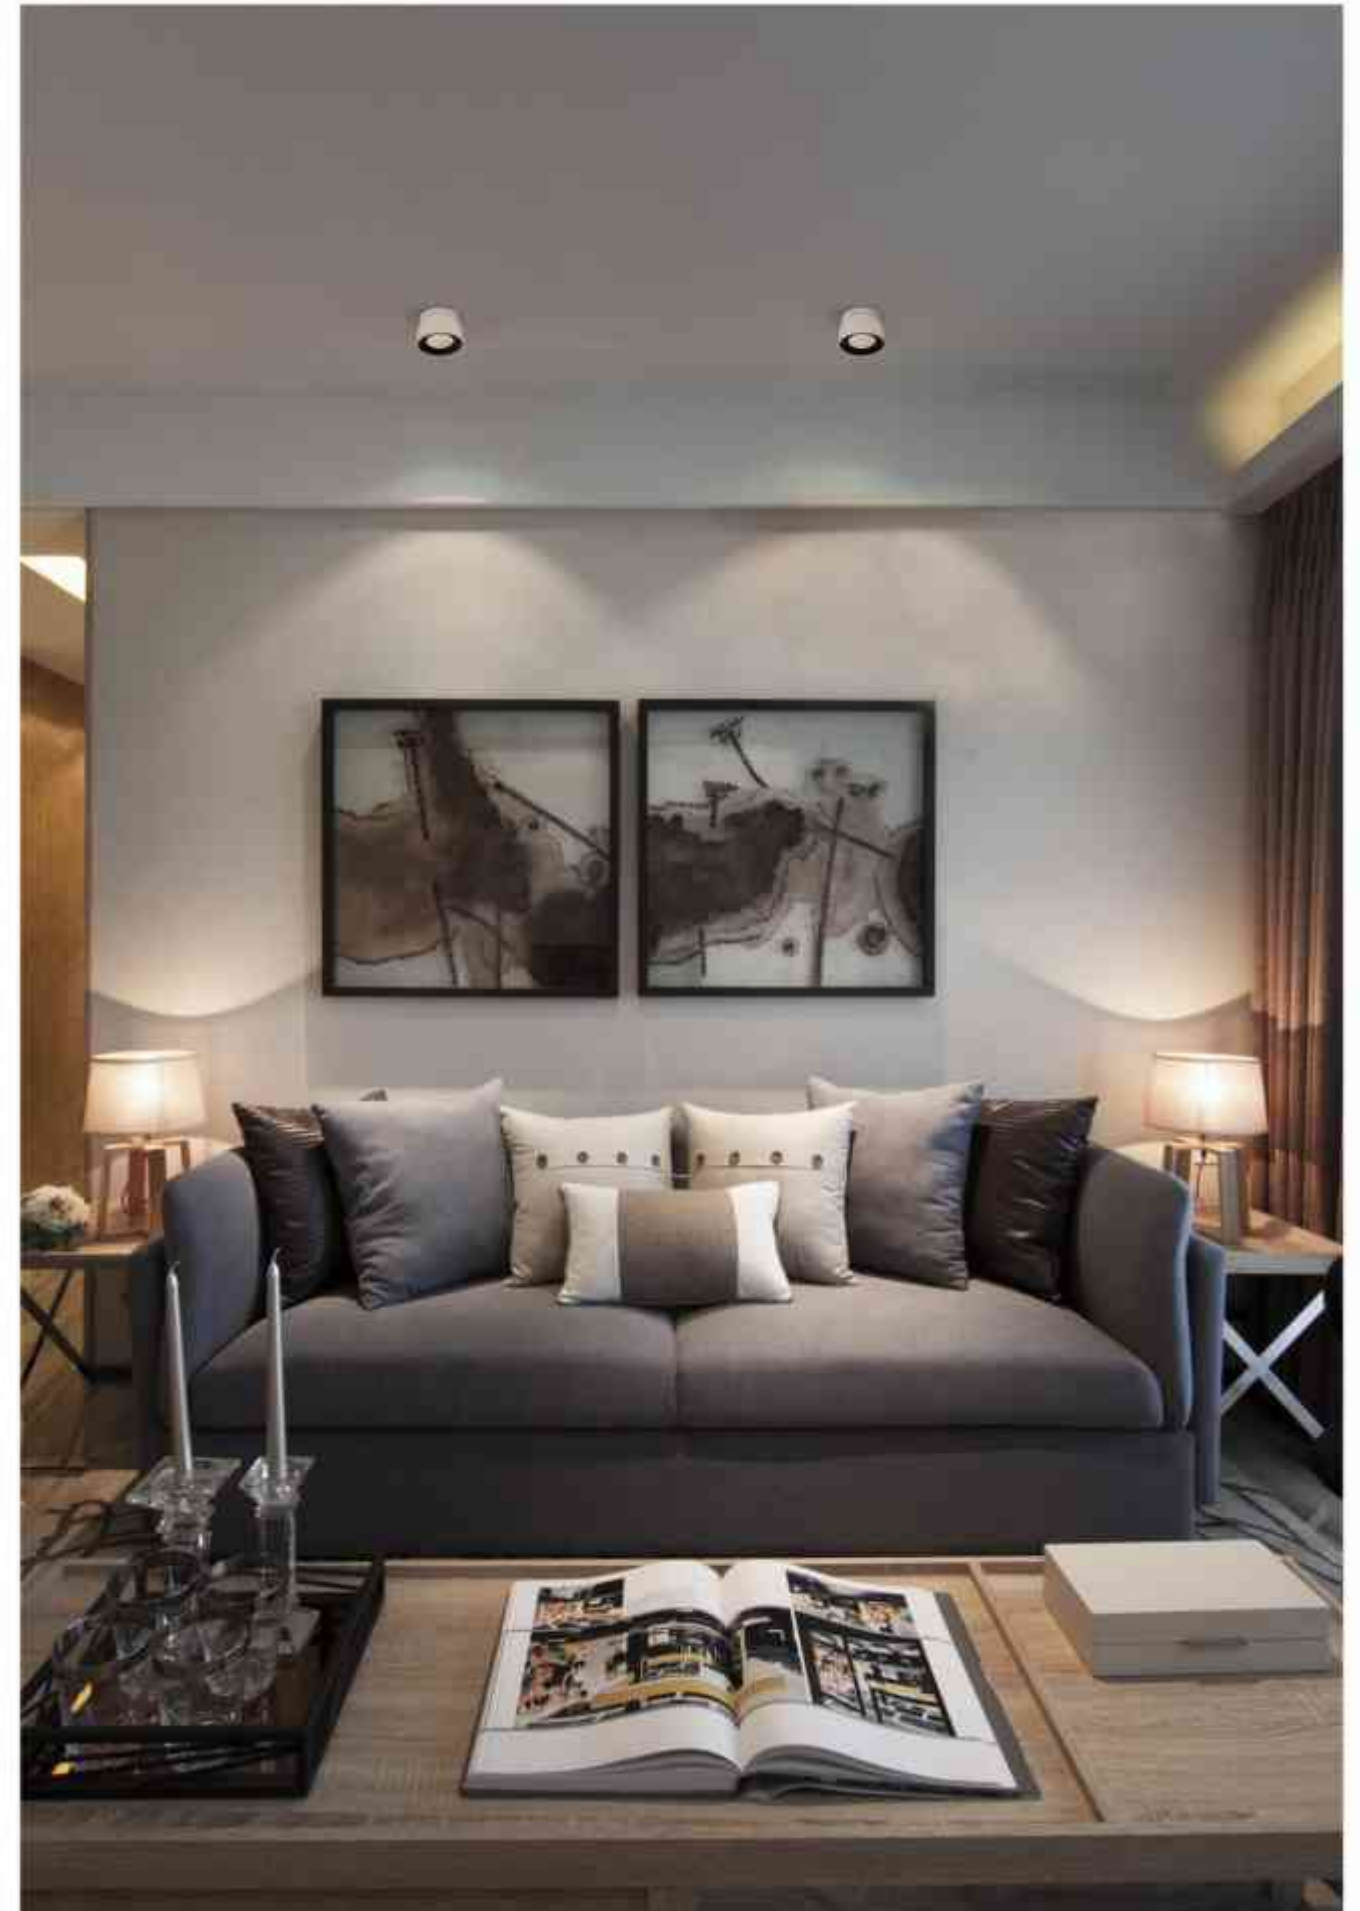



ELLEN

Minimalism and simplicity are the key words to describe ELLEN collection. Coming directly from the ceiling, slim lighting tube can be adjusted up to 90°. Thanks to narrow beam angle, just 15°, most dramatic lighting effects can be created through the high contrast between dark and light.

GOLD CHIP FINISHING



IN

ELLEN IN

LED POWER: 8W
 LED OUTPUT: 300lm
 SYSTEM POWER: 7 W
 SYSTEM OUTPUT: 413lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSIONS: Ø20x140mm
 HOLE SIZE: Ø20mm




RECOMMEND: OTHER VERSIONS:




ANGLE 15°



ØW 15° 3000K

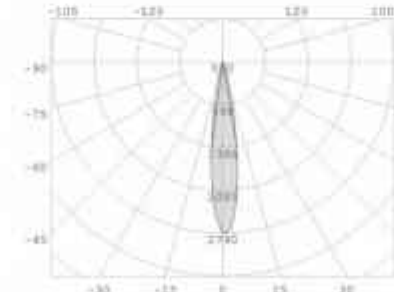

ØW 15° 3000K







FAVOR

Thanks to its elegant design, FAVOR has already become classic collection.
Be it residential or commercial spaces, FAVOR is the best choice for accent lighting.
From wide to narrow beam angle, from recessed to surface mounted and track application,
with different color finishes and accessories combinations,
FAVOR can meet all possible lighting requirements.
Rotatable function makes it possible to turn up the fitting to 350° around the room.
FAVOR is available in 2 sizes;
bigger version can be chosen with SOFT DIM function.

© CE (IP20) (DIM TRIAC) (DIM 1-10V) (DALI) (TOUCH DIM)

COLOR FINISHINGS:

Blk B Wht W.C



INS R



INS R TRIMLESS




INS G



INS G TRIMLESS

FAVOR (ING R / (ING R TRIMLESS / ING G / (ING G TRIMLESS)

SYSTEM POWER: 11.6W
 SYSTEM OUTPUT: 368 lm/3000K
 410lm/4000K
 INPUT: INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø132*110mm / 140*90*110mm / 102*132*110mm / 142*132*110mm
 HOLE SIZE: Ø90mm / Ø120mm / 90*90mm / 130*90mm


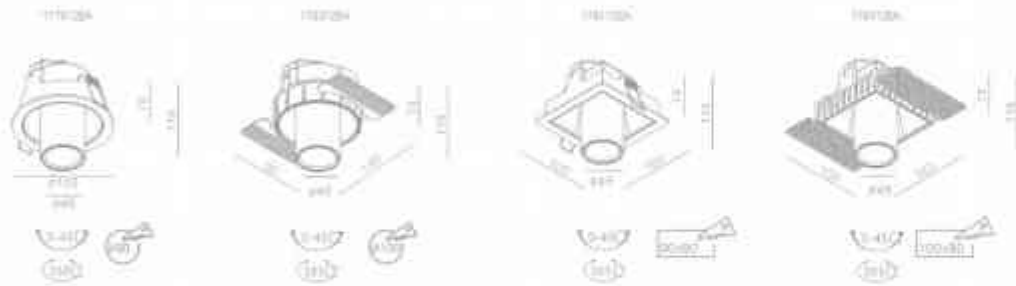


RECOMMEND: OTHER VERSIONS:



FAVOR (ING R / (ING R TRIMLESS / ING G / (ING G TRIMLESS

ANGLE: 22°

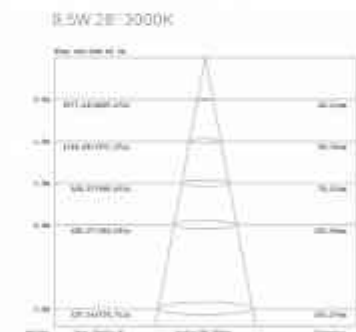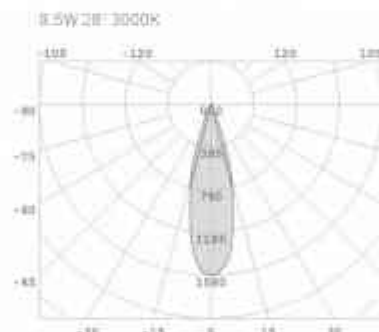

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



INM R



INM R TRIMLESS




INM G



INM G TRIMLESS

FAVOR INM R / INM R TRIMLESS / INM G / INM G TRIMLESS

SYSTEM POWER: 18 W
 SYSTEM OUTPUT: 337 lm/3000K
 INPUT (INPUT): 220-240V AC/50/60Hz
 CR: 90
 DIMENSION: Ø120/123mm / 160/110/123mm / 120/120/123mm / 160/110/123mm
 HOLE SIZE: Ø118mm / Ø125mm / 142/118mm / 118/118mm

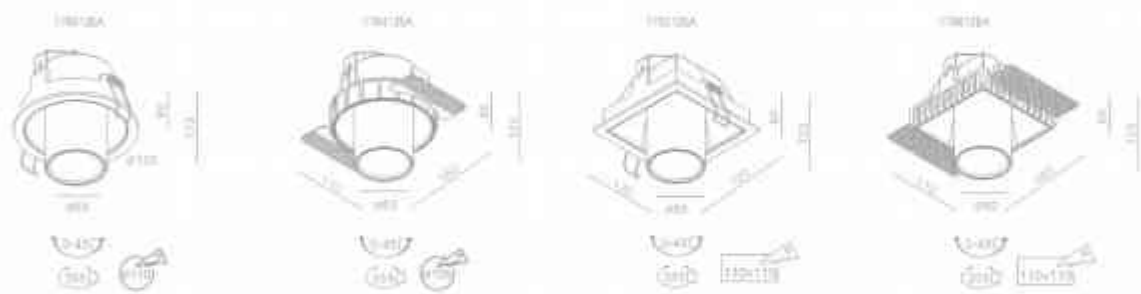

RECOMMEND: OTHER VERSIONS:



FAVOR INM R / INM R TRIMLESS / INM G / INM G TRIMLESS

ANGLE 32°




OTHER VERSIONS:




For more information, please visit our website or contact our sales representative

13.8W 32° 3000K

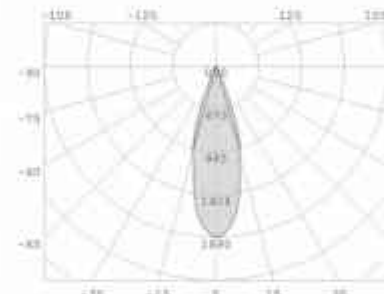

13.8W 32° 3000K





INS



INM

FAVOR INS

LED POWER 8W
 SYSTEM POWER 11.6W
 SYSTEM OUTPUT 360lm/3000K
 INPUT INPUT 220-240V/AC/50/60HZ
 CRI 90
 DIMENSION Ø60*119mm
 HOLE SIZE Ø50mm




RECOMMEND: **OTHER VERSIONS:**




ANGLE 25°



8.5W 25° 3000K

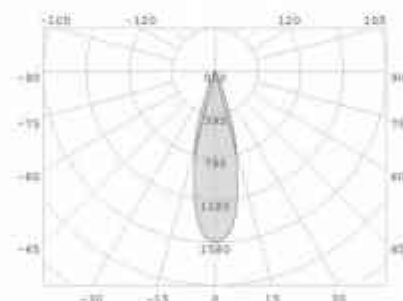

8.5W 25° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FAVOR INM

LED POWER 14W
 LED OUTPUT 348lm
 SYSTEM POWER 18.4W
 SYSTEM OUTPUT 337lm/3000K
 INPUT INPUT 220-240V/AC/50/60HZ
 CRI 90
 DIMENSION Ø60*128mm
 HOLE SIZE Ø50mm




RECOMMEND: **OTHER VERSIONS:**




ANGLE 32°



13.8W 32° 3000K

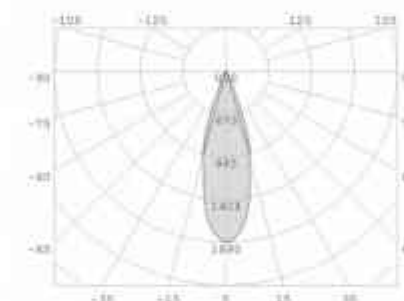

13.8W 32° 3000K

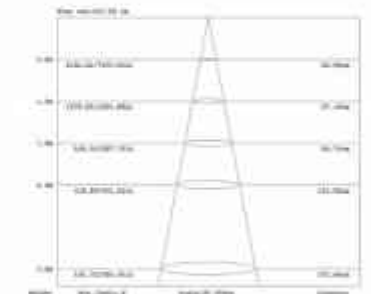

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



INL 18 REFLECTOR



INL 25 REFLECTOR

FAVOR INL 18 REFLECTOR


LED POWER: 18W
 SYSTEM POWER: 20W
 SYSTEM OUTPUT: 1048lm/3000K
 INPUT: INPUT: 220-240VAC, 50/60Hz
 CR: 90
 DIMENSION: Ø126*183mm
 HOLE SIZE: Ø75mm




RECOMMEND: OTHER VERSIONS:




ANGLE 25°



18W 25° 3000K

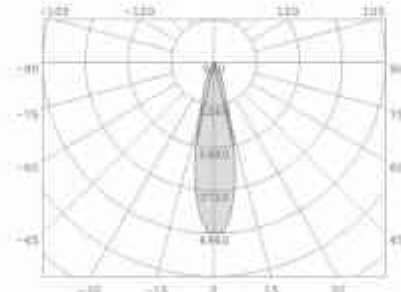

18W 25° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FAVOR INL 25 REFLECTOR


LED POWER: 25W
 SYSTEM POWER: 28W
 SYSTEM OUTPUT: 1350lm/3000K
 INPUT: INPUT: 100-240VAC, 50/60Hz
 CR: 90
 DIMENSION: Ø126*224mm
 HOLE SIZE: Ø75mm




RECOMMEND: OTHER VERSIONS:



ANGLE 25°



18W 25° 3000K

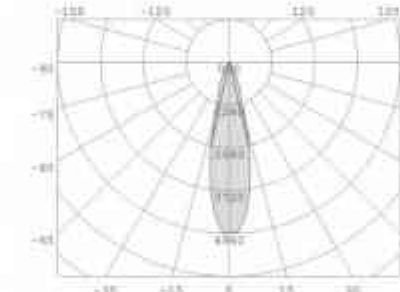


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



18W 25° 3000K

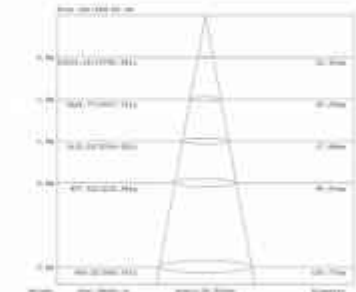



INM BOX 02



INM BOX 03



ONM ER

FAVOR INM BOX 02


LED POWER: 21.3W
 SYSTEM POWER: 32.8W
 SYSTEM OUTPUT: 1814lm/3000K
 INPUT INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: 410*247*87mm
 HOLE SIZE: 330*60mm



EMBEDDED HEIGHT: 62MM

FAVOR INM BOX 03

LED POWER: 31.53W
 SYSTEM POWER: 49.3W
 SYSTEM OUTPUT: 2611lm/3000K
 INPUT INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: 500*247*112MM
 HOLE SIZE: 320*60mm



EMBEDDED HEIGHT: 108MM

RECOMMEND: OTHER VERSIONS:





FAVOR INM BOX 02 / INM BOX 03

ANGLE: 32°

13.9W/32°/3000K

13.9W/32°/3000K

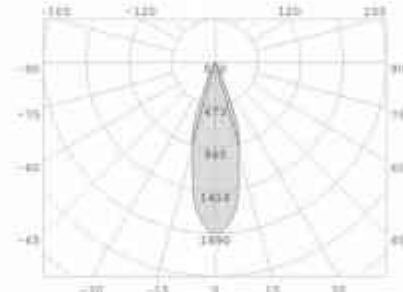

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

FAVOR ONM ER

LED POWER: 5.3W
 SYSTEM POWER: 8.4W
 SYSTEM OUTPUT: 2611lm/3000K
 INPUT INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: 100*148mm





RECOMMEND:



ANGLE: 32°

5.3W/32°/3000K



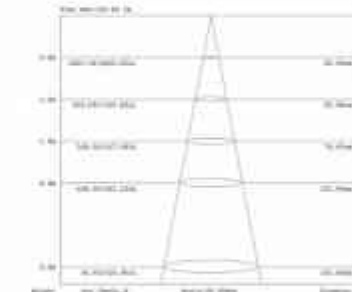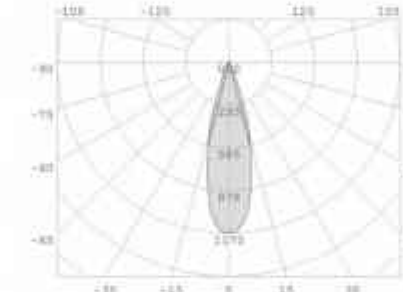



















5.3W/32°/3000K



OTHER VERSIONS:




For more information, please visit our website or contact our sales representative

ITEM CODE	      						
	A	DT	DX	DS	DA	DO	TD
 FAVOR INS R	•	•	•		•		
 FAVOR INS R TRIMLESS	•	•	•		•		
 FAVOR INS S	•	•	•		•		
 FAVOR INS S TRIMLESS	•	•	•		•		
 FAVOR IM R	•	•	•		•		
 FAVOR IM R TRIMLESS	•	•	•		•		
 FAVOR IM S	•	•	•		•		
 FAVOR IM S TRIMLESS	•	•	•		•		
 FAVOR INS	•	•	•		•		
 FAVOR IM	•	•	•		•		
 FAVOR INL18 REFLECTOR		•			•		
 FAVOR INL25 REFLECTOR	•	•			•		
 FAVOR IM BOX G2		•	•		•		
 FAVOR IM BOX G3		•	•		•		
 FAVOR DIMER	•						




GEN

Good lighting can reproduce the charm and vitality of the artwork, just like opening a skylight for a dusty treasure, and let the story behind it slowly tell.




IN M



ON M

COLOR FINISHINGS:

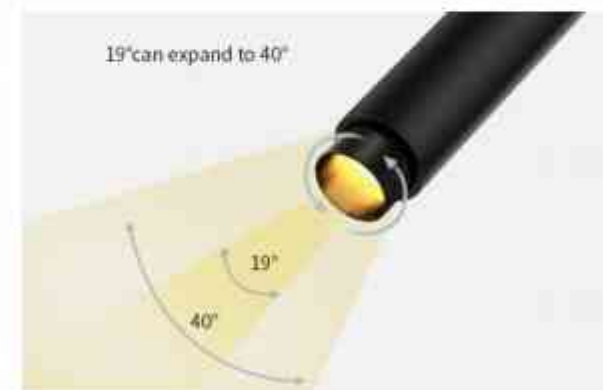



IN SS



ON SS



IN S



ON S

GEN IN SS

LED POWER: 6.5W
LED OUTPUT: 665lm
SYSTEM POWER: 6.5W
SYSTEM OUTPUT: 220lm/3000K
INPUT: 400mA
CRI: 90
DIMENSION: 245*119mm
HOLE SIZE: 20mm



GEN ON SS

LED POWER: 6.5W
LED OUTPUT: 665lm
SYSTEM POWER: 6.5W
SYSTEM OUTPUT: 220lm/3000K
INPUT: 230-240VAC
CRI: 90
DIMENSION: 245*119mm
HOLE SIZE: 17



RECOMMEND:




ON/OFF

RECOMMEND:




DIM 1%AC

ANGLE(19°-40°)

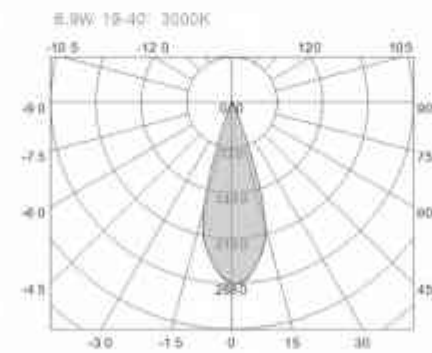

6.5W 19-40° 3000K



GEN IN S

LED POWER: 10.5W
LED OUTPUT: 1173lm
SYSTEM POWER: 10.7W
SYSTEM OUTPUT: 310lm/3000K
INPUT: 300mA
CRI: 80
DIMENSION: 245*145mm
HOLE SIZE: 20mm



GEN ON S

LED POWER: 10.5W
LED OUTPUT: 1173lm
SYSTEM POWER: 12.5W
SYSTEM OUTPUT: 310lm/3000K
INPUT: 230-240VAC/50/60Hz
CRI: 80
DIMENSION: 245*145mm
HOLE SIZE: 17



RECOMMEND:





ON/OFF

RECOMMEND:




DIM 1%AC

ANGLE(19°-40°)

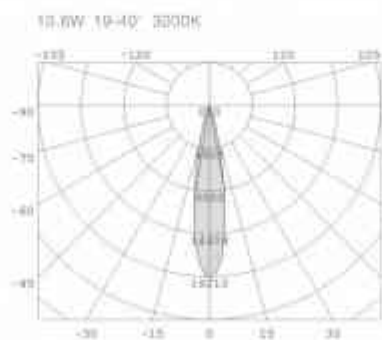

10.5W 19-40° 3000K





IN M



ON M



IN L



ON L


GEN IN M

LED POWER: 14.5W
LED OUTPUT: 1705lm
SYSTEM POWER: 14.2W
SYSTEM OUTPUT: 436lm/3000K
INPUT: 400mA
CRI: 90
DIMENSION: Ø72.5*107mm
HOLE SIZE: Ø68mm



GEN ON M

LED POWER: 14.5W
LED OUTPUT: 1705lm
SYSTEM POWER: 15.6W
SYSTEM OUTPUT: 426lm/3000K
INPUT: 220-240VAC, 154Hz
CRI: 90
DIMENSION: Ø72.5*173mm
HOLE SIZE: -



RECOMMEND:



DALI
DALI
DALI

RECOMMEND:



DALI
DALI
DALI

GEN IN L

LED POWER: 21.6W
LED OUTPUT: 2596lm
SYSTEM POWER: 21.7W
SYSTEM OUTPUT: 687lm/3000K
INPUT: 600mA
CRI: 90
DIMENSION: Ø72.5*248mm
HOLE SIZE: Ø68mm



GEN ON L

LED POWER: 21.6W
LED OUTPUT: 2596lm
SYSTEM POWER: 25.8W
SYSTEM OUTPUT: 587lm/3000K
INPUT: 220-240VAC
CRI: 90
DIMENSION: Ø72.5*322mm
HOLE SIZE: -



RECOMMEND:



DALI
DALI
DALI

RECOMMEND:



DALI
DALI
DALI

OTHER VERSIONS:




DALI
DALI
DALI


ANGLE(18°-45°)



14.5W 18-45° 3000K

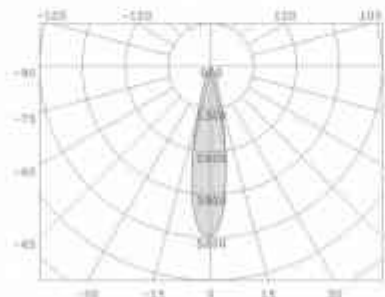


14.5W 18-45° 3000K




ANGLE(18°-45°)




21.6W 18-45° 3000K

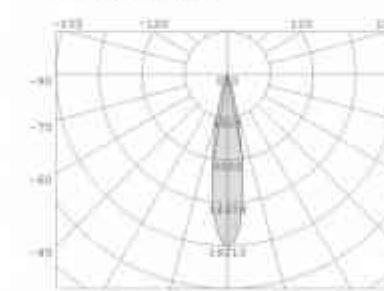

21.6W 18-45° 3000K



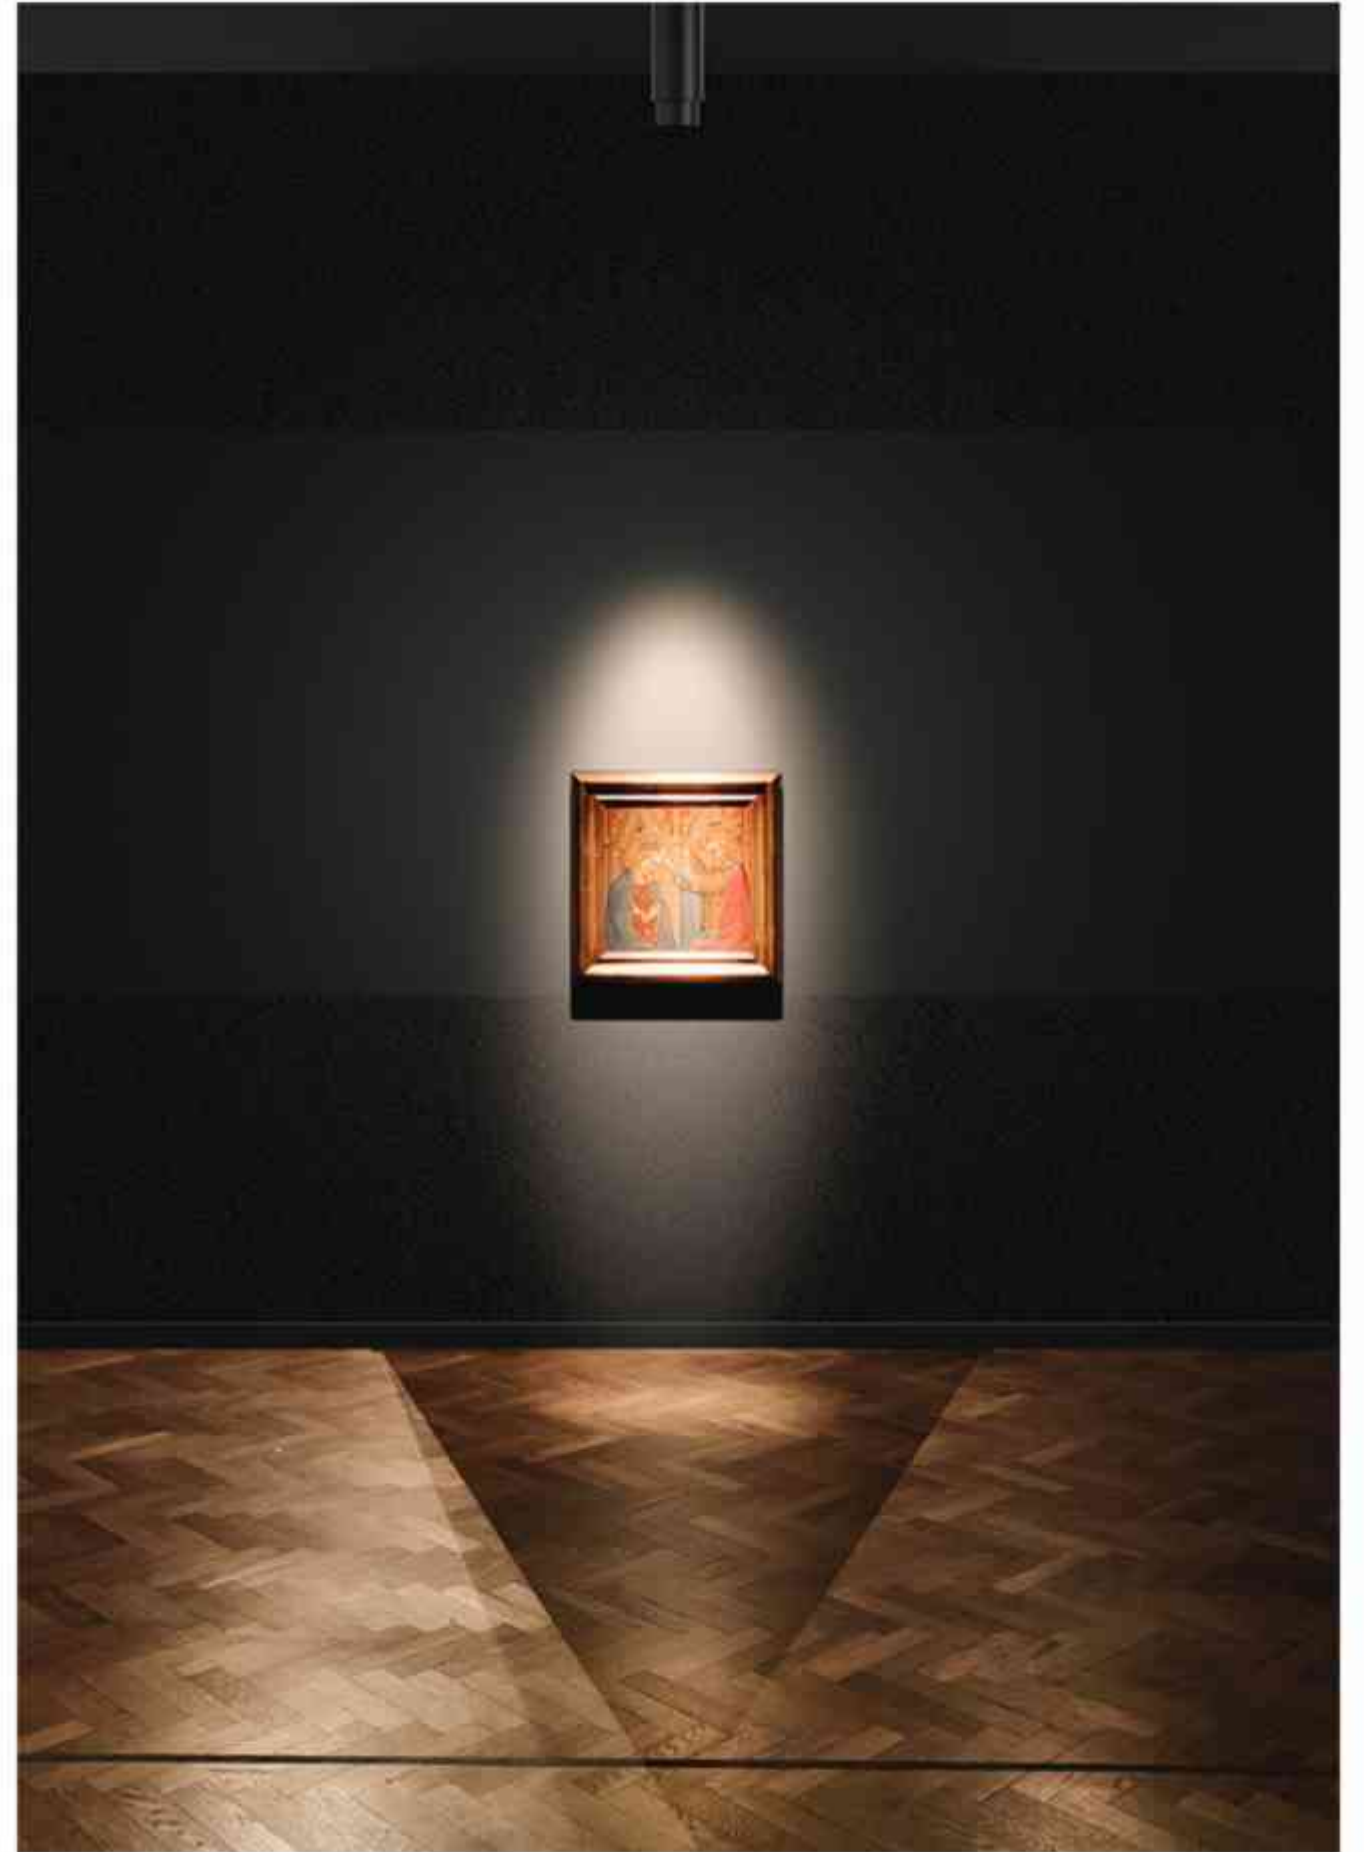

IRIS

IRIS is not just one product but big family with various selection for choice. One common feature is decorative lighting ring created around the edge of the lamp. Recessed version can be equipped with rectangular frame for single or more lamps. Surfaced model is presented with direct or adjustable versions.

© CE IP20 220-240VAC DIM TRIAC



ON AD 2.0



ON AC 2.0



ONAD AC 2.0





ON AD2 2.0



ON AC 2.0



ON AD AC 2.0

IRIS ON AD2 2.0

LED POWER: 10.5W
 LED OUTPUT: 1300LM
 SYSTEM POWER: 12.5W
 SYSTEM OUTPUT: 864lm/3000K
 INPUT: 220-240VAC/50/60HZ
 CR: 90
 DIMENSION: Ø76x127mm
 HOLE SIZE: 76mm



RECOMMEND:




DALI/DMT
 210T9K


ANGLE 36°



10.5W 36° 3000K

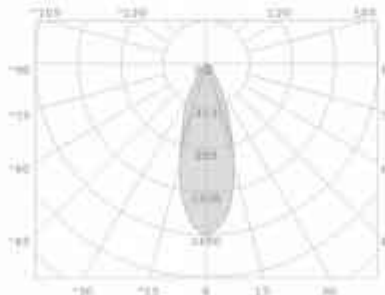


10.5W 90° 3000K



IRIS ON AC / ON AD AC 2.0

LED POWER: 8.5W
 SYSTEM POWER: 8.7W
 SYSTEM OUTPUT: 422lm/3000K
 INPUT: 220-240VAC/50/60HZ
 CR: 90
 DIMENSION: Ø70x110mm/Ø71x95mm
 HOLE SIZE: 70mm



RECOMMEND:




DALI/DMT
 0T

IRIS ON AC / ON AD AC 2.0


ANGLE 18°




8.5W 18° 3000K

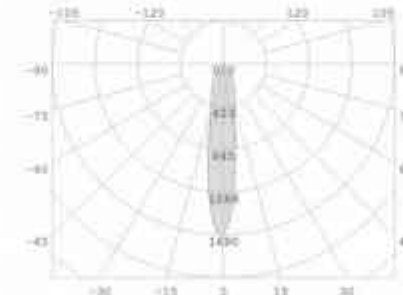

8.5W 18° 3000K

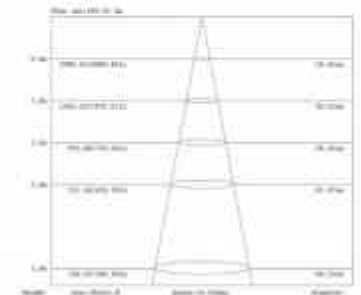

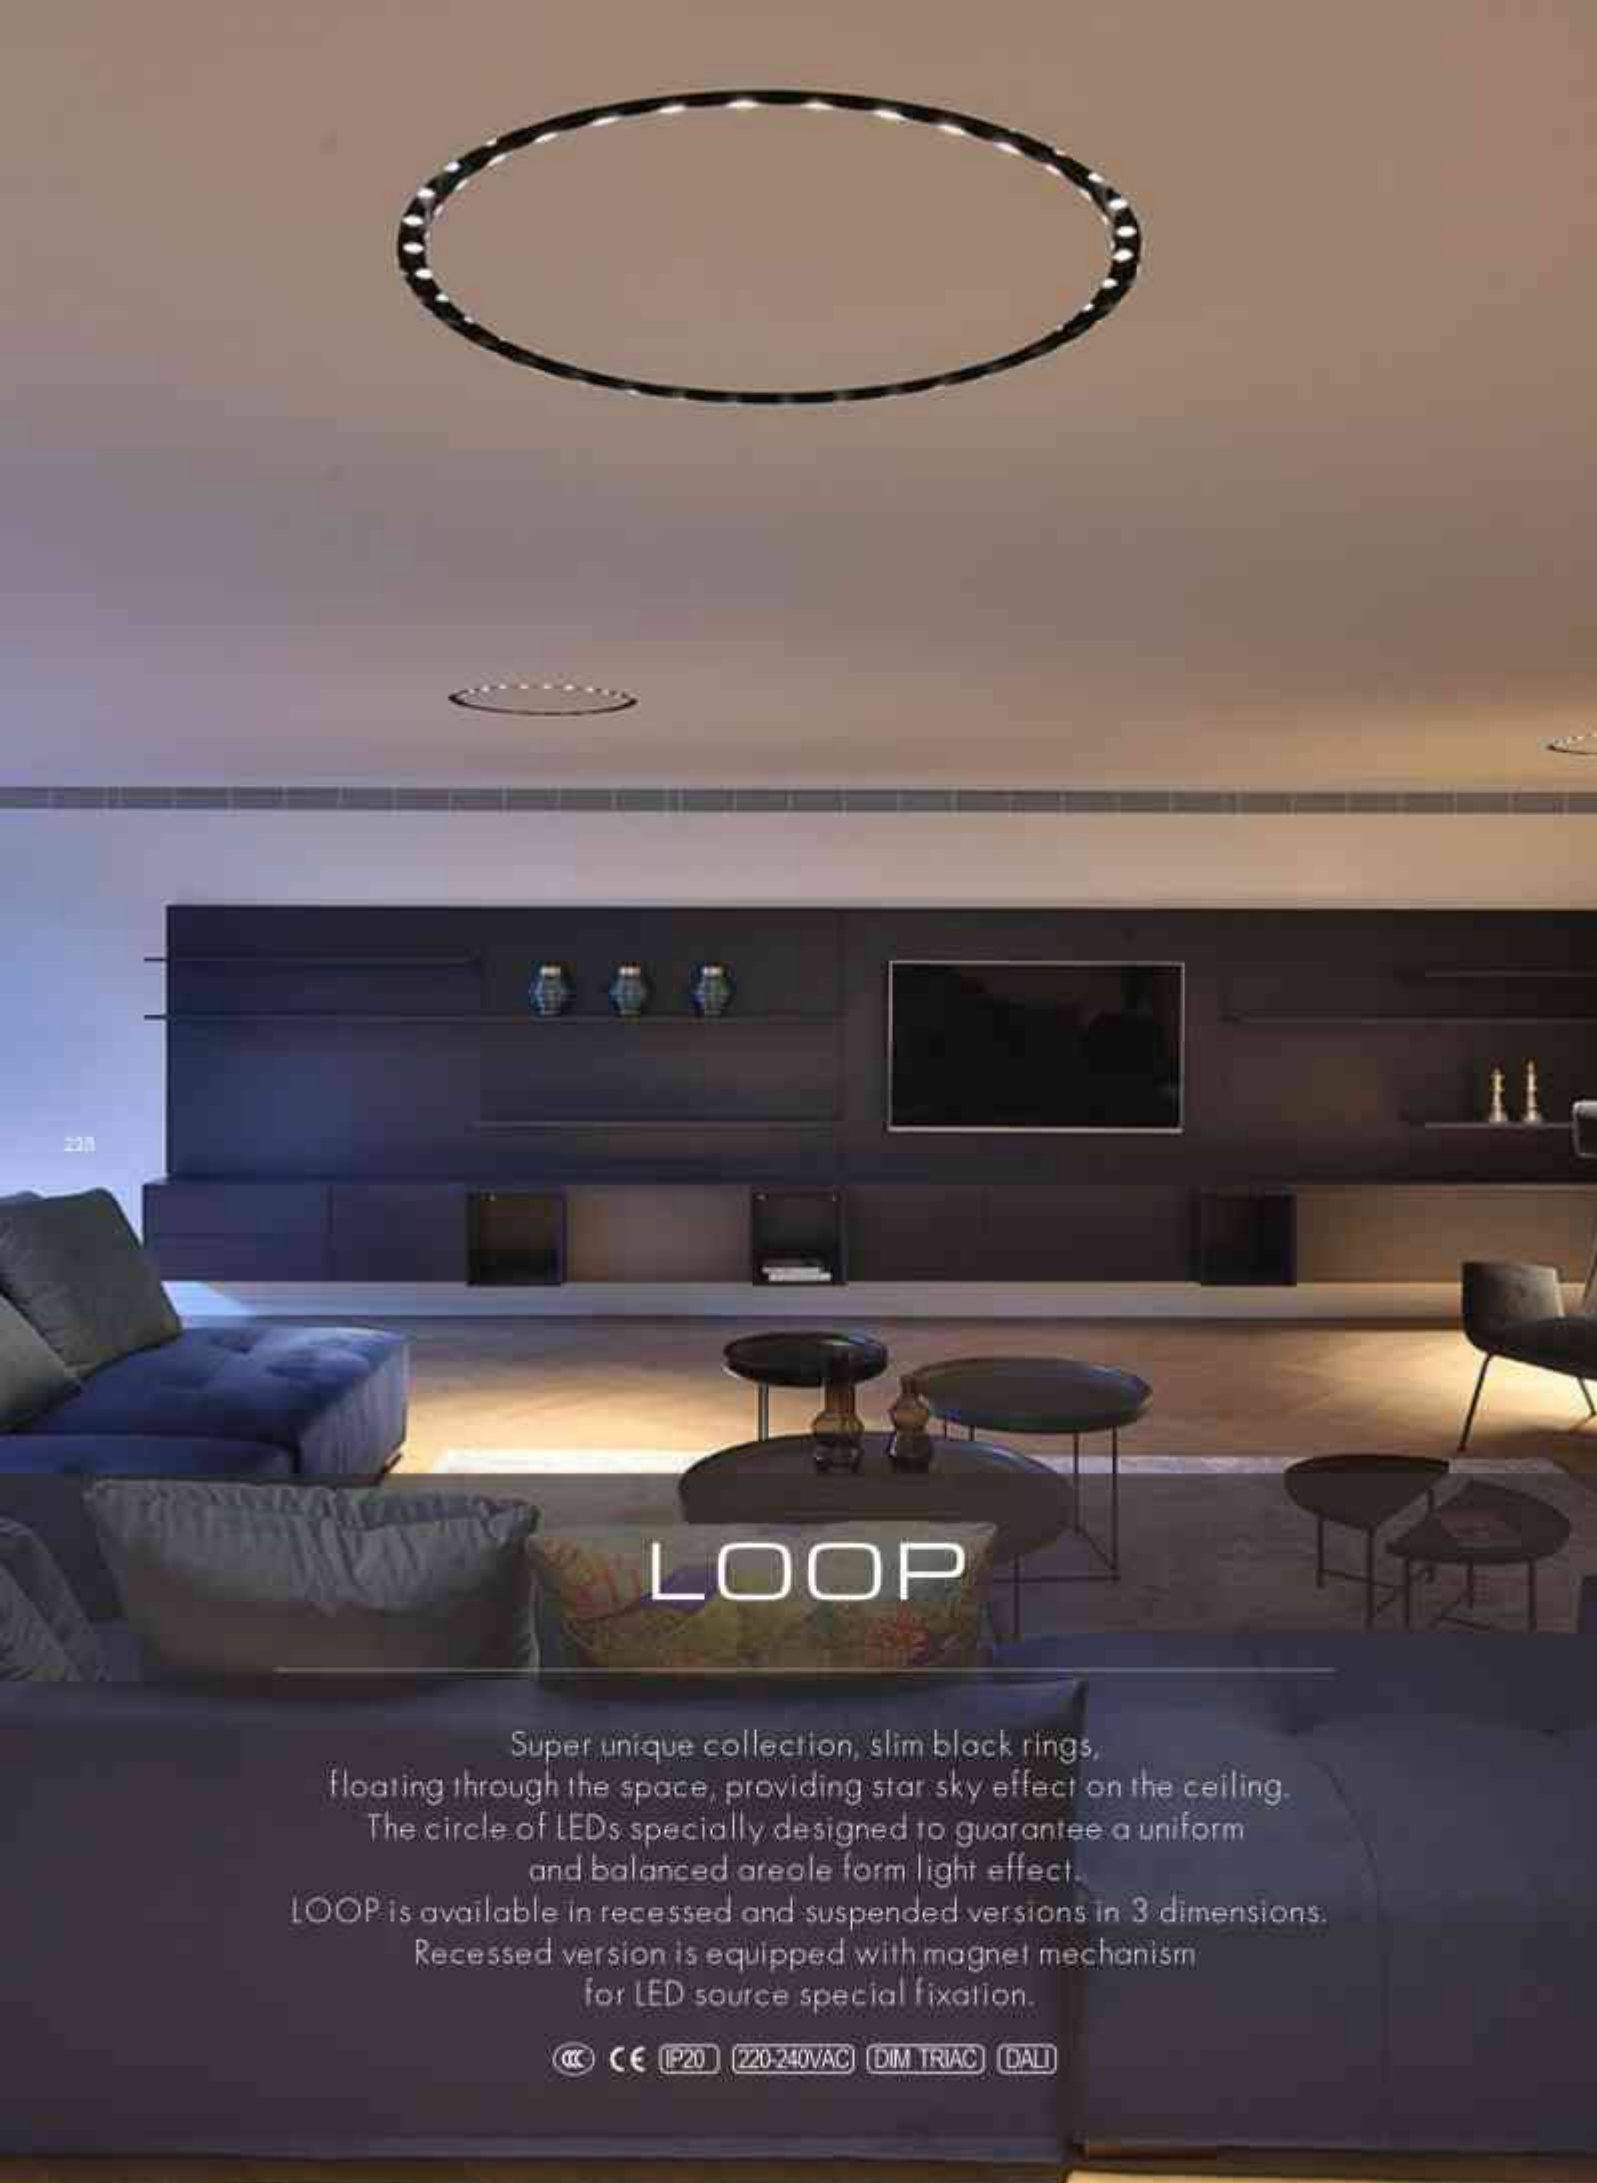

235

LOOP

Super unique collection, slim black rings, floating through the space, providing star sky effect on the ceiling. The circle of LEDs specially designed to guarantee a uniform and balanced areole form light effect. LOOP is available in recessed and suspended versions in 3 dimensions. Recessed version is equipped with magnet mechanism for LED source special fixation.

© CE IP20 220-240VAC DIM TRIAC DALI

LOOP

SPOTLIGHT



IN 24 1,1



IN 38 1,1



IN 12 1,1

236

COLOR FINISHINGS:



PAV



LOOP IN 12.1.1

LED POWER 12*2.2W
CRI: 90
SYSTEM POWER 32.2W
OUTPUT: 1776lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø375*59mm
HOLE SIZE: Ø310mm

PHOTO:



RECOMMEND:



OTHER VERSIONS:



LOOP IN 24.1.1

LED POWER 24*2.2W
CRI: 90
SYSTEM POWER 64.2W
OUTPUT: 3552lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø450*59mm
HOLE SIZE: Ø385mm

PHOTO:



RECOMMEND:



OTHER VERSIONS:



LOOP IN 36.1.1

LED POWER 36*2.2W
CRI: 90
SYSTEM POWER 96.6W
OUTPUT: 5328lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø585*59mm
HOLE SIZE: Ø500mm


PHOTO:




RECOMMEND:




OTHER VERSIONS:

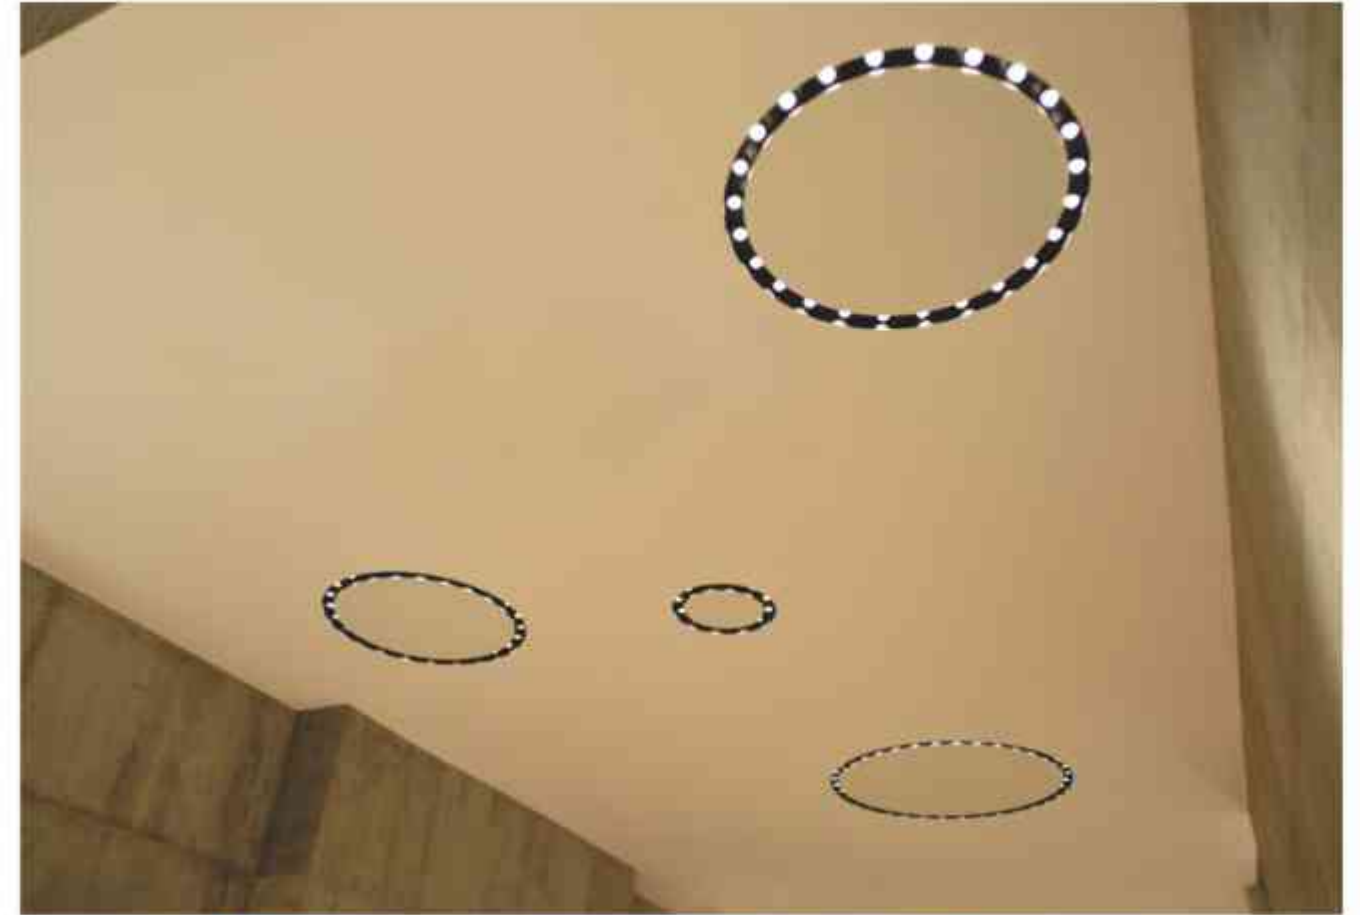

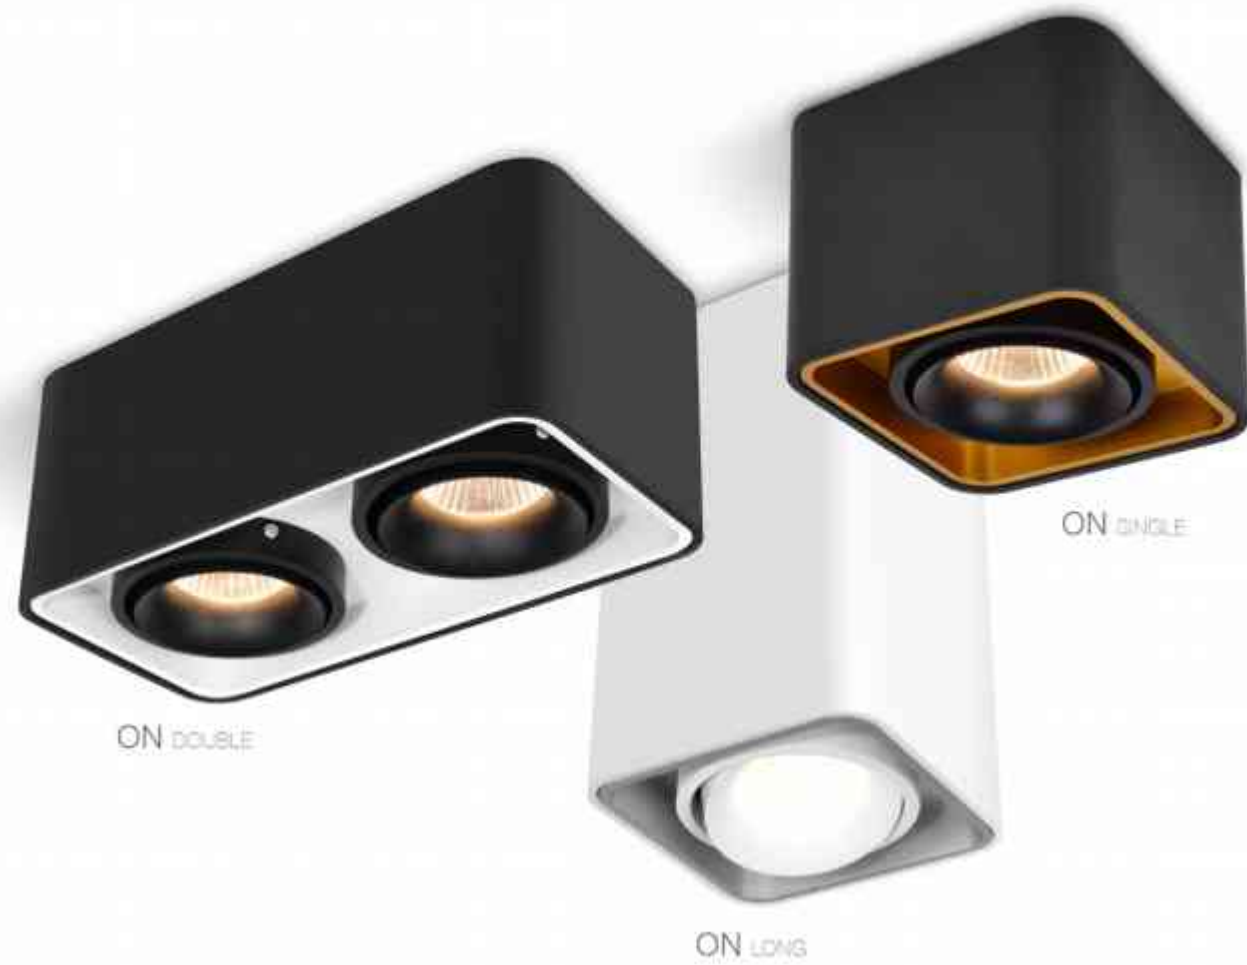

LUXURY ON SINGLE / LONG

LED POWER: 9.25W
 SYSTEM POWER: 11.4W
 SYSTEM OUTPUT: 120LM
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 100*50*80mm/100*100*170mm
 HOLE SIZE: /



LUXURY ON DOUBLE

LED POWER: 2*9.25W
 SYSTEM POWER: 2*11.4W
 SYSTEM OUTPUT: 140LM
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 100*50*80mm
 HOLE SIZE: /




RECOMMEND: OTHER VERSIONS:

ON/OFF 180/180° DIM TRAC 180/180° DIM 1-10V 180/180° DALI 180/180°

OTHER VERSIONS:

3000K/2700K/4000K
 22°

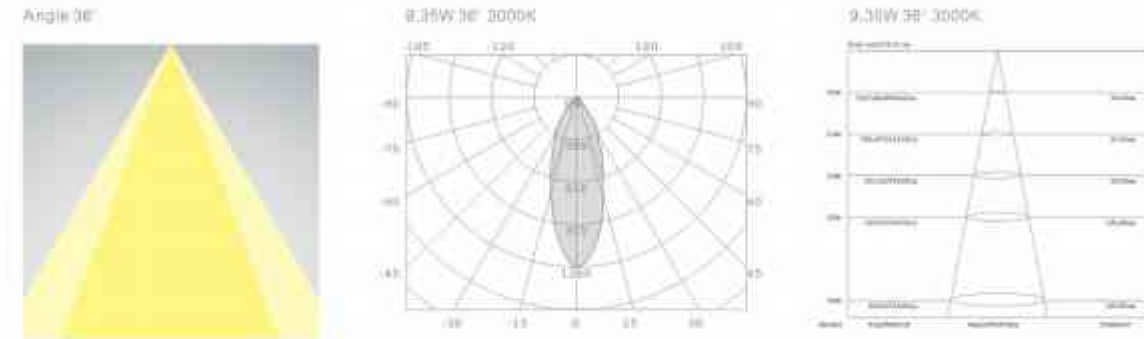

LUXURY

LUXURY, as its name indicates, can give additional luxurious and elegant detail to any room, be it residential or public spaces. This splendid surface mounted downlight is presented with single or double versions. To extend the collection, LUXURY ON LONG version was created.

LUXURY can be used in an elegant combination of wall mounted and ceiling mounted variants. Aesthetics and functionality are the key words to describe LUXURY collection. Various of color combinations are available for choice. In addition, the product has adjustable function.




COLOR FINISHINGS:



For more information, please visit our website or contact our sales representative



241

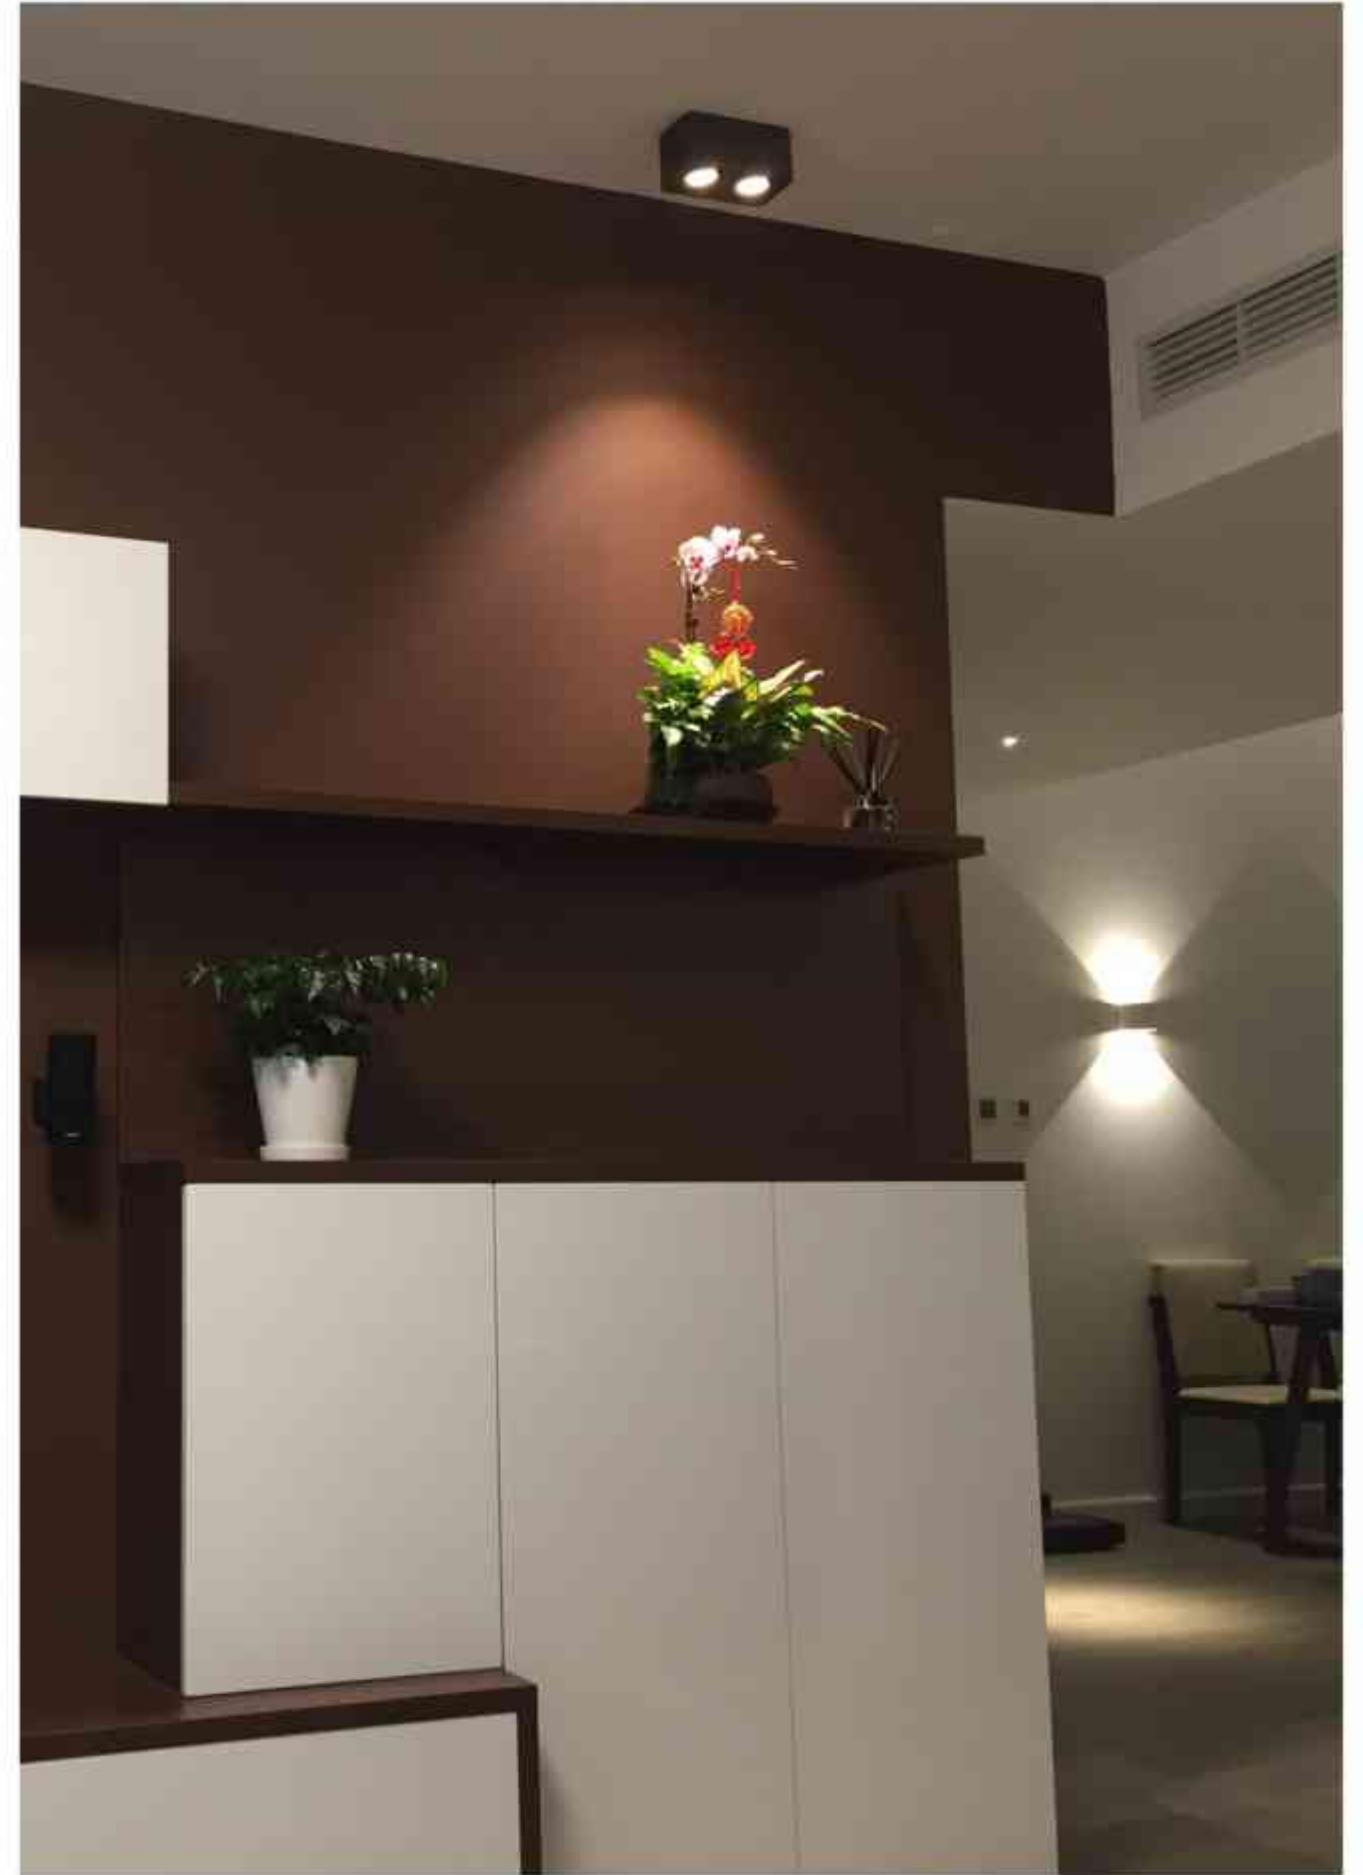

SPOTLIGHT

242

METEOR

Constructing geometric sculptures of light, METEOR establishes an intimate relationship with space and combines functionality with beauty of pure lines. Thanks to METEOR narrow beam angle, just 1.5°, it can create perfect light effect, focusing on separate objects in the room. Installed in a group, with different heights and angles, METEOR creates unique lighting patterns on the ceiling.

© CE IP20 100-240VAC DIM TRIAC



IN TRIMLESS

METEOR IN TRIMLESS 

LED POWER 3W
 CRI 90
 SYSTEM POWER 1.7W
 OUTPUT 413lm/3000K
 INPUT 100-240VAC, 50/60Hz
 DIMENSION Ø29*260/350mm
 HOLE SIZE Ø29mm

RECOMMEND OTHER VERSIONS:



ON/OFF




DIM TRAC




ANGLE 15°



8W 15° 3000K



8W 15° 3000K



COLOR FINISHINGS:



FAW RAG



NIC

NIC is the biggest product family in FLUA collection, giving answer to almost all lighting requirements.

Various selections are available for choice: from smallest member NIC SS 6W up to biggest NIC L 42W.

This big collection provides unlimited number of choices from recessed to surface mounted versions,

from direct to adjustable, with or without mounting frame, single or double lamp.

To extend NIC series NIC DEEP version could be chosen for the projects where additional anti-glare function is demanded.



ON AD

NIC ON AD

LEO POWER: 10.5W
 LEO OUTPUT: 1300lm/3000K
 SYSTEM POWER: 12.4W
 SYSTEM OUTPUT: 604lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø100x70mm




RECOMMEND:




ANGLE 36°



10.7W 36° 3000K

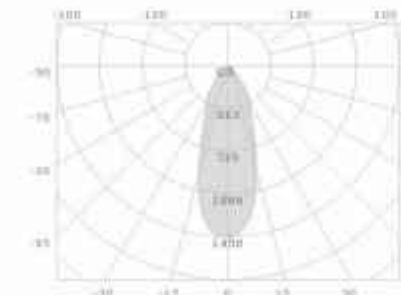

10.7W 36° 3000K



NORMO

This miniature luminaire is a great solution for the areas where it is necessary to use surface mounted down light. Thanks to its AC version, NORMO size is becoming even smaller. Available in 2 sizes: 3.7W and 6.6W.

© CE IP20 220-240VAC DIM TRIAC

COLOR FINISHINGS:



AW

RB



NORMO ON5

NORMO ON5



LED POWER: 3.7WAC LED
 SYSTEM POWER: 3.7W
 OUTPUT: 198lm/3000K
 INPUT: 220-230VAC
 CRI: 90
 DIMENSION: 24x34.5mm
 HOLE SIZE: 1



RECOMMEND:



ANGLE 30°

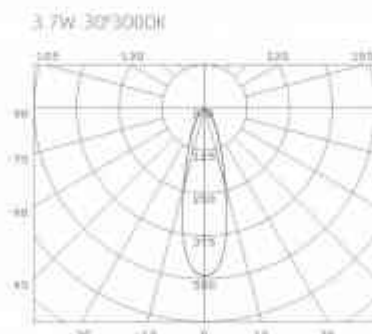



NORMO ONM

NORMO ONM

LED POWER & 8W AC LED
 SYSTEM POWER: 6.6W
 OUTPUT: 544 LM/3000K
 INPUT: 220-230VAC
 CRI: 90
 DIMENSION: Ø60*30 mm
 HOLE SIZE: /




RECOMMEND:




ANGLE 27°




6.6W 27°3000K

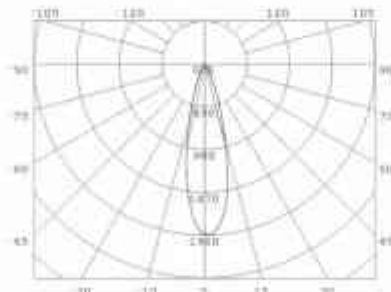

6.6W 27°3000K

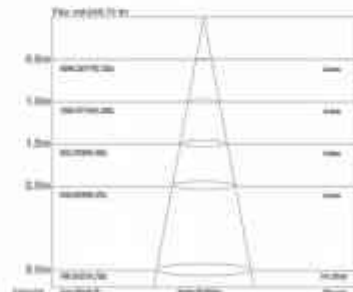

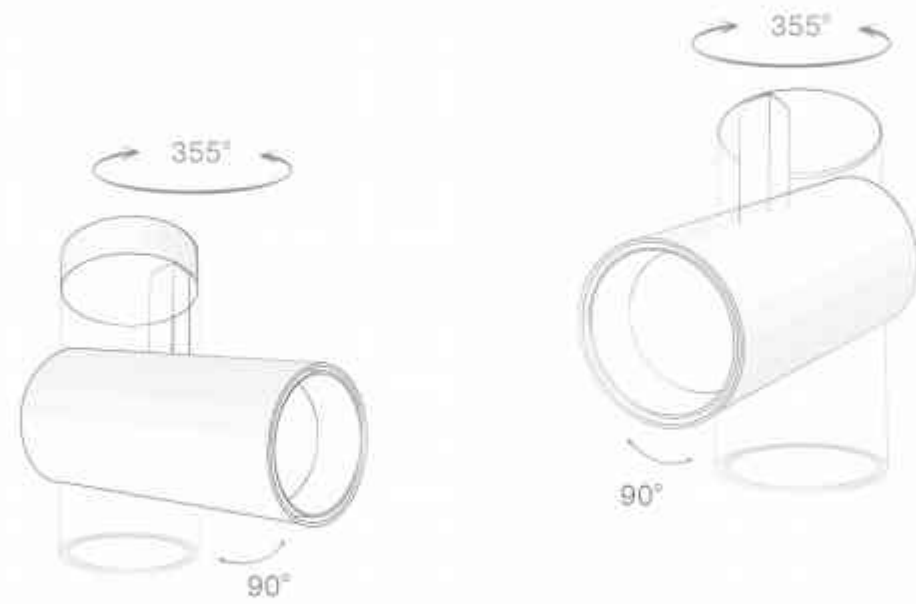

IN SS



ON SS

ORIAN

ORIAN track lights are designed to be compatible with FLUA track system as well as LUCA M and LUNA M track system. You can always find your dream light from the ORIAN family: SS (9.3W), S (13.1W), M (20.7W), L (30W).

© CE IP20 220-240VAC




ORIAN IN SS / ON SS

LED POWER: 7.2W
 LED OUTPUT: 880lm
 SYSTEM POWER: 10W
 SYSTEM OUTPUT: 840lm/3000K
 INPUT: 220-240VAC/50-60Hz
 CRI: 90
 DIMENSIONS: Ø48*132.5mm / Ø47*140mm
 HOLE SIZE: Ø50mm


RECOMMEND:




ANGLE 24°



7.2W 24° 3000K

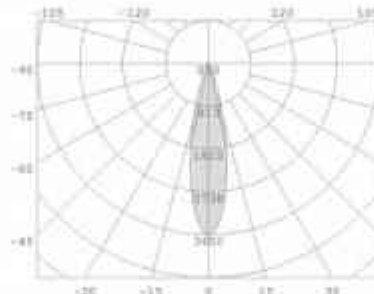

7.2W 24° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.





IN S



ON S



IN M



ON M


ORIAN IN S / ON S

LED POWER: 10.8W
 LED OUTPUT: 1290LM
 SYSTEM POWER: 13W
 SYSTEM OUTPUT: 780lm/3000K
 INPUT: 100-240VAC/50/60HZ
 CRI: 90
 DIMENSION: $\varnothing 45 \times 32.5mm$ | $\varnothing 42 \times 17mm$
 HOLE SIZE: $\varnothing 30mm$


RECOMMEND:




CRI: TMAC
 10001REDT | 20491REDT

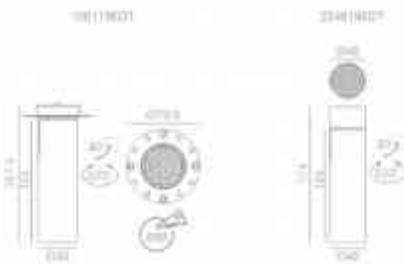


ANGLE 24°



10.8W 24° 3000K

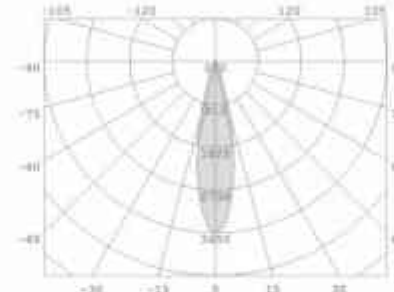

10.8W 24° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



ORIAN IN M / ON M

LED POWER: 18W
 LED OUTPUT: 2140LM
 SYSTEM POWER: 20.7W
 SYSTEM OUTPUT: 1460lm/3000K
 INPUT: 200-240VAC/50/60HZ
 CRI: 90
 DIMENSION: $\varnothing 72 \times 44mm$ | $\varnothing 72 \times 197mm$
 HOLE SIZE: $\varnothing 50mm$


RECOMMEND:




CRI: TMAC
 10621REDT | 20491REDT




ANGLE 25°



18W 25° 3000K

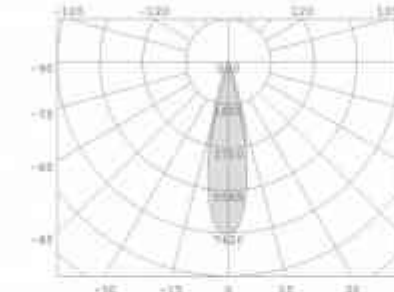

18W 25° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative





IN L






ON L


ORIAN IN L / ON L

LED POWER: 25.2W
 LED OUTPUT: 2140LM
 SYSTEM POWER: 30 VA
 SYSTEM OUTPUT: 2000LM/3000K
 INPUT: 100-240VAC/50/60HZ
 CRI: 90
 DIMENSION: $\varnothing 72 \times 183\text{mm}$ / $\varnothing 72 \times 226\text{mm}$
 HOLE SIZE: $\varnothing 50\text{mm}$

RECOMMEND:
 DALI
 DIM 1-10V
 DALI
 DALI
 DALI

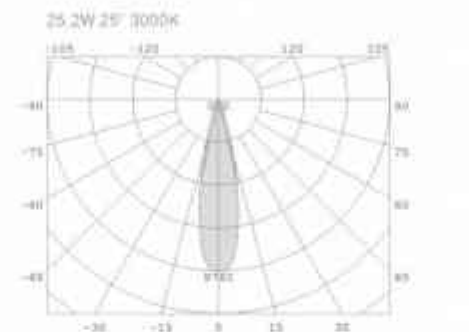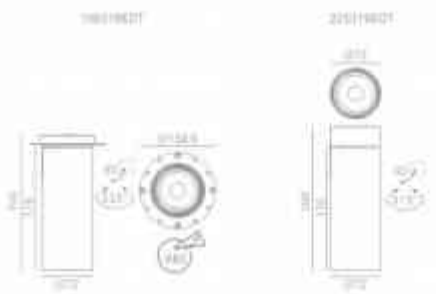

OTHER VERSIONS:
 2700K/4000K
 2700K/4000K

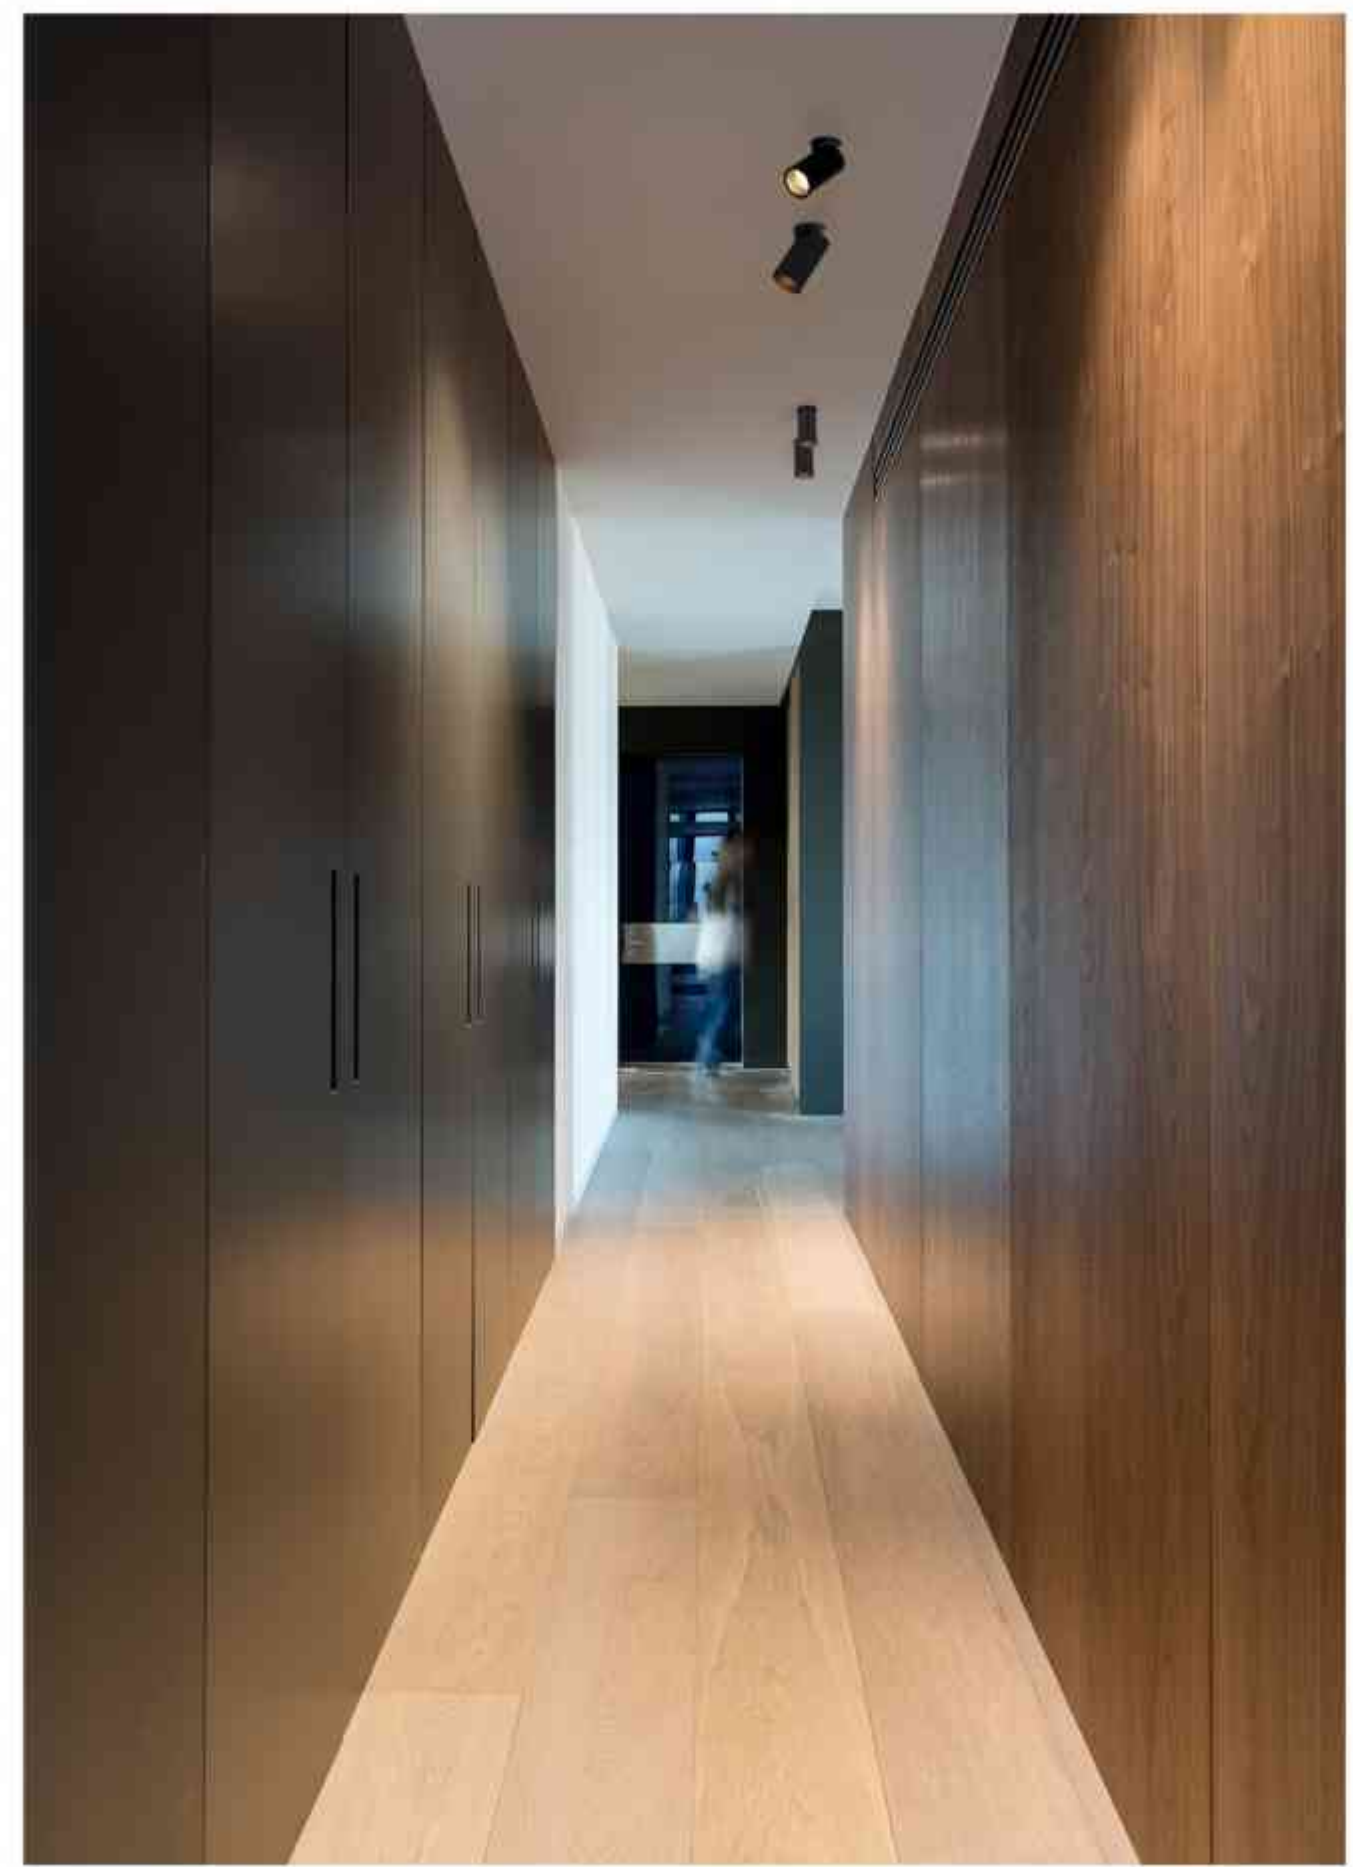

PEBUK

Simple design and compact size makes this surfaced mounted fixture more and more popular. Whether single use or accompanied by other fittings, PEBUK creates perfect light effect. Thanks to many playful finishing colors, PEBUK can match any design concept of the room. Deeply installed light source gives soft and harmonious light with best anti-glare effect. PEBUK is available. Smaller version is additionally decorated by narrow line alongside the body.

© CE IP20 100-240VAC DIM TRIAC



M/MDO

PEBUK M


LED POWER: 15.6W
LED OUTPUT: 1700LM
SYSTEM POWER: 15.3W
SYSTEM OUTPUT: 1687lm(3000K)
INPUT: 220-240VAC, 50/60Hz
CRI: 90
DIMENSION: 200x100mm
HOLE SIZE: 7



RECOMMEND:



ANGLE:30°



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

PEBUK M DO



LED POWER: 12.6W
LED OUTPUT: 960LM
SYSTEM POWER: 15.3W
SYSTEM OUTPUT: 750lm(2700-6000K)
INPUT: 220-240VAC, 50/60Hz
CRI: 90
DIMENSION: 200x100mm
HOLE SIZE: 7




RECOMMEND:



15.6W 30° 3000K

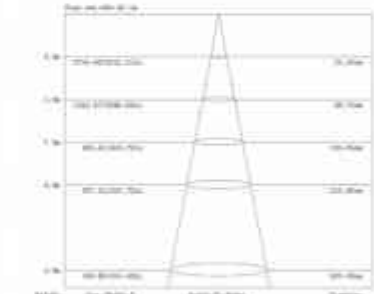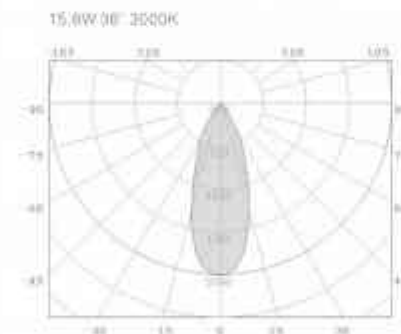



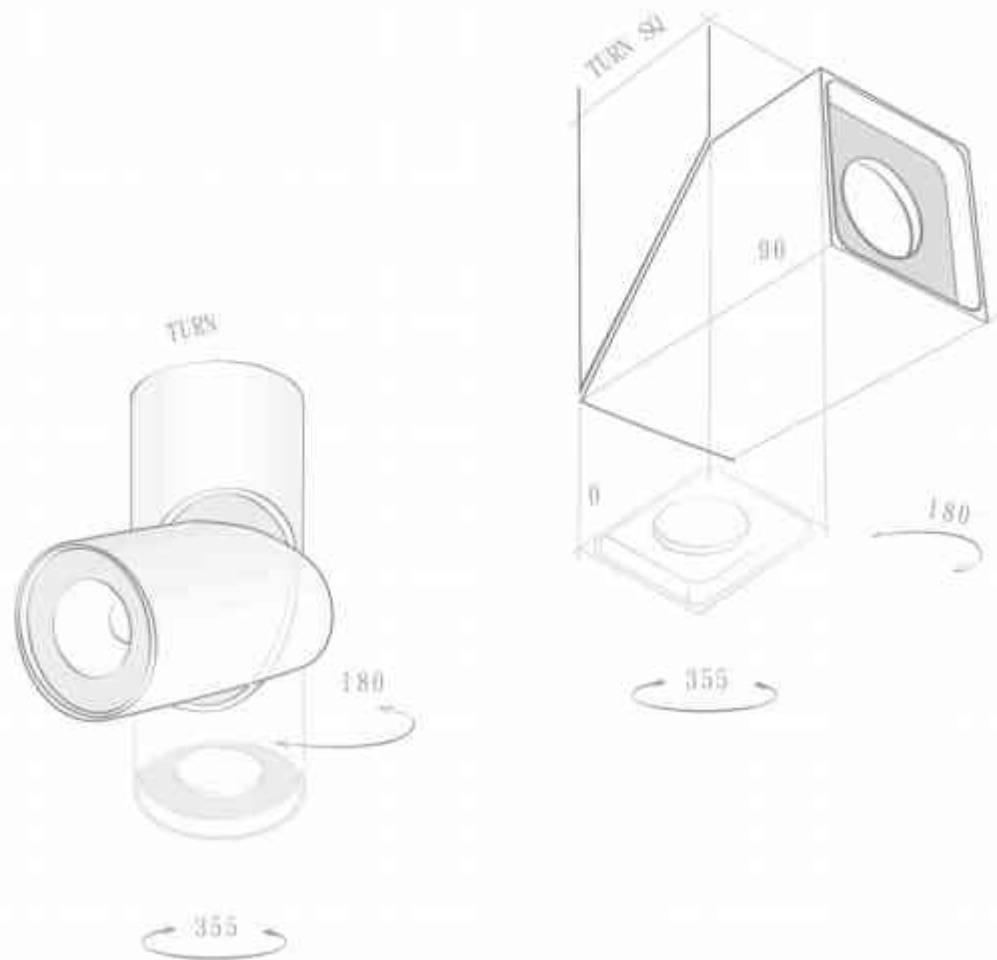

TURN

TURN, as the name of the fixture indicates, can be rotated in different directions however needed.

The body of TURN can be tilted 90° degrees angle, and rotated no less than 350° degrees.

Special structure of TURN provides maximum flexibility to the fitting giving best lighting performance to the room.

Square and cylinder shapes are available, both could have surface mounted or installed by track system.

© CE IP20 DIM TRIAC



COLOR FINISHES




PAW-WEL

PAW

PAJ



ON S

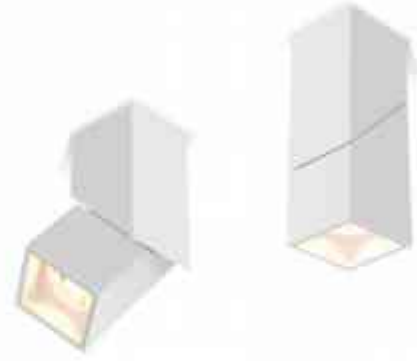

ON S SQUARED



ON M



ON M SQUARED

TURN ON S / ON S SQUARED

LED POWER: 7.4W
LED OUTPUT: 348LM
SYSTEM POWER: 8.5W
SYSTEM OUTPUT: 80LM/3000K
INPUT: 100-240VAC 50/60HZ
CRI: 90
DIMENSION: 262*162mm/10.31*6.38inch
HOLE SIZE: 1





RECOMMEND: OTHER VERSIONS:



TURN ON S / ON S SQUARED

ANGLE 38°

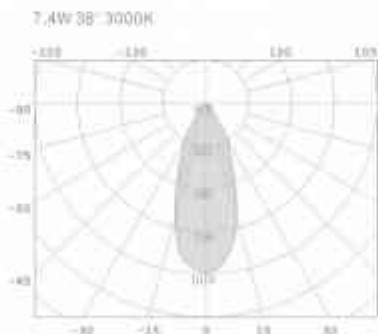


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

TURN ON M / ON M SQUARED

LED POWER: 8.2W
LED OUTPUT: 180LM
SYSTEM POWER: 11.8W
SYSTEM OUTPUT: 80LM/3000K
INPUT: 100-240VAC 50/60HZ
CRI: 90
DIMENSION: 272*182mm/10.71*7.165inch
HOLE SIZE: 1






RECOMMEND:



TURN ON M / ON M SQUARED

ANGLE 30°

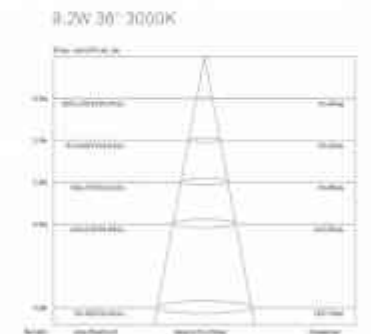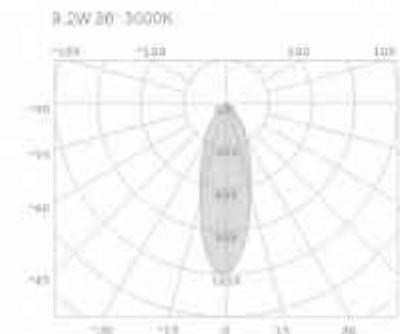

OTHER VERSIONS:




For more information, please visit our website or contact our sales representative



267

TURN ON L / ON L SQUARED


LED POWER: 18.29W
 LED OUTPUT: 1756LM
 SYSTEM POWER: 18.29W
 SYSTEM OUTPUT: 1046lm/3000K
 INPUT: 220-240VAC/50/60HZ
 CRI: 90
 DIMENSION: 280*228mm/90*80*228mm
 HOLE SIZE: /



RECOMMEND: ENERGY STAR
 OTHER VERSIONS: DALI 1504C
 DALI

TURN ON L / ON L SQUARED

ANGLE 37°

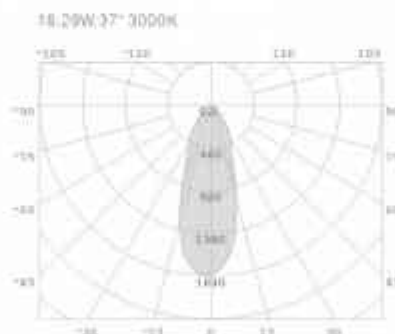

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



SPOTLIGHT

268





269

VIKA

With anti-glare design,
VIKA take you into a lighting world full of gentleness.

Certified with IP54.

It's capable of most interior lighting demands.


And both round and square version are at your service.

You may also design your own square VIKA combo from bachelor to twins,
and to three "musketeers".

© CE IP54 DIM TRIAC DIM 1-10V

VIKA

SPOTLIGHT

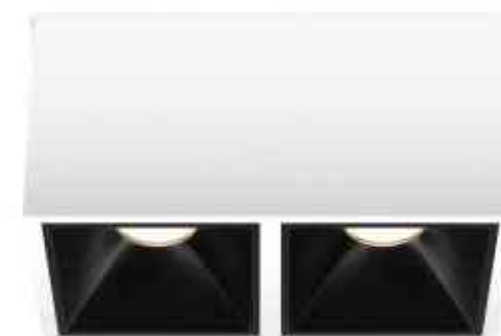

DOUBLE



SINGLE

270

COLOR FINISHINGS:



RAW-WAB RAW-PAW PAB-PAB




S ON SINGLE



S ON DOUBLE



M ON SINGLE

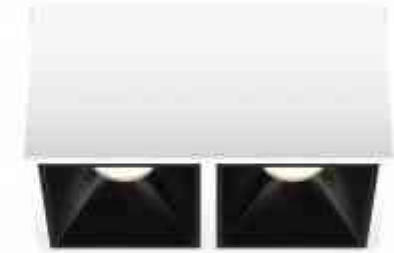

M ON DOUBLE

VIKA S ON SINGLE

LED POWER: 6W
SYSTEM POWER: 8.1W
SYSTEM OUTPUT: 410lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 70*70*77mm
HOLE SIZE: 7




RECOMMEND:



VIKA S ON DOUBLE

LED POWER: 11.6W
SYSTEM POWER: 15.2W
SYSTEM OUTPUT: 800lm/3000K
INPUT: 220-240VAC 50/60Hz
CRI: 90
DIMENSION: 138*70*77mm
HOLE SIZE: 7



RECOMMEND:



ANGLE 30°

VIKA M ON SINGLE

LED POWER: 12.6W
SYSTEM POWER: 15.4W
SYSTEM OUTPUT: 1010lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: 81*91*100mm
HOLE SIZE: 7



RECOMMEND:



OTHER VERSIONS:



VIKA M ON DOUBLE



LED POWER: 25.2W
SYSTEM POWER: 31.8W
SYSTEM OUTPUT: 2020lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: 178*91*100mm
HOLE SIZE: 7






RECOMMEND:



VIKA S ON SINGLE ANGLE 32° VIKA S ON DOUBLE ANGLE 30°

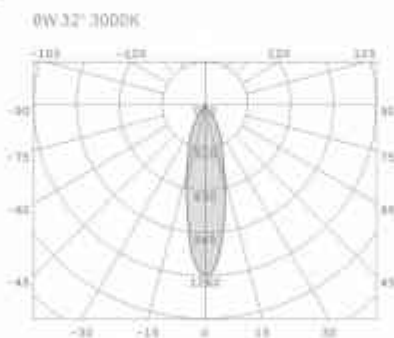

ANGLE 28°

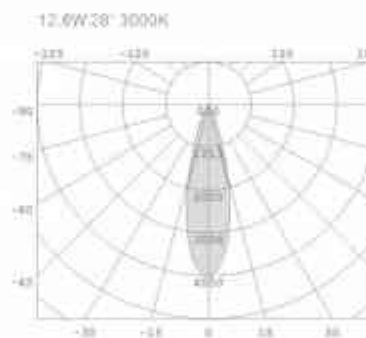

OTHER VERSIONS:



2700K/4000K




2700K/4000K

For more information, please visit our website or contact our sales representative.

CEILING LIGHT



273

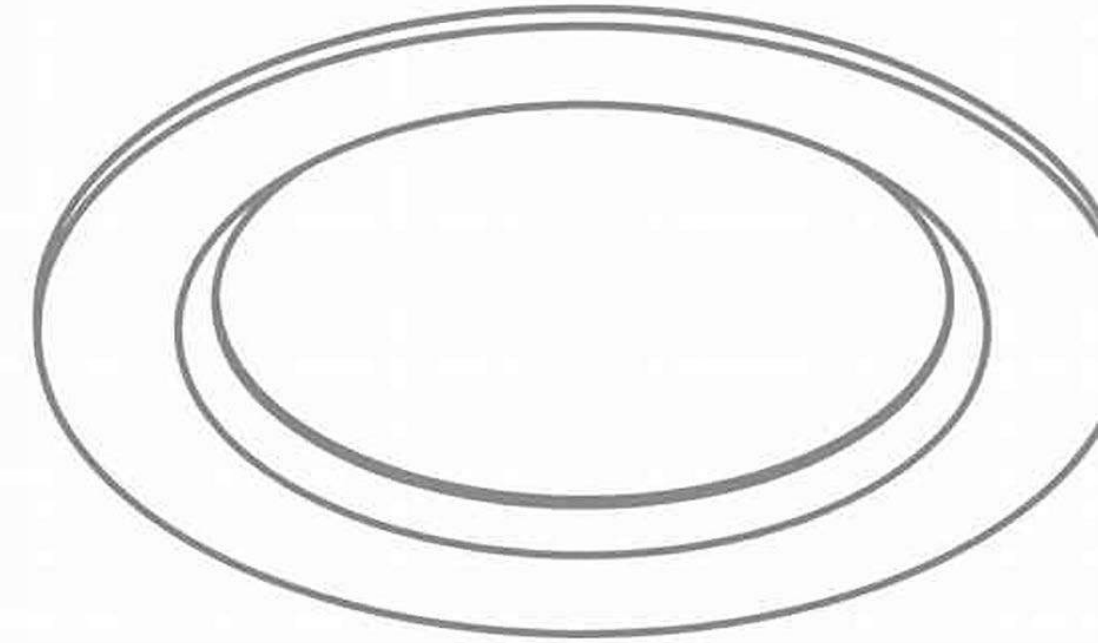

274

PERFORM YOUR LIGHT

FLAT

Ultra slim downlight is the best example of usability and functionality. FLAT is a great solution for the projects where flood light is required. Thanks to its adjustable function and possibility to match the installation cutting hole from 60 mm to 120mm, FLAT is a great choice for both private premises and public areas.

© CE IP20 IP44 DIM TRIAC DALI TOUCH DIM

COLOR FINISHINGS:



RAL RAW

UPGRADE DIFFUSER

FLAT 020/M20



FLAT_{G2.0}



FLAT_{M2.0}

FLAT_{G2.0}  
 LED POWER: 6W
 LED OUTPUT: 755lm
 SYSTEM POWER: 8W
 SYSTEM OUTPUT: 480lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø122*26.3mm
 HOLE SIZE: /





RECOMMEND:



ON/OFF
220V/5A

ANGLE:

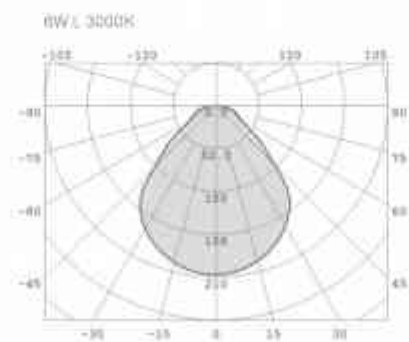

FLAT_{M2.0}  
 LED POWER: 10W
 LED OUTPUT: 1220lm
 SYSTEM POWER: 12W
 SYSTEM OUTPUT: 750lm/3000K
 INPUT: 110-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø150*30mm
 HOLE SIZE: /






RECOMMEND:



ON/OFF
220V/5A

ANGLE:

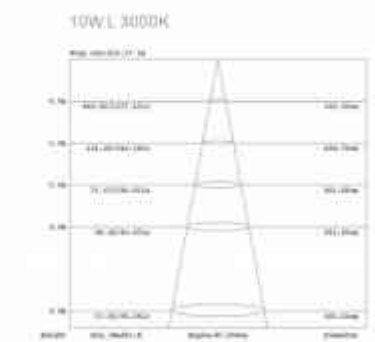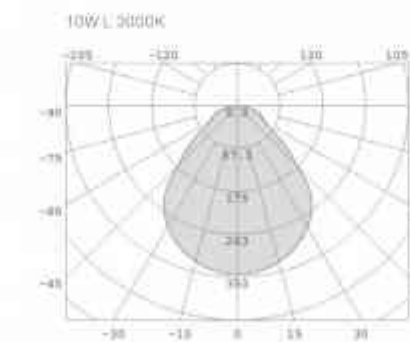




FLAT



FLAT AD

FLAT IP20



LED POWER: 9.6W
 LED OUTPUT: 1
 SYSTEM POWER: 12W
 SYSTEM OUTPUT: 484lm/3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø144x25mm
 HOLE SIZE: Ø50-125mm



RECOMMEND: OTHER VERSIONS:



ANGLE

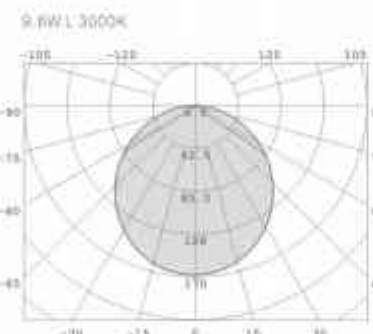

FLAT AD IP20



LED POWER: 9.6W
 LED OUTPUT: 1
 SYSTEM POWER: 12W
 SYSTEM OUTPUT: 484lm/3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø182x30mm
 HOLE SIZE: Ø173mm



RECOMMEND: OTHER VERSIONS:



ANGLE

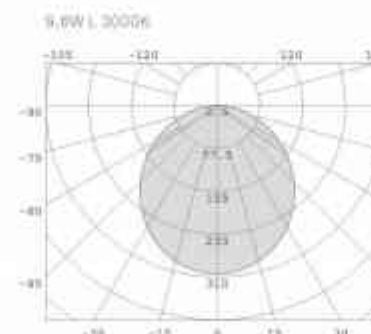



FLAT ON IP (IP44)



FLAT ON2 CC-3

FLAT ON IP (IP44)

LED POWER: 12W
 LED OUTPUT: /
 SYSTEM POWER: 14.4W
 SYSTEM OUTPUT: 85LM/3000K
 INPUT: 100-240VAC
 CR: 90
 DIMENSION: Ø100*37mm
 HOLE SIZE: /



RECOMMEND:




FLAT ON IP
 ANGLE L



FLAT ON2 CC-3 (IP20)

LED POWER: 7.2W+4.2W
 LED OUTPUT: /
 SYSTEM POWER: 16.4W+6.3W
 SYSTEM OUTPUT: 475LM/3000K
 INPUT: 220-240VAC 50/60Hz
 CR: 90
 DIMENSION: Ø100*38.7mm
 HOLE SIZE: /




RECOMMEND:




ANGLE L




7.2W L3000K

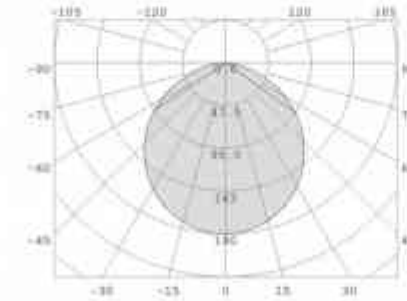

7.2W L3000K

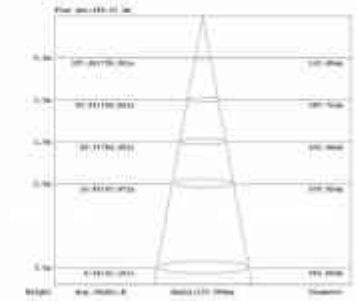

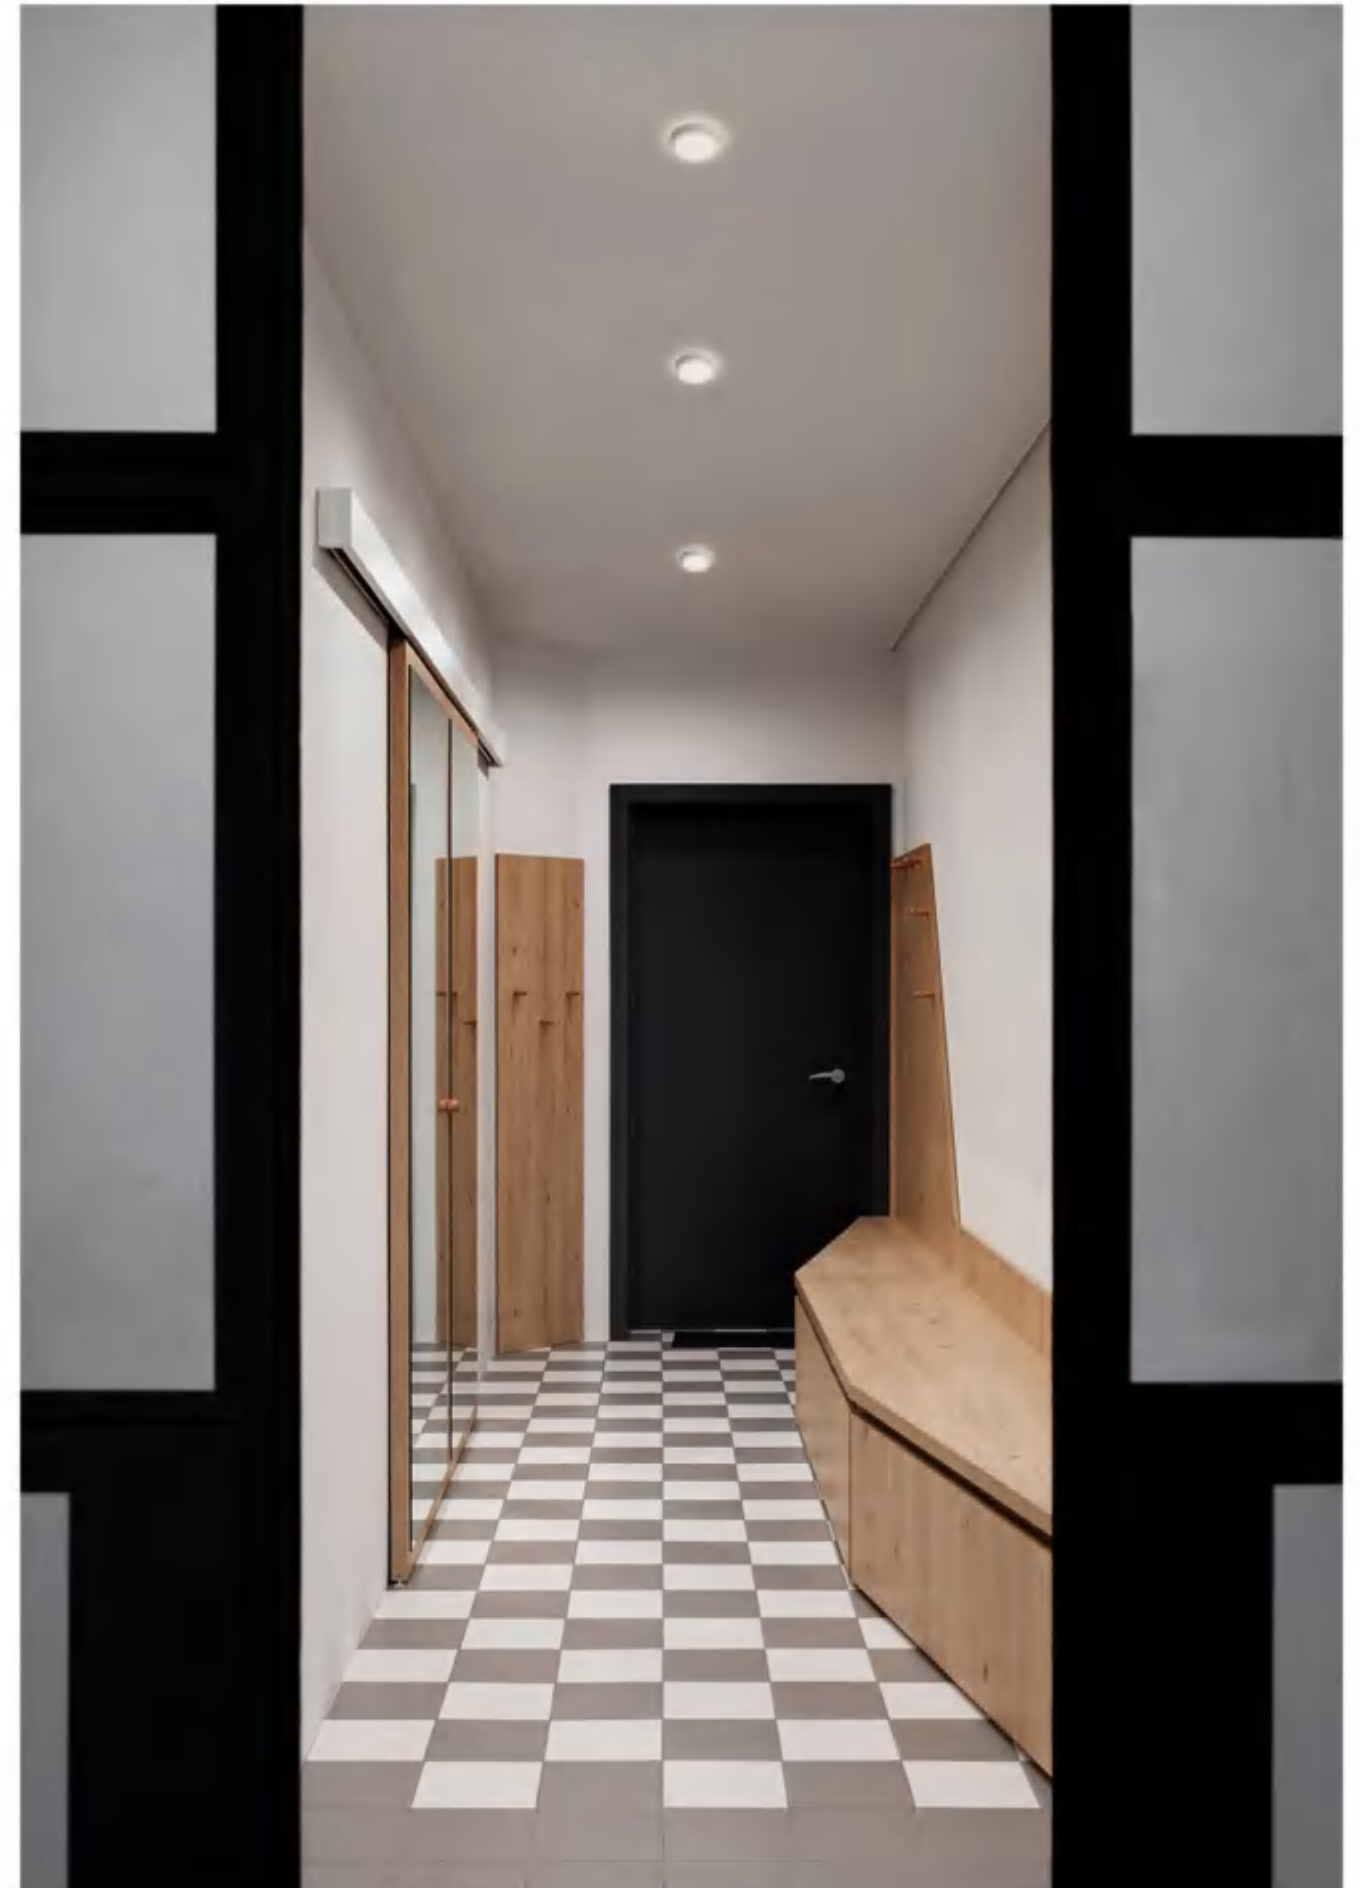



MESO

MESO range is presented with 3 different dimensions.
Thanks to IP 54 rate, the fixture caters for most applications,
be it residential or commercial areas.

MESO is available with the function of brightness and color temperature changing.

User can easily adjust color temperature
from 2700K to 5700K by slightly touch of control panel.

Thanks to the new technology, MESO can easily create different light atmosphere
to the environment according to user's wish.

© CE (220-240VAC) (24VDC) (IP54) (DIM TRIAC) (DIM 1-10V) (DALI) (DIM COLOR)



SS1.1



XS1.1



S1.1



M1.1



L1.1

MESO

CEILING LIGHT

COLOR FINISHINGS:





SS RGB



S RGB



M RGB



L RGB



SS SENSOR/SS SENSOR



XS SENSOR/XS SENSOR



S SENSOR/S SENSOR



M SENSOR/M SENSOR



L SENSOR/L SENSOR

CEILING LIGHT

COLOR FINISHINGS:



RAW



PAK

MESO 00-1-1

LED POWER: 6.3W
LED OUTPUT: 486lm
SYSTEM POWER: 7.4W
OUTPUT: 154lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø90*45mm
HOLE SIZE: Ø90mm

RECOMMEND
DMT/AC 10718DT

OTHER VERSIONS:
DM 1-10V 10718DX
DALI 10718DA

MESO X0-1-1

LED POWER: 8.2W
LED OUTPUT: 736lm
SYSTEM POWER: 11.3W
OUTPUT: 357lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø100*45mm
HOLE SIZE: Ø96mm

RECOMMEND
DMT/AC 10719DT

OTHER VERSIONS:
DM 1-10V 10719DX
DALI 10719DA

MESO 01-1-1

LED POWER: 12.8W
LED OUTPUT: 1106lm
SYSTEM POWER: 19W
OUTPUT: 417lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø120*55.5mm
HOLE SIZE: Ø110mm

RECOMMEND
DMT/AC 10719DT

OTHER VERSIONS:
DM 1-10V 10719DX
DALI 10719DA

MESO M1-1-1

LED POWER: 19W
LED OUTPUT: 1616lm
SYSTEM POWER: 21.4W
OUTPUT: 596lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø147*52mm
HOLE SIZE: Ø130mm

RECOMMEND
DMT/AC 107218DT

OTHER VERSIONS:
DM 1-10V 107218DX
DALI 107218DA

MESO L1-1-1

LED POWER: 28.2W
LED OUTPUT: 2086lm
SYSTEM POWER: 32.2W
OUTPUT: 1044lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø172*52mm
HOLE SIZE: Ø150mm

RECOMMEND
DMT/AC 107218DT

OTHER VERSIONS:
DM 1-10V 107218DX
DALI 107218DA

MESO 00-SENSOR

LED POWER: 6.3W
LED OUTPUT: 486lm
SYSTEM POWER: 8W
OUTPUT: 152lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø90*45mm
HOLE SIZE: Ø90mm

RECOMMEND
ON/OFF 11419A

MESO X0-SENSOR

LED POWER: 10.2W
LED OUTPUT: 736lm
SYSTEM POWER: 12.3W
OUTPUT: 286lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø100*45mm
HOLE SIZE: Ø96mm

RECOMMEND
ON/OFF 11419A

MESO 01-SENSOR

LED POWER: 12.8W
LED OUTPUT: 1106lm
SYSTEM POWER: 18.3W
OUTPUT: 373lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø120*55.5mm
HOLE SIZE: Ø110mm

RECOMMEND
ON/OFF 11421A

MESO M1-SENSOR

LED POWER: 19.7W
LED OUTPUT: 1630lm
SYSTEM POWER: 24.3W
OUTPUT: 509lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø147*52mm
HOLE SIZE: Ø130mm

RECOMMEND
ON/OFF 11421A

MESO L1-SENSOR

LED POWER: 28.8W
LED OUTPUT: 1986lm
SYSTEM POWER: 32.4W
OUTPUT: 945lm/3000K
INPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: Ø172*52mm
HOLE SIZE: Ø150mm

RECOMMEND
ON/OFF 11421A

MESO 00-RGB

LED POWER: 1.3W
LED OUTPUT: 1
SYSTEM POWER: 1.3W
OUTPUT: RGB 300K
INPUT: 24VDC
CRI: 1
DIMENSION: Ø90*45mm
HOLE SIZE: Ø90mm

RECOMMEND
ON/OFF 10794

MESO 01-RGB

LED POWER: 2.7W
LED OUTPUT: 1
SYSTEM POWER: 2.7W
OUTPUT: RGB 300K
INPUT: 24VDC
CRI: 1
DIMENSION: Ø120*55.5mm
HOLE SIZE: Ø110mm

RECOMMEND
ON/OFF 10794

MESO M1-RGB

LED POWER: 3.9W
LED OUTPUT: 1
SYSTEM POWER: 3.9W
OUTPUT: RGB 300K
INPUT: 24VDC
CRI: 1
DIMENSION: Ø147*52mm
HOLE SIZE: Ø130mm

RECOMMEND
ON/OFF 10814

MESO L1-RGB

LED POWER: 8W
LED OUTPUT: 1
SYSTEM POWER: 8W
OUTPUT: RGB 300K
INPUT: 24VDC
CRI: 1
DIMENSION: Ø172*52mm
HOLE SIZE: Ø150mm




RECOMMEND
ON/OFF 10814



LRS SERIES

UL (On Request)

Model No.	Power	Output	MESO S DO 1.1	MESO S DO 1.1	MESO M DO 1.1	MESO L DO 1.1
LR5-50-24	52.6W	24Vdc 2.2A	max.5 sets	max.4 sets	max.2 sets	max.2 sets
LR5-100-24	106W	24Vdc 4.5A	max.10sets	max.8 sets	max.5 sets	max.4 sets

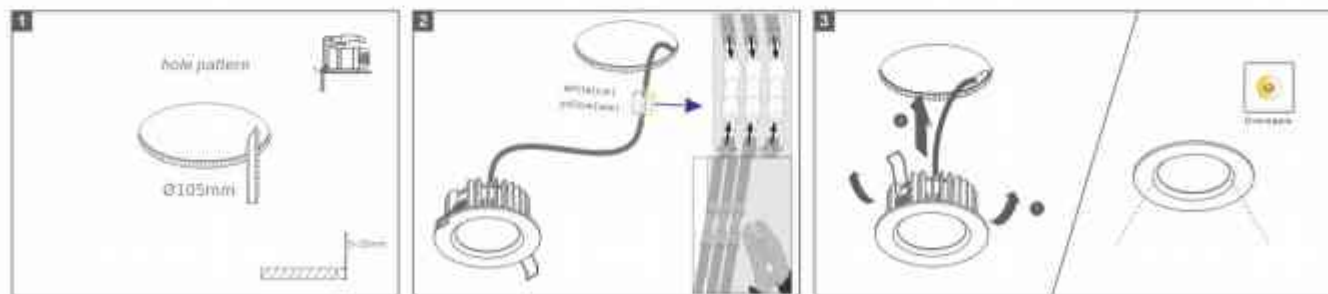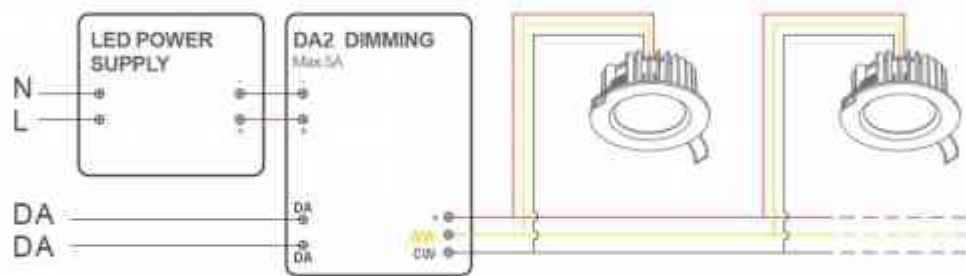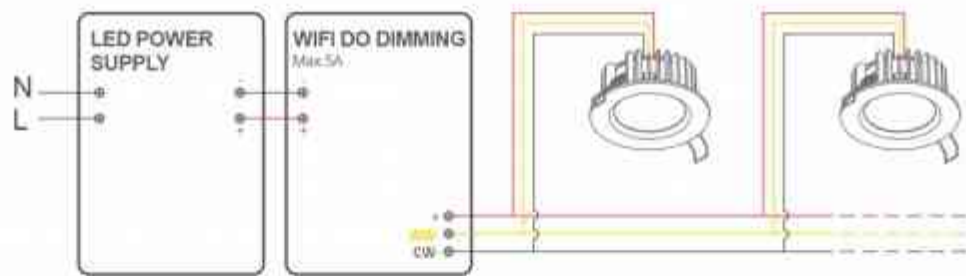

MESO SS / XS / S / M / L

Suggestions for supporting use in the above products



Day / Night

Summer / Winter





MOONY

Surface mounted fixture MOONY, with its simple minimalist design, has already become FLUA classic series.

With IP54 grade, MOONY could be widely used both for indoor and outdoor.

MOONY is available in 3 sizes and presented with spot and diffused versions.

© CE IP54 DIM TRIAC

MOONY



S SPOT

L SPOT

M

COLOR FINISHINGS:



PWW/WH



PWW/WBL



PAB/WBL



PCC/WBL



S



M



L

MOONY S

LED POWER: 6.4W (POLED)
CRI: 90
SYSTEM POWER: 8.4W
OUTPUT: 230lm/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø85x54.5mm
HOLE SIZE: 77



RECOMMEND



MOONY M

LED POWER: 11.6W
CRI: 90
SYSTEM POWER: 13.6W
OUTPUT: 410lm/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø120x71mm
HOLE SIZE: 110



RECOMMEND



OTHER VERSIONS:



MOONY L

LED POWER: 17.2W
CRI: 90
SYSTEM POWER: 20W
OUTPUT: 1090lm/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø160x90mm
HOLE SIZE: 147





RECOMMEND






OTHER VERSIONS:




MOONY S
ANGLE L

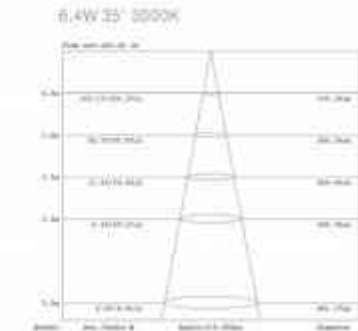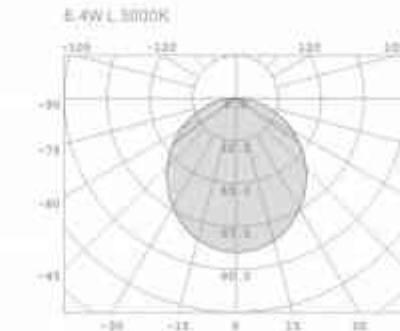

MOONY M
ANGLE L

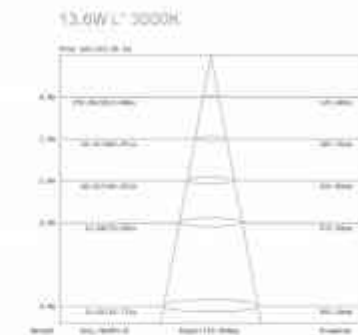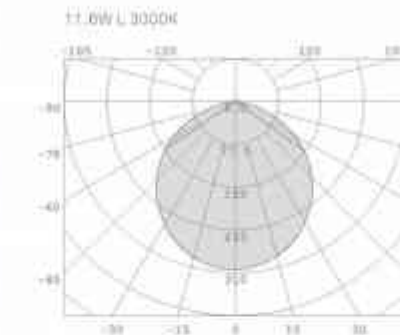

MOONY L
ANGLE L

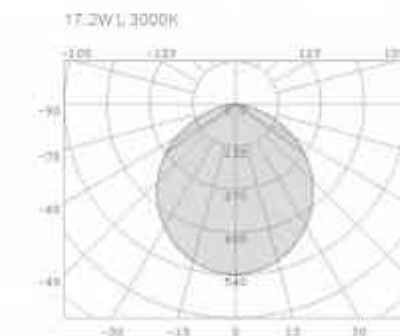



M SENSOR



L SENSOR

MOONY M SENSOR

LED POWER: 13W
CRI: 90
SYSTEM POWER: 16W
OUTPUT: 348lm/3000K
INPUT: 100-240VAC/50/60Hz
DIMENSION: Ø130*77mm
HOLE SIZE: -



RECOMMEND



ON/OFF

MOONY L SENSOR

LED POWER: 26.2W
CRI: 90
SYSTEM POWER: 28.2W
OUTPUT: 650lm/3000K
INPUT: 100-240VAC/50/60Hz
DIMENSION: Ø150*85mm
HOLE SIZE: -






RECOMMEND



ON/OFF



MOONY M SENSOR

ANGLE L

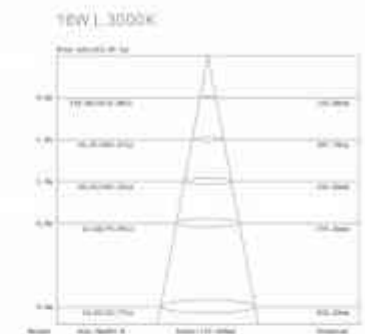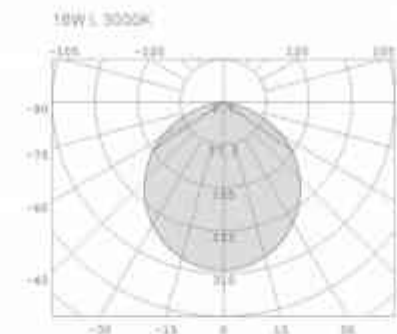

MOONY L SENSOR

ANGLE L

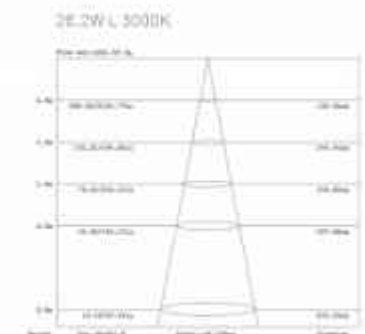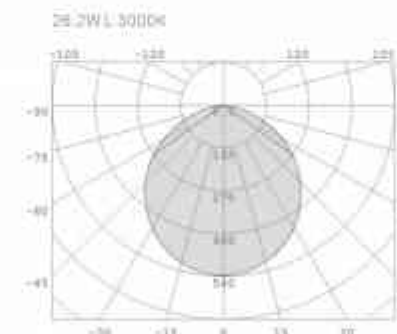



M SPOT






L SPOT





S SPOT



MOONY S SPOT
ANGLE 38°

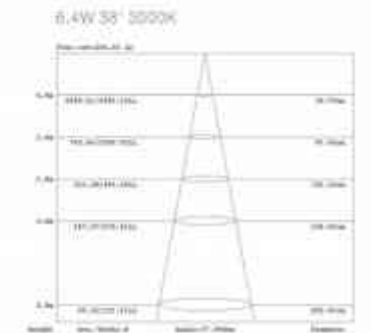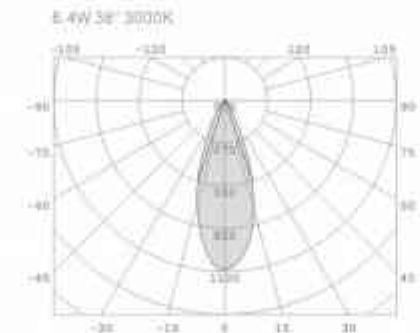

MOONY M SPOT
ANGLE 38°

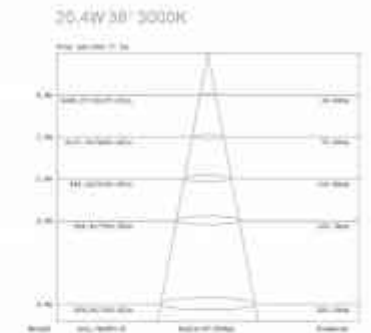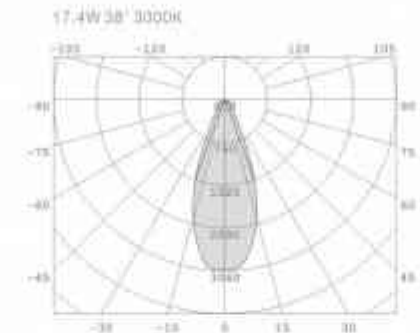

MOONY L SPOT
ANGLE 38°

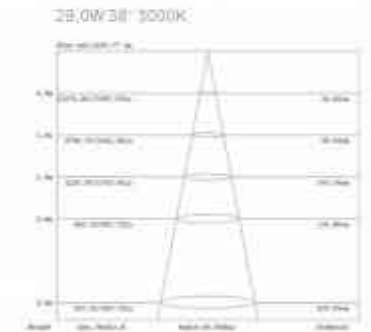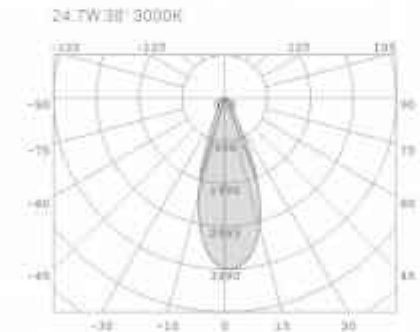

MOONY S SPOT

LED POWER: 6.4W
CRI: 90
SYSTEM POWER: 8.4W
OUTPUT: 299lm/3000K
INPUT: 220-240VAC/50/60Hz
DIMENSION: Ø65/54.5mm
HOLE SIZE: /



RECOMMEND



MOONY M SPOT

LED POWER: 17.4W
CRI: 90
SYSTEM POWER: 20.44W
OUTPUT: 1654lm/3000K
INPUT: 100-240VAC/50/60Hz
DIMENSION: Ø120/71mm
HOLE SIZE: /



RECOMMEND



MOONY L SPOT

LED POWER: 24.7W
CRI: 90
SYSTEM POWER: 29W
OUTPUT: 2121lm/3000K
INPUT: 100-240VAC/50/60Hz
DIMENSION: Ø160/90mm
HOLE SIZE: /




RECOMMEND





SPECIALY TRACK LIGHT (ULTRA)

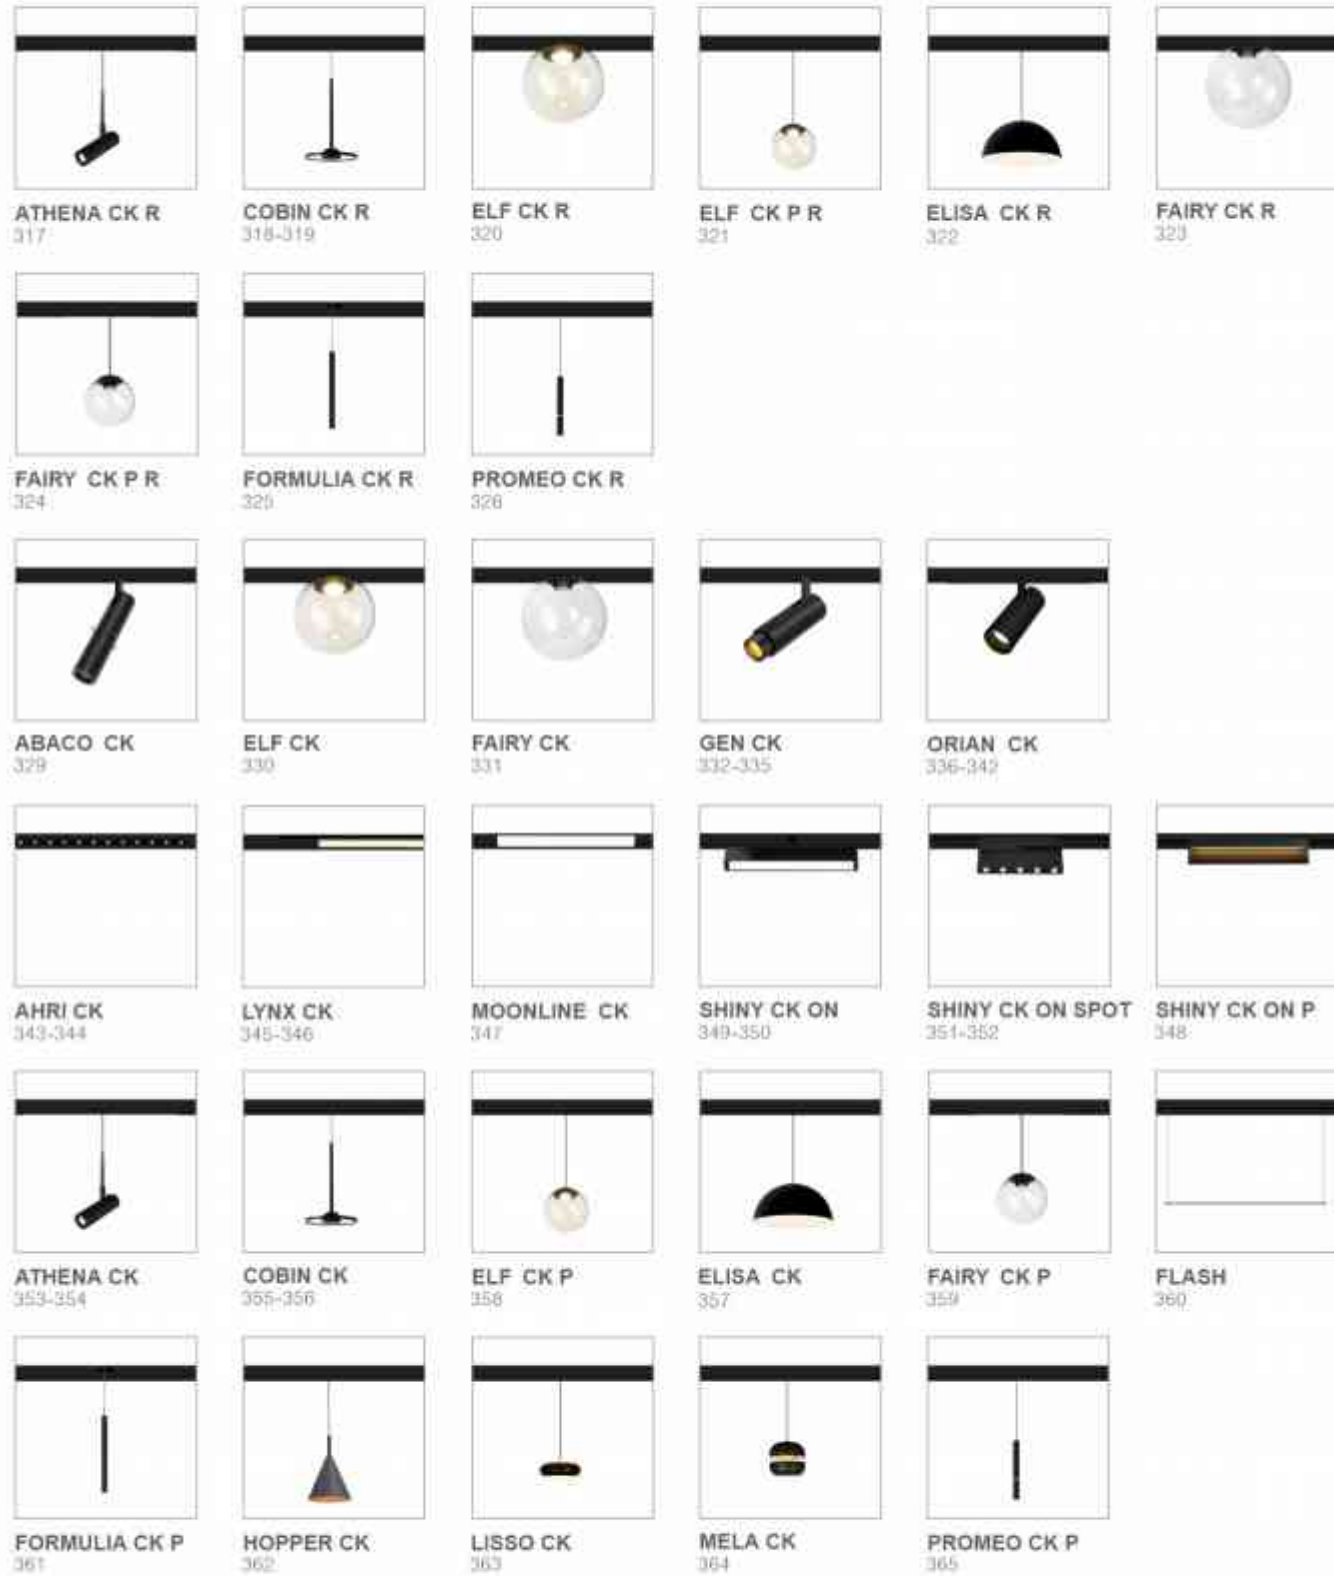

305

BUCKLE TRACK LIGHT (LUCA SS)




BUCKLE TRACK LIGHT (ARMO)




306

MAGNETIC TRACK LIGHT (LUNA S)

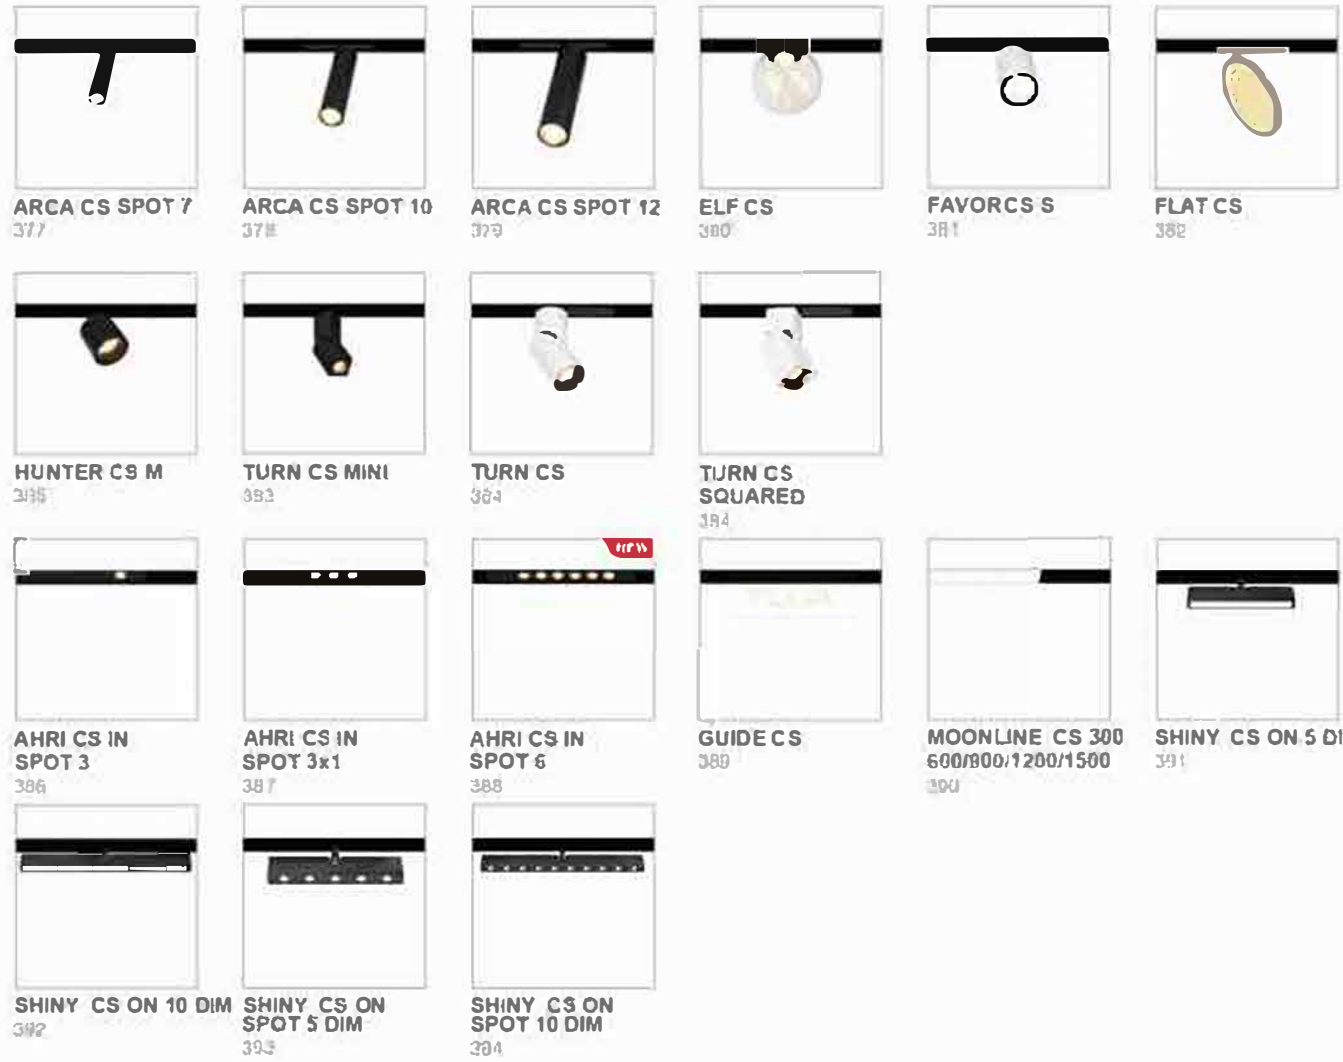

307

MAGNETIC TRACK LIGHT (LUNA M)

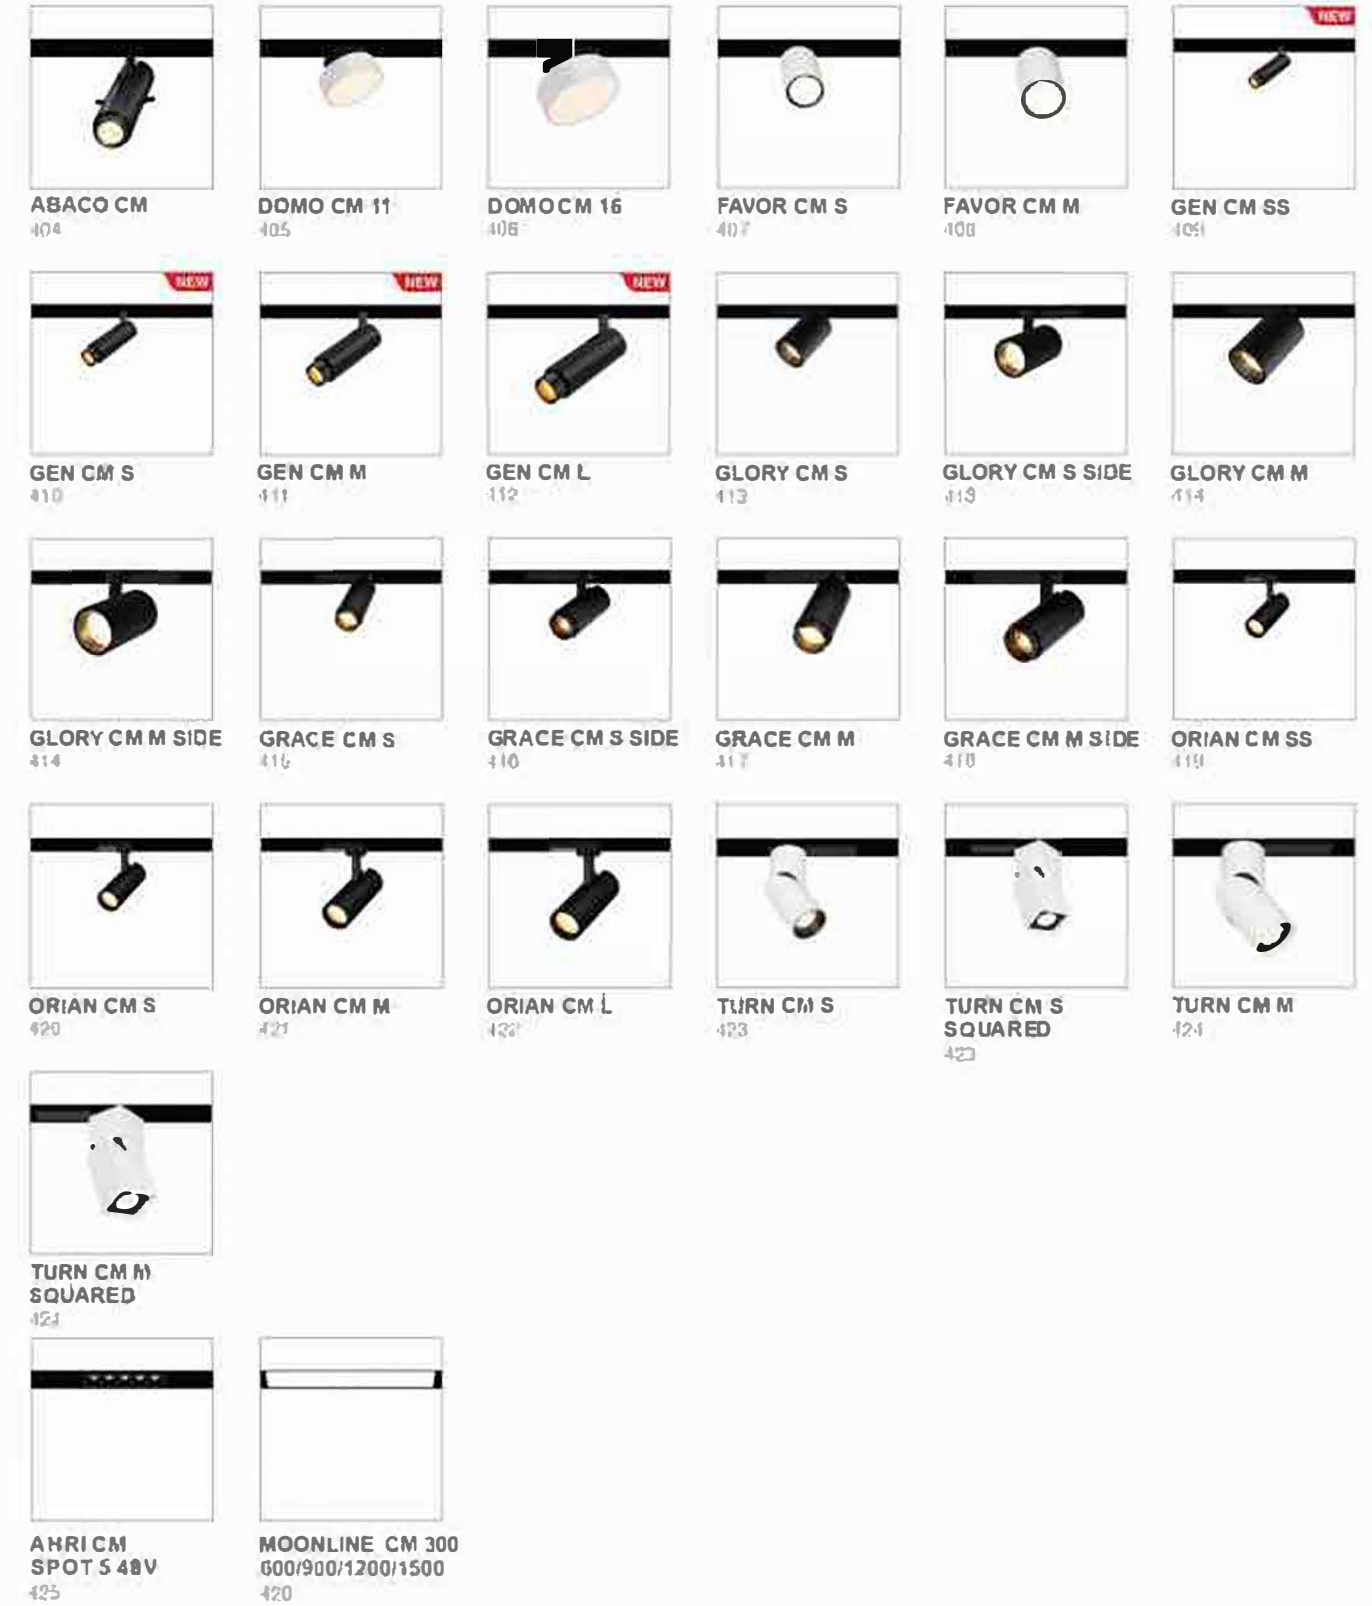

308



ULTRA

ULTRA, FLUA new track system, consists of surface and recessed trimless two installation. through the buckle function and a variety of connectors, it can achieve the straight, arc, and circular space design applications requirements.

Dimming color & brightness by APP, can meet the requirement of home environment; External DALI system can meet the needs of commercial places for the point-to-point lighting control.


Limited spaces, inifited creativity. Extremely narrow, extremely powerful, ULTRA, will be the new leader in the track rail market.

© CE IP20 48VAC





L1500/2500



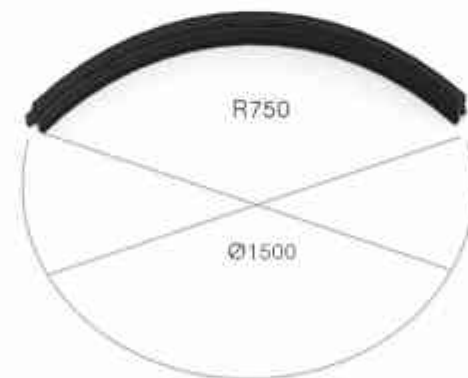





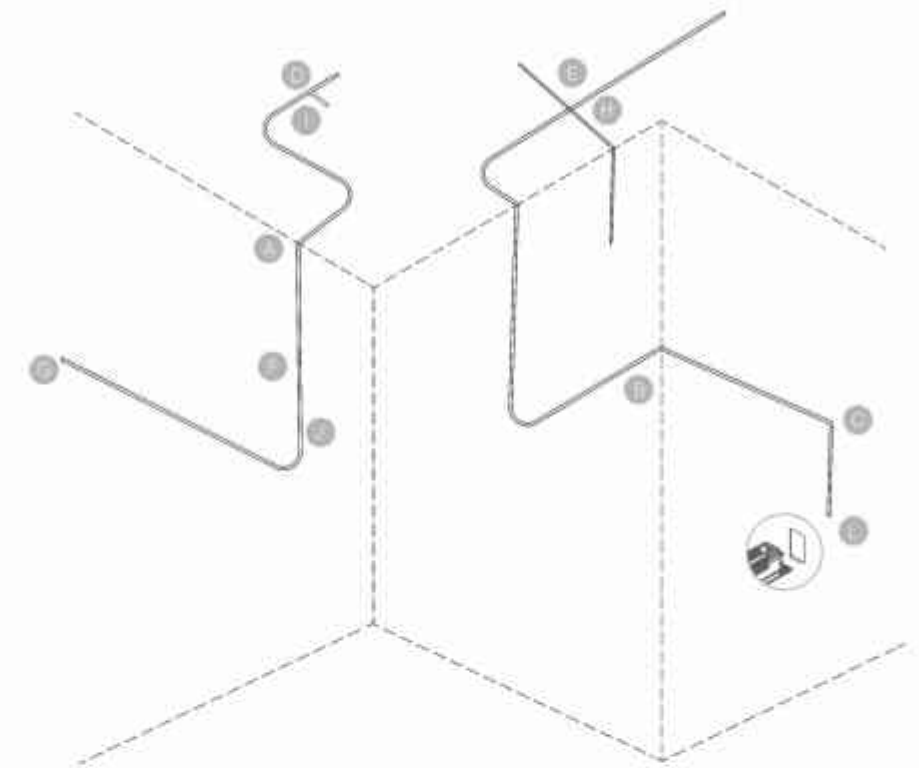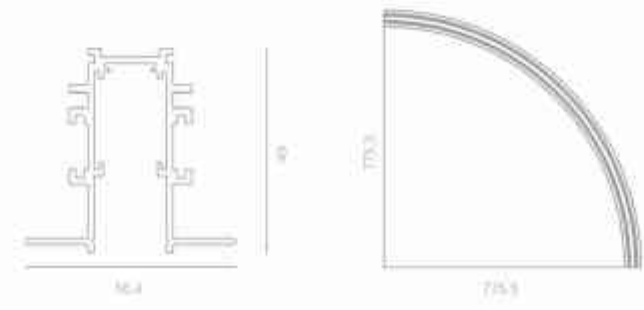



003357/003354



IN R750

003462




- 
A
 DC-L1
 003466
- 
B
 DC-L2
 003487
- 
C
 DC-L3
 003488
- 
D
 DC-L4
 003489
- 
E
 DC-L5
 003490
- 
F
 CONNECT
 003352
- 
G
 CONNECT C0.5M
 003351
- 
H
 CORNER A
 003481
- 
I
 CORNER B
 003515
- 
J
 R CONNECT C0.5M
 003517
- 
K
 R CONNECT
 003480
- 
L
 SIDE 1/SIDE 2
 003353/003703




ON L1500/2500

003358/003355

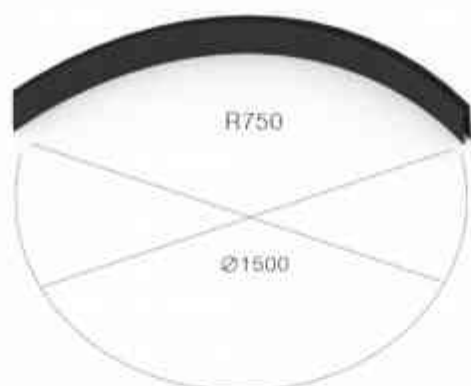

ON R750

003463

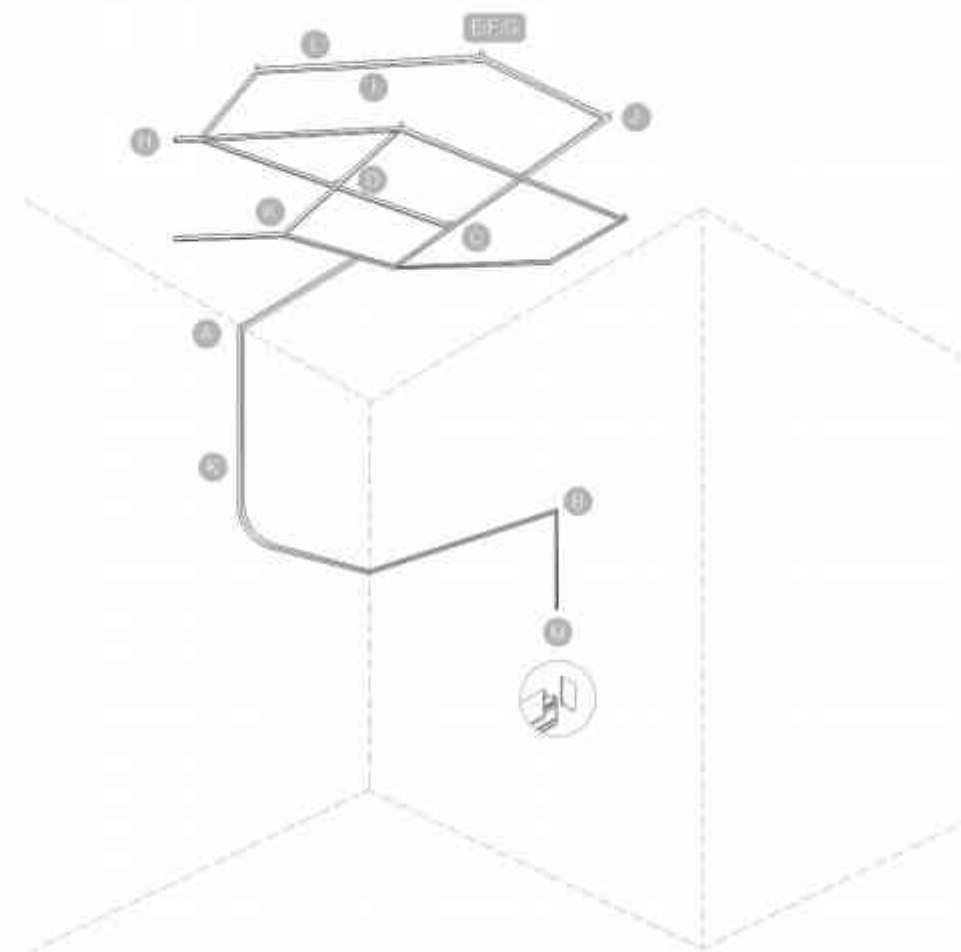

- | | | | | | | |
|-------------------------------|-----------------------------|-------------------------------|-------------------------|-------------------------------|-------------------------------|-------------------------------------|
| | | | | | | |
| A
ON DC-L2
003483 | B
ON DC-L1
003482 | C
ON DC-L3
003484 | D
ON DC-L4
003485 | E
ON CONNECTOR A
003587 | F
ON CONNECTOR B
003589 | |
| | | | | | | |
| G
ON FIX
003619 | H
CONNECT 0.5M
003351 | I
CONNECT
003352 | J
CORNER A
003481 | K
CORNER B
003615 | L
DRIVER 0.2M
003616 | M
SIDE 1/SIDE 2
003353/003709 |
| | | | | | | |
| N
R CONNECT 0.5M
003617 | O
R CONNECT
003480 | P
ON CONNECTOR C
003588 | | | | |



P



A1
P.ON
003697



A2
P.IN
003698



B
P.FIX
003491



C
CONNECT
003352



D
CONNECT C2M
003356



E
SIDE 1/SIDE 2
003353/003703





COBIN CK 25 R



ELF CK R

TRACK LIGHT

COBIN CK 25 R 
 LED POWER: 3.5W
 SYSTEM POWER: 6.4W
 LUMINAIRE LUMEN: 100LM/2700K-4000K
 INPUT: 48V DC
 CRI: 80
 DIMENSION: Ø248*320mm
 HOLE SIZE: ∅100



COBIN CK 25 R 
 LED POWER: 3.5W
 SYSTEM POWER: 3.5W
 LUMINAIRE LUMEN: 100LM/2700K
 INPUT: 48V DC
 CRI: 80
 DIMENSION: Ø248*320mm
 HOLE SIZE: ∅100



RECOMMEND:

 OSRAM COLOR
 A&R

RECOMMEND:

 OSRAM COLOR
 A&R

ANGLE: L



ANGLE: L



ELF CK R 
 LED POWER: 3W
 SYSTEM POWER: 7.5W
 LUMINAIRE LUMEN: 312LM/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø180mm
 HOLE SIZE: ∅100



RECOMMEND: 
 OSRAM COLOR
 A&R

RECOMMEND: 
 OSRAM
 DALI

ELF CK R 
 LED POWER: 6W
 SYSTEM POWER: 8.5W
 LUMINAIRE LUMEN: 303LM/2700-6000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø180mm
 HOLE SIZE: ∅100



RECOMMEND:

 OSRAM COLOR
 A&R

ANGLE: L





ELF CKR 300



ELISA CKR 300

TRACK LIGHT

ELF CKR 300

LED POWER: 5 W
SYSTEM POWER: 5 W
LUMINAIRE LUMEN: 303LM/2700-6500K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø150mm
HOLE SIZE: 1



RECOMMEND:



ELF CKR 300

LED POWER: 5 W
SYSTEM POWER: 7 W
LUMINAIRE LUMEN: 312LM/3000K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø150mm
HOLE SIZE: 1



RECOMMEND: RECOMMEND:



ELISA CKR 300

LED POWER: 20 W
SYSTEM POWER: 23 W
LUMINAIRE LUMEN: 1135LM/3000K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø200*180mm
HOLE SIZE: 1



RECOMMEND: RECOMMEND:



ELISA CKR 300

LED POWER: 17 W
SYSTEM POWER: 23 W
LUMINAIRE LUMEN: 1214LM/2700-6000K
INPUT: 48V DC
CRI: 80
DIMENSION: Ø200*180mm
HOLE SIZE: 1



RECOMMEND:



ANGLE:



ANGLE:



ANGLE:



ANGLE:





FAIRY CK R




FAIRY CK P R

TRACK LIGHT

FAIRY CK R

LED POWER: 3.3W
SYSTEM POWER: 7.5W
LUMINAIRE LUMEN: 350LM 3000K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø150mm
HOLE SIZE: 1



RECOMMEND:

FAIRY CK R

LED POWER: 3.3W
SYSTEM POWER: 6W
LUMINAIRE LUMEN: 230LM 2700K-4000K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø150mm
HOLE SIZE: 1



RECOMMEND:

FAIRY CK P R

LED POWER: 3.3W
SYSTEM POWER: 7.5W
LUMINAIRE LUMEN: 350LM 3000K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø150mm
HOLE SIZE: 1



RECOMMEND:

FAIRY CK P R

LED POWER: 3.3W
SYSTEM POWER: 6W
LUMINAIRE LUMEN: 230LM 2700-4000K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø150mm
HOLE SIZE: 1




RECOMMEND:


ANGLE 36°



3.3W 36° 3000K

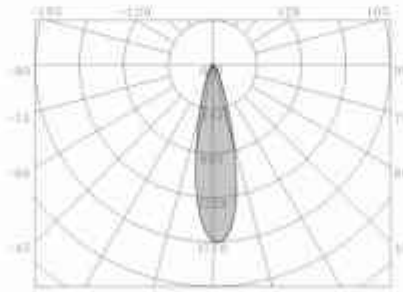

3.3W 36° 3000K



ANGLE L



ANGLE L





FORMULIA CK-R350



PROMEO CK-R200/300/400


FORMULIA CK-R350

LED POWER: 5W
 SYSTEM POWER: 7.4W
 LUMINAIRE LUMEN: 313LM/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø20*300mm
 HOLE SIZE: 1




RECOMMEND:
 DALI APP


ANGLE 20°



5.8W 20° 3000K

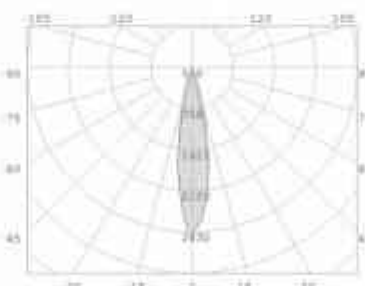


5.8W 20° 3000K

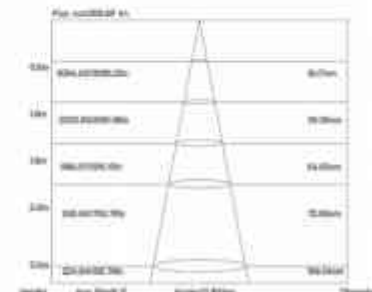

PROMEO CK-R200/300/400

LED POWER: 5W
 SYSTEM POWER: 4.3W
 LUMINAIRE LUMEN: 76LM/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø20*200mm
 Ø20*300mm
 Ø20*400mm
 HOLE SIZE: 1

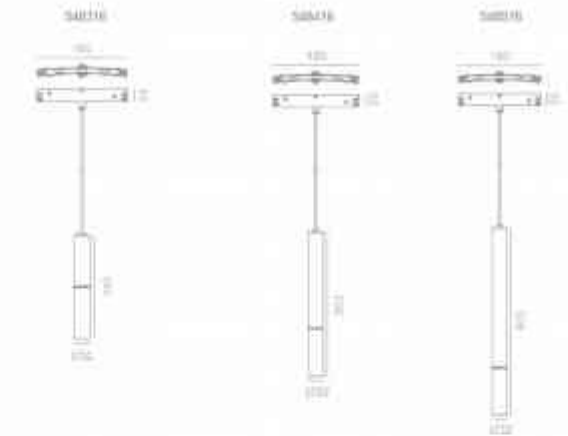


RECOMMEND:
 DALI APP


ANGLE 12°




3.5W 12° 3000K

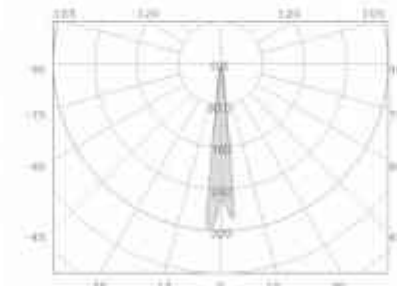

3.5W 12° 3000K

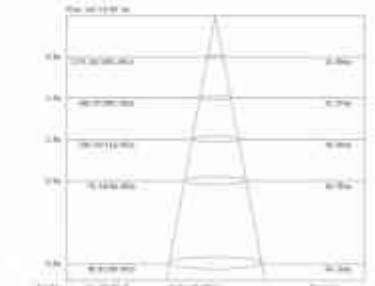

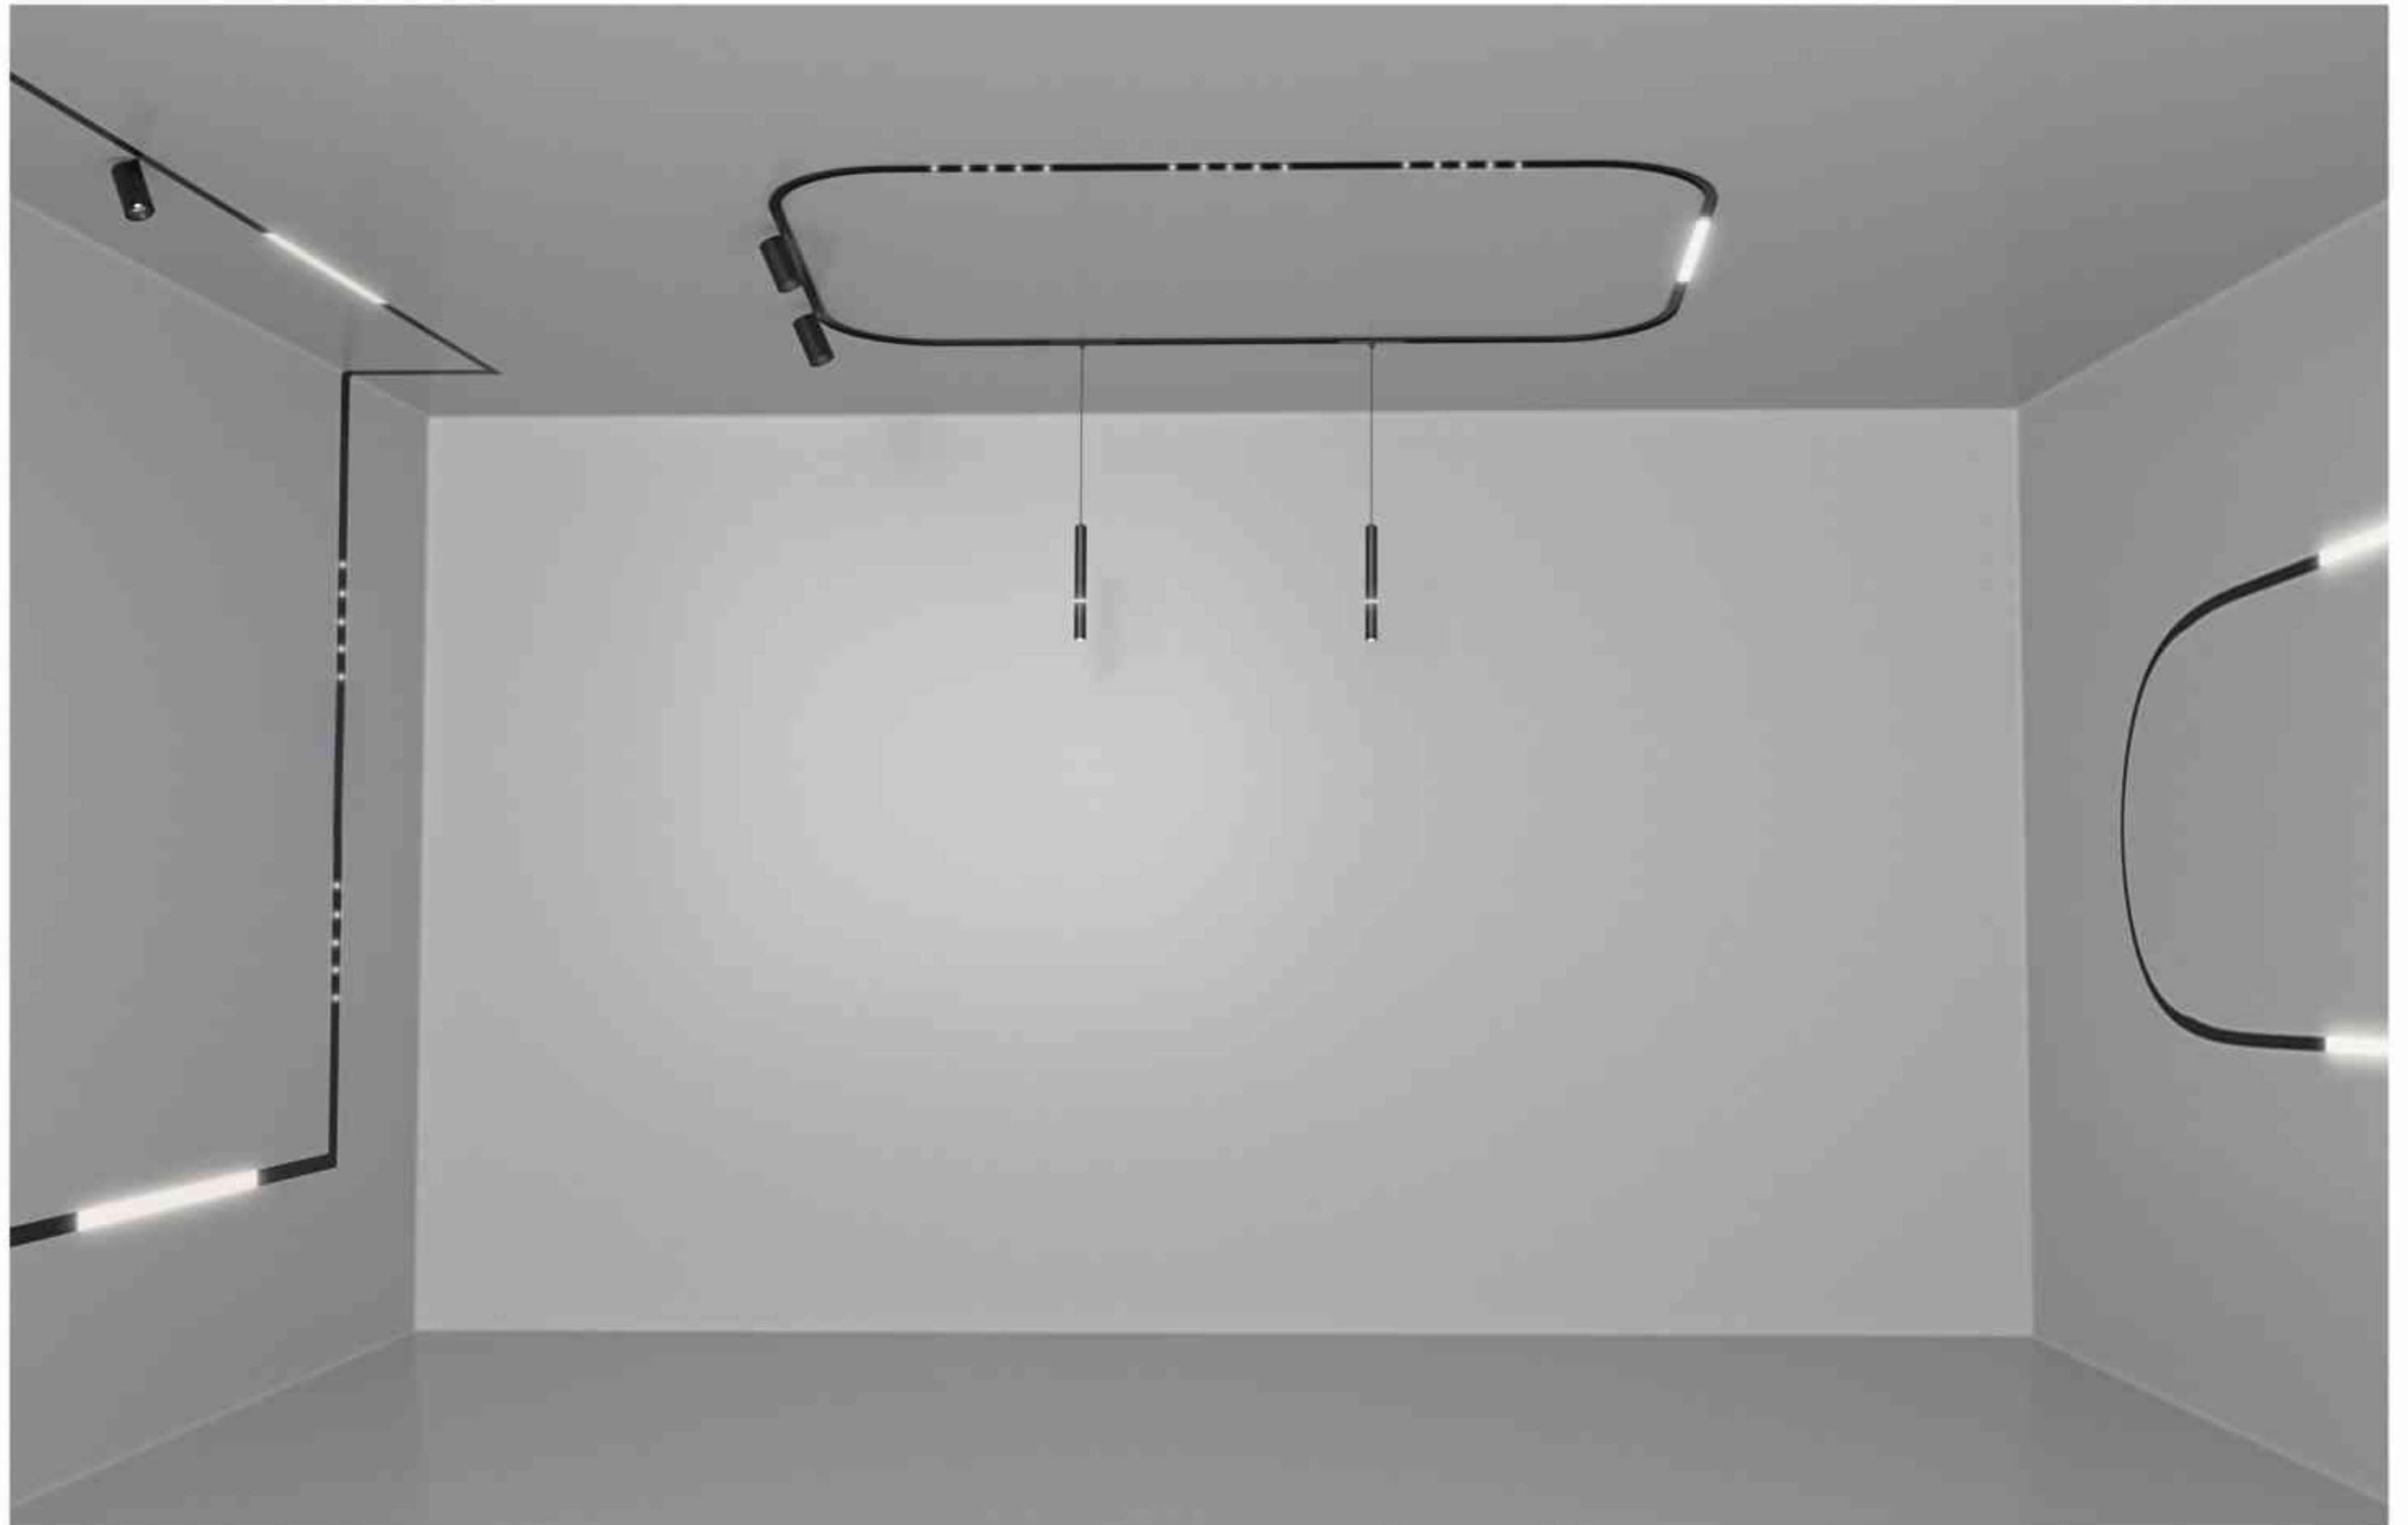




TRACK LIGHT

ABACO OK

ELF OK

ABACO OK
 LED POWER 4.2W
 SYSTEM POWER 4.8W
 OUTPUT: 110lm3000K
 INPUT 48V DC
 CR: 90
 DIMENSION: Ø42x220mm
 HOLE SIZE: /




RECOMMEND:


ANGLE(12°-17°)



0.2W ANGLE(12°-17°) 3000K

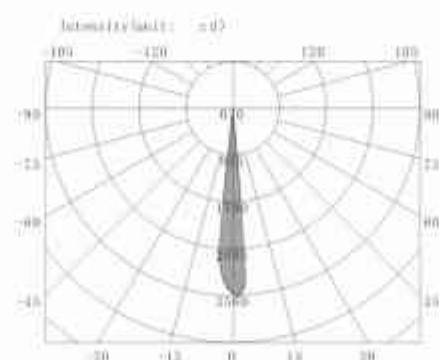

6.2W ANGLE(12°-17°) 3000K

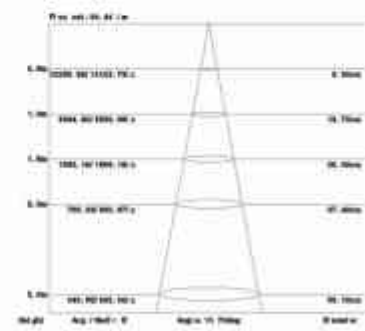

ELF OK
 LED POWER 3.3W
 SYSTEM POWER 7.2W
 SYSTEM OUTPUT: 312LM3000K
 INPUT 48V DC
 CR: 90
 DIMENSION: Ø150mm
 HOLE SIZE: /



RECOMMEND:

ANGLE1



ELF OK
 LED POWER 3.3W
 SYSTEM POWER 8.3W
 SYSTEM OUTPUT: 300LM2700-6000K
 INPUT 48V DC
 CR: 90
 DIMENSION: Ø150mm
 HOLE SIZE: /



RECOMMEND:

ANGLE1





FAIRY CK




GEN CK CC

TRACK LIGHT

FAIRY CK 
 LED POWER: 5.5W
 LED LUMEN: 348LM
 SYSTEM POWER: 7.5W
 SYSTEM OUTPUT: 350LM/3000K
 INPUT: 8W DC
 CRI: 90
 DIMENSION: 37x50mm
 HOLE SIZE: 1



FAIRY CK 
 LED POWER: 5.5W
 LED LUMEN: 480LM
 SYSTEM POWER: 6W
 SYSTEM OUTPUT: 330LM/2700-6000K
 INPUT: 8W DC
 CRI: 90
 DIMENSION: 37x50mm
 HOLE SIZE: 1






RECOMMEND:  
 DIM COLOR
 DALI

RECOMMEND: 
 DIM COLOR
 DALI

GEN CK CC 
 LED POWER: 7W
 SYSTEM POWER: 8.2W
 SYSTEM OUTPUT: 181LM/3000K
 INPUT: 8W DC
 CRI: 90
 DIMENSION: 34x141mm
 HOLE SIZE: 1



RECOMMEND:  
 DIM COLOR
 DALI

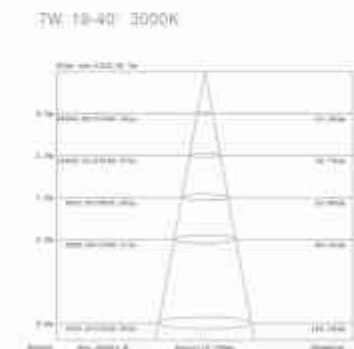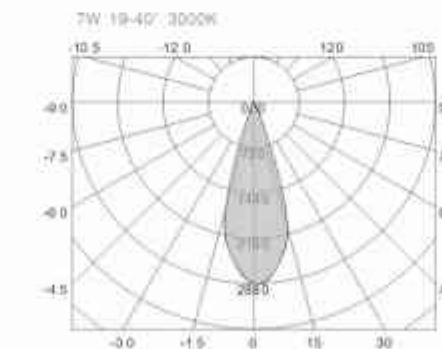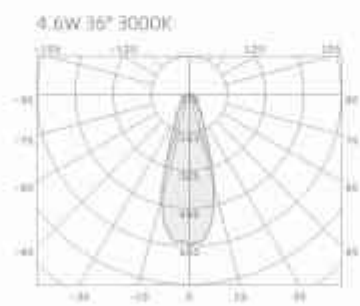




GEN OKC



GEN OKM

GEN OKC

LED POWER: 10.7W
 SYSTEM POWER: 11.9W
 SYSTEM OUTPUT: 215LM/3000K
 BEPLOT: 48VDC
 CRI: 90
 DIMENSION: Ø48*120mm
 HOLE SIZE: 1




RECOMMEND: RECOMMEND:




ANGLE(18°-40°)



10.7W 18-40° 3000K

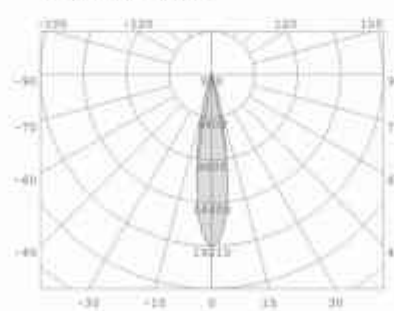

10.7W 18-40° 3000K



GEN OKM

LED POWER: 14.5W
 SYSTEM POWER: 15.4W
 LUMINAIRE LUMEN: 385LM/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø70*120mm
 HOLE SIZE: 1




RECOMMEND: RECOMMEND:




ANGLE(18°-45°)



14.5W 18-45° 3000K

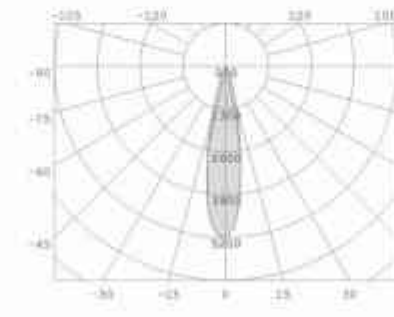

14.5W 18-45° 3000K

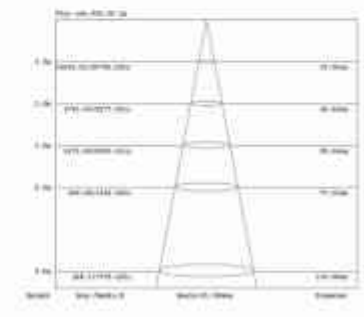



GEN CKL



ORIAN CK-XC

GEN CKL 
 LED POWER: 21.7W
 SYSTEM POWER: 23.3W
 LUMINAIRE LUMEN: 230LM/3000K
 INPUT: 48V AC
 CRI: 90
 DIMENSION: $\varnothing 2 \times 178$ mm
 HOLE SIZE: $\varnothing 2$




RECOMMEND:  
 DIM COLOR:  


ANGLE: 18°-45°




21.6W 18-45° 3000K

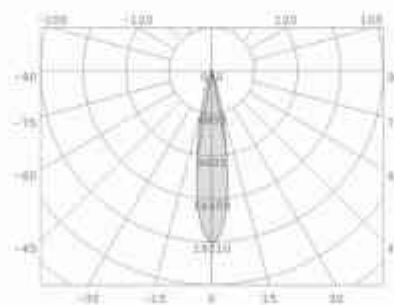

21.6W 18-45° 3000K



ORIAN CK-XC 
 LED POWER: 4W
 SYSTEM POWER: 5W
 OUTPUT: 223LM/3000K
 INPUT: 48V AC
 CRI: 90
 DIMENSION: $\varnothing 2 \times 93$ mm
 HOLE SIZE: $\varnothing 2$




RECOMMEND:  
 DIM COLOR:  


ANGLE: 14°



4W 14° 3000K

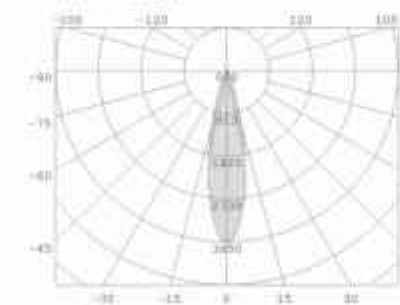

4W 14° 3000K

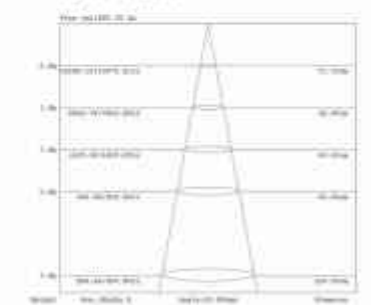




TRACK LIGHT

ORIAN CR SS

ORIAN CR M

ORIAN CR SS

LED POWER 7W
SYSTEM POWER 12W
OUTPUT: 818LM/3000K
INPUT: 48VDC
CRI: 90
DIMENSION: Ø45*118mm
HOLE SIZE: 1




RECOMMEND: RECOMMEND:




ANGLE 24°



TW 24° 3000K

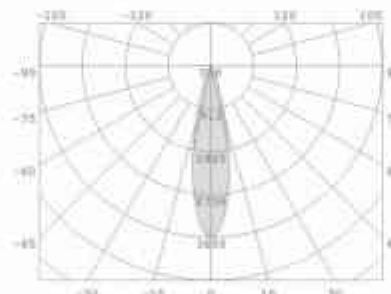

TW 24° 3000K




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

ORIAN CR M

LED POWER 18W
SYSTEM POWER 18.8W
OUTPUT: 1833LM/3000K
INPUT: 48VDC
CRI: 90
DIMENSION: Ø72*127*118mm
HOLE SIZE: 1




RECOMMEND: RECOMMEND:




ANGLE 25°



18W 25° 3000K

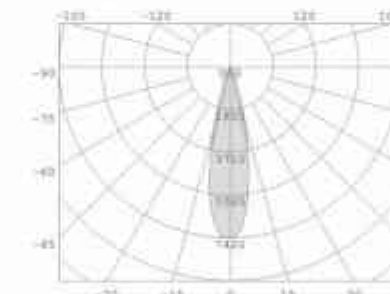

18W 25° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



ORIAN CKL

ORIAN CKSHE

ORIAN CKL 
 LED POWER 25.2W
 SYSTEM POWER 24.9W
 OUTPUT: 1940LM 3000K
 INPUT 48VDC
 CRI: 90
 DIMENSION: Ø72x116x227mm
 HOLE SIZE: 7




RECOMMEND:  RECOMMEND:




ANGLE 25°



25.2W 25° 3000K

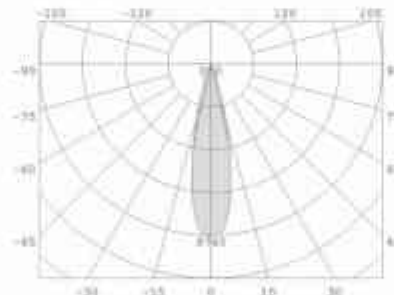

25.2W 25° 3000K




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

ORIAN CKSHE 
 LED POWER 5.8W
 SYSTEM POWER 5.8W
 OUTPUT: 330LM 3000K
 INPUT 48VDC
 CRI: 90
 DIMENSION: Ø42x116mm
 HOLE SIZE: 7




RECOMMEND:  RECOMMEND:




ANGLE 12°



5.8W 12° 3000K

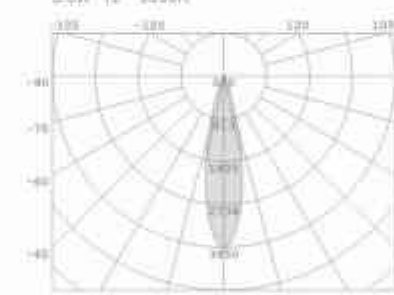

5.8W 12° 3000K






TRACK LIGHT

ORIAN $\text{OK} \infty \text{DO}$

ORIAN $\text{OK} \infty \text{DO}$

ORIAN $\text{OK} \infty \text{DO}$

LED POWER 9.8W
SYSTEM POWER 10.8W
OUTPUT 348LM 2700-6500K
INPUT 48VDC
CRI 90
DIMENSION $\varnothing 48 \times 118\text{mm}$
HOLE SIZE $\varnothing 48$




RECOMMEND:




ANGLE 28°



9.8W 28° 3000K

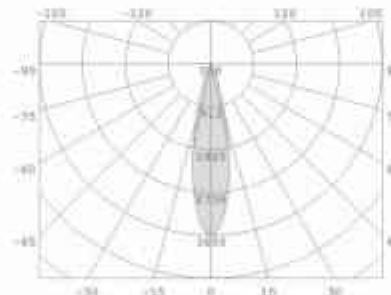

9.8W 28° 5000K




OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

ORIAN $\text{OK} \infty \text{DO}$


LED POWER 19.8W
SYSTEM POWER 20.8W
OUTPUT 1170LM 2700-6500K
INPUT 48VDC
CRI 90
DIMENSION $\varnothing 72 \times 127 \times 118\text{mm}$
HOLE SIZE $\varnothing 72$




RECOMMEND:




ANGLE 27°



19.8W 27° 2700-6500K

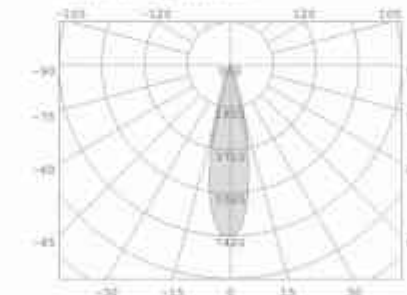

19.8W 27° 2700-6500K

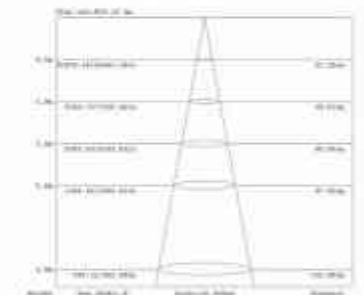

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

AHRI CK SPOT 12

AHRI CK SPOT 24

AHRI CK SPOT 36

343

AHRI CK SPOT 12
 LED POWER 6.5W
 SYSTEM POWER 8.1W
 LUMINAIRE LUMEN: 180LM/2700K-6000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: 300*18.5*16.8mm
 HOLE SIZE: 1



AHRI CK SPOT 24
 LED POWER 13.5W
 SYSTEM POWER 14.6W
 LUMINAIRE LUMEN: 360LM/2700K-6000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: 600*18.5*16.8mm
 HOLE SIZE: 1



RECOMMEND:
 OSRAM
 OSRAM




RECOMMEND:
 OSRAM
 OSRAM

AHRI CK SPOT 36
 LED POWER 23W
 SYSTEM POWER 24.3W
 LUMINAIRE LUMEN: 500LM/2700K-6000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: 900*18.5*16.8mm
 HOLE SIZE: 1



RECOMMEND:
 OSRAM
 OSRAM

344

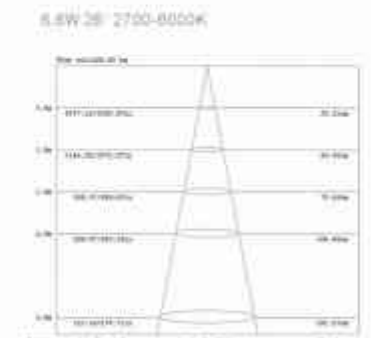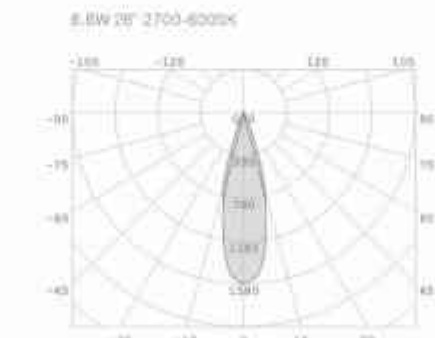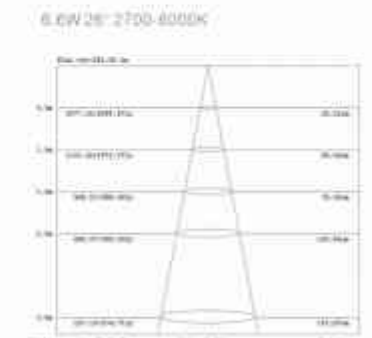

LYNX CK 600 DO

LYNX CK 1200 DO

LYNX CK 1800 DO

345

LYNX CK 600 DO 
 LED POWER 6.5W
 SYSTEM POWER 1.5W
 OUTPUT: 314lm/2700-6500K
 INPUT: AC/DC
 CRI: 80
 DIMENSION: 232x183mm
 HOLE SIZE: \varnothing

LYNX CK 1200 DO 
 LED POWER 13.5W
 SYSTEM POWER 3.5W
 OUTPUT: 628lm/2700-6500K
 INPUT: AC/DC
 CRI: 80
 DIMENSION: 232x183mm
 HOLE SIZE: \varnothing



LYNX CK 1800 DO 
 LED POWER 20.5W
 SYSTEM POWER 5.5W
 OUTPUT: 942lm/2700-6500K
 INPUT: AC/DC
 CRI: 80
 DIMENSION: 232x183mm
 HOLE SIZE: \varnothing



346





MOONLINE CK

SHINY CK ON P 300 DO

MOONLINE CK 300 / 600 / 900

CR: 90
INPUT: 48V DC

ITEM CODE	POWER	SIZE	OUTPUT
94231A/P	3.3W	307*43.3*18.8mm	300LM/3000K
94241A/P	10.9W	344*43.3*18.8mm	400LM/3000K
94251A/P	23.4W	372*43.3*18.8mm	815LM/3000K



SHINY CK ON P 300 DO

LED POWER: 5.8W
SYSTEM POWER: 6W
LUMINAIRE LUMEN: 195LM/2700-6500K
INPUT: 48V DC
CR: 90
DIMENSION: 307*43.3*18.8mm
HOLE SIZE: 4



RECOMMEND:




RECOMMEND:



ANGLE L



ANGLE P






SHINY OK ON 5 DO

SHINY OK ON 10 DO

SHINY OK ON 5 DO

LED POWER 3.5W
 SYSTEM POWER 5.3W
 LUMINAIRE LUMEN 146LM/2100-6500K
 INPUT 48V DC
 CRI 80
 DIMENSION 188*32*14.6mm
 HOLE SIZE 1



RECOMMEND:



ANGLE



SHINY OK ON 10 DO


LED POWER 6.5W
 SYSTEM POWER 9.9W
 LUMINAIRE LUMEN 316LM/2100-6500K
 INPUT 48V DC
 CRI 80
 DIMENSION 300*32*14.6mm
 HOLE SIZE 1



RECOMMEND:



ANGLE






SHINY CK ON SPOT 5 DO

SHINY CK ON SPOT 10 DO

SHINY CK ON SPOT 5 DO

LED POWER: 4.3W
 SYSTEM POWER: 9W
 LUMINAIRE LUMEN: 350LM (2700-6000K)
 INPUT: 48V DC
 CRI: 90
 DIMENSION: 156x37x14.5mm
 HOLE SIZE: 1




RECOMMEND:




ANGLE 30°



4.3W 30° 2700-6000K

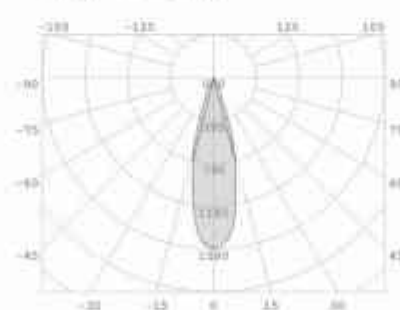


4.3W 30° 2700-6000K



SHINY CK ON SPOT 10 DO


LED POWER: 9W
 LED LUMEN: 1000LM
 LUMINAIRE LUMEN: 387LM (2700-6000K)
 INPUT: 48V DC
 CRI: 90
 DIMENSION: 300x142x50mm
 HOLE SIZE: 1




RECOMMEND:




ANGLE 31°



10W 31° 2700-6000K

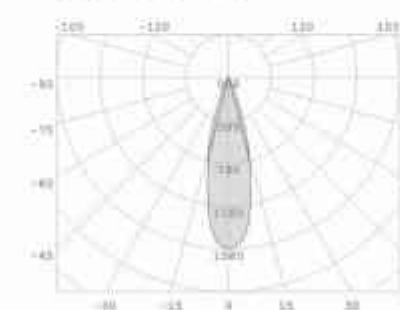

10W 31° 2700-6000K





ATHENA CK



ATHENA CK.P

353

ATHENA CK


LED POWER: 7.9W
 SYSTEM POWER: 9.3W
 LUMINAIRE LUMEN: 630LM/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø42*130mm
 HOLE SIZE: 1




RECOMMEND: RECOMMEND:




ANGLE 27°



7.9W 27° 3000K

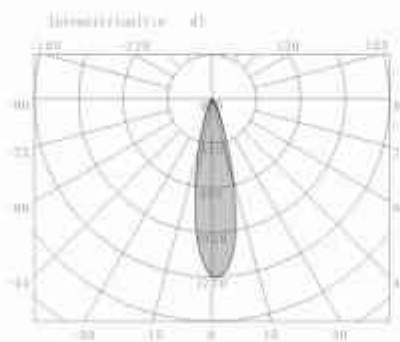

7.9W 27° 3000K



354

ATHENA CK.P


LED POWER: 8.9W
 SYSTEM POWER: 9.9W
 LUMINAIRE LUMEN: 850LM/2700-4500K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø42*130mm
 HOLE SIZE: 1




RECOMMEND:




ANGLE 29°



7.9W 27° 3000K

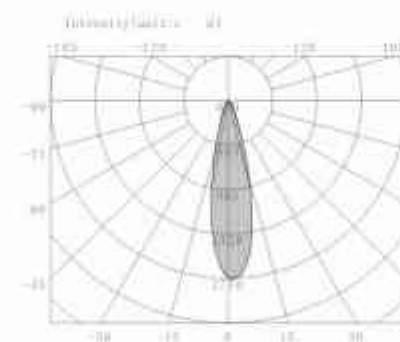

7.9W 27° 3000K

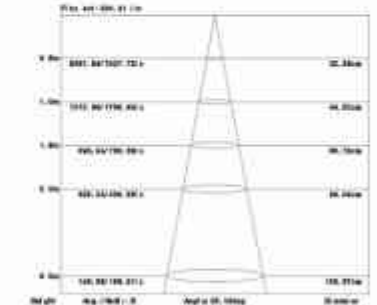

OTHER VERSIONS:



For more information, please, visit our website or contact our sales representative



COBIN CK 18



COBIN CK 25

COBIN CK 18

LED POWER: 3.5W
 SYSTEM POWER: 6.4W
 LUMINAIRE LUMEN: 100LM/2700-6000K
 INPUT: 48V DC
 CRI: 80
 DIMENSION: Ø180x305mm
 HOLE SIZE: 1



RECOMMEND:

DM COLOR 4000

ANGLE 1



COBIN CK 18

LED POWER: 3.5W
 SYSTEM POWER: 3.5W
 LUMINAIRE LUMEN: 100LM/2700K
 INPUT: 48V DC
 CRI: 80
 DIMENSION: Ø180x305mm
 HOLE SIZE: 1



RECOMMEND: RECOMMEND:

DM COLOR 4000

DM COLOR 4000

DM COLOR 4000

ANGLE 1



COBIN CK 25

LED POWER: 3.5W
 SYSTEM POWER: 6.4W
 SYSTEM OUTPUT: 100LM/2700-6000K
 INPUT: 48V DC
 CRI: 80
 DIMENSION: Ø238x305mm



RECOMMEND:

DM COLOR 4000

ANGLE 1



COBIN CK 25

LED POWER: 3.5W
 SYSTEM POWER: 6.4W
 SYSTEM OUTPUT: 100LM/2700-6000K
 INPUT: 48V DC
 CRI: 80
 DIMENSION: Ø238x305mm



RECOMMEND: RECOMMEND:

DM COLOR 4000

DM COLOR 4000

DM COLOR 4000

ANGLE 1





ELISA OK 300



ELISA OK P 300



ELF OK P

357

ELISA OK 300 
 LED POWER: 21.5W
 SYSTEM POWER: 22.2W
 LUMINAIRE LUMEN: 1195LM/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø300*130mm
 HOLE SIZE: 1



RECOMMEND:  
 DIM COLOR:  

ANGLE: 

ELISA OK P 300 
 LED POWER: 21.5W
 SYSTEM POWER: 22.7W
 LUMINAIRE LUMEN: 1320LM/2700-6000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø300*150mm
 HOLE SIZE: 1



RECOMMEND: 
 DIM COLOR: 

ANGLE: 

358

ELF OK P 
 LED POWER: 5.5W
 LED LUMEN: 549LM
 SYSTEM POWER: 7.5W
 SYSTEM OUTPUT: 312LM/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø150mm
 HOLE SIZE: 1



RECOMMEND:  
 DIM COLOR:  

ANGLE: 

ELF OK P 
 LED POWER: 5.5W
 LED LUMEN: 600LM
 SYSTEM POWER: 6.5W
 SYSTEM OUTPUT: 300LM/2700-6000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø150mm
 HOLE SIZE: 1



RECOMMEND: 
 DIM COLOR: 

ANGLE: 



FAIRY CK P



FLASH CK

FAIRY CK P
 LED POWER: 5.5W
 LED LUMEN: 542lm
 SYSTEM POWER: 7.5W
 LUMINAIRE LUMEN: 300LM/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø150mm
 HOLE SIZE: 1



FAIRY CK P
 LED POWER: 5.5W
 LED LUMEN: 442lm
 SYSTEM POWER: 6.5W
 LUMINAIRE LUMEN: 250LM/2700-6500K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø150mm
 HOLE SIZE: 1





RECOMMEND:
 DALI
 DIM COLOR:
 DALI

RECOMMEND:
 DALI
 DIM COLOR:
 DALI

FLASH CK
 LED POWER: 20 W
 SYSTEM POWER: 21 W
 SYSTEM OUTPUT: 364LM/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: 218*121*62mm
 HOLE SIZE: 1



RECOMMEND:
 DALI

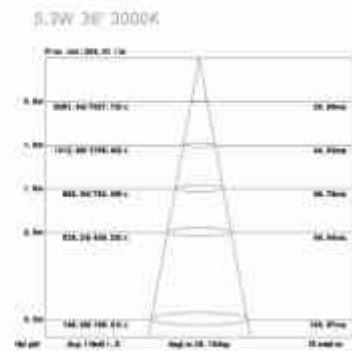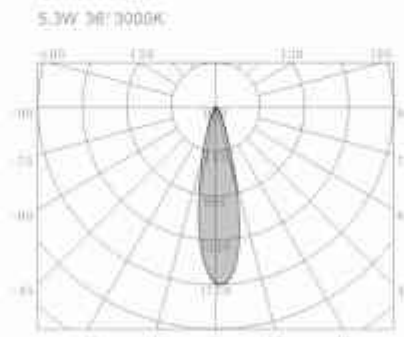



FORMULIA CK P 350



HOPPER CK 5M

FORMULIA CK P 350

LED POWER: 5.8W
 SYSTEM POWER: 7.4W
 SYSTEM OUTPUT: 325LM/3000K
 INPUT: 48V DC
 CR: 90
 DIMENSION: Ø28x350mm
 HOLE SIZE: >




RECOMMEND: RECOMMEND:




ANGLE: 20°



5.8W 20° 3000K

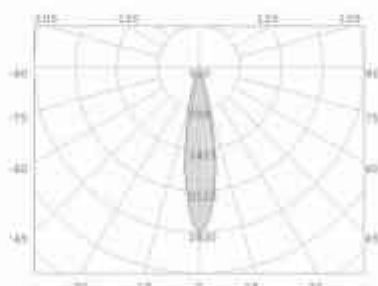

5.8W 20° 3000K

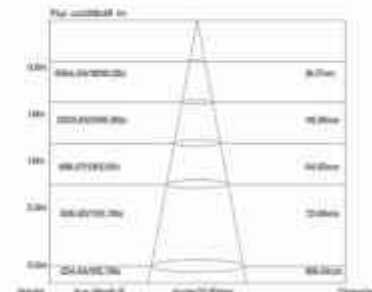

HOPPER CK 5

LED POWER: 6.7W
 SYSTEM POWER: 8.5W
 SYSTEM OUTPUT: 330LM/3000K
 INPUT: 48V DC
 CR: 90
 DIMENSION: Ø200x350mm
 HOLE SIZE: >



RECOMMEND: RECOMMEND:



ANGLE: 1



HOPPER CK M

LED POWER: 14W
 SYSTEM POWER: 15W
 SYSTEM OUTPUT: 616LM/3000K
 INPUT: 48V DC
 CR: 91
 DIMENSION: Ø200x245mm
 HOLE SIZE: >



RECOMMEND: RECOMMEND:



ANGLE: 1





LISSO OK



MELO OK

363

LISSO OK

LED POWER: 11.8W
 SYSTEM POWER: 16.2W
 OUTPUT: 678LM/3000K
 CRI: 90
 INPUT: 48VDC
 DIMENSION: 27x51x70mm
 HOLE SIZE: 7



RECOMMEND:

RECOMMEND:

ANGLE:



364

MELO OK

LED POWER: 14.5W
 SYSTEM POWER: 19.5W
 OUTPUT: 800LM/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: 47x51x130mm
 HOLE SIZE: 7



RECOMMEND:

RECOMMEND:




ANGLE:






PROMEO CK P 200 / P 300 / P 400

LED POWER 3.5W
 SYSTEM POWER 4.5W
 OUTPUT: 28lm/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø32x200mm
 Ø32x300mm
 Ø32x400mm
 HOLE SIZE: /

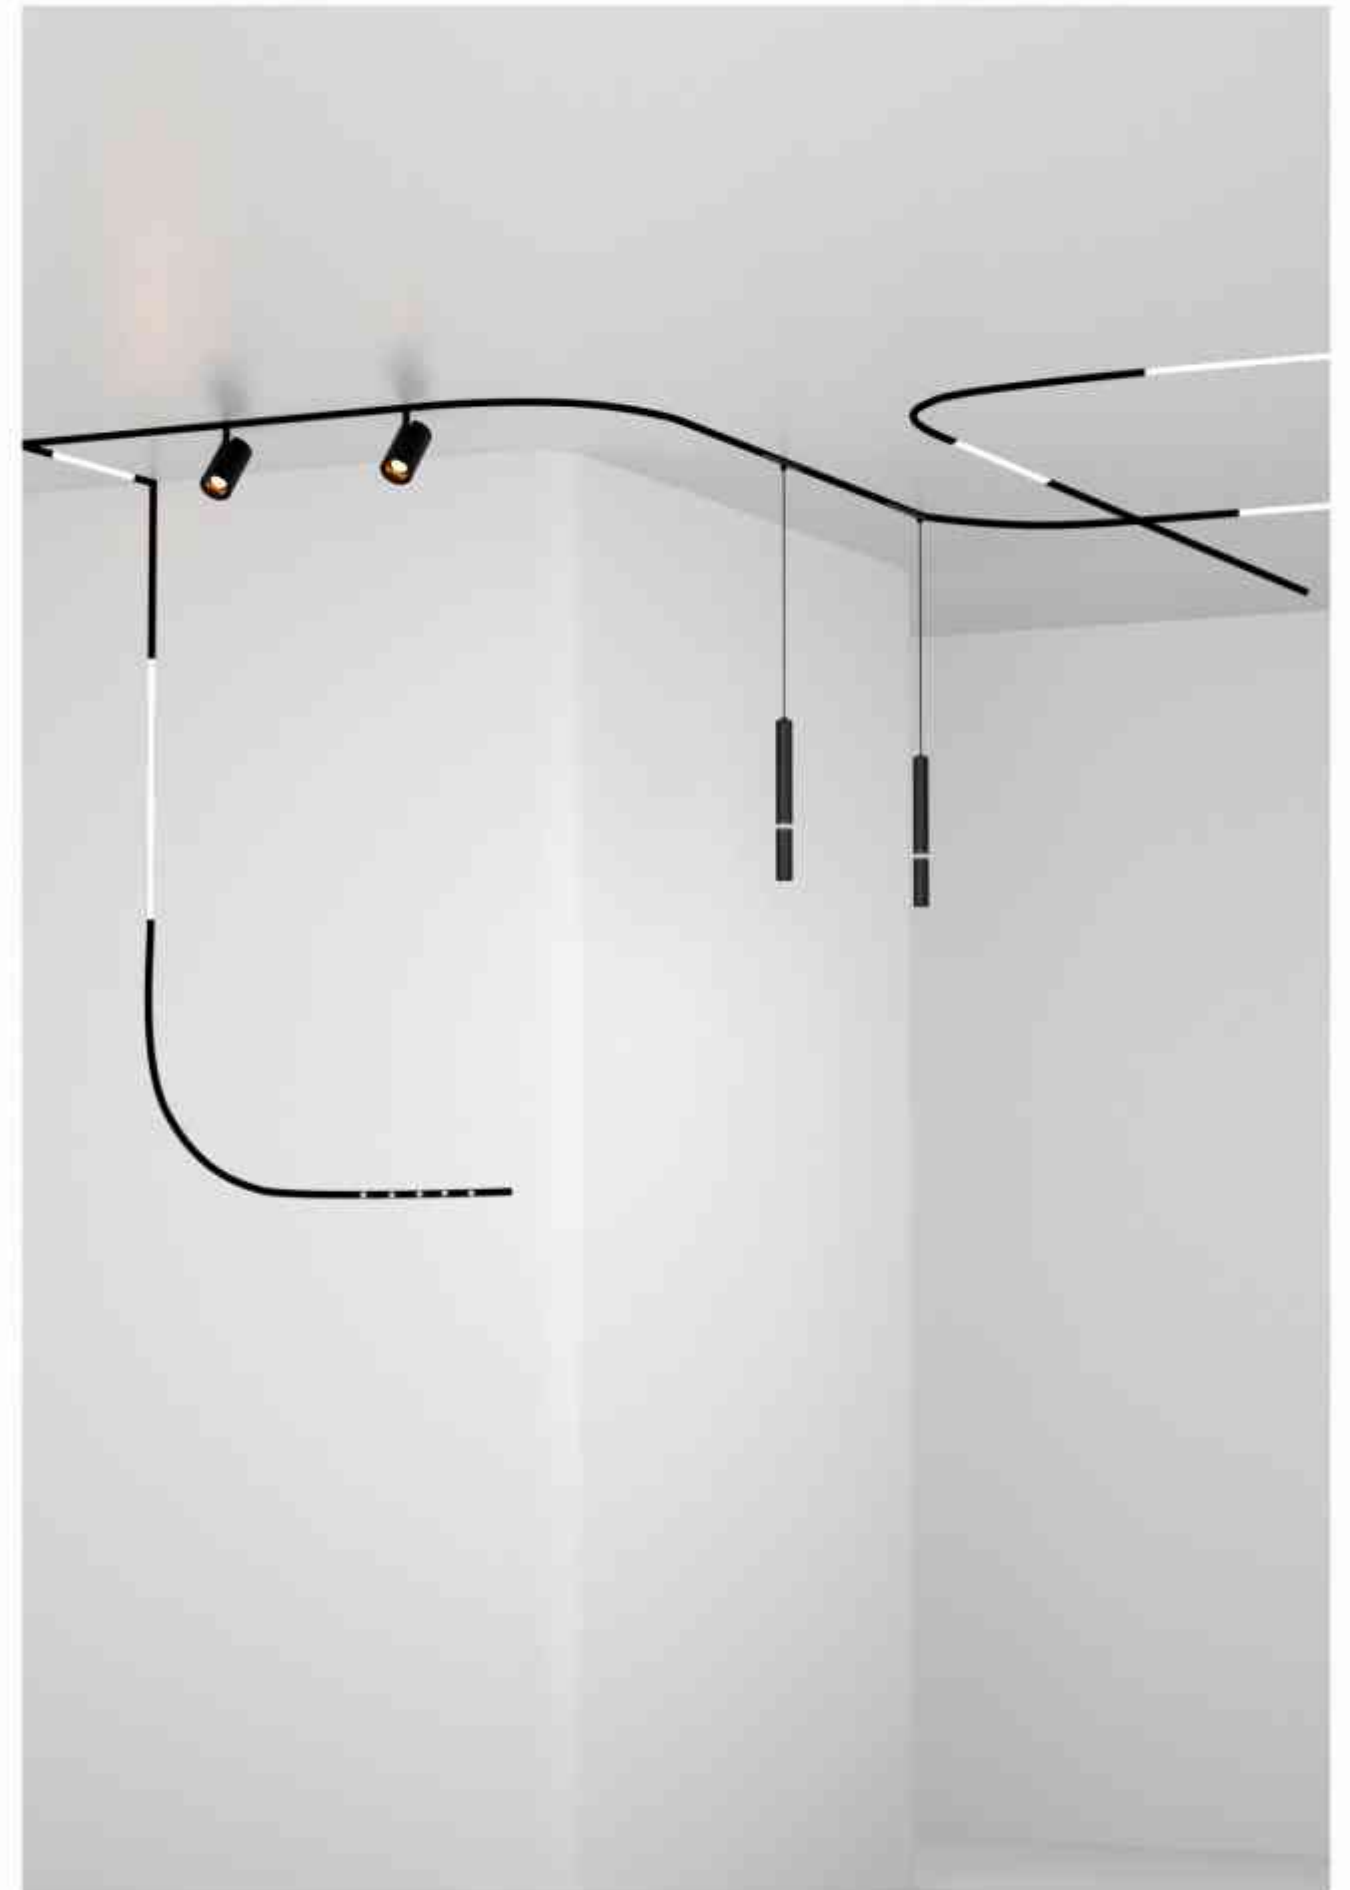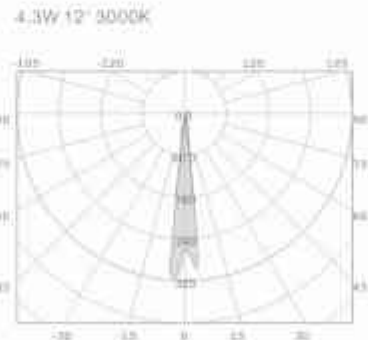



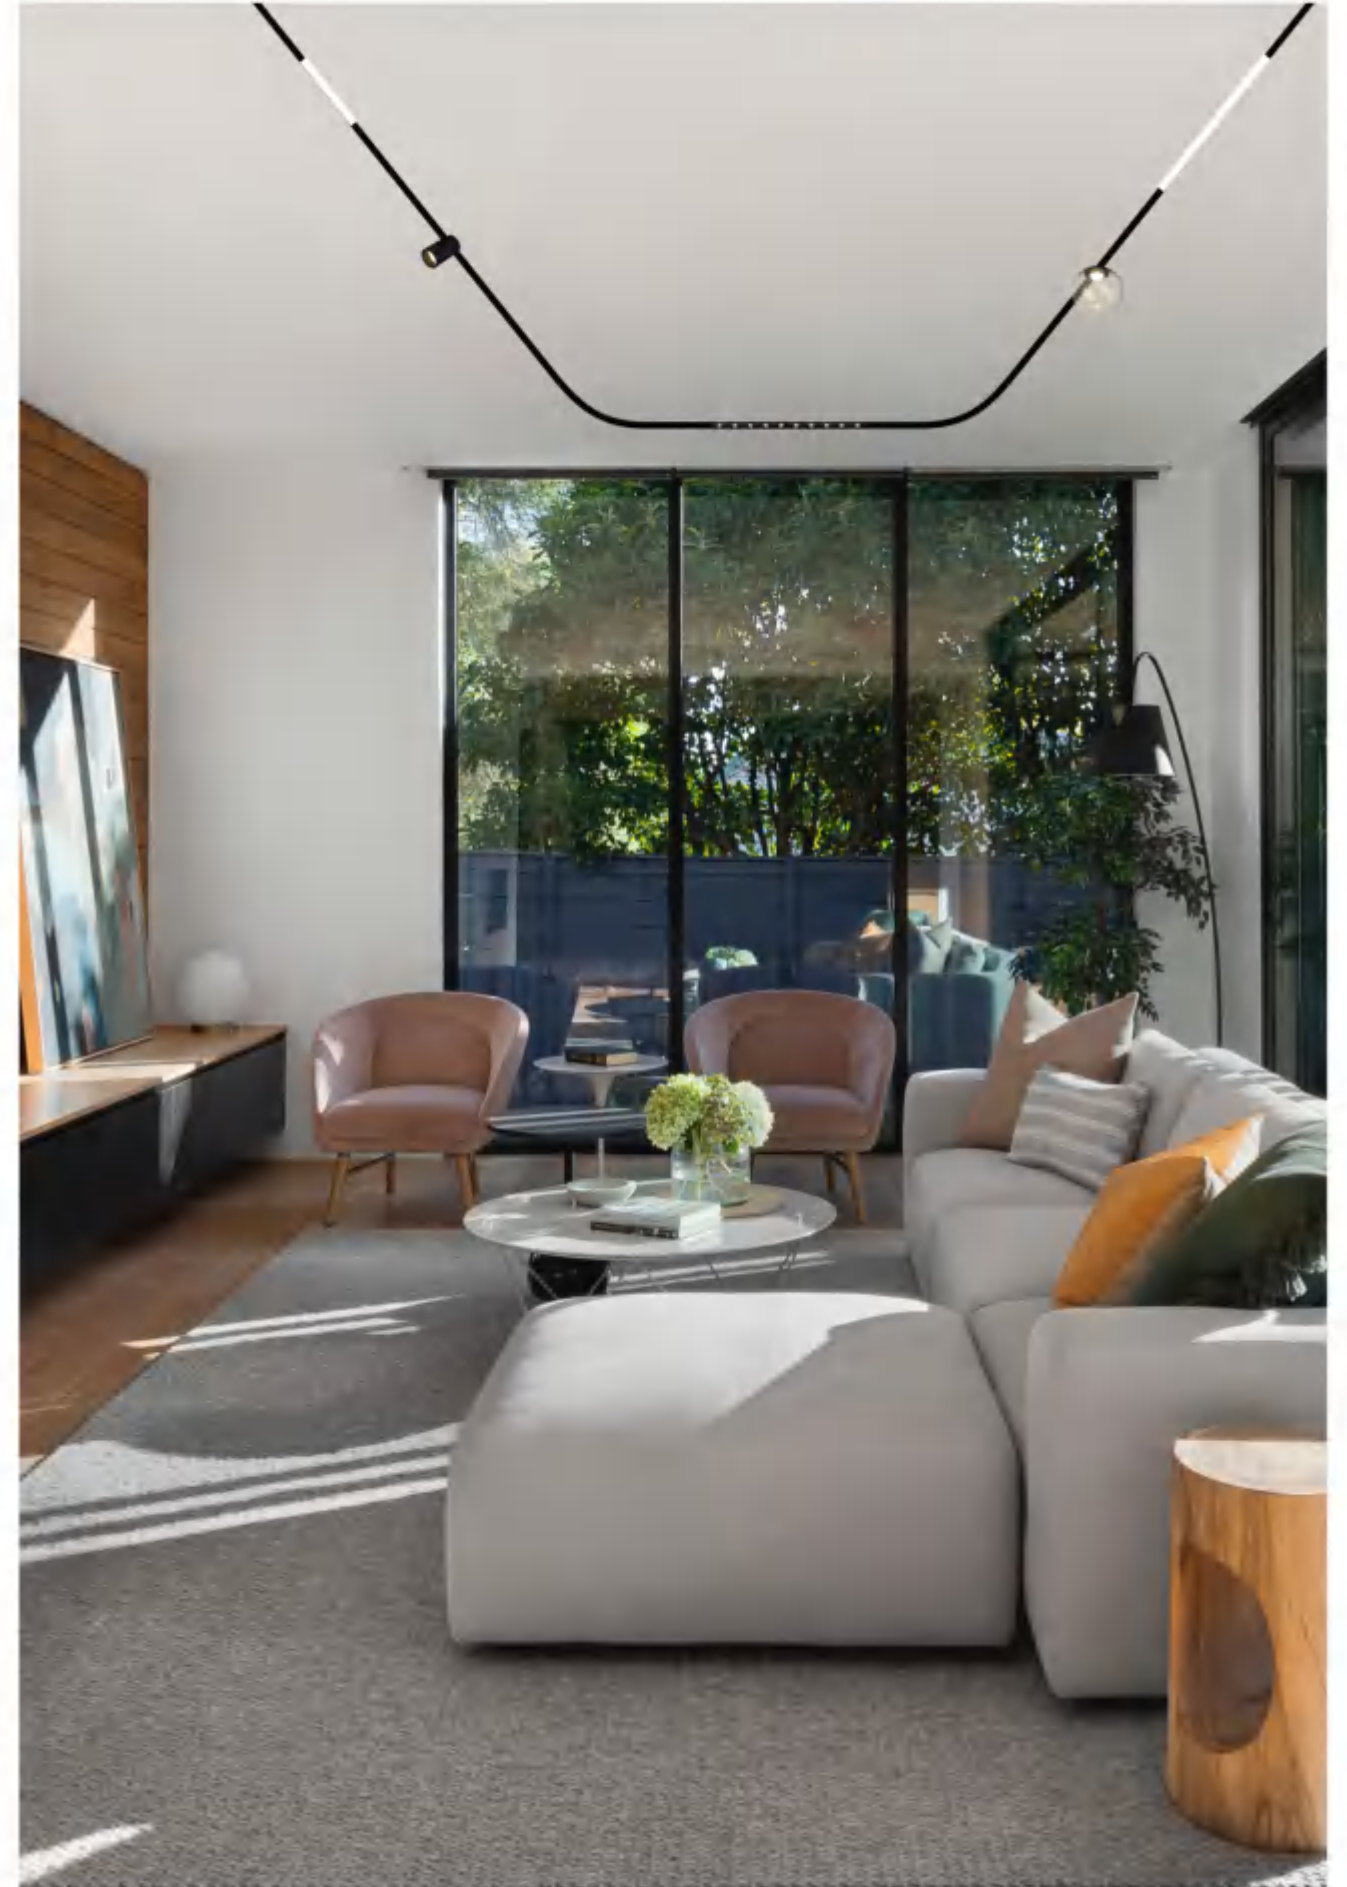

LUNA S/M (48V)

LUNA is compact lighting track system with magnetically installed luminaires.
LUNA provides great choices for designers and architectures to simply change the light direction from the wall to the ceiling and back, blurring the borders and creating new magnificent spaces and incredibly unique atmosphere.

Wide choice of luminaires, with their sharp minimalist design, enables to provide elegance and style for any project, as long as magnetic installation makes it easy to change the light of the room.

© CE IP20 48VAC



S TRACK



ON TRACK

TRACK LIGHT



DC-24/48-L1
001374



DC-24/48-L2
001375



DC-24/48-L3
001376



DC-24/48-I
001377



ON-DC-24/48-L1
001566



ON-DC-24/48-L2
001567




ON-DC-24/48-L3
001569

FEED	MODEL	CODE	SIZE
	DC-24/48-0.5M	001563	500mm
	DC-24/48-1M	001570	1000mm
	DC-24/48-1.5M	001591	1500mm
	DC-24/48-2M	001282	2000mm
	DC-24/48-2.5M	001293	2500mm

INTERMEDIATE	MODEL	CODE	SIZE
	DC-24/48C-0.5M	001373	500mm
	DC-24/48C-1M	001381	1000mm
	DC-24/48C-1.5M	001398	1500mm
	DC-24/48C-2M	001299	2000mm
	DC-24/48C-2.5M	001300	2500mm

FEED	MODEL	CODE	SIZE
	ON-DC-24-0.5M	001564	500mm
	ON-DC-24-1M	001574	1000mm
	ON-DC-24-1.5M	001575	1500mm
	ON-DC-24-2M	001576	2000mm
	ON-DC-24-2.5M	001577	2500mm

INTERMEDIATE	MODEL	CODE	SIZE
	ON-DC-24C-0.5M	001585	500mm
	ON-DC-24C-1M	001573	1000mm
	ON-DC-24C-1.5M	001583	1500mm
	ON-DC-24C-2M	001581	2000mm
	ON-DC-24C-2.5M	001582	2500mm

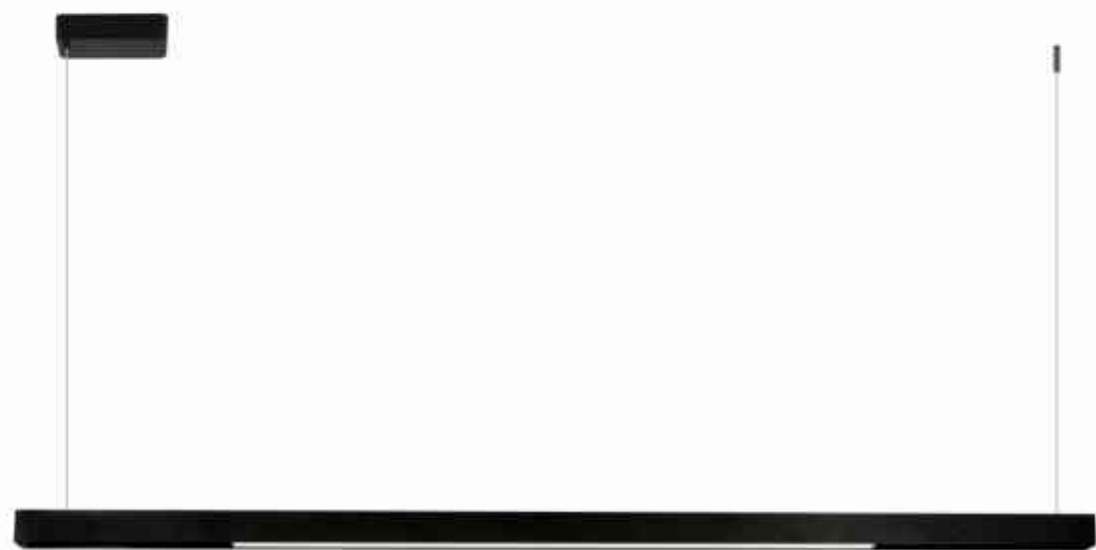

375


P

LUNA C.P. 48V
(RFLC: 100-240VAC, 50/60Hz)



TRACK LIGHT

376



ARCA CO SPOT 7



ARCA CO SPOT 10

ARCA CO SPOT 7

LED POWER: 5.4W
 LED OUTPUT: 467lm
 SYSTEM POWER: 6.8W
 SYSTEM OUTPUT: 380lm@3000K
 INPUT: 0W/DC
 CRI: 90
 DIMENSION: Ø32*120*186mm
 HOLE SIZE: 1



RECOMMEND

ON/OFF





ARCA CO SPOT 10

LED POWER: 8.4W
 LED OUTPUT: 642lm
 SYSTEM POWER: 9.7W
 SYSTEM OUTPUT: 400lm@3000K
 INPUT: 0W/DC
 CRI: 90
 DIMENSION: Ø32*120*186mm
 HOLE SIZE: 1



RECOMMEND

ON/OFF

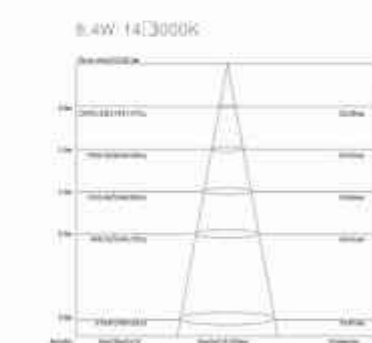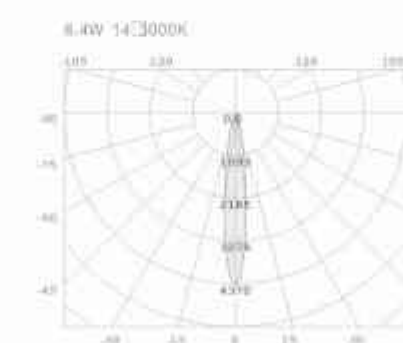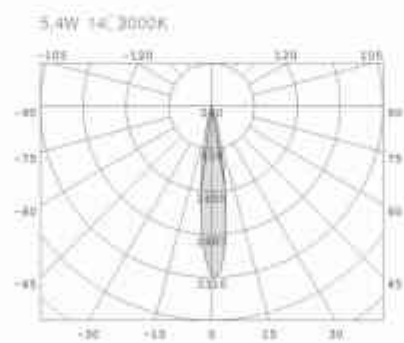



ARCA CO SPOT 12




ELF CO

TRACK LIGHT

379

ARCA CO SPOT 12

LED POWER: 10 W
 LED OUTPUT: 96 Lm
 SYSTEM POWER: 11.4 W
 SYSTEM OUTPUT: 683lm/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø42*120/186mm
 HOLE SIZE: 7




RECOMMEND




ANGLE 28°



10.8W 28° 3000K

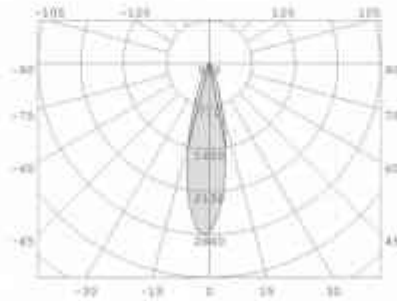

10.8W 28° 3000K



380

ELF CO

LED POWER: 7.5W
 CRI: 90
 SYSTEM POWER: 7.5W
 SYSTEM OUTPUT: 421LM/3000K
 INPUT: 48VDC
 DIMENSION: 220*150*190mm
 HOLE SIZE: 1



RECOMMEND




ANGLE 1





FAVOR

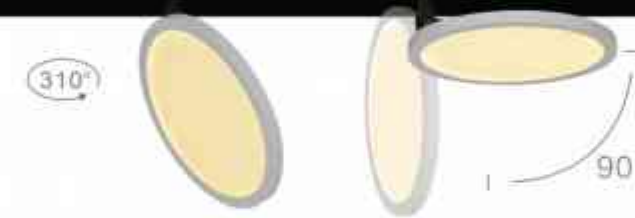


FLAT

TRACK LIGHT

381

FAVOR

LED POWER: 8.5W
 LED OUTPUT: 857lm
 SYSTEM POWER: 9.6W
 SYSTEM OUTPUT: 306lm/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø40/73/180mm
 HOLE SIZE: 1





RECOMMEND



DA/DCP

ANGLE 28°

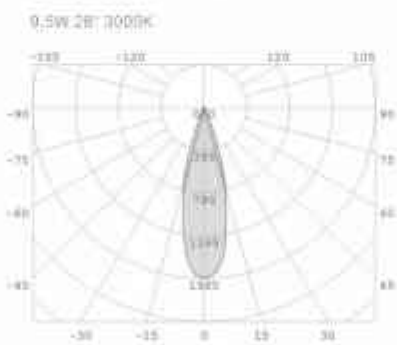

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

382

FLAT

LED POWER: 14W
 LED OUTPUT: 1400lm
 SYSTEM POWER: 14W
 OUTPUT: 611lm/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: 227/34.2/180mm
 HOLE SIZE: 1



RECOMMEND



DA/DCP

ANGLE L





TURN CS MINI



TURN CS SQUARED

TURN CS S

TRACK LIGHT

TURN CS MINI

LED POWER: 0.95W
LED OUTPUT: /
SYSTEM POWER: 1.2W
SYSTEM OUTPUT: 73lm/3000K
INPUT: 48VDC
CRI: 90
DIMENSIONS: 150*16*30mm
HOLE SIZE: /





RECOMMEND



ON/OFF

TURN CS MINI/KS MINI

ANGLE 22°

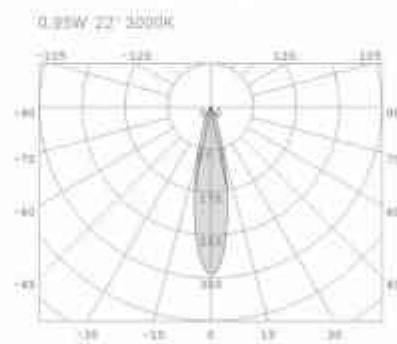


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

TURN CS S/CS S SQUARED

LED POWER: 7.4W
LED OUTPUT: 346lm
SYSTEM POWER: 7.3W
SYSTEM OUTPUT: 407lm/3000K
INPUT: 48VDC
CRI: 90
DIMENSIONS: 282*161mm/57*57*161mm
HOLE SIZE: /






RECOMMEND



ON/OFF

TURN CS S/CS S SQUARED

ANGLE 35°

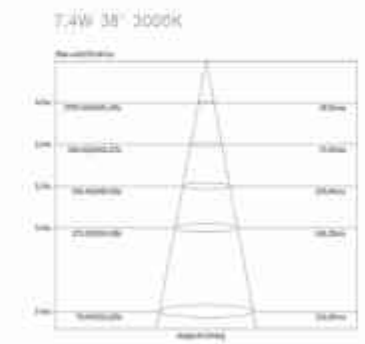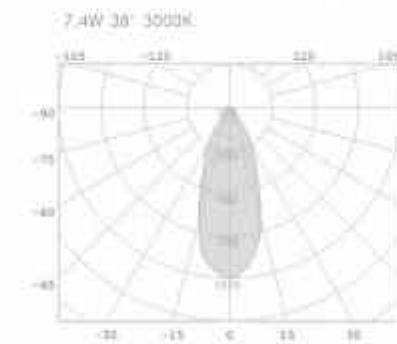

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative




HUNTER CSM

AHRI CSM IN SPOT 3

385


HUNTER CSM 
 LED POWER: 3.2W
 LED OUTPUT: 794lm
 SYSTEM POWER: 3.2W
 SYSTEM OUTPUT: 498lm/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: 29x18x30mm
 HOLE SIZE: 1




RECOMMEND




ANGLE 6°




6.4W 6° 3000K

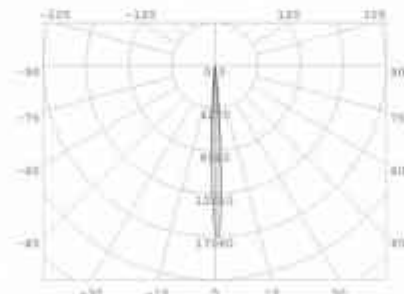

6.4W 6° 3000K



386

AHRI CSM IN SPOT 3 
 LED POWER: 3.1W
 LED OUTPUT: 195lm/3000K
 SYSTEM POWER: 3.5W
 SYSTEM OUTPUT: 78lm
 INPUT: 48VDC
 CRI: 90
 DIMENSION: 100x24.5x14.5mm
 HOLE SIZE: 1




RECOMMEND




ANGLE 20°



3W 20° 3000K

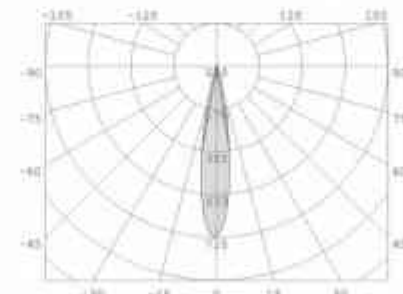

3W 20° 3000K

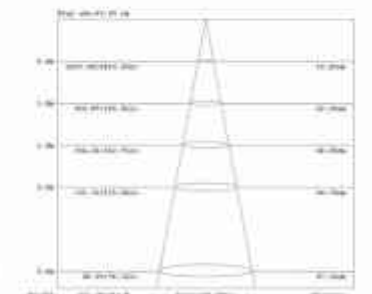



AHRI CS IN SPOT 3X1

AHRI CS IN SPOT 6

387

AHRI CS IN SPOT 3X1

LED POWER: 3.1W
 LED OUTPUT: 300lm/3000K
 SYSTEM POWER: 3.7W
 SYSTEM OUTPUT: 180lm
 INPUT: 48VDC
 CRI: 90
 DIMENSION: 100*14.8*24.5mm
 HOLE SIZE: 7




RECOMMEND




ANGLE 18°



3.1W 18°3000K

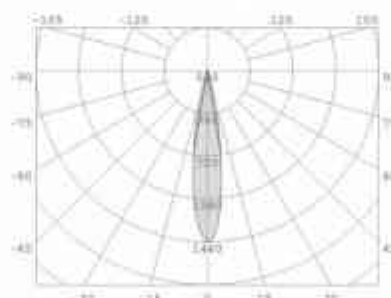

3.1W 18°3000K



388

AHRI CS IN SPOT 6

LED POWER: 4.3W
 LED OUTPUT: 300lm/3000K
 SYSTEM POWER: 5.9W
 SYSTEM OUTPUT: 120lm
 INPUT: 48VDC
 CRI: 90
 DIMENSION: 100*14.8*24.5mm
 HOLE SIZE: 7




RECOMMEND




ANGLE 18°



4.3W 18°3000K

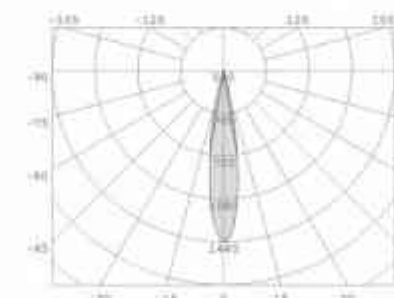

4.3W 18°3000K

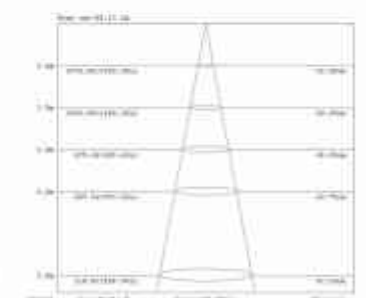



TRACK LIGHT

GUIDE

MOONLINE

389

GLIDE

LED POWER 10W
 LED OUTPUT
 SCENE POWER 1W
 OUTPUT 60 (5.1/3000K)
 INPUT 48V DC
 CFI: 40
 DIM: 110CM / 37" x 14" x 12mm
 HOLE SIZE 2"



RECOMMEND



ANGLE L



390

MOONLINE

Dim to
 Input 48V DC

ITEM CODE	POWER	SIZE	OUTPUT
500114	11.3W	300*24.5*14.8	85lm/3000K
500114	20W	400*24.5*14.8	112lm/3000K
500114	30W	500*24.5*14.8	136lm/3000K
500114	40W	600*24.5*14.8	162lm/3000K
500114	50W	700*24.5*14.8	188lm/3000K




RECOMMEND




ANGLE L



11.3W/3000K

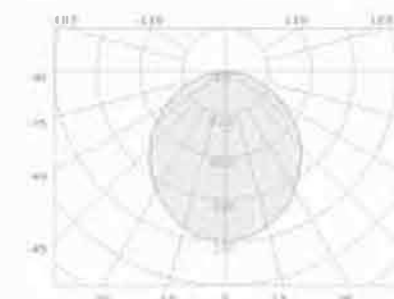

11.3W/3000K

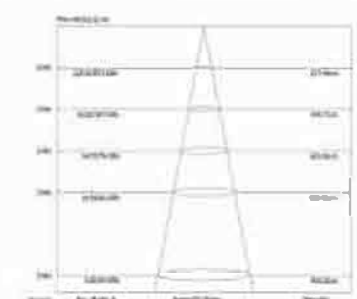




SHINY CC ON 5 DIM

SHINY CC ON 10 DIM

391

SHINY CC ON 5 DIM

LED POWER: 4.8W
CRI: 90
SYSTEM POWER: 5W
SYSTEM OUTPUT: 158lm@3000K
INPUT: 48VDC
DIMENSION: 203*14.8*60mm
HOLE SIZE: 1



RECOMMEND



ON/OFF

392

SHINY CC ON 10 DIM

LED POWER: 11.5W
CRI: 90
SYSTEM POWER: 12W
SYSTEM OUTPUT: 344lm@3000K
INPUT: 48VDC
DIMENSION: 305*14.8*60mm
HOLE SIZE: 1



RECOMMEND




ON/OFF


ANGLE L



4.8W L 3000K

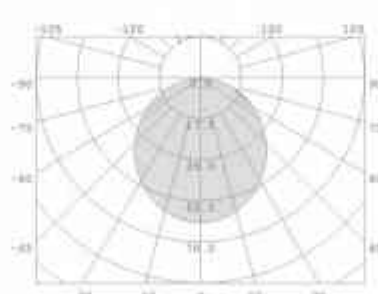


4.8W L 3000K




ANGLE L



10W L 3000K

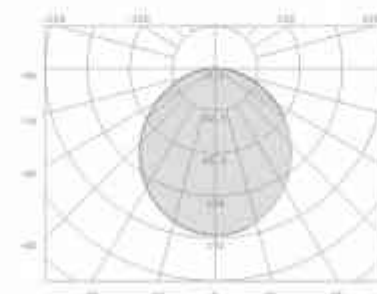

10W L 3000K

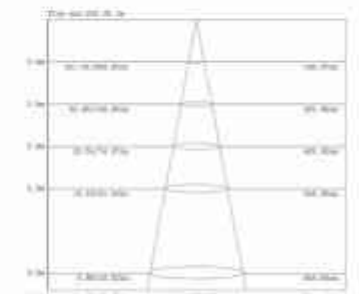



SHINY CO ON SPOT 5 DIM




SHINY CO ON SPOT 10 DIM

393

SHINY CO ON SPOT 5 DIM

LED POWER: 4.5W
LED OUTPUT: 500lm/3000K
SYSTEM POWER: 5W
SYSTEM OUTPUT: 200LM
INPUT: 48V DC
CRI: 90
DIMENSION: 307*14.8*90mm
HOLE SIZE:



RECOMMEND:




ANGLE 20°



4.5W 20°3000K



4.5W 20°3000K



394

SHINY CO ON SPOT 10 DIM

LED POWER: 9W
LED OUTPUT: 1000lm/3000K
SYSTEM POWER: 10.4W
SYSTEM OUTPUT: 400LM
INPUT: 48V DC
CRI: 90
DIMENSION: 307*14.8*90mm
HOLE SIZE:




RECOMMEND:




ANGLE 20°




9W 20°3000K

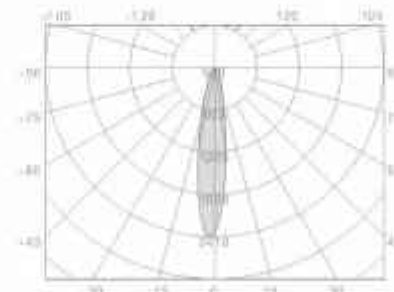

9W 20°3000K





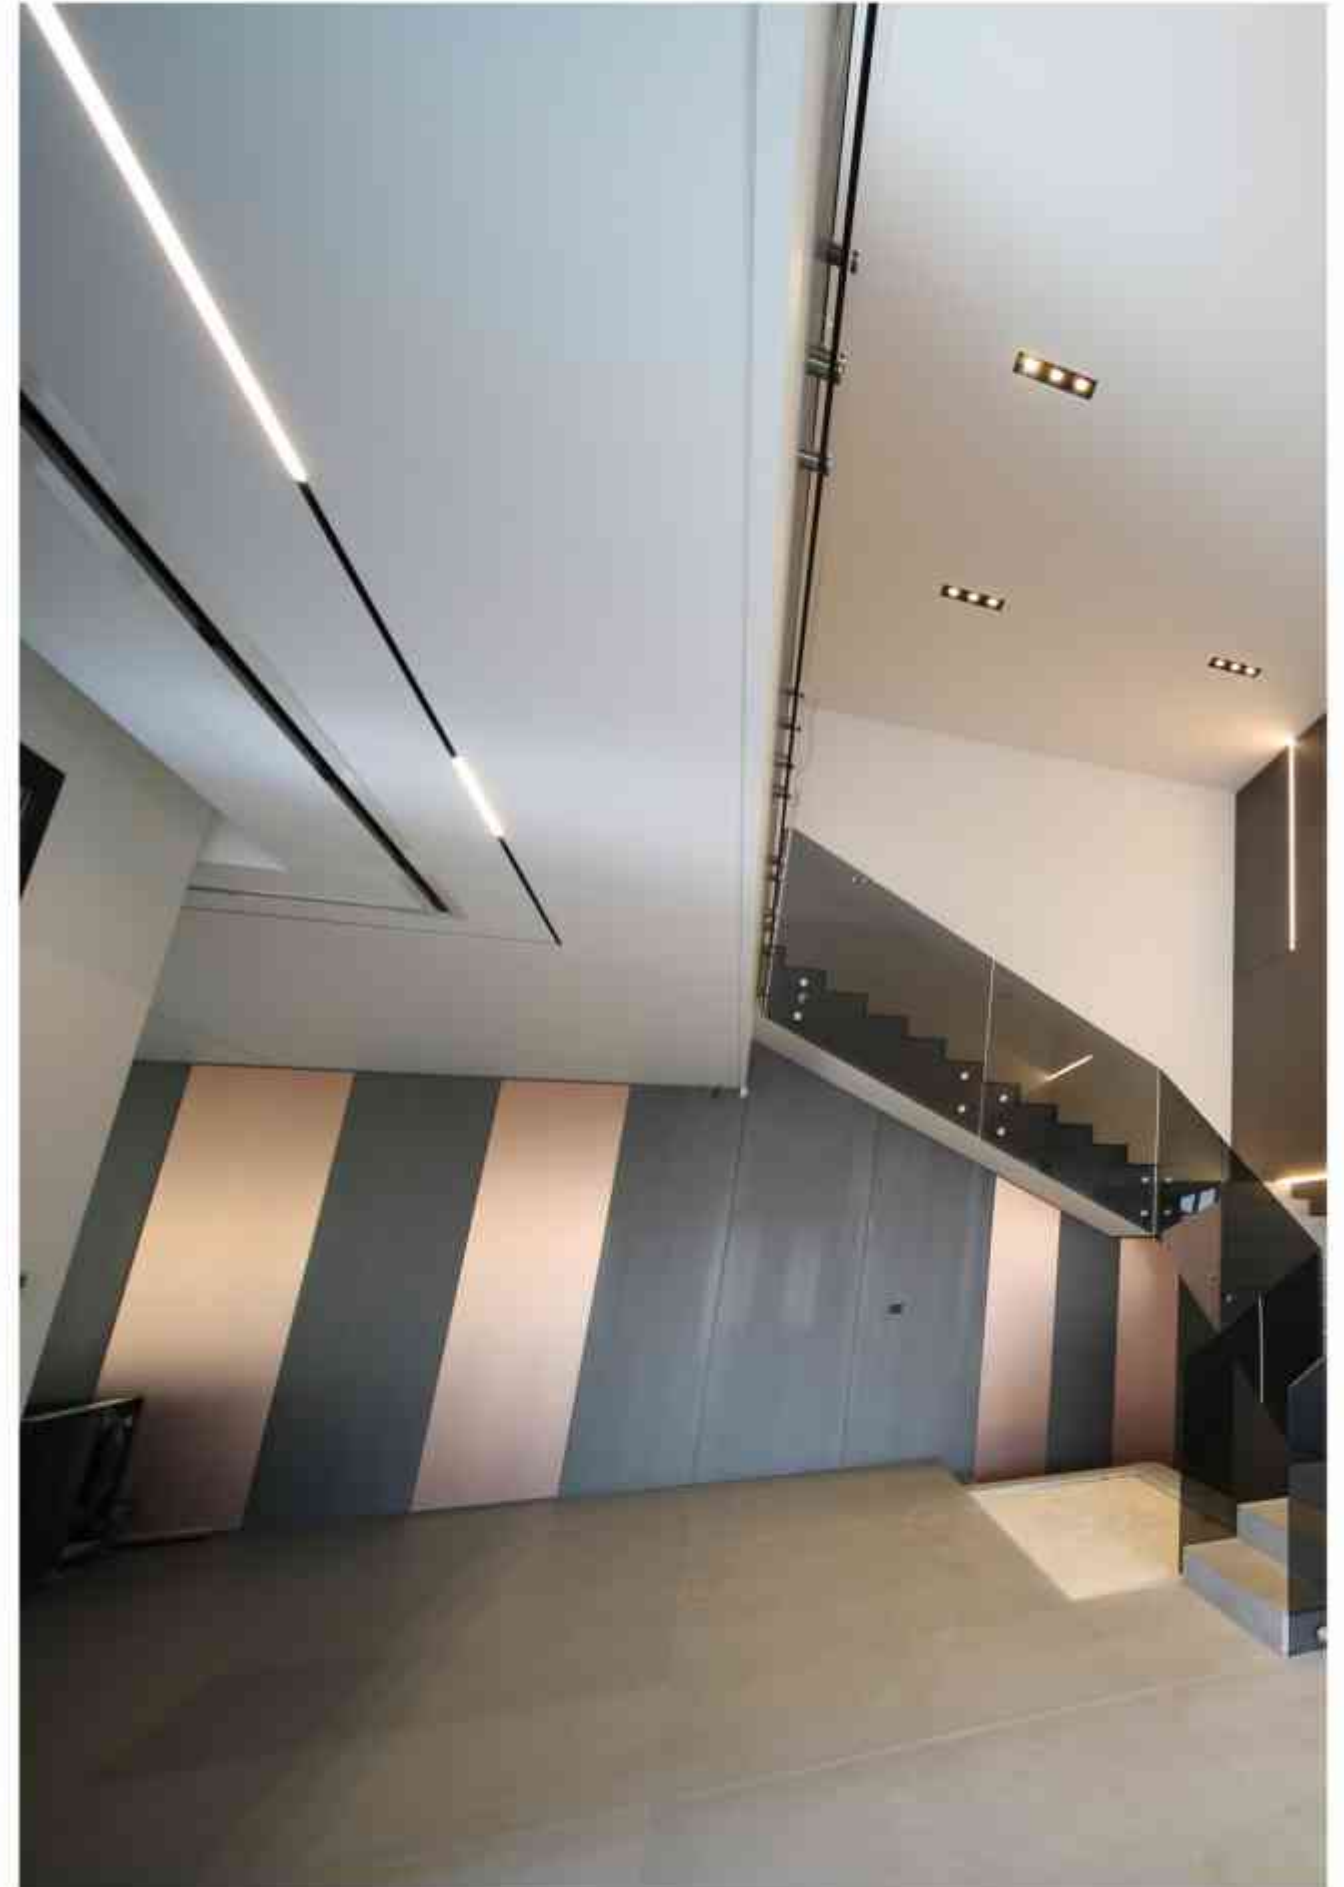





M TRACK



M-DC-24/48-L1
001503

M-DC-24/48-L2
001504

M-DC-24/48-L3
001505


M-DC-24/48-I
001506

FEED	MODEL	CODE	SIZE
	M-DC-24/48-0.5M	001498	500mm
	M-DC-24/48-1M	001499	1000mm
	M-DC-24/48-1.5M	001500	1500mm
	M-DC-24/48-2M	001501	2000mm
	M-DC-24/48-2.5M	001502	2500mm

INTERMEDIATE	MODEL	CODE	SIZE
	M-DC-24/48C-0.5M	001507	500mm
	M-DC-24/48C-1M	001508	1000mm
	M-DC-24/48C-1.5M	001509	1500mm
	M-DC-24/48C-2M	001510	2000mm
	M-DC-24/48C-2.5M	001511	2500mm




TRACK LIGHT

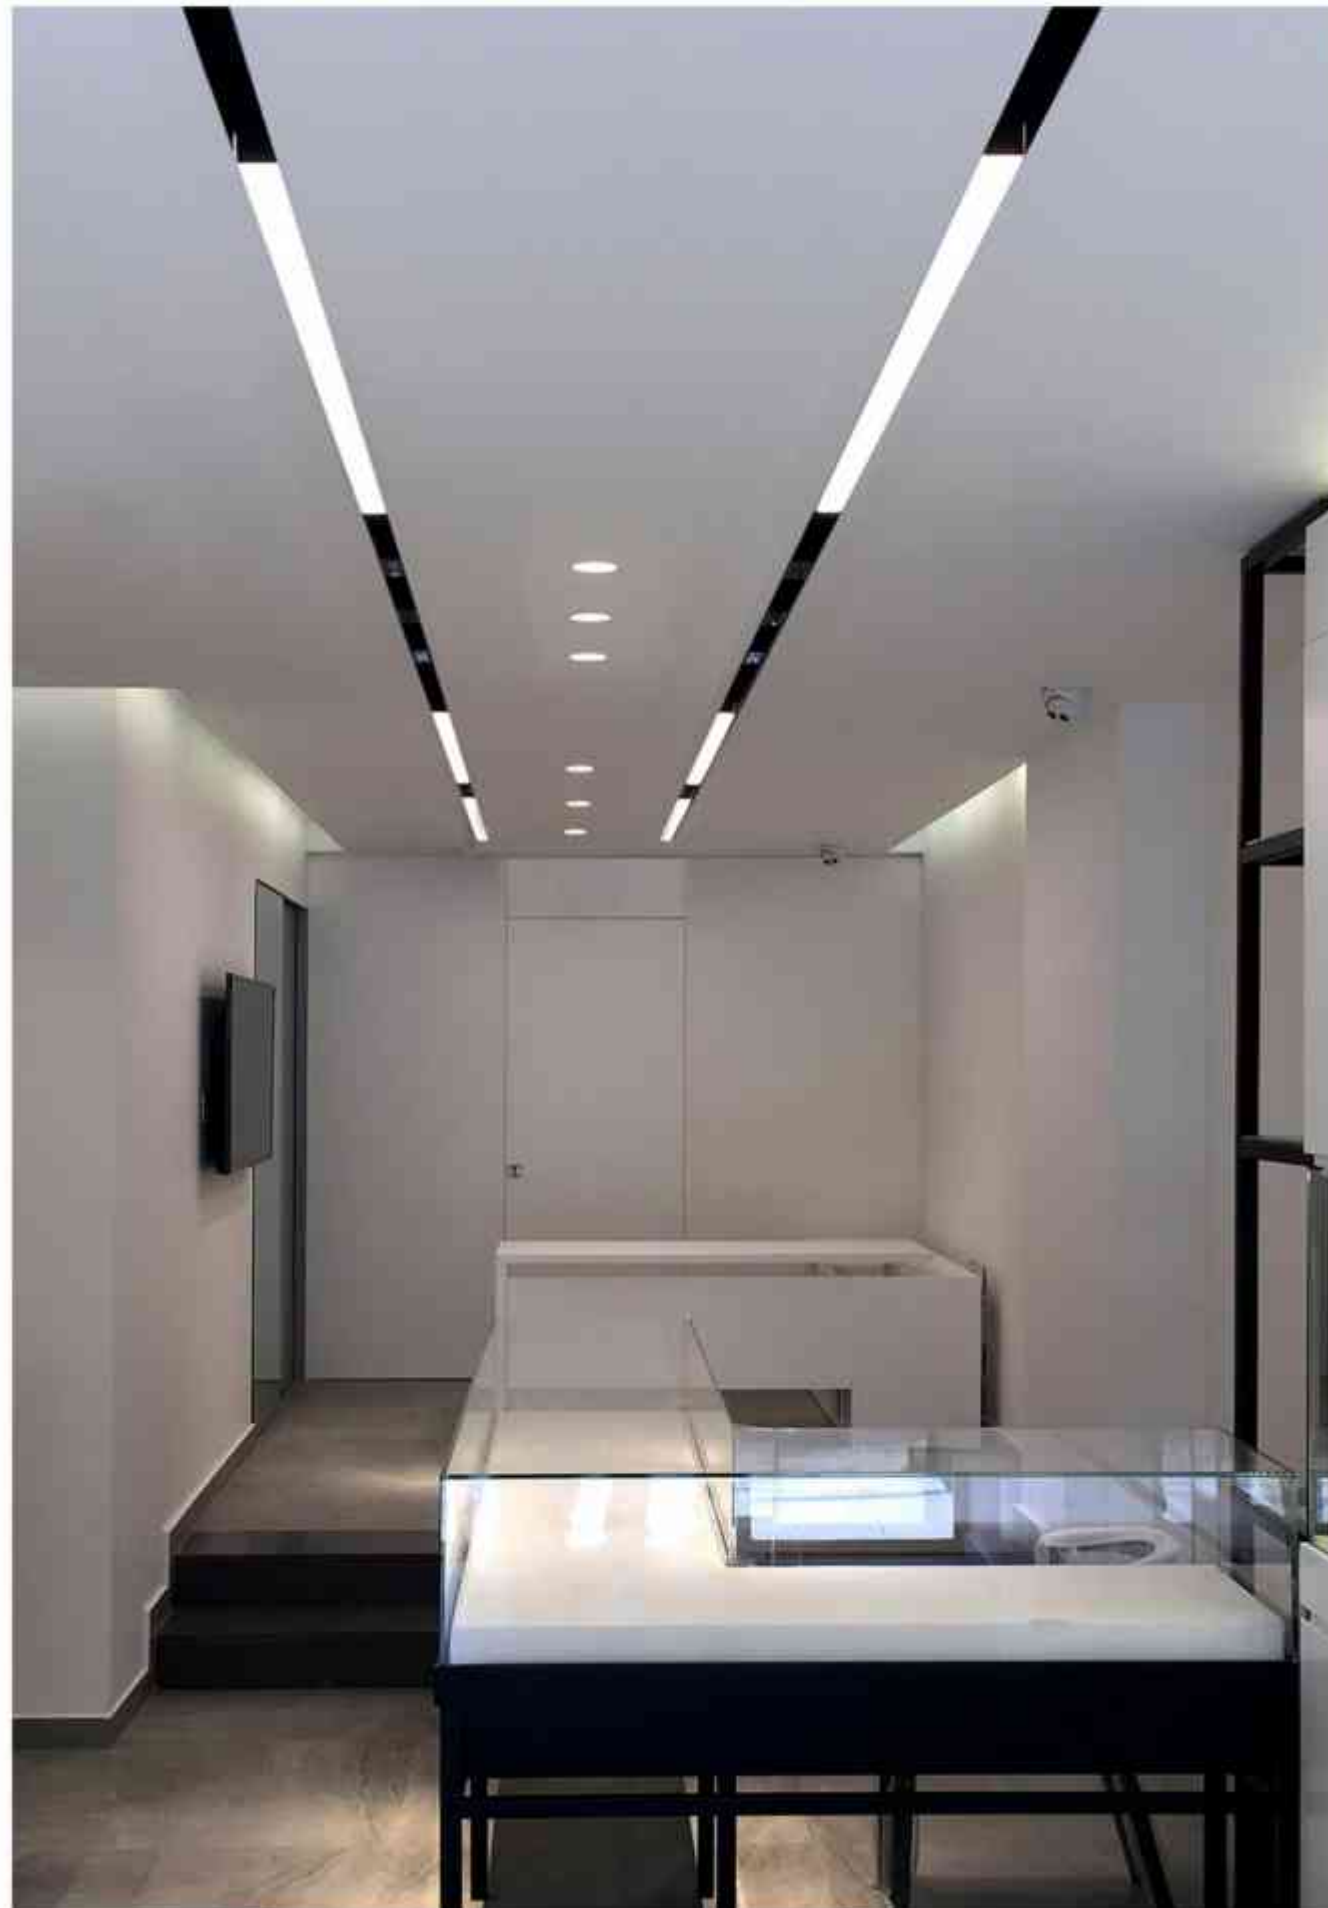

ABACO CM


ABACO CM 
 LED POWER: 12.3W
 LED OUTPUT: 1290lm(3000K)
 SYSTEM POWER: 12.7W
 SYSTEM OUTPUT: 860lm
 INPUT: 0-10VDC
 CRI: 94
 DIMENSION: 260*118mm
 HOLE SIZE: 1




RECOMMEND

 DALI


ANGLE 15°(MIN)




14.4W 15°3000K

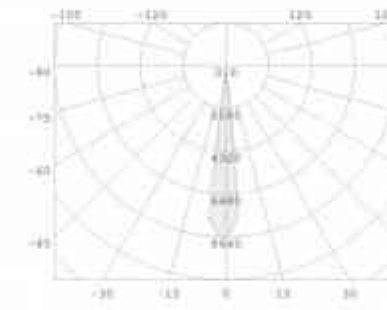


14.4W 15°3000K

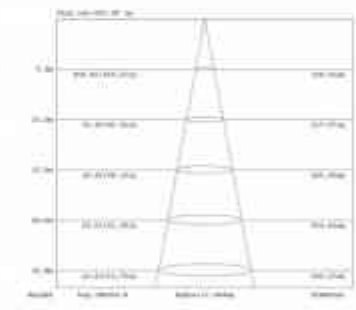


ANGLE 23°(MAX)



14.4W 23°3000K

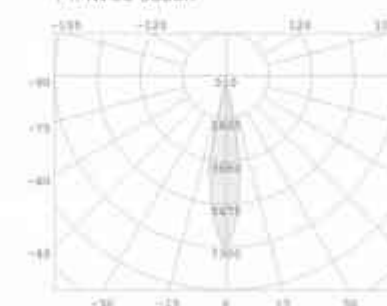

14.4W 23°3000K

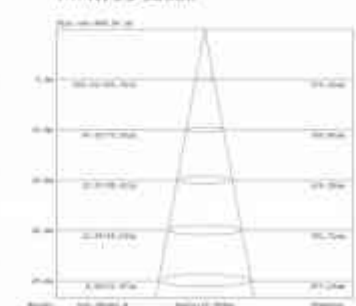



DOMO CM 11



DOMO CM 16

TRACK LIGHT

405

DOMO CM 11

LED POWER: 5.2W
CRI: 90
SYSTEM POWER: 5.8W
SYSTEM OUTPUT: 300lm @ 2700-5700K
INPUT: 48VDC
DIMENSION: (Ø113*50*165mm)
HOLE SIZE: 1



RECOMMEND



ANGLE



L

406

DOMO CM 16

LED POWER: 16.8W
CRI: 90
SYSTEM POWER: 18.6W
SYSTEM OUTPUT: 680lm @ 2700-5700K
INPUT: 48VDC
DIMENSION: (Ø160*50*165mm)
HOLE SIZE: 1



RECOMMEND



ANGLE



L



FAVOR CM D



FAVOR CM M

TRACK LIGHT

407

FAVOR CM D 

LED POWER: 9.5W
 LED OUTPUT: 857LM
 SYSTEM POWER: 9.5W
 SYSTEM OUTPUT: 384lm/3000K
 INPUT: 48V DC
 CR: 95
 DIMENSION: 24x75x180mm
 HOLE SIZE: 1




RECOMMEND




ANGLE 28°



9.5W 28° 3000K

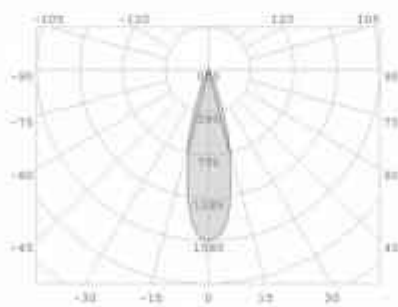

9.5W 28° 3000K



OTHER VERSIONS:




For more information, please visit our website or contact our sales representative.

408

FAVOR CM M 

LED POWER: 13.9W
 LED OUTPUT: 1485LM
 SYSTEM POWER: 13.9W
 SYSTEM OUTPUT: 571lm/3000K
 INPUT: 48V DC
 CR: 95
 DIMENSION: 200x243mm
 HOLE SIZE: 1




RECOMMEND




ANGLE 32°



13.9W 32° 3000K

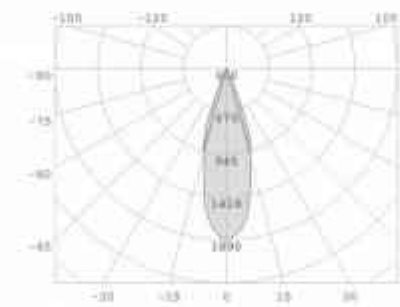

13.9W 32° 3000K

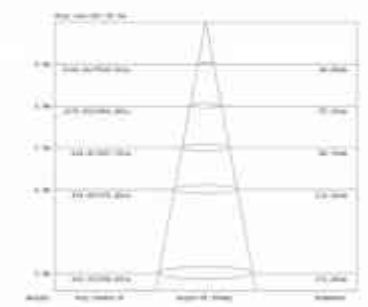

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



GEN CM CC



GEN CM C

409



GEN CM CC 
 LED POWER: 7W
 LED OUTPUT: 817LM
 SYSTEM POWER: 9.3W
 SYSTEM OUTPUT: 161lm/3000K
 INPUT: 48VDC
 CR: 95
 DIMENSION: 24x141mm
 HOLE SIZE: 1



RECOMMEND



ANGLE 10°

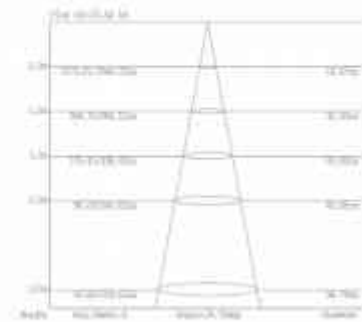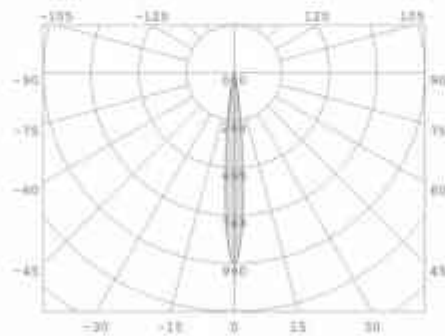


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.

410



GEN CM C 
 LED POWER: 10.7W
 LED OUTPUT: 1117LM
 SYSTEM POWER: 11.9W
 SYSTEM OUTPUT: 217lm/3000K
 INPUT: 48VDC
 CR: 95
 DIMENSION: 24x173mm
 HOLE SIZE: 1



RECOMMEND



ANGLE 10°

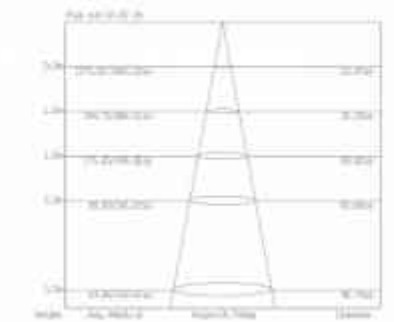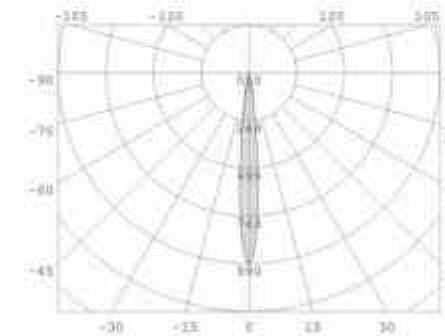

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



GEN CMM




GEN CML

TRACK LIGHT

411

GEN CMM 

LED POWER: 14.2W
 LED OUTPUT: 1192lm
 SYSTEM POWER: 15.6W
 SYSTEM OUTPUT: 985lm/3000K
 INPUT: 48VDC
 CR: 95
 DIMENSION: Ø72x130mm
 HOLE SIZE: 1




RECOMMEND




ANGLE 18°



6.8W 18° 3000K

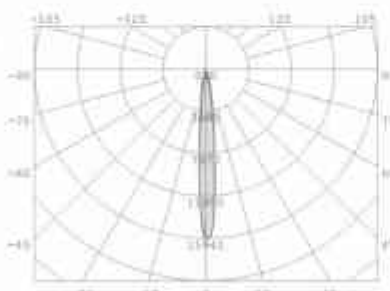

6.8W 18° 3000K



OTHER VERSIONS:




For more information, please visit our website or contact our sales representative.

412

GEN CML 

LED POWER: 21.7W
 LED OUTPUT: 2062lm
 SYSTEM POWER: 23.5W
 SYSTEM OUTPUT: 1674lm/3000K
 INPUT: 48VDC
 CR: 95
 DIMENSION: Ø72x178mm
 HOLE SIZE: 1




RECOMMEND




ANGLE 18°



8.8W 18° 3000K

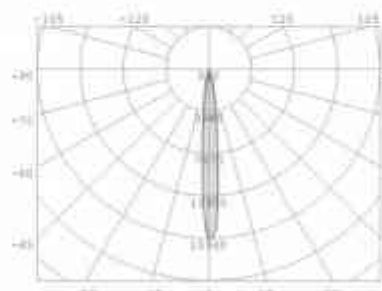

8.8W 18° 3000K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative.



GLORY CM G

GLORY CM G SIDE


GLORY CM M

GLORY CM M SIDE

TRACK LIGHT

GLORY CM G / CM G SIDE




LED POWER: 16W
LED OUTPUT: 1400LM
SYSTEM POWER: 16W
SYSTEM OUTPUT: 303lm/3000K
INPUT: 48V-DC
CRI: 90
DIMENSION: CM G 180*193mm / CM G SIDE 201*193mm
HOLE SIZE: 1



RECOMMEND



ANGLE 20°

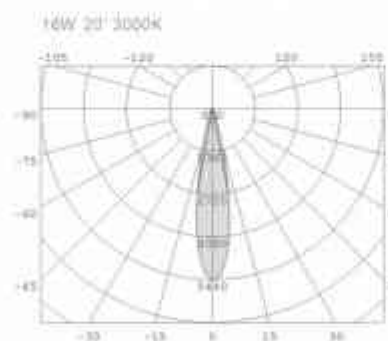


OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

GLORY CM M / CM M SIDE



LED POWER: 32.4W/30W
LED OUTPUT: 3090LM
SYSTEM POWER: 30W
SYSTEM OUTPUT: 1683lm/3000K
INPUT: 48V-DC
CRI: 90
DIMENSION: CM M 180*234mm / CM M SIDE 221*215mm
HOLE SIZE: 1



RECOMMEND



ANGLE 30°

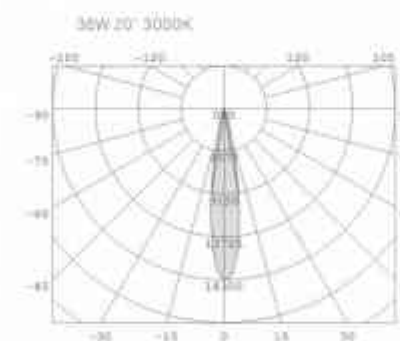

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



GLORY CM M


GRACE CM C

GRACE CM S/SIDE

TRACK LIGHT

GLORY CM M 


LED POWER: 17.7W
 LED OUTPUT: 1800lm
 SYSTEM POWER: 17.7W
 SYSTEM OUTPUT: 1830lm 2700-5700K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø60*120mm
 HOLE SIZE: ∅




RECOMMEND




ANGLE 42°



17.7W 42° 2700K

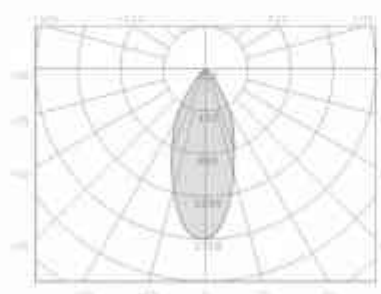

17.7W 42° 2700K



OTHER VERSIONS:



For more information, please visit our website or contact our sales representative

GRACE CM C / CM S/SIDE 


LED POWER: 19W
 LED OUTPUT: 1825lm
 SYSTEM POWER: 20W
 SYSTEM OUTPUT: 1825lm 3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø60*160*132mm/Ø60*180*208mm
 HOLE SIZE: ∅




RECOMMEND




ANGLE 30° (MAX)



19W 30° 3000K

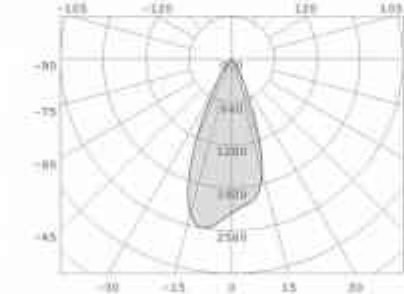

19W 30° 3000K





GRACE CMM

GRACE CMM SIDE

TRACK LIGHT

417

GRACE CMM

LED POWER: 29W
 LED OUTPUT: 3000lm
 SYSTEM POWER: 33W
 SYSTEM OUTPUT: 1786lm/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø86*190*234mm/Ø86*180*233mm
 HOLE SIZE: ∅



RECOMMEND



418

GRACE CMM SIDE

LED POWER: 29W
 LED OUTPUT: 3000lm
 SYSTEM POWER: 33W
 SYSTEM OUTPUT: 1786lm/3000K
 INPUT: 48VDC
 CRI: 90
 DIMENSION: Ø86*190*234mm
 HOLE SIZE: ∅



RECOMMEND



ANGLE 30°







29W 30° 3000K

29W 30° 3000K

ANGLE 30°

29W 30° 3000K

29W 30° 3000K

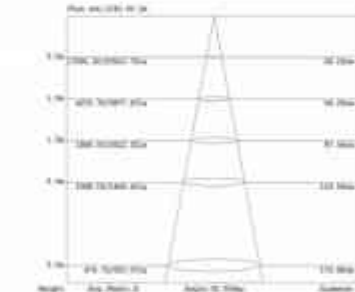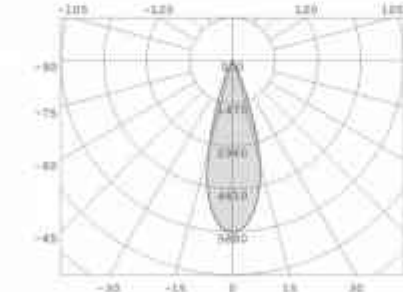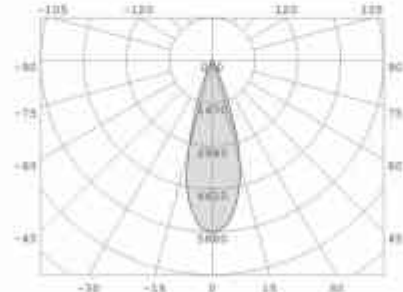



ORIAN CM 55



ORIAN CM 65

ORIAN CM 55




LED POWER: 7.2W
LED OUTPUT: 865lm
SYSTEM POWER: 7.4W
SYSTEM OUTPUT: 84lm/3000K
INPUT: 48VDC
CRI: 90
DIMENSION: $\varnothing 45 \times 116mm$
HOLE SIZE: $\varnothing 45$



RECOMMEND



ANGLE 24°

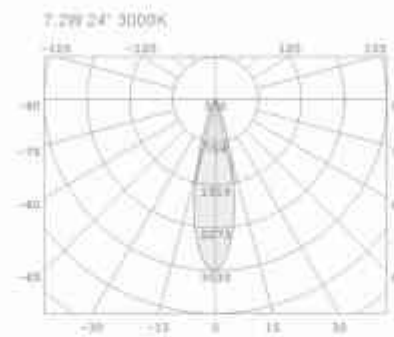

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



ORIAN CM 65



LED POWER: 10.8W
LED OUTPUT: 1280lm
SYSTEM POWER: 11.4W
SYSTEM OUTPUT: 1265lm/3000K
INPUT: 48VDC
CRI: 90
DIMENSION: $\varnothing 48 \times 142mm$
HOLE SIZE: $\varnothing 48$



RECOMMEND



ANGLE 24°

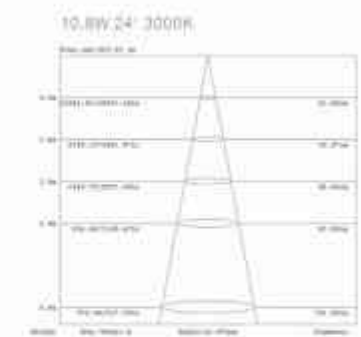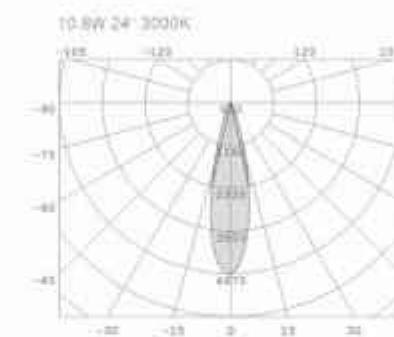

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative






ORIAN CM M

ORIAN CM L

421

ORIAN CM M

LED POWER: 18W
LED OUTPUT: 2140LM
SYSTEM POWER: 18.8W
SYSTEM OUTPUT: 1930LM/3000K
INPUT: 48VDC
CRI: 90
DIMENSION: Ø72*127mm
HOLE SIZE: /



RECOMMEND




ORIAN CM M


ANGLE 25°



18W 25° 3000K

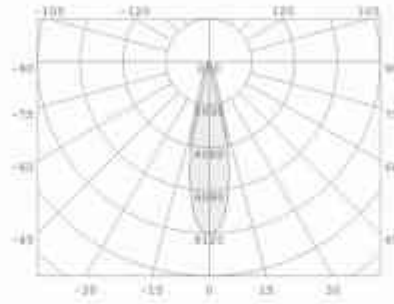

18W 25° 3000K



OTHER VERSIONS:




For more information, please visit our website or contact our sales representative



422

ORIAN CM L

LED POWER: 25.2W
SYSTEM POWER: 26.6W
SYSTEM OUTPUT: 1940LM/3000K
INPUT: 48VDC
CRI: 90
DIMENSION: Ø72*127mm
HOLE SIZE: /



RECOMMEND




ORIAN CM L


ANGLE 25°



25W 25° 3000K

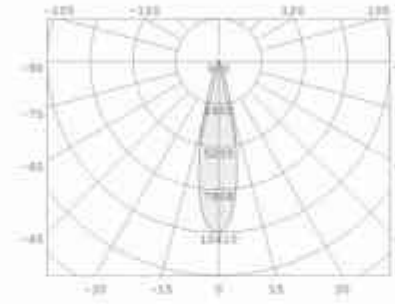

25W 25° 3000K

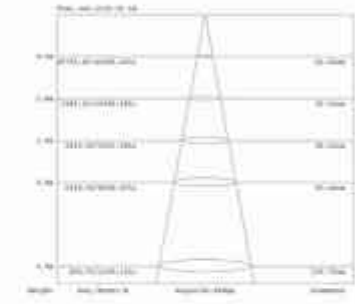

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative





TURN CM S

TURN CM S SQUARED



TURN CM M


TURN CM M SQUARED

TRACK LIGHT

423

TURN CM S/CM S SQUARED

LED POWER: 7.4W
LED OUTPUT: 948LM
SYSTEM POWER: 7.5W
SYSTEM OUTPUT: 807LM/3000K
INPUT: 48V DC
CRI: 90
DIMENSION: Ø62*181mm/57*181mm
HOLE SIZE: 1


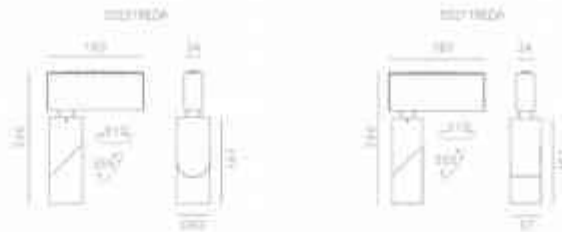


RECOMMEND



TURN CM S/CM S SQUARED

ANGLE 30°

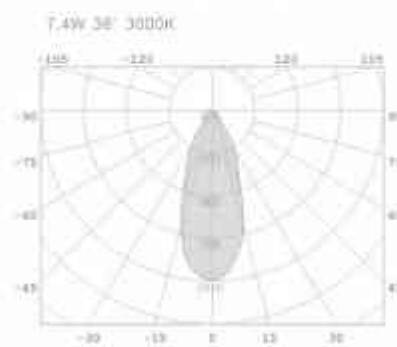

OTHER VERSIONS:




For more information, please visit our website or contact our sales representative

424

TURN CM M/CM M SQUARED

LED POWER: 9.2W
LED OUTPUT: 1008LM
SYSTEM POWER: 10W
SYSTEM OUTPUT: 855LM/3000K
INPUT: 48V DC
CRI: 90
DIMENSION: 251*180mm/201*180mm
HOLE SIZE: 1


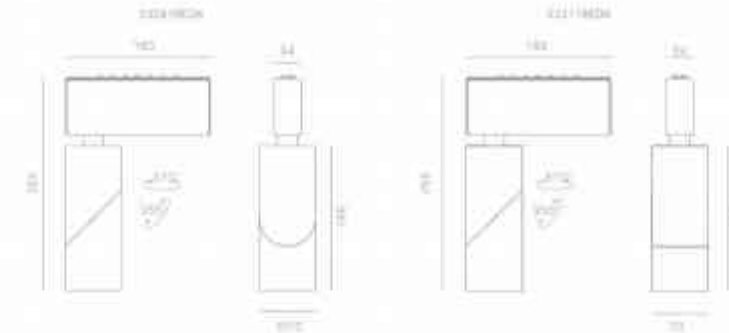


RECOMMEND



TURN CM M/CM M SQUARED

ANGLE 30°

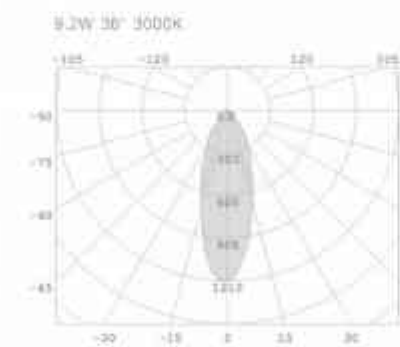

OTHER VERSIONS:



For more information, please visit our website or contact our sales representative



AHRI CM SPOT 5 48V

MOONLINEE CM

TRACK LIGHT

425

AHRI CM SPOT 5 48V 

LED POWER: 11W
 LED OUTPUT: 895lm/3000K
 SYSTEM POWER: 11W
 SYSTEM OUTPUT: 786lm
 INPUT: 48V DC
 CRI: 90
 DIMENSION: 142*34*13mm
 HOLE SIZE: 1



RECOMMEND 

426

MOONLINEE CM 300 / 600 / 900 / 1200 / 1500 



CRI: 90
 INPUT: 48V DC

ITEM CODE	POWER	SIZE	OUTPUT
522140A	34W	300*34*11	1235lm/3000K
523140A	48W	390*34*11	2473lm/3000K
521140A	72W	490*34*11	3759lm/3000K
525140A	96W	1180*34*11	4940lm/3000K
523140A	120W	1480*34*11	6176lm/3000K





RECOMMEND 


ANGLE 

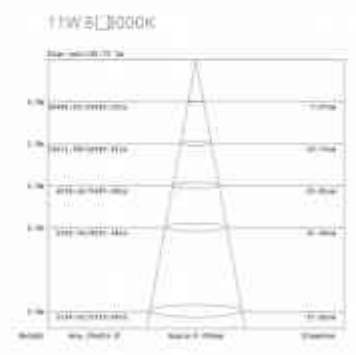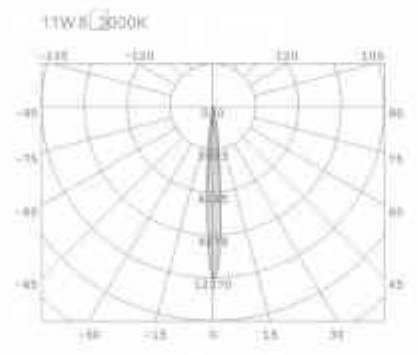

ANGLE

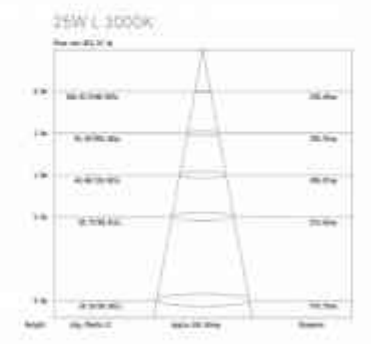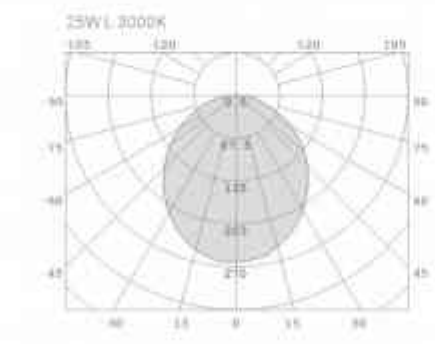




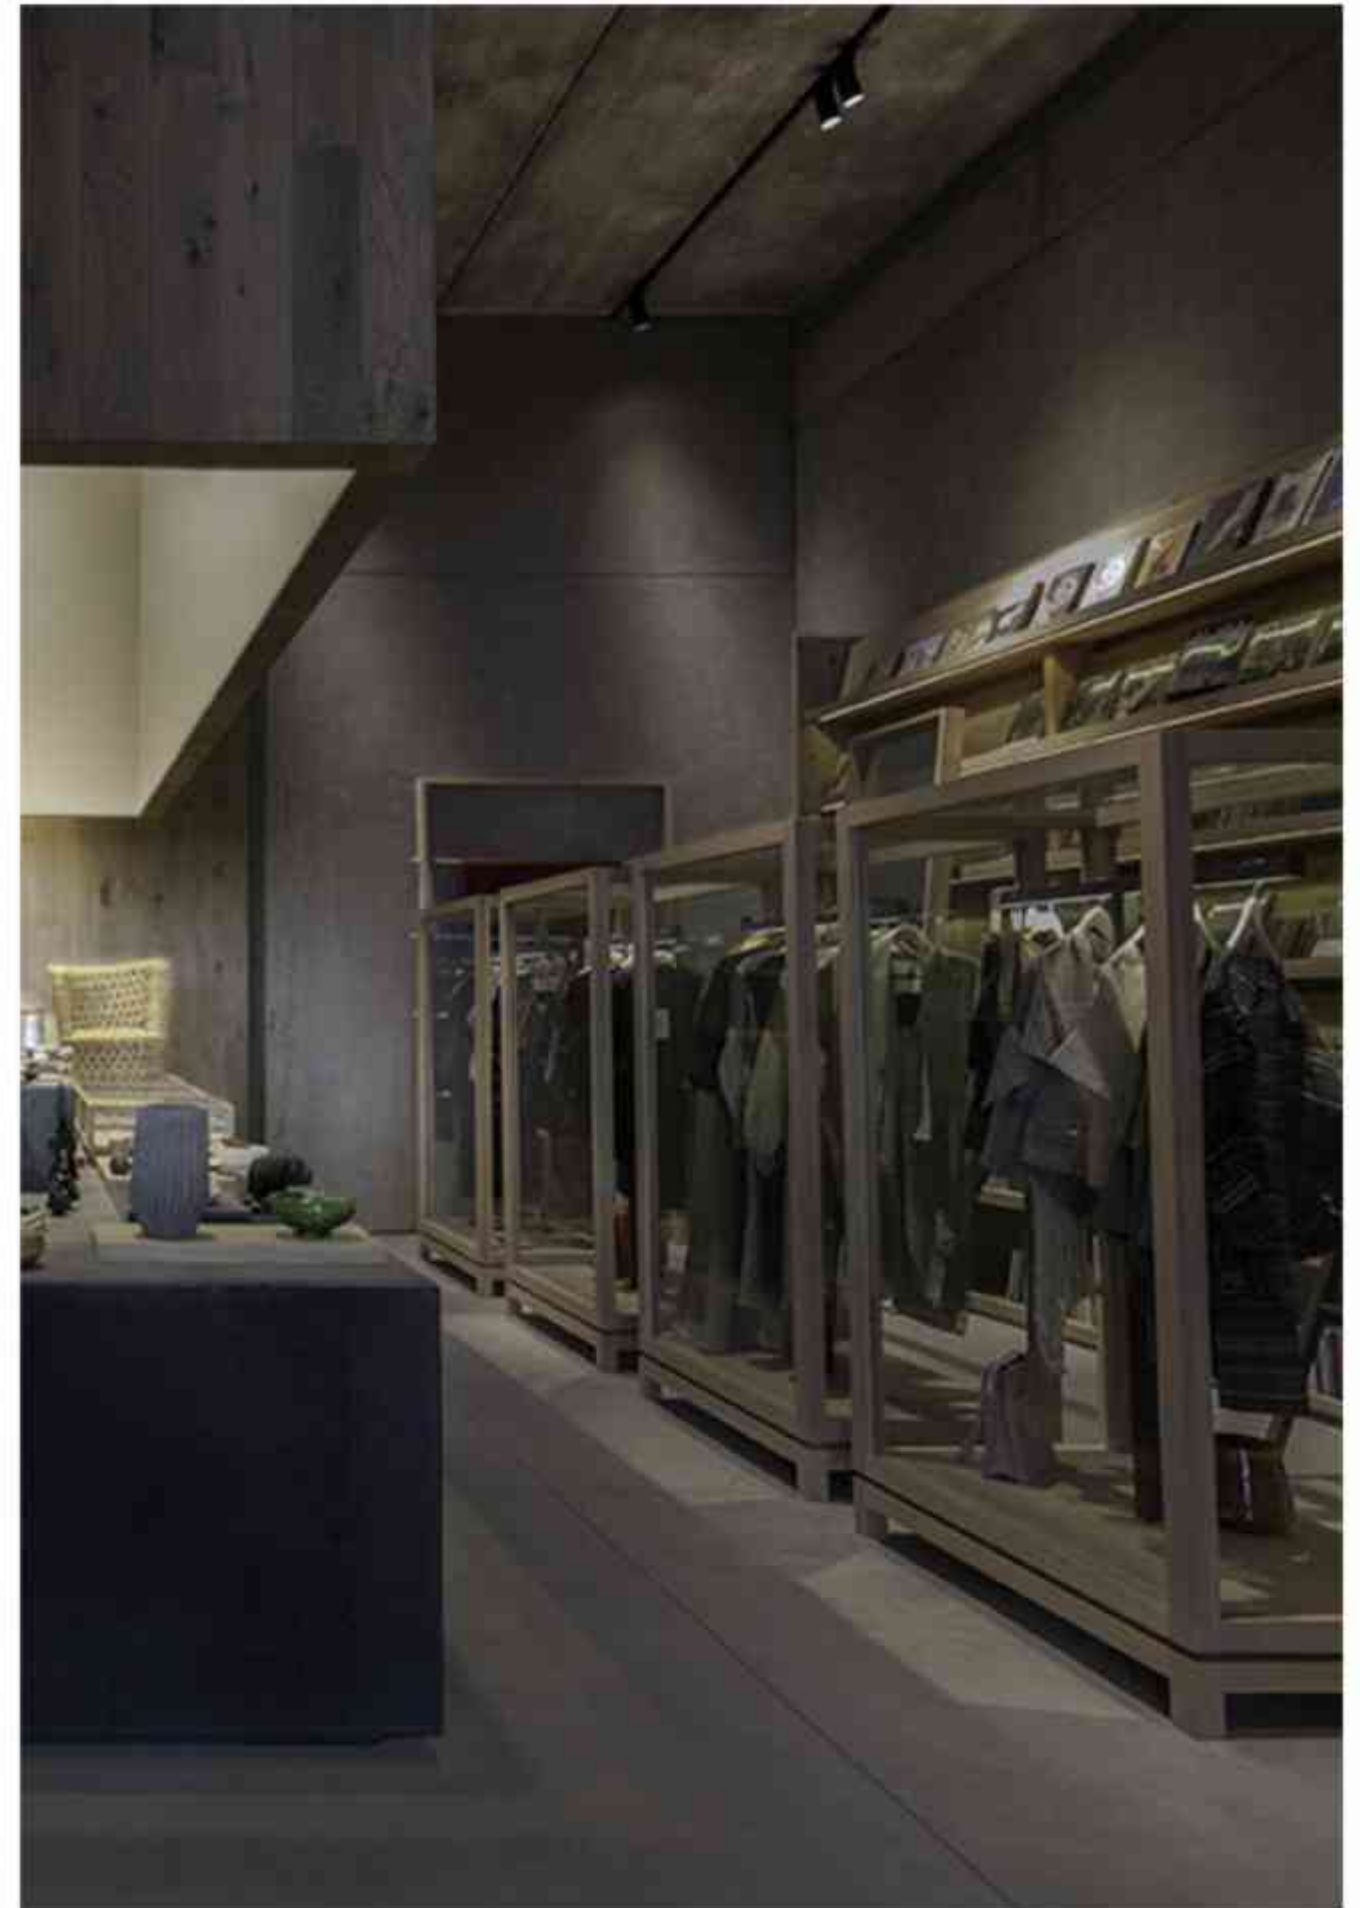

LUCA SS (24V)

Super mini with only 10.1mm width 24V input, suitable for partial scenes, such as shop windows, bookcases, etc. Matching spotlights/linear lights/suspended lights and other fixtures to meet various types of illuminated objects. Its buckle connection to lamps ensures the safety of installation and fixation.

© CE IP20 24VAC

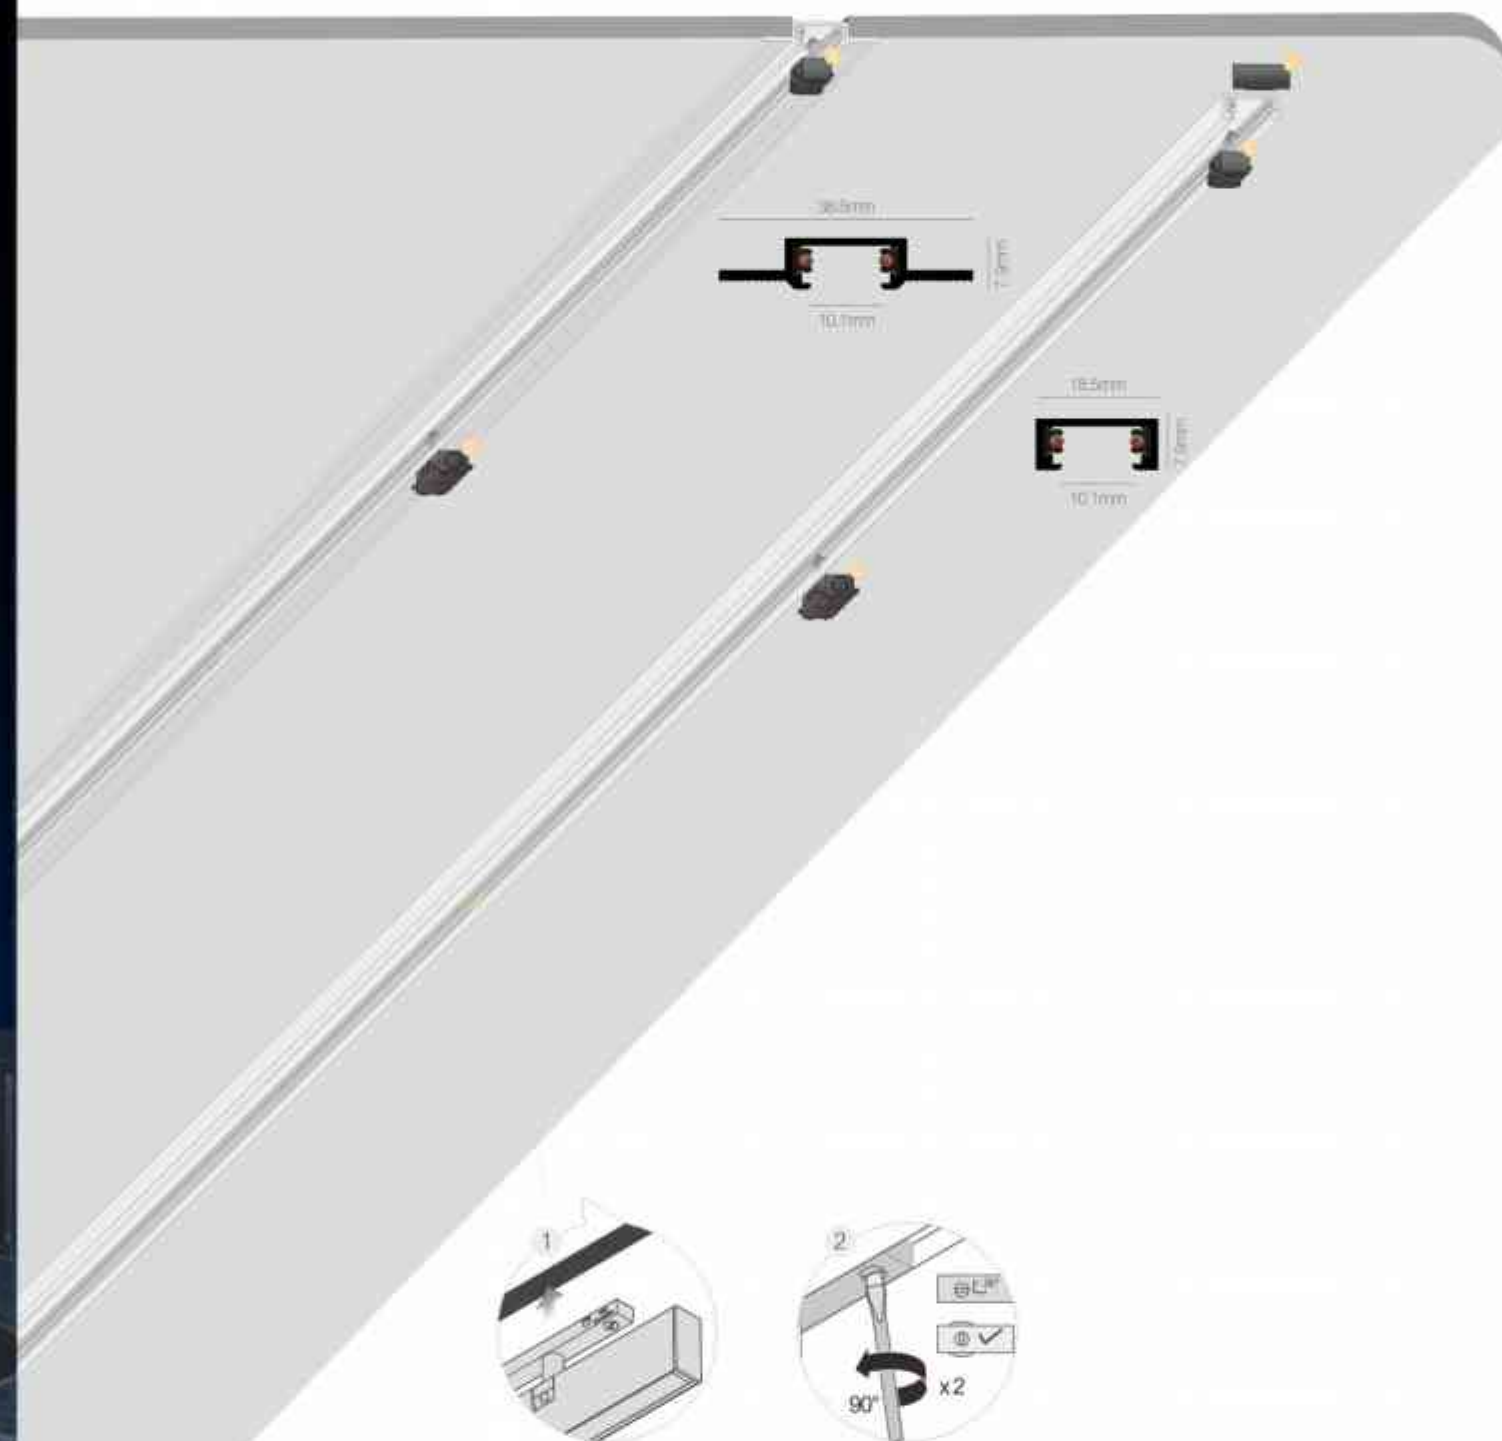



ARCA 450 SPOT

TRACK LIGHT



COLOR FINISHINGS:



ARCA 450 SPOT


LED POWER: 2.5W
 LED OUTPUT: 280LM
 SYSTEM POWER: 2.7W
 SYSTEM OUTPUT: 180LM/3000K
 INPUT: 24V DC
 CRI: 90
 DIMENSION: Ø25x30mm
 HOLE SIZE: 1



RECOMMEND



ANGLE 45°

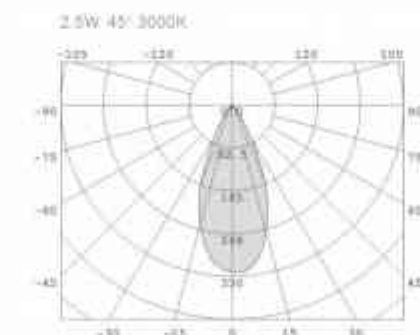



ARCA KGG SPOT M




ARCA KGG SPOT L

435

ARCA KGG SPOT M

LED POWER: 6.2W
 LED OUTPUT: 386LM
 SYSTEM POWER: 6.3W
 SYSTEM OUTPUT: 320LM/3000K
 INPUT: 24V DC
 CRI: 95
 DIMENSION: 27x110mm
 HOLE SIZE: 1




RECOMMEND



436

ARCA KGG SPOT L

LED POWER: 9W
 LED OUTPUT: 608LM
 SYSTEM POWER: 9.6W
 SYSTEM OUTPUT: 500LM/3000K
 INPUT: 24V DC
 CRI: 95
 DIMENSION: 27x120mm
 HOLE SIZE: 1




RECOMMEND




ANGLE 21°




6.2W 21° 3000K

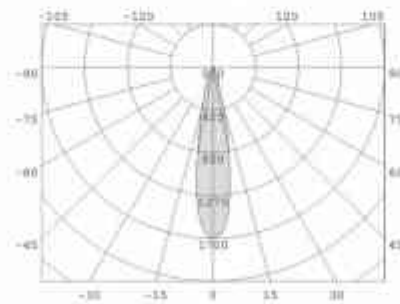


6.2W 21° 3000K




ANGLE 25°



9W 25° 3000K

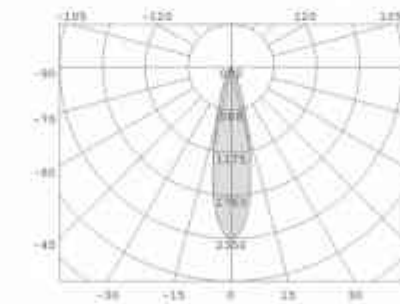

9W 25° 3000K

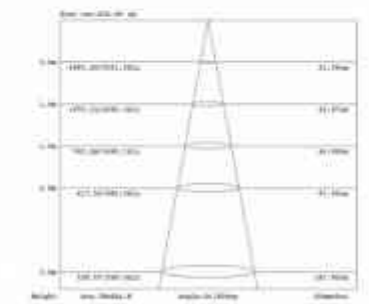



SHINY RGB CN 6



SHINY RGB CN 10

TRACK LIGHT

437

SHINY RGB CN 5

LED POWER: 5.3W
 LED OUTPUT: 448lm
 SYSTEM POWER: 1.3W
 SYSTEM OUTPUT: 347lm/3000K
 INPUT: 54V DC
 CRI: 80
 DIMENSIONS: 108x54.2x14.6mm
 HOLE SIZE: 7



RECOMMEND



ANGLE: 1



438

SHINY RGB CN 10

LED POWER: 10.6W
 LED OUTPUT: 896lm
 SYSTEM POWER: 1.6W
 SYSTEM OUTPUT: 694lm/3000K
 INPUT: 54V DC
 CRI: 80
 DIMENSIONS: 108x54.2x14.6mm
 HOLE SIZE: 7



RECOMMEND



ANGLE: 2



FORMULIA K30 300 1:1

FORMULIA K30 300 1:1



LED POWER 6.2W
 SYSTEM POWER 8.3W
 SYSTEM OUTPUT 300LM/3000K
 INPUT 24VDC
 CR: 91
 DIMENSION 253x300mm
 HOLE SIZE 1




RECOMMEND



ANGLE 21°







443

hotel
INDIGO
Helsinki - Ehdollinen

ARMO


ARMO is aluminum profile system, going in combination with LED strip and mechanically attached lighting spots. Installed on the ceiling backside, ARMO creates linear patterns throughout the room, visually extending the space.

Be it an office or retail, meeting room or museum, private apartment or villa, ARMO provides unique design on the ceiling, Integrating lighting with architectural solutions.


CCC CE IP20 DIM TRIAC DIM 1-10V DALI

COLOR FINISHINGS:



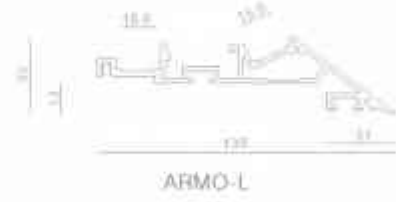

ARMO-L

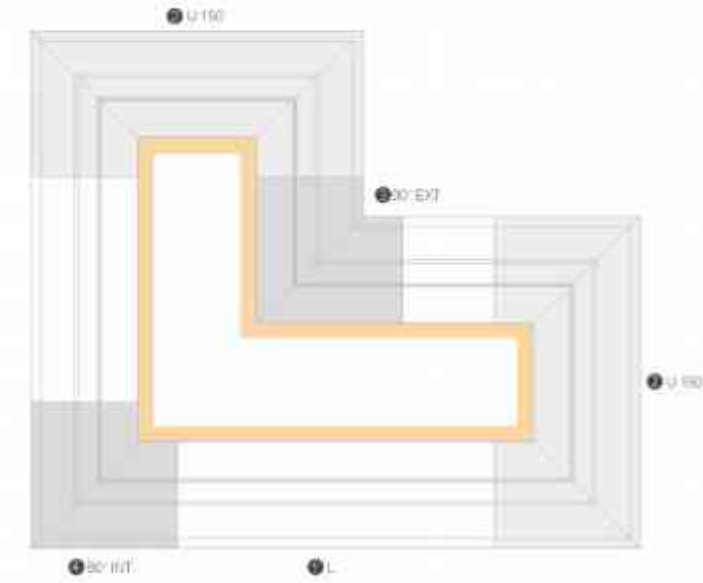

ARMO-PRO
301102 100mm



ARMO-PRO CORNER IN90°
301103



ARMO-PRO CORNER EX90°
301104



ARMO-PRO CORNER U150
301104



ARMO-FIX
301101



ARMO-PET
301103









- 1 ARMO-L

- 2 ARMO-L CORNER U150

- 3 ARMO-L CORNER EX90°

- 4 ARMO-L CORNER IN90°

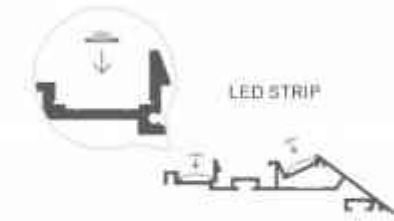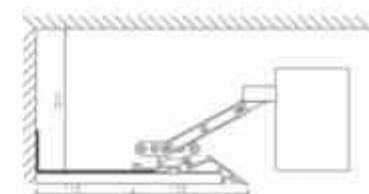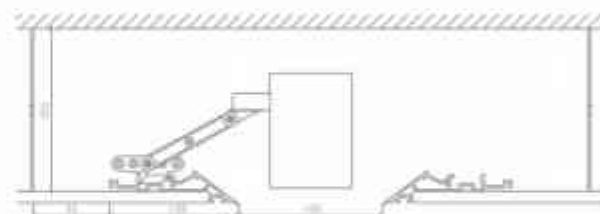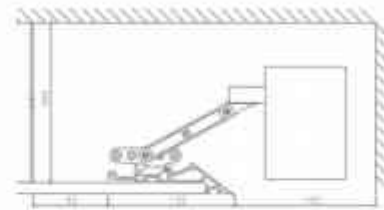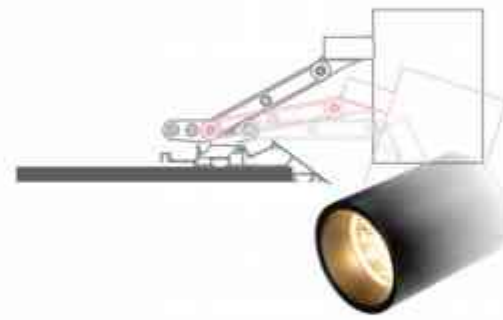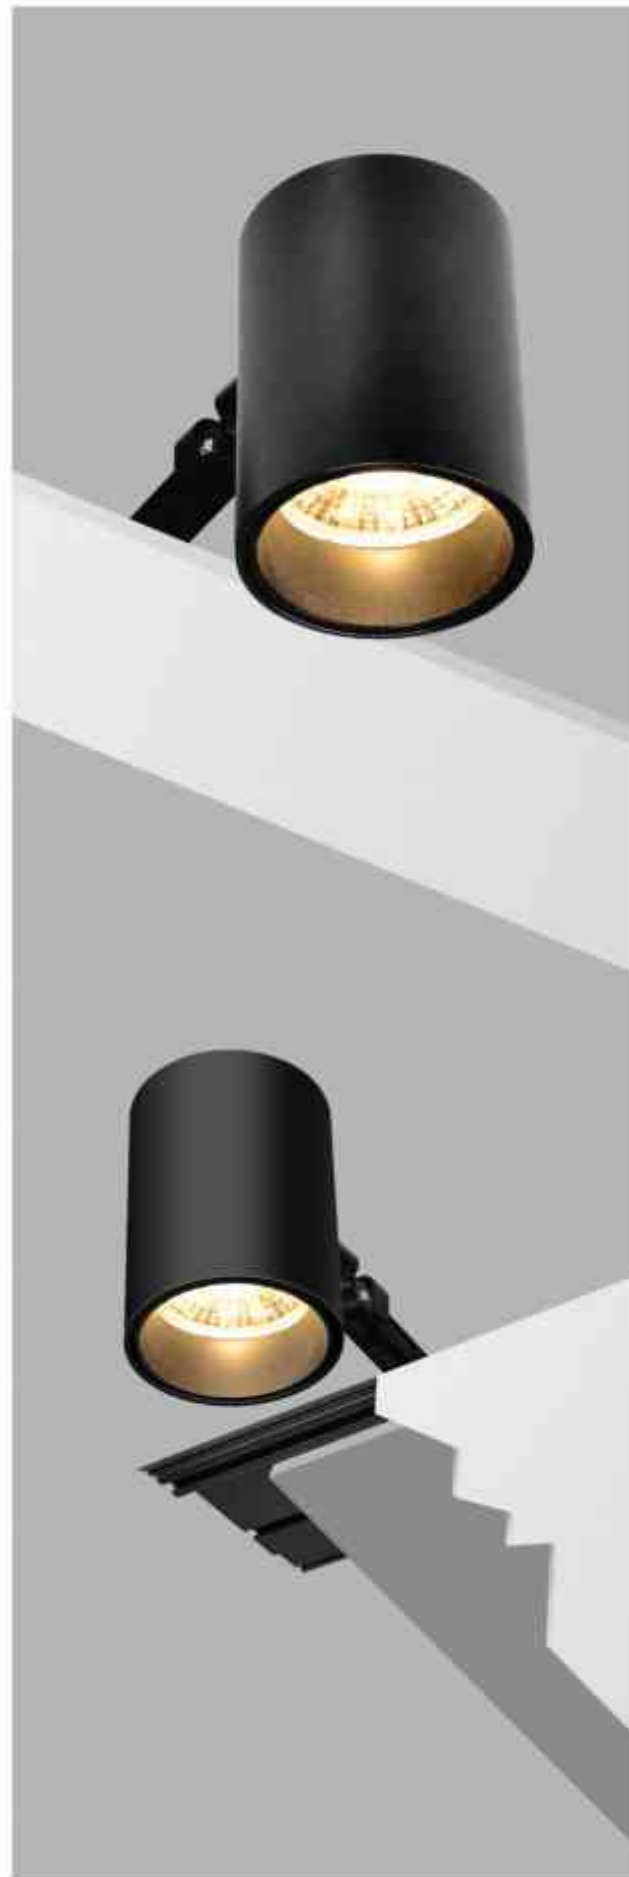FLUA-CV1-120	002940
LEDs/meter:	100 x DMC LED's
Size / Extruding width:	3000x120x15mm / DIVISIBLE PER 50mm
Power/water:	0-200W
Light output/meter:	3600lm
Voltage input:	24Vdc
Color temperature:	
Color Rendering Index:	>80
Ingress protection:	IP33

FLUA-CV1-120	002936
LEDs/meter:	100 x DMC LED's
Size / Extruding width:	3000x120x15mm / DIVISIBLE PER 50mm
Power/water:	14-40W
Light output/meter:	1440lm
Voltage input:	24Vdc
Color temperature:	
Color Rendering Index:	>80
Ingress protection:	IP33



001517
SET OF 2 PCS



001518
SET OF 2 PCS




001514
SET OF 2 PCS




ARMO MATRIX S

Item code	Led power	System power	Color temperature	CRI	OUTPUT	INPUT	DIMENSION
0100152A	10.2W	19W	2700K 3000K 4000K	90	321 lm 356 lm 408 lm	220-240VAC 10A/2P	Ø62x120mm

RECOMMEND OTHER VERSIONS:

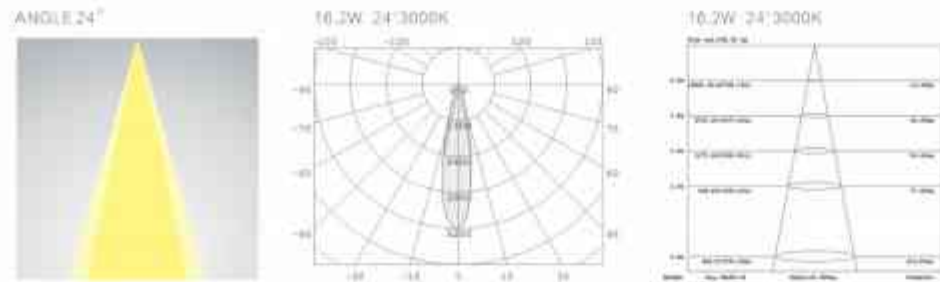


OTHER VERSIONS:





ARMO MATRIX M

Item code	Led power	System power	Color temperature	CRI	OUTPUT	INPUT	DIMENSION
0100152A	33W	38.9W	3100K 3000K 4000K	90	2045 lm 2126 lm 2262 lm	220-240VAC 30A/3P	96x120x240mm

RECOMMEND OTHER VERSIONS:

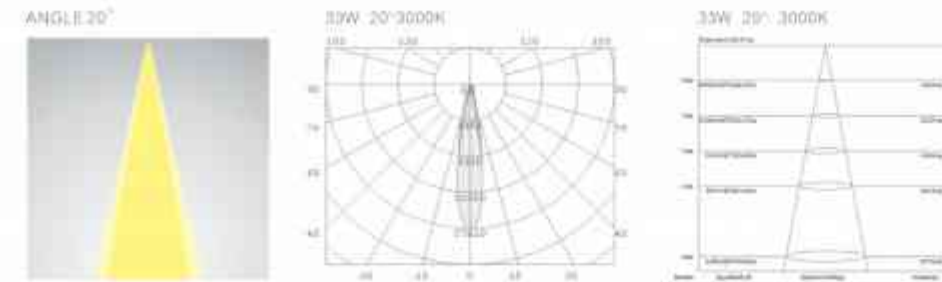

OTHER VERSIONS:

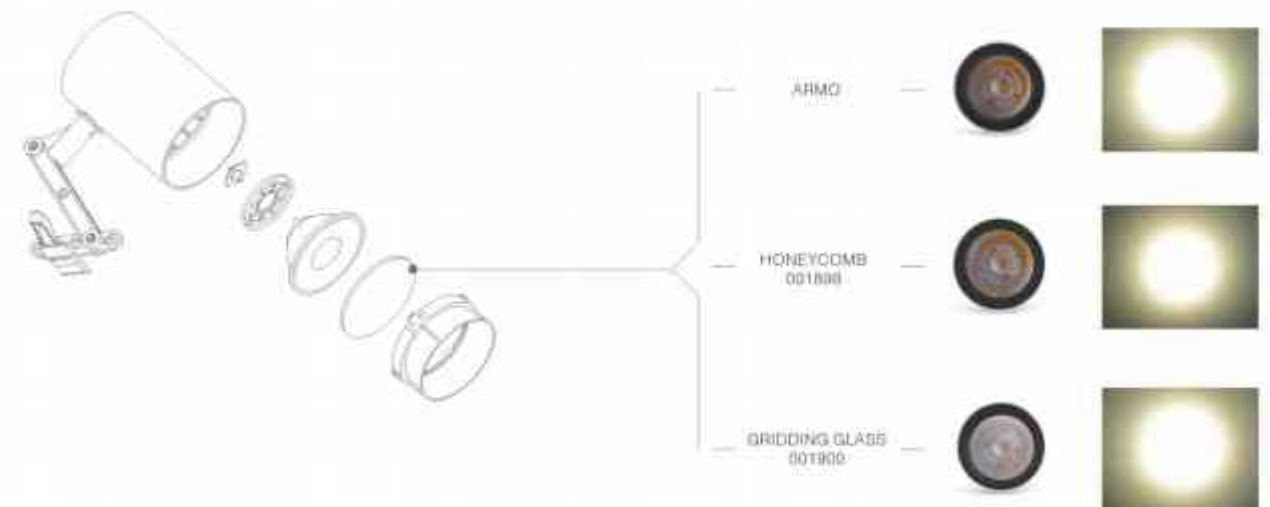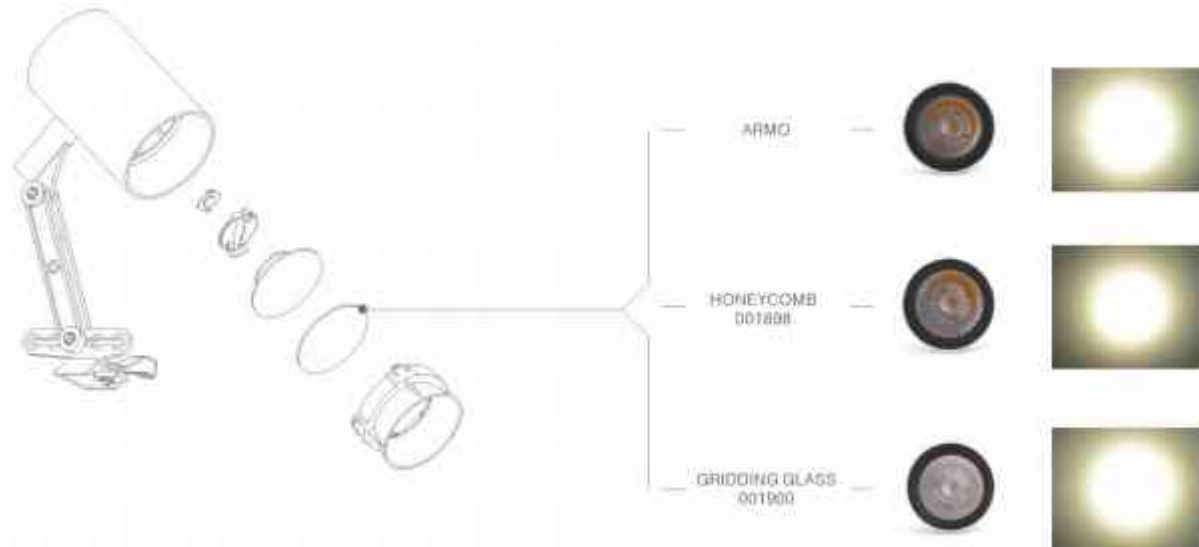




ARMO MATRIX NB

Item code	Led power	System power	Color temperature	CRI	OUTPUT	INPUT	DIMENSION
52111A	9W	11.3W	3000K	90	520lm	220-240VAC 50/60Hz	Ø52*100*235mm


RECOMMEND OTHER VERSIONS:

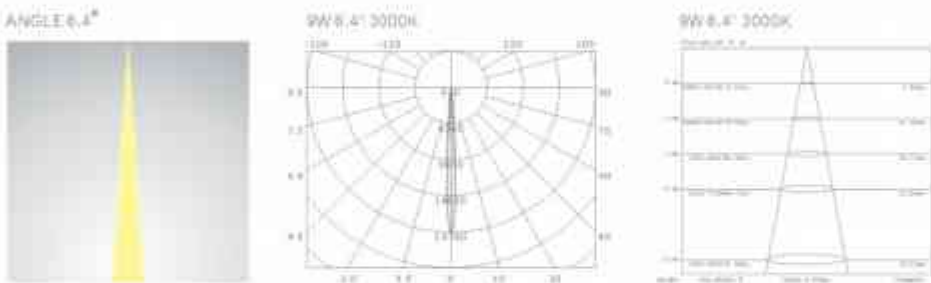


ARMO MATRIX S

Item code	Led power	System power	Color temperature	CRI	OUTPUT	INPUT	DIMENSION
52112A2	14.4W	18W	2700K-6300K	90	988lm	220-240VAC 50/60Hz	Ø65*100mm


RECOMMEND

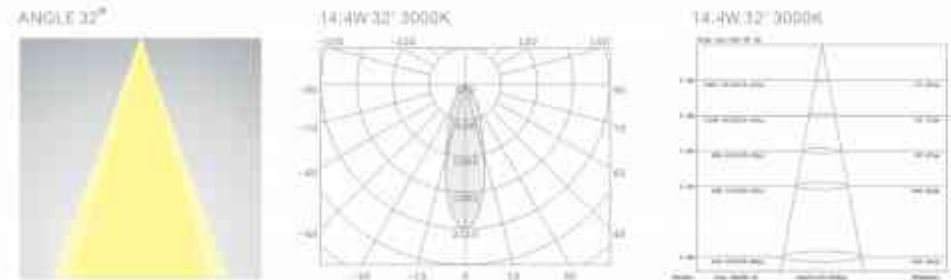

OTHER VERSIONS:

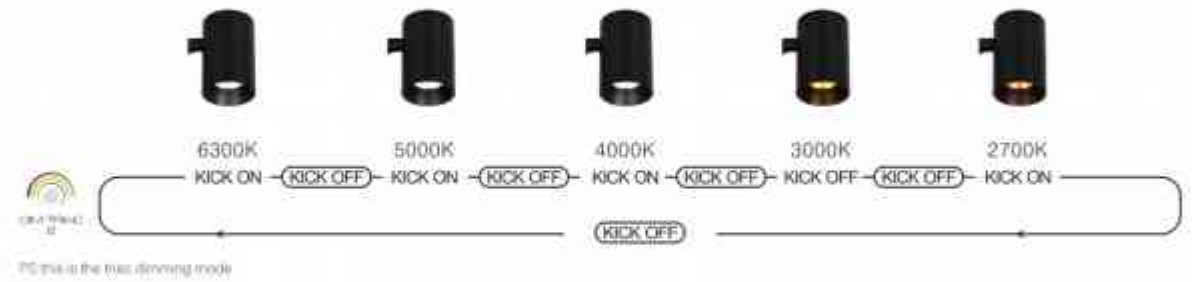


453

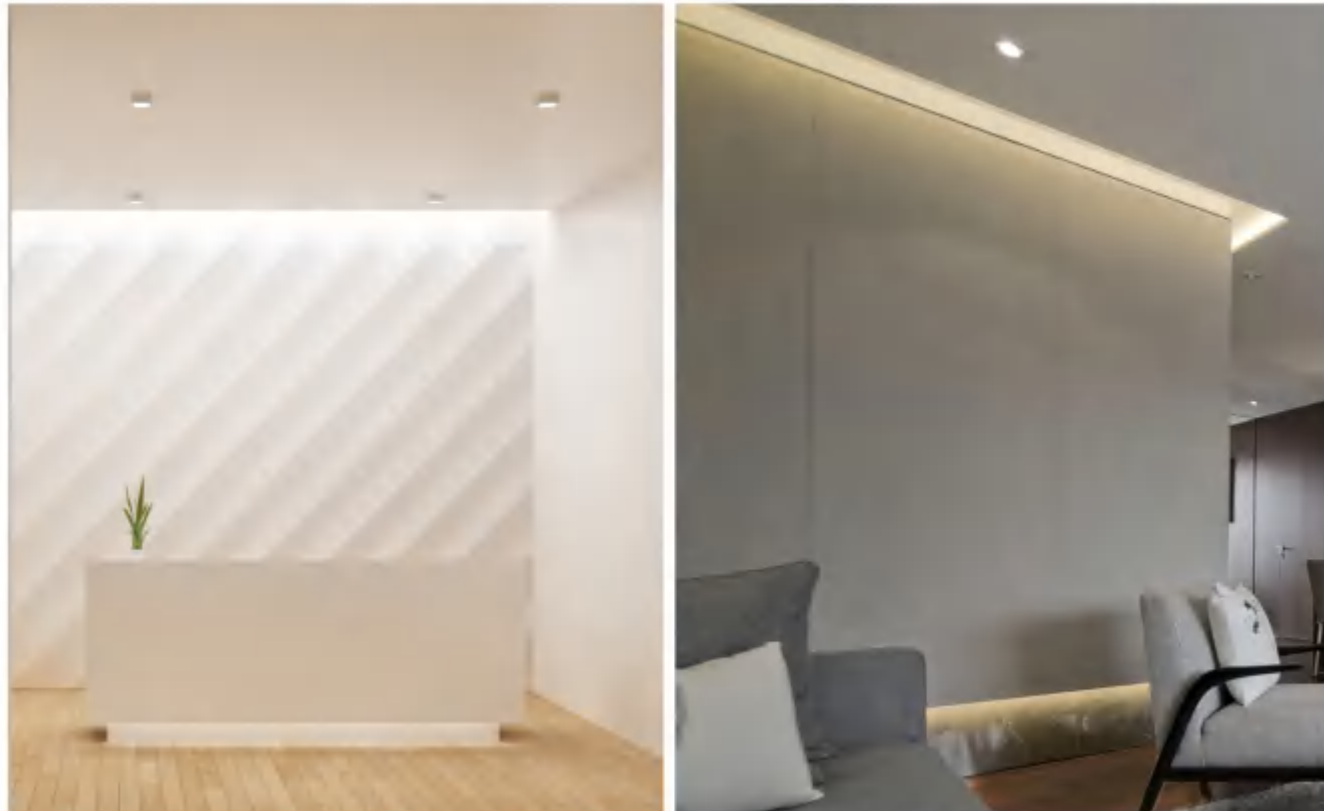


















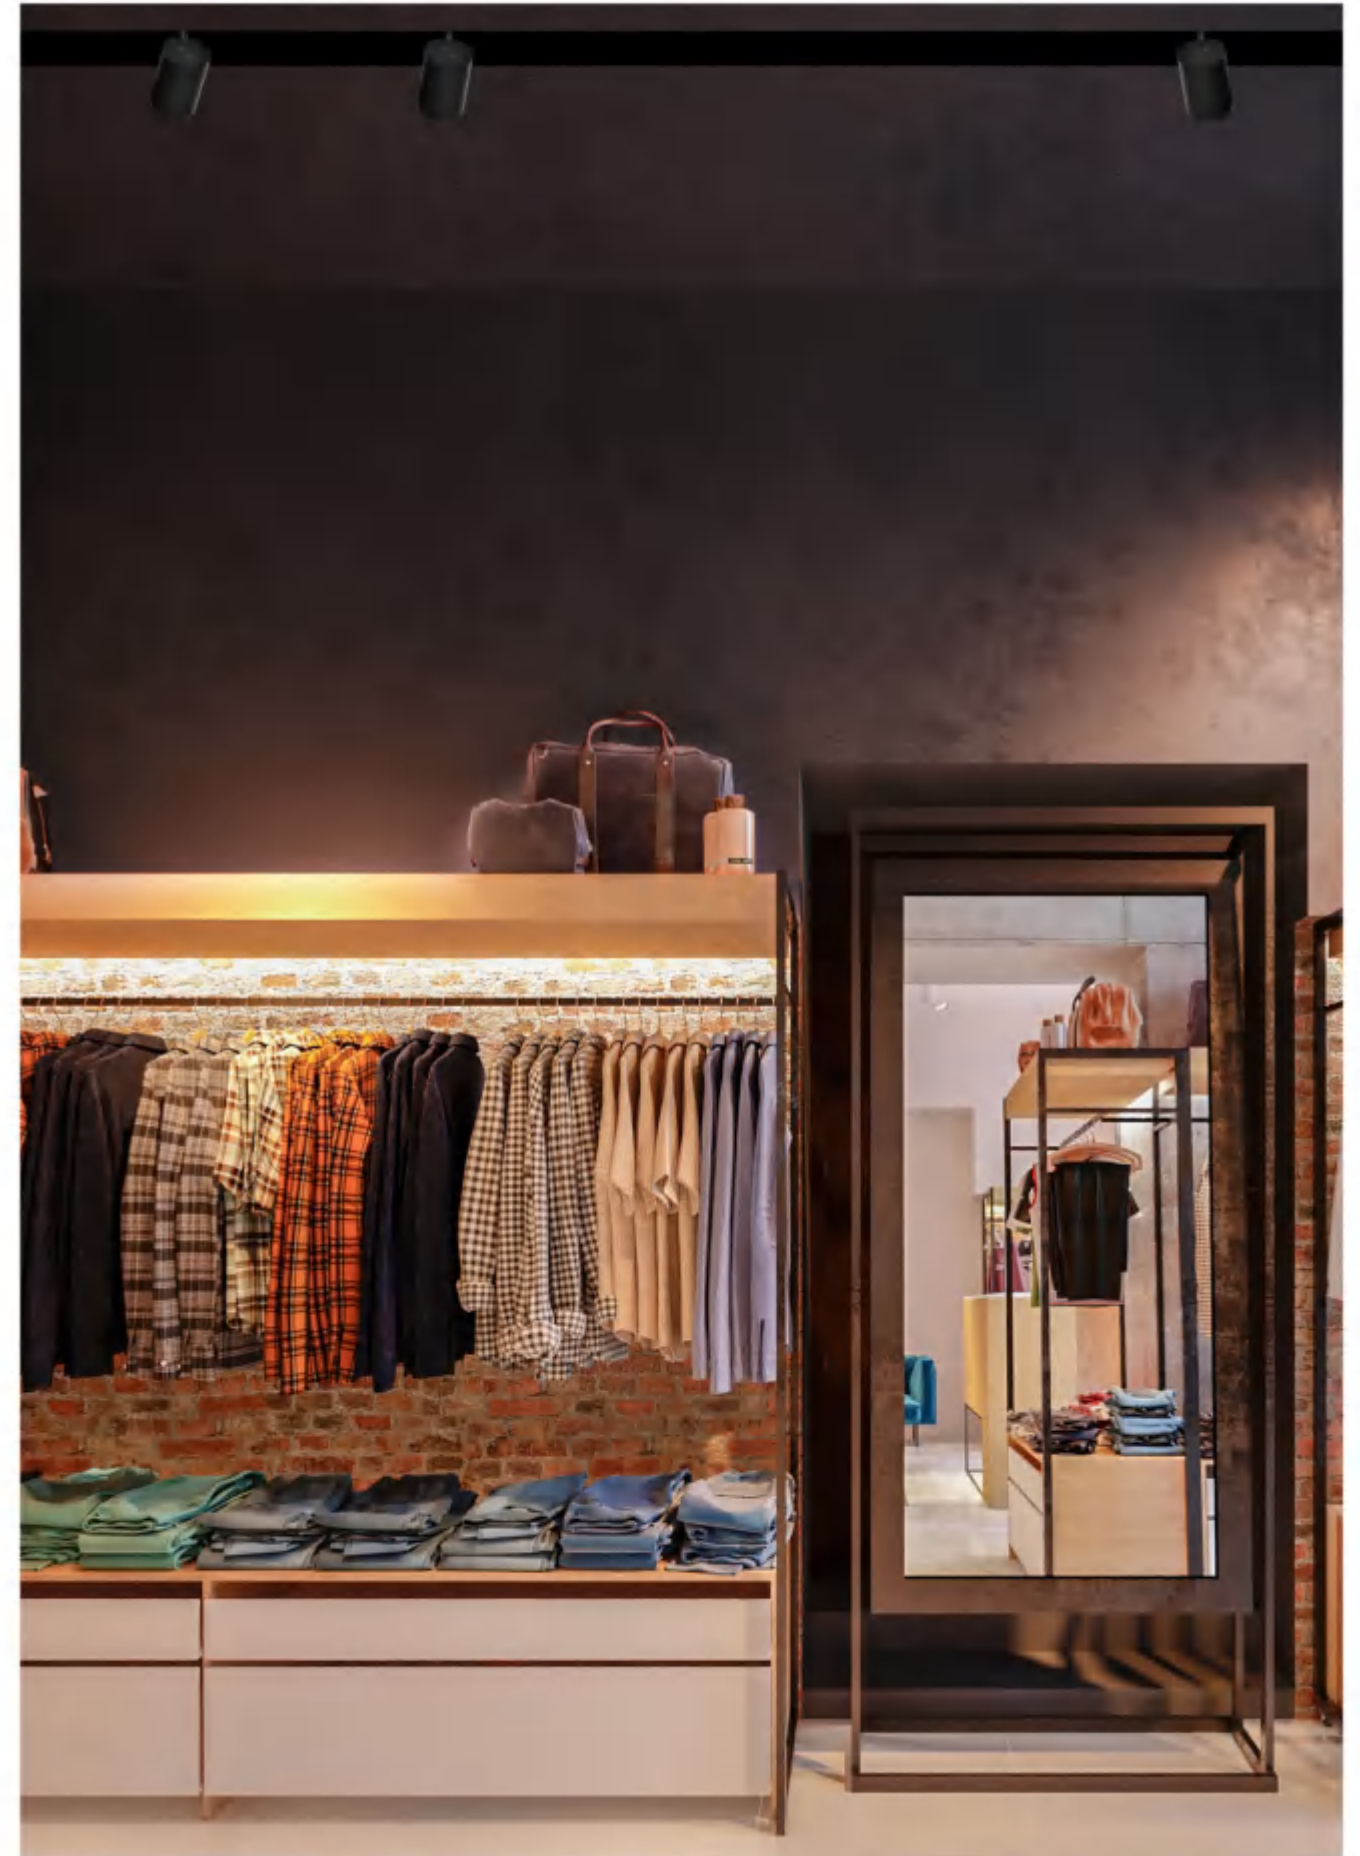










TRACK LIGHT

454




WALL LIGHT

					
CARD IN 1 458	CARD IN 2 459	CARD SQ 459	DANAS RO 1 463-464	DANAS SQ 1 463-464	DANAS RO 2 463-464
					
DANAS SQ 2 463-464	DANAS RO 3 463-464	DANAS SQ 3 463-464	DANAS RO 4 463-464	DANAS SQ 4 463-464	DANAS RO 5 463-464
					
DANAS SQ 5 463-464	PROSER H 467-468	PROSER V 467-468	SLIDE AISI316 473	SLIDE IP SQUARE 474	SLIDE IP RECTANGULAR 475
					
SLIDE 476	SNOW 482	TONE S RO RGB AISI316 484	TONE S LI RGB AISI316 484	TONE S RO RGB 484	TONE S LI RGB 484
					
TONE S RO AISI316 485	TONE S LI AISI 316 485	TONE S RO 485	TONE S LI 485		

455

456

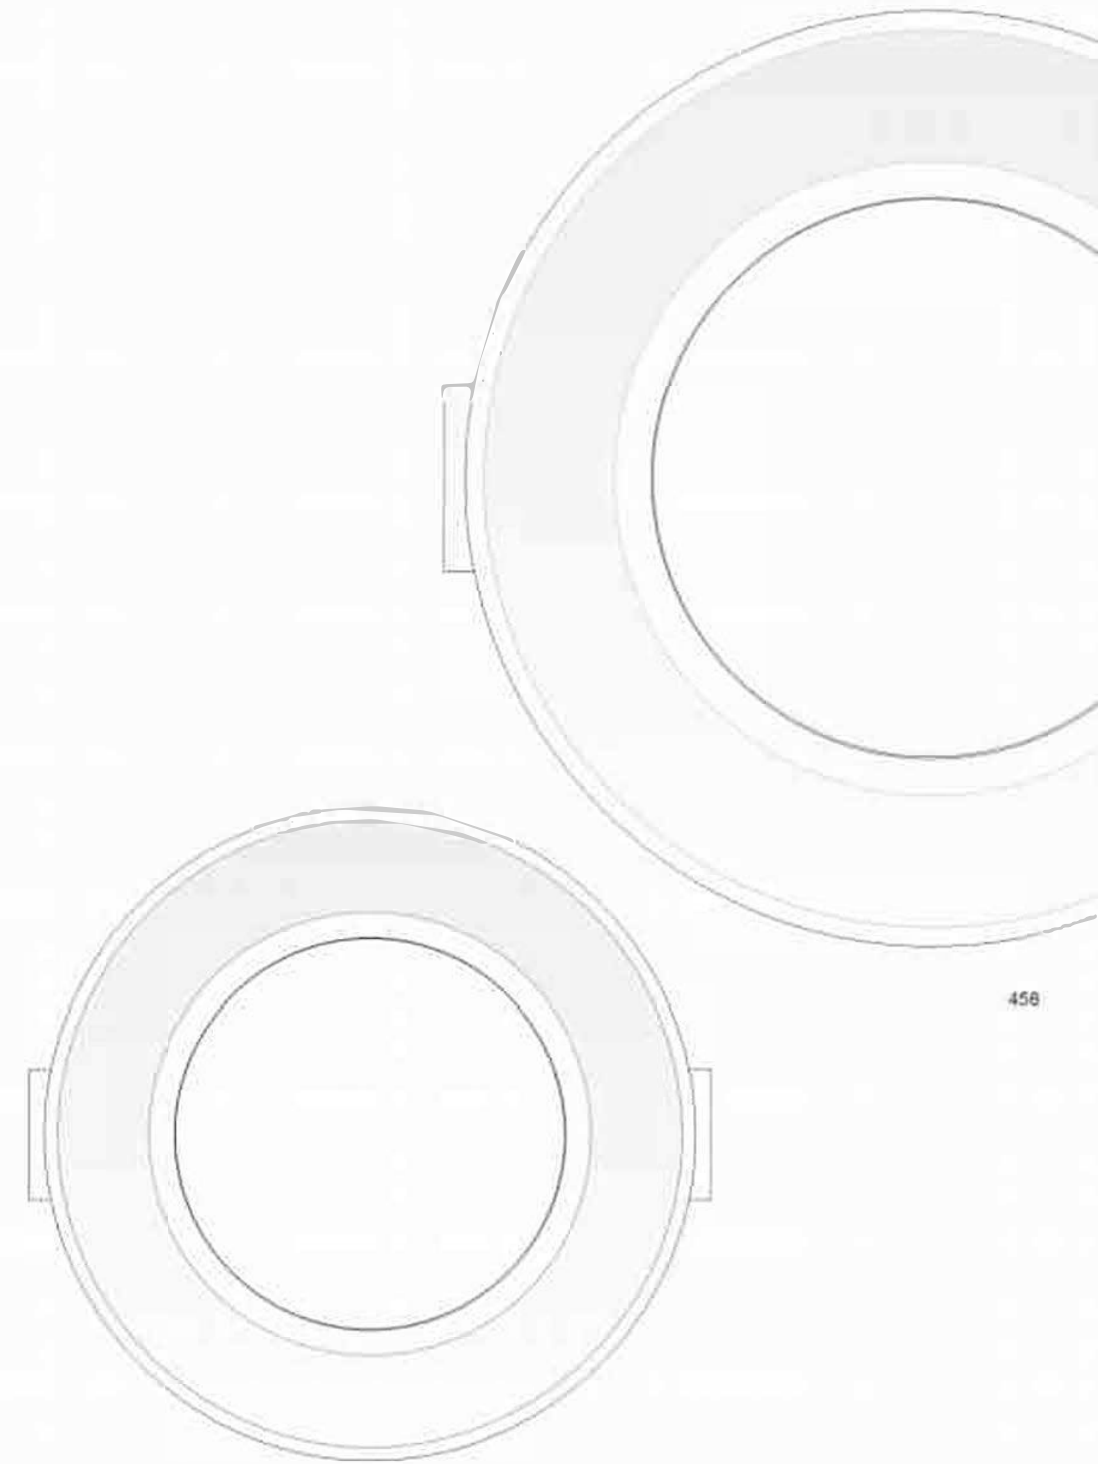

CARD

CARD is the best choice for guidance light in hallways and staircase for indoor application. Narrow beam angle produces triangular shaped lighting effect on the floor. CARD series is presented by 3 different dimensions that could meet all possible lighting requirements. In addition to white amber color, CARD is available in red, green and blue colors. CARD can be installed both in plywood and cement walls.

© CE IP20 220-240VAC

CARD

WALL LIGHT



IN 1




IN 2



CARD IN 1

LED POWER: 2.2W
LED OUTPUT: 195lm
SYSTEM POWER: 4W
SYSTEM OUTPUT: 80lm/3000K
INPUT: 100-240VAC/50/60Hz
CRI: 80
DIMENSION: 70*25*36mm
HOLE SIZE: 63*25mm/Ø70mm




CARD IN 2

LED POWER: 2.2W
LED OUTPUT: 195lm
SYSTEM POWER: 4W
SYSTEM OUTPUT: 75lm/3000K
INPUT: 100-240VAC/50/60Hz
CRI: 80
DIMENSION: 170*35*50mm
HOLE SIZE: 160*30mm/Ø170mm




CARD IN 2


P



2.2W P(1°51'-57°) 3000K

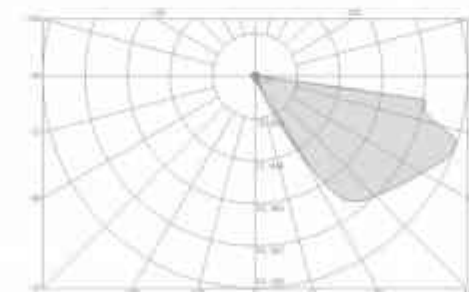

2.2W P(1°51'-57°) 3000K

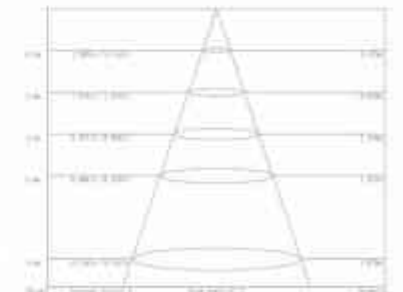



SQ

CARD CQ



LED POWER: 2.2W
SYSTEM POWER: 4W
SYSTEM OUTPUT: 80lm/3000K
INPUT: 100-240VAC/50/60Hz
CRI: 90
DIMENSION: 70*15*40mm
HOLE SIZE: 50*55mm/Ø150mm



P

2.2W P(1151*57) 3000K

2.2W P(1151*57) 3000K

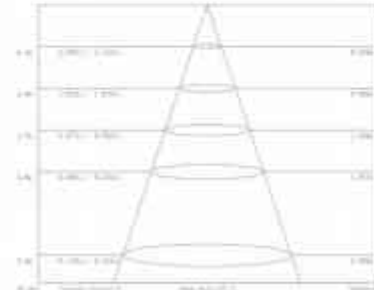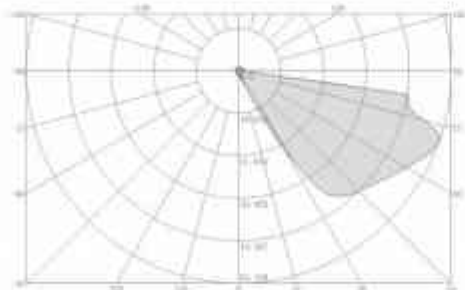

WALL LIGHT



DANAS

Thanks to wide variety of the outer frame, DANAS can meet any design requirements creating different lighting patterns on the floor. IP 65 rate makes it possible to use DANAS for both interior and exterior projects.


Both round and square frames are available. Plastic box is provided specially for installation into cement wall.

CE IP65 230V/AC

481

DANAS

WALL LIGHT

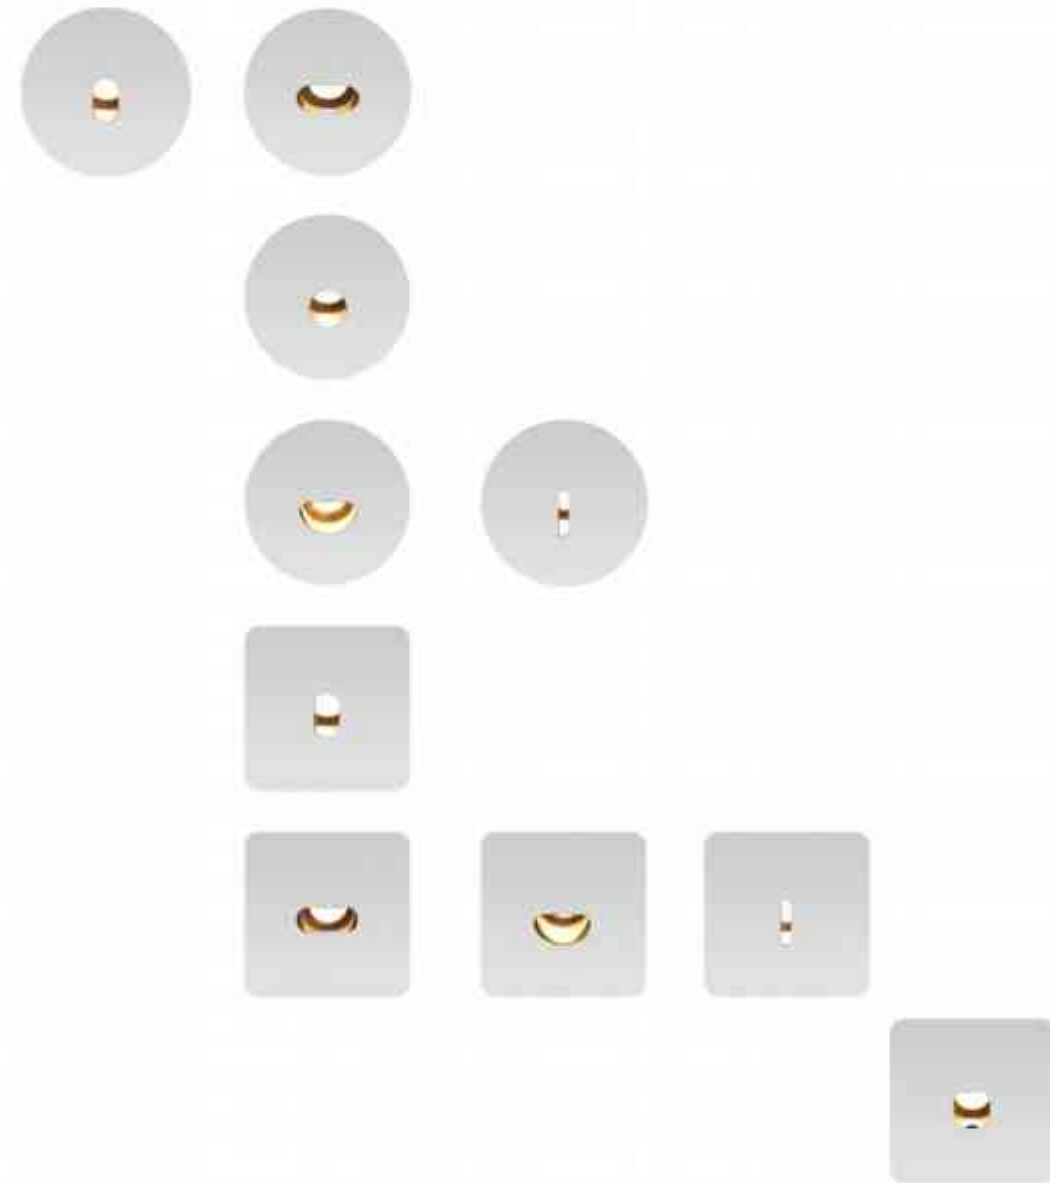

482

COLOR FINISHINGS:





463




DANAS 
 LED POWER: 2.2W
 CRI: 90
 SYSTEM POWER: 4.2W
 SYSTEM OUTPUT: 271lm
 INPUT: 100-240VAC/50/60Hz
 DIMENSION: Ø55*42mm/Ø55*42mm
 HOLE SIZE: Ø40mm/Ø70mm



ANGLE C





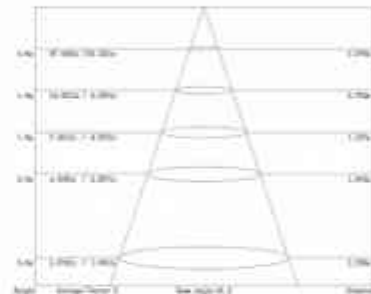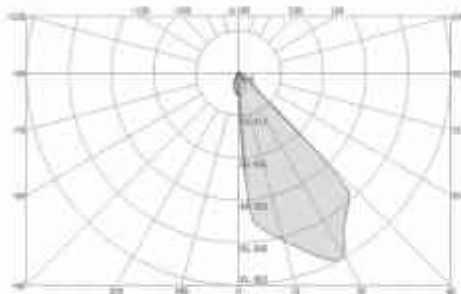










2.2W (152°41'-24") 3000K

2.2W (152°41'-24") 3000K



WALL LIGHT

464

					
RO 1	SQ 1		RO 2	SQ 2	
408415A	408215A		408215A	408215A	
					
RO 3	SQ 3		RO 4	SQ 4	
408515A	408115A		408715A	408215A	
					
RO 5	SQ 5				
408515A	408215A				

PROSER

Not a main light, unassuming, yet it's quite an important part of home lighting system, it's functional, aesthetic and reliable, it's step light.

Along the hall way, winding stairs, step light is the best lighting option that provides a soft light to aesthetically enhance the spatial hierarchy and functionally guide the walking direction.

Integrated with sensor,

PROSER step light is like the lighting house standing by all the time.

Chaotically trying to switch the light on in a dark night is no longer a trouble for you.

2 ways to light it up at your service,

walking past it to activate it or leave a light on automatically when ambient light lower than 50lux, 10 lux or 5 lux at your setting.

Now install it to enjoy it.

© CE IP20 220-240VAC

465



PROSER

WALL LIGHT



466



Intuition switch



Daylight sensor hold



Detection area



Hold time



COLOR FINISHINGS:



YSP SWP





H



V




PROSER H

SYSTEM POWER: 2W
 SYSTEM OUTPUT: 15LM/2700K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 90*42mm
 HOLE SIZE: /



PROSER V

SYSTEM POWER: 2W
 SYSTEM OUTPUT: 15LM/2700K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 90*42mm
 HOLE SIZE: 32*35mm



RECOMMEND



RECOMMEND



Detection area

Detection area means detection coverage. It can be adjusted by combining DIP switches for specific application. Max.4m

1	2
↑ ↓	25%
↑ ↓	50%
↑ ↓	75%
↑ ↓	100%



25% 50% 75% 100%



Hold-time

Hold-time means the time period the light will be ON after the last detection.

1	4
↑ ↓	5min
↑ ↓	10s
↑ ↓	30s
↑ ↓	1h



Daylight thres hold

Daylight sensor prior to motion sensor. Set threshold for specific needs. If Disable, only motion sensor works.

1	0
↑ ↓	5lux
↑ ↓	10lux
↑ ↓	50lux
↑ ↓	Dis Able



Don't Push


1
↑ ↓
↑ ↓
↑ ↓
↑ ↓



Switch


1
↑ ↓
↑ ↓
↑ ↓
↑ ↓

469

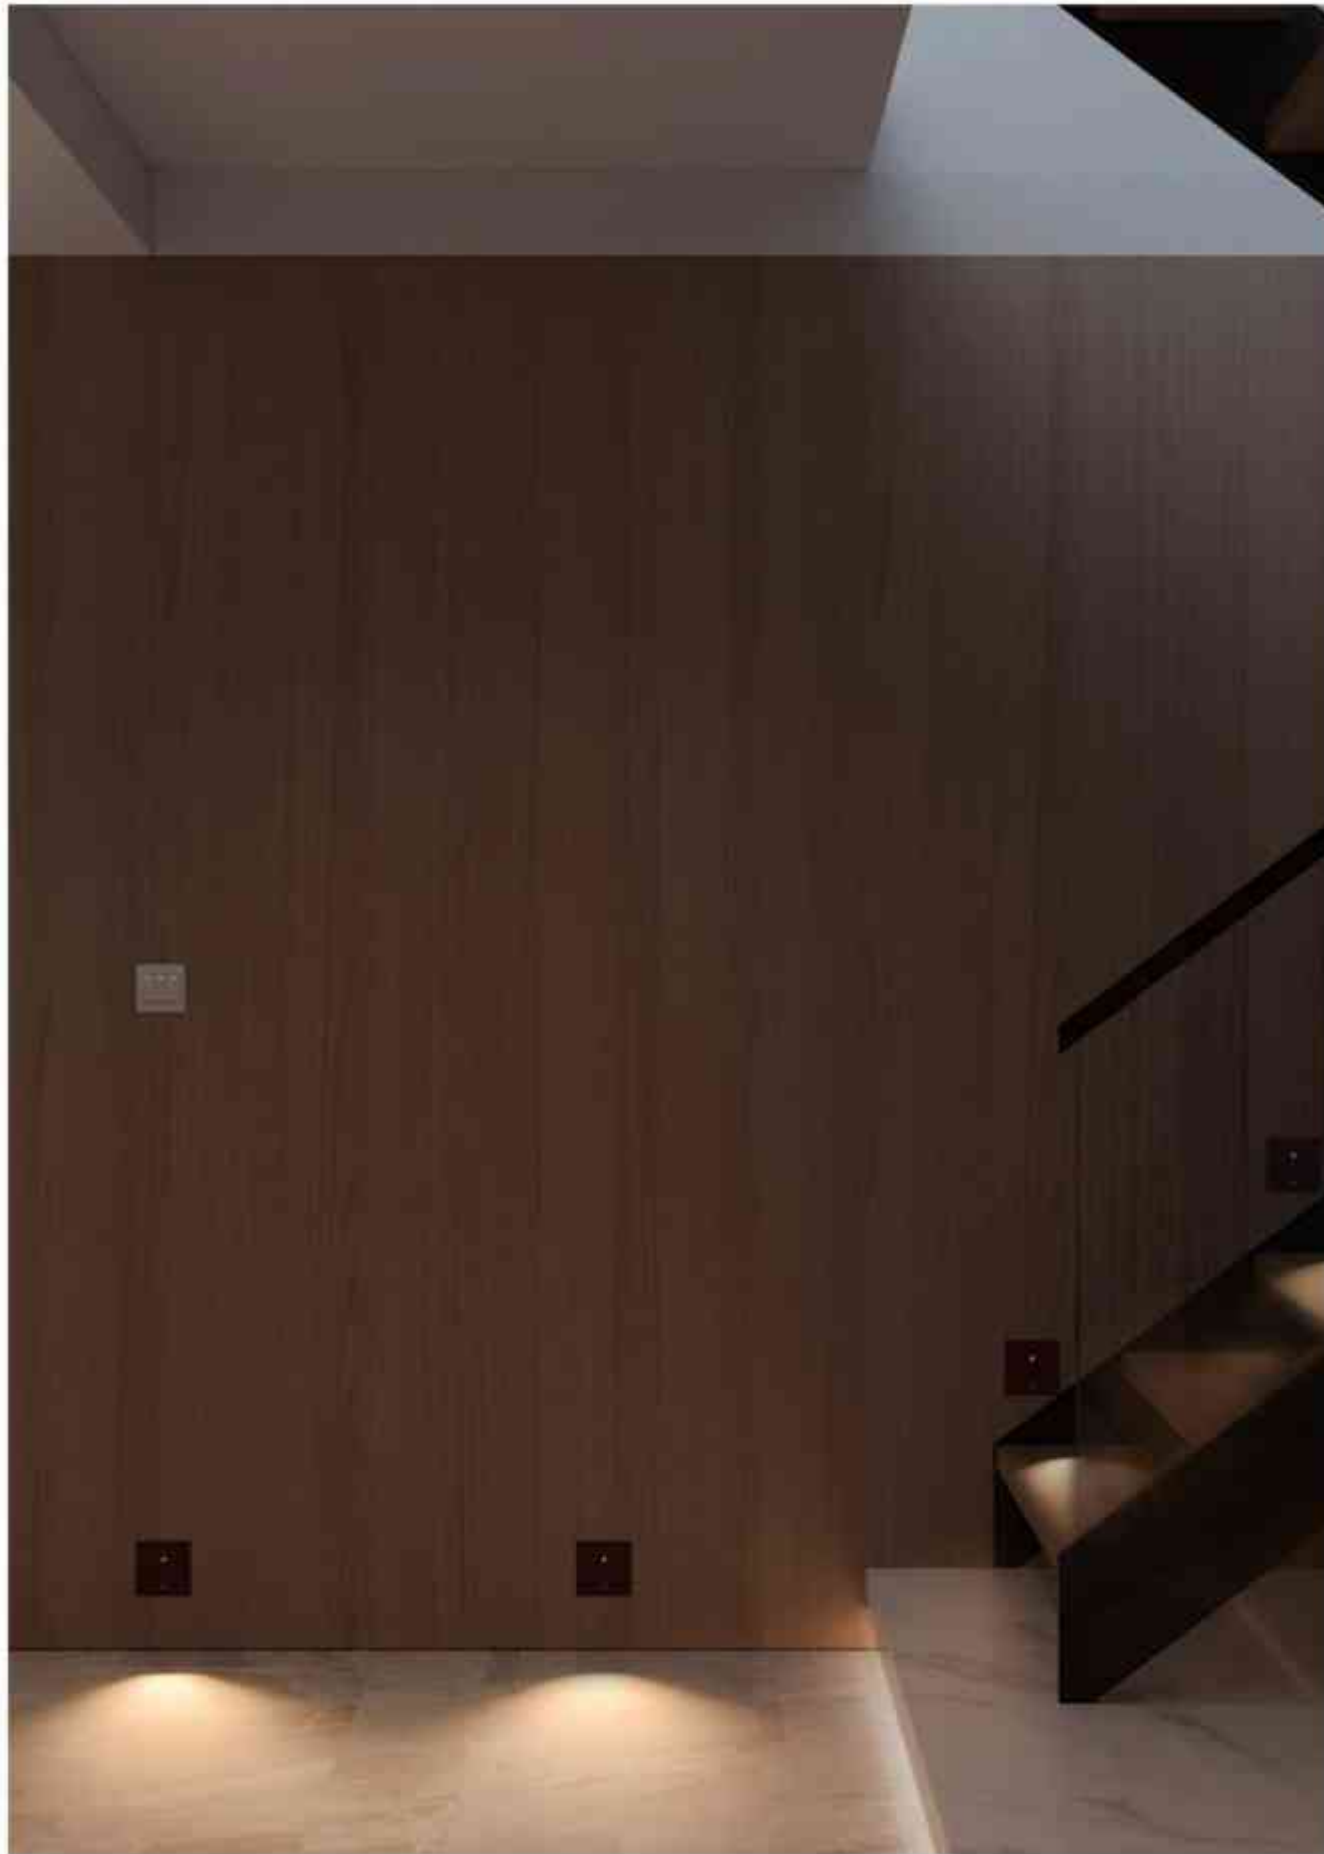

WALL LIGHT

470

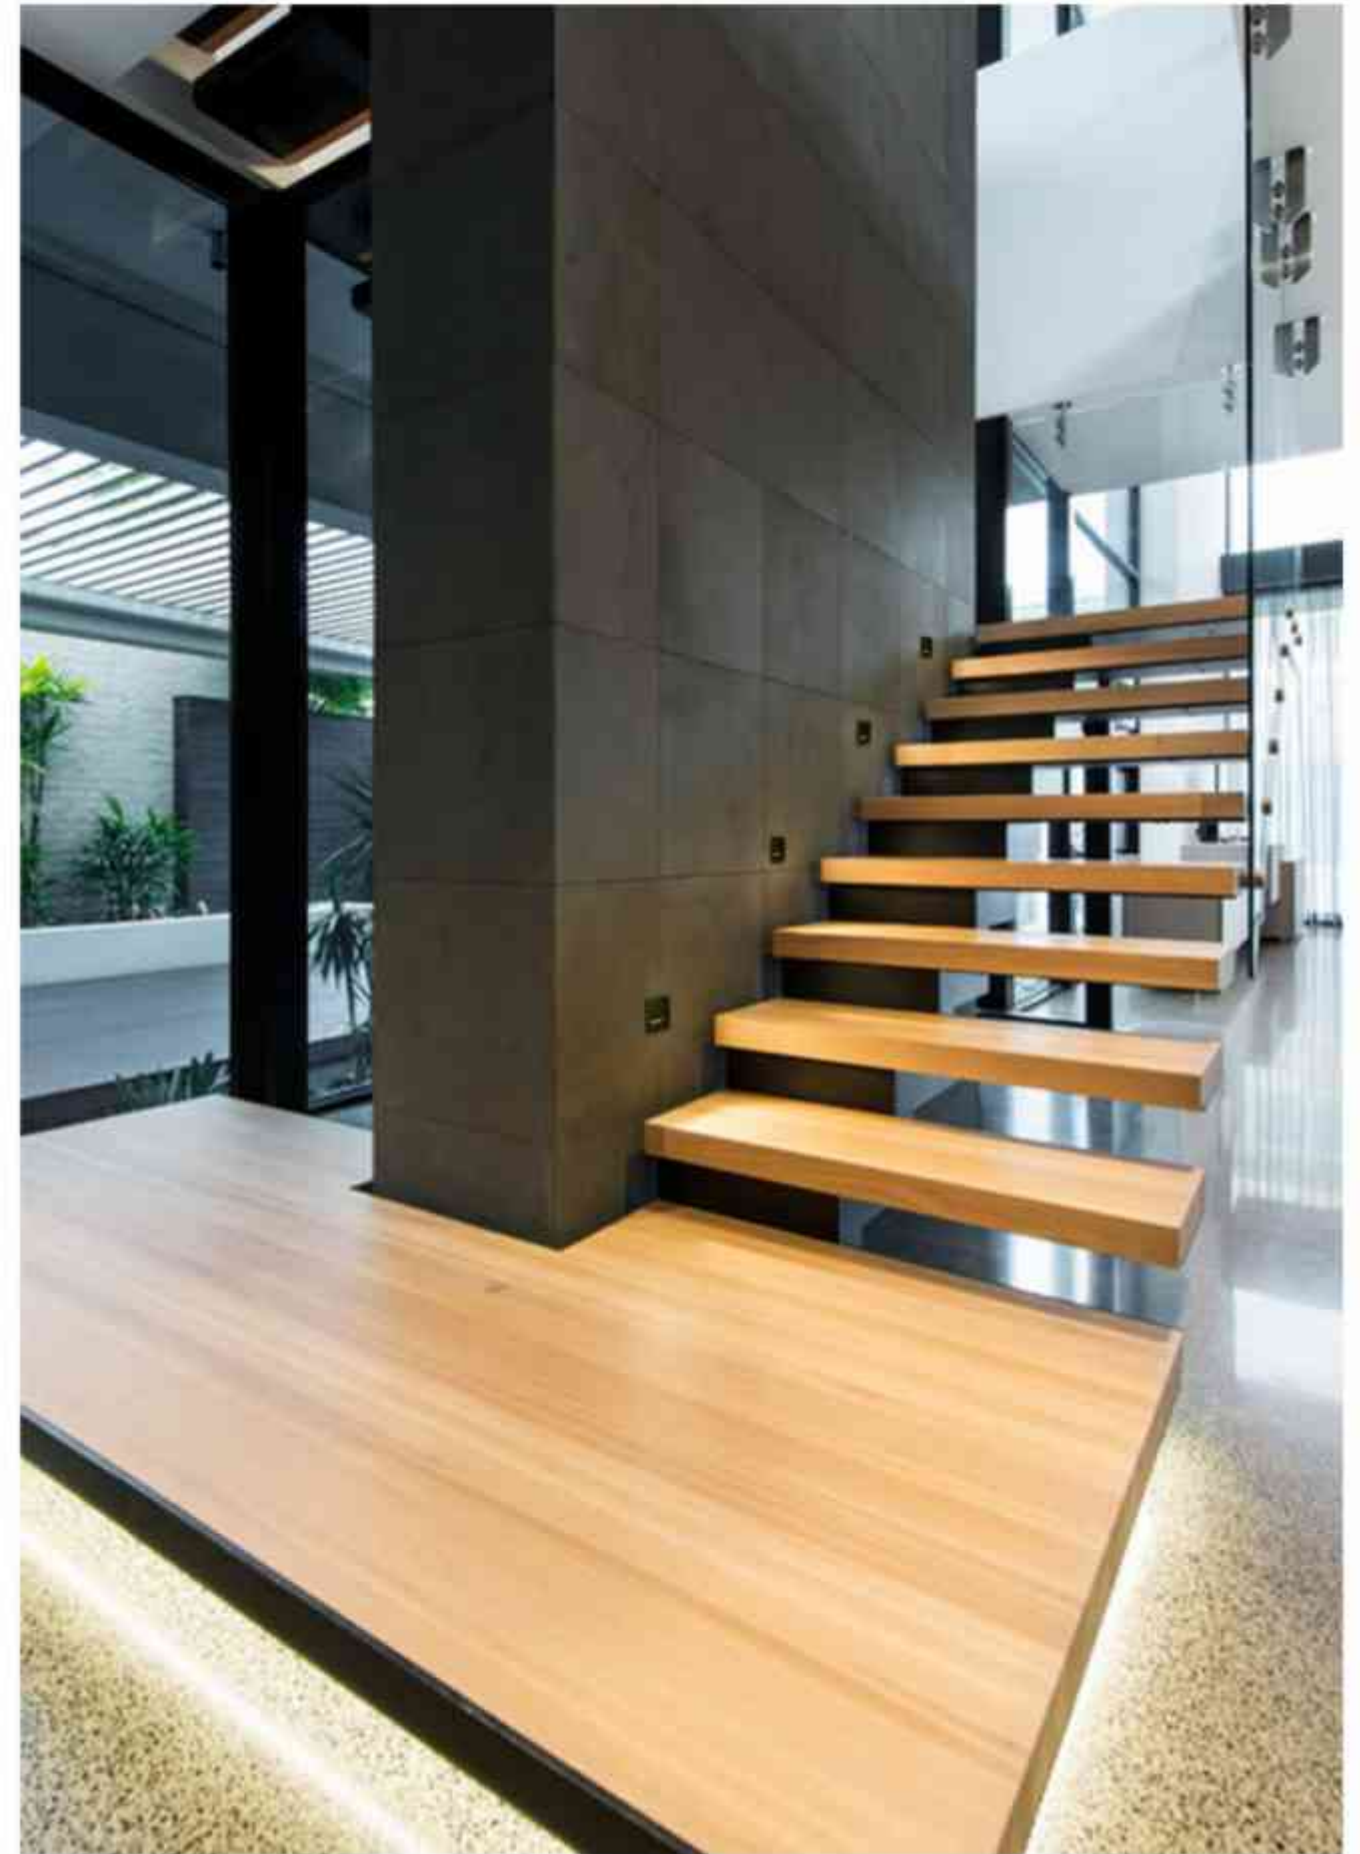

SLIDE

As a wall recessed luminaire,
SLIDE is perfect as a guidance light.
Be it in a corridor or as a safety light for the steps of your stairs at night,
SLIDE does the trick. SLIDE is available with IP20 and IP65 rate.
For special requirements stainless steel version
is also available.

© CE IP20 IP65 100-240VAC

471



472






IP ACB16


SLIDE IP ACB16 
 LED POWER: 3W
 SYSTEM POWER: 5W
 OUTPUT: 215lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 80
 DIMENSION: 85*108*45mm
 HOLE SIZE: 72*90mm




ANGLE P



3W P(78*68*41) 3000K

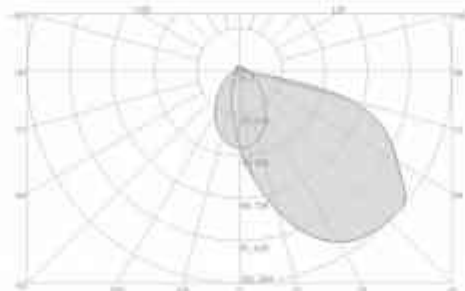


3W P(78*68*41) 3000K

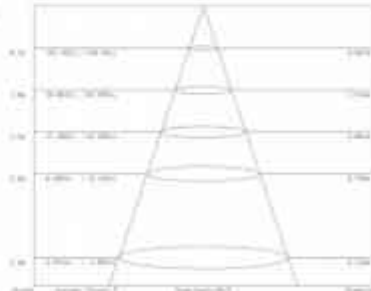


IP SQUARE


SLIDE IP SQUARE 
 LED POWER: 3W
 SYSTEM POWER: 5W
 OUTPUT: 215lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 80
 DIMENSION: 85*100*45mm
 HOLE SIZE: 72*90mm




ANGLE P



3W P(78*68*41) 3000K

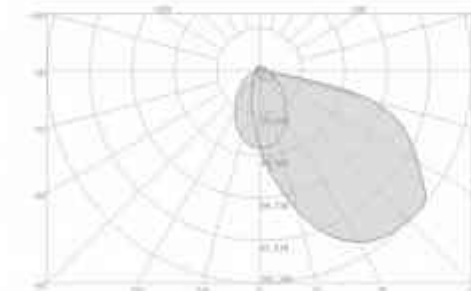

3W P(78*68*41) 3000K

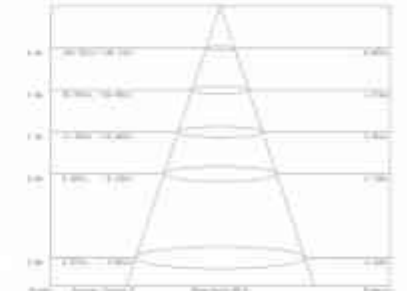




IP RECTANGULAR



SLIDE


SLIDE IP RECTANGULAR IP65

LED POWER: 3W
 SYSTEM POWER: 5.6W
 OUTPUT: 173lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CR: 80
 DIMENSION: 30*60*48mm
 HOLE SIZE: 40*25mm




SLIDE IP20


LED POWER: 2.2W
 SYSTEM POWER: 3.1W
 SYSTEM OUTPUT: 85lm
 INPUT: 100-240VAC, 50/60Hz
 CR: 80
 DIMENSION: 71*73*40mm
 HOLE SIZE: 60*60mm/90*90mm

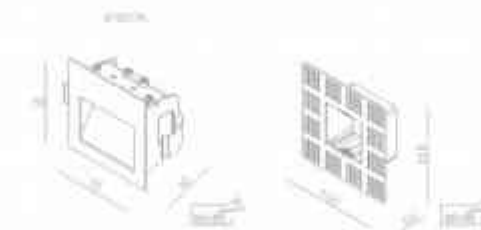


ANGLE P




3W P(33°61'-34°) 3000K

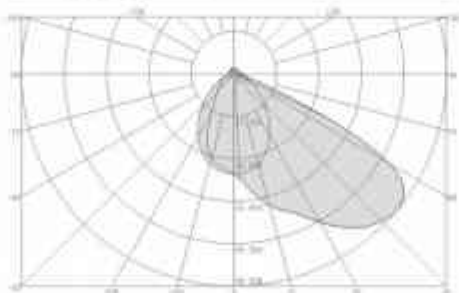


3W P(33°61'-34°) 3000K

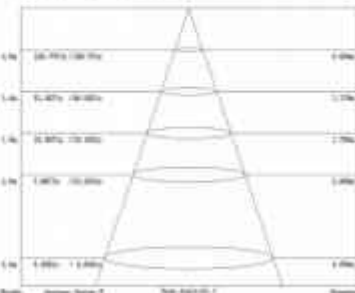


ANGLE P



2.2W P(71°38'-46°) 3000K


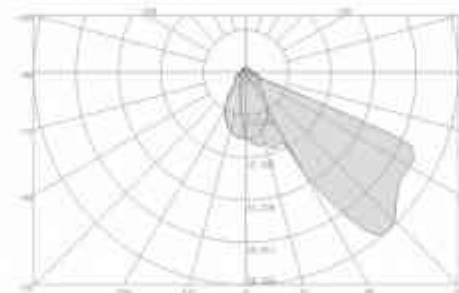


2.2W P(71°38'-46°) 3000K

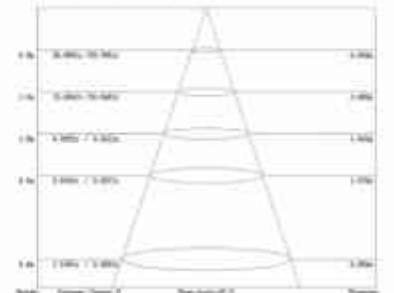



477

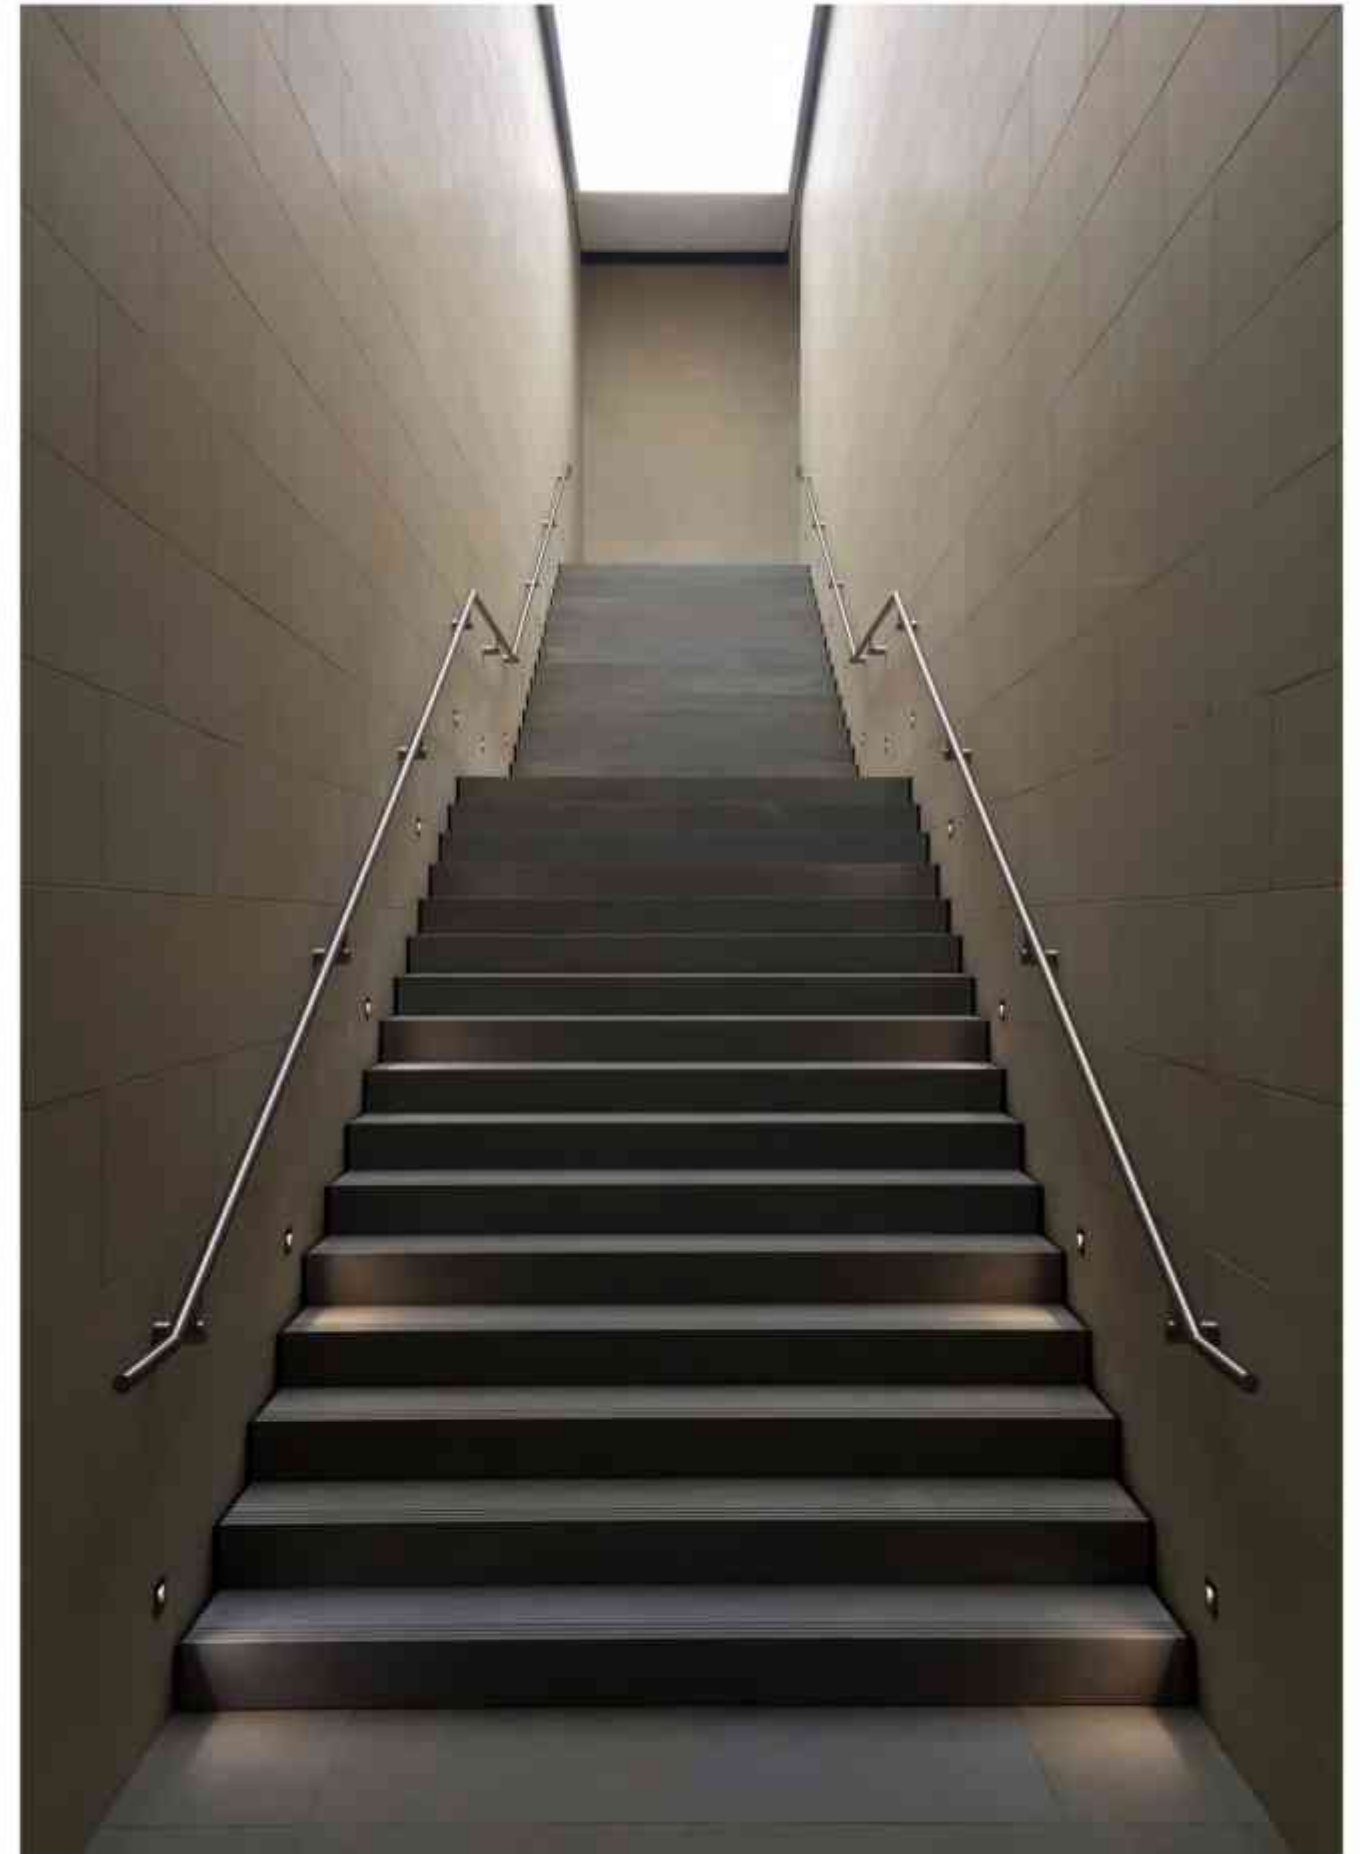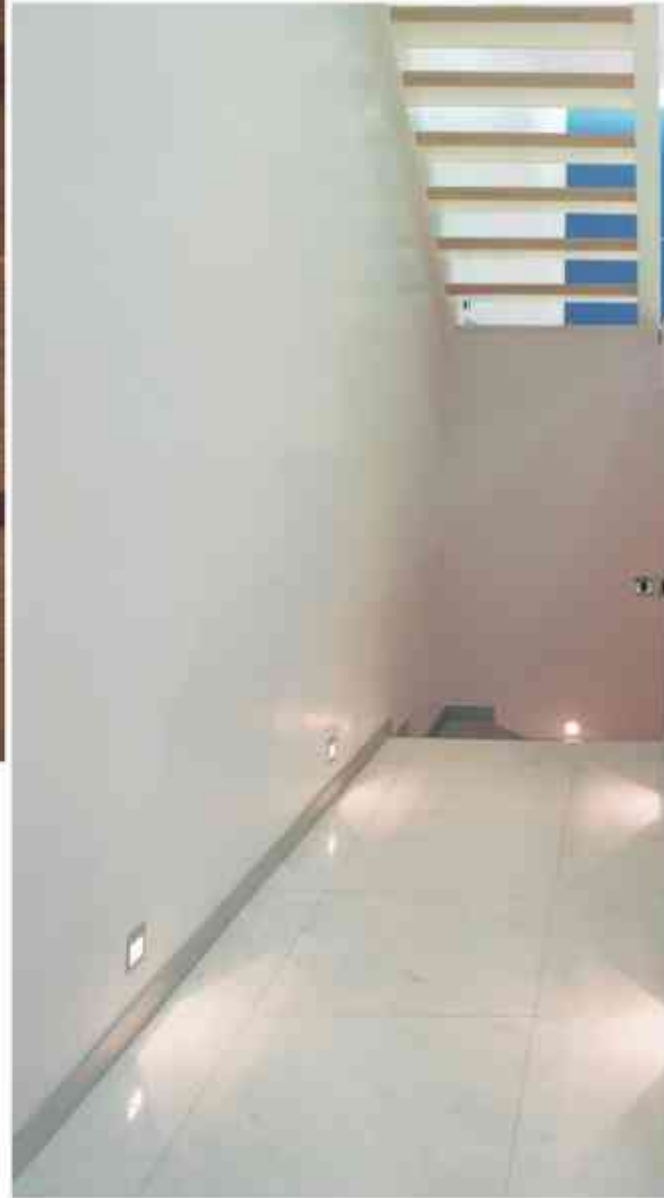

WALL LIGHT

478




SNOW

This miniature fixture, thanks to its special structure, makes the light going from a deep shelter, creating unique lighting patterns on the floor.

Due to its slim body, SNOW can be easily installed in the places where the space is limited.

© CE (IP54) 100-240VAC

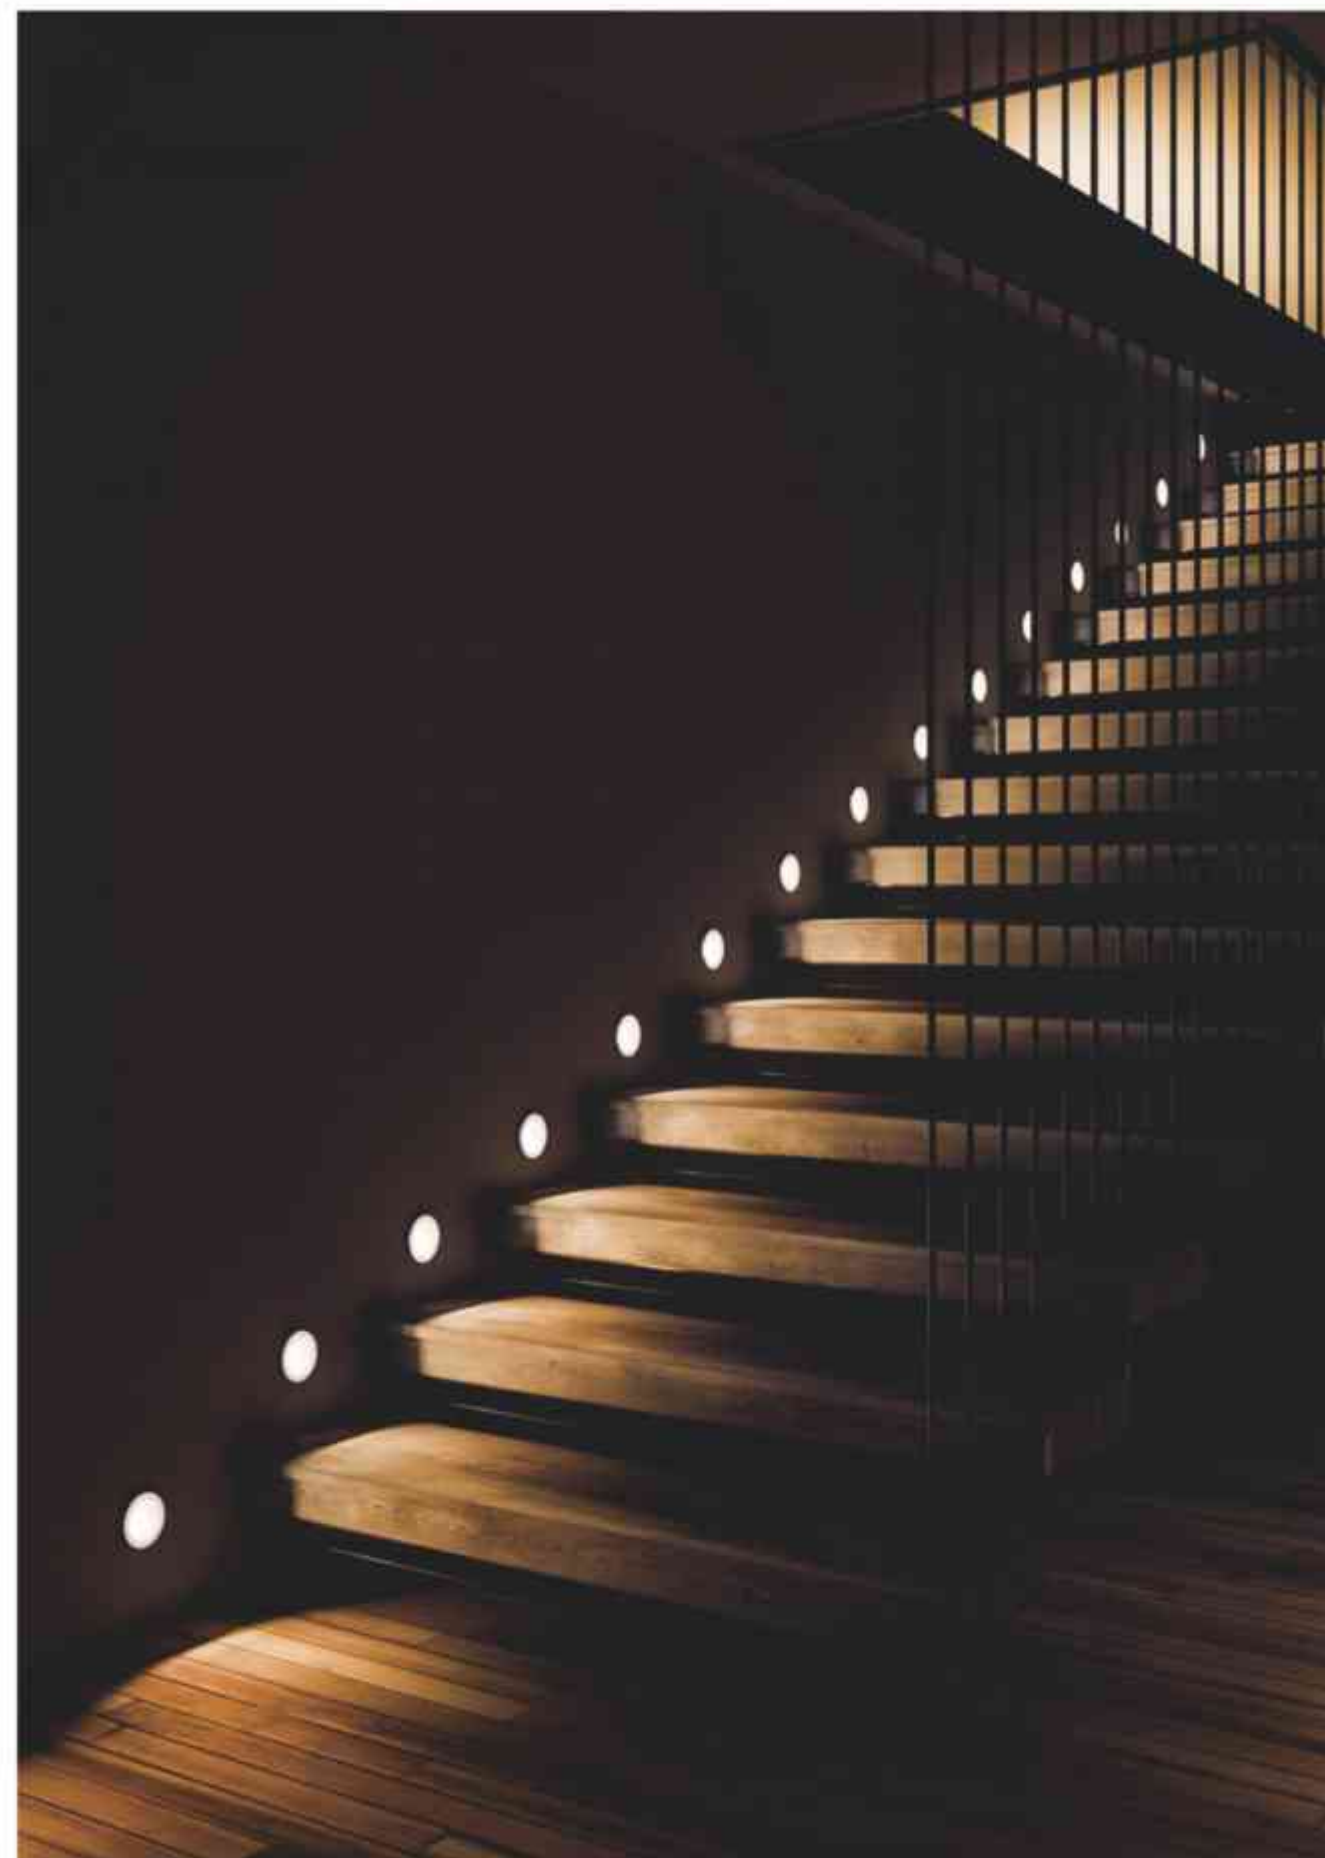



SNOW


SNOW 
 LED POWER 2.2W
 SYSTEM POWER 3.6W
 SYSTEM OUTPUT: 15 LUM/MOOK
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: Ø80*25mm
 HOLE SIZE: Ø70mm




ANGLE C



2.2W C(48°76°-36°) 3000K

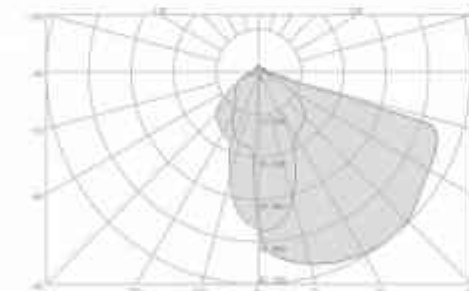

2.2W C(48°76°-36°) 3000K

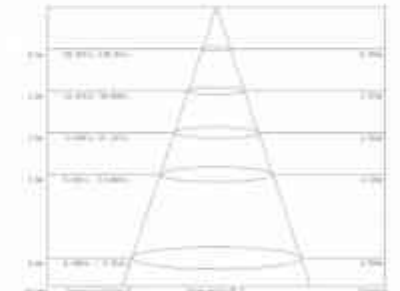



TONE

This splendid wall recessed fixture has become the best guidance light for staircase. Round shaped frame with elegant ring makes TONE unique and extremely popular. Aluminum and stainless steel versions are available, both with IP65 rate.



COLOR FINISHINGS:



SSS

PAW

PAB



S RD RGB A10316



S LI RGB A10316



S LI RGB



S RD RGB

TONE S LI RGB A10316 DC / S LI RGB DC
S RD RGB A10316 DC / S RD RGB DC


LED POWER: 3W
LED OUTPUT: 1
SYSTEM POWER: 3W
SYSTEM OUTPUT: 1
INPUT: 24VDC/50/60Hz
CRI: 1
DIMENSION: Ø31*29mm
HOLE SIZE: Ø25mm

402611-402612



402611-402612



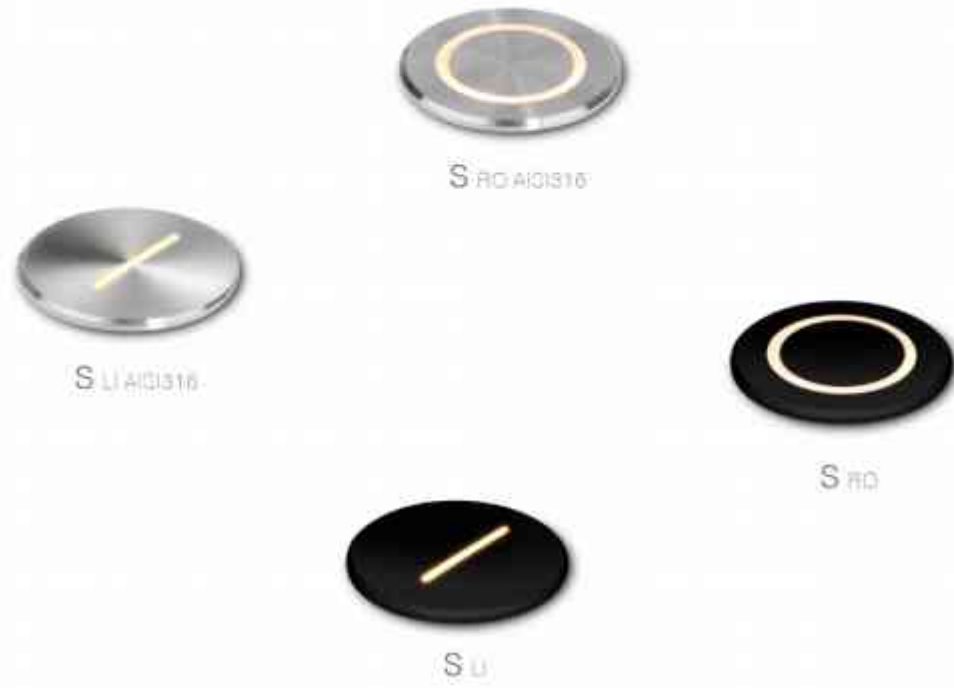

485




WALL LIGHT

486


TONE S LI AIGI316 / S U / S RO AIGI316 / S RD

LED POWER: 0.9W
 LED OUTPUT: 150lm
 SYSTEM POWER: 1.4W
 SYSTEM OUTPUT: 18lm/3000K
 INPUT: 100-240VAC 50/60Hz
 CR: 90
 DIMENSION: Ø217x29mm
 HOLE SIZE: Ø20mm

002184 / 002184

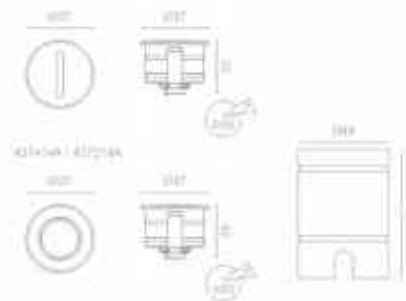

TONE S LI RGB AIGI316 DC / S U RGB DC / S RO RGB AIGI316 DC / S RD RGB DC

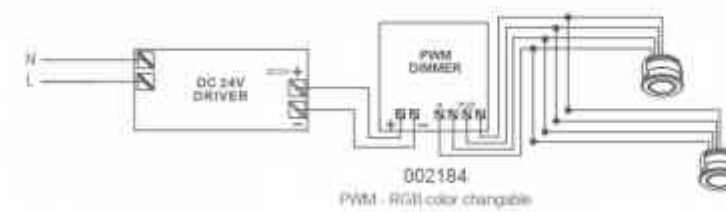

LINEAR LIGHTING



HEBE
489-482



LARI
495-498



LINE
499-502



LOCUSS 2
503-506



LOCUS S 4
503-506




LOCUS S 8
503-504




LOCUS S 12
509-508



LOE 40
507-510




LOE 60
507-510



LOE 90
507-510



LOE 120
507-510



LOE 150
507-510




LOE 180
507-510



PROFILE OUTER
511-512



PROFILE INNER
513-514



PROFILE OVAL
515-516



PROFILE SQ
517-518



PROFILE FL ON
519-520



PROFILE FL IN
521-522



PROFILE ON2
523-524



PROFILE ON IP
525-526



RADIAL 10 / 10 DO
531-536



RIGA SS
537-542



RIGA S
537-542



RIGA M
537-542



RIGA M
537-542



RIGA SS TRIMLESS
537-542



RIGA SS TRIMLESS
537-542



RIGA SS TRIMLESS
537-542



RIGA SS TRIMLESS
537-542

HEBE

Working invisibly in the wall or ceiling,
HEBE provides perfect lighting and architectural solutions.
Thanks to special installation methods, HEBE becomes completely invisible.
Sharp outlines along the perimeter of the room visually extend the space.


© CE IP20



L 3100 PRO / L 1500 PRO
L 3100 ECO / L 1500 ECO

000367001925
000366001911

002904001926
002903001917

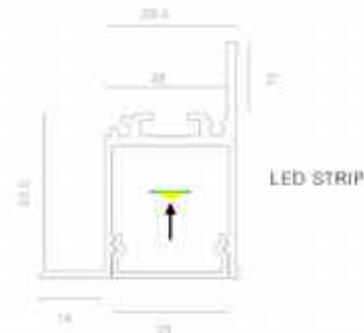

PRO-SIDE
001985



OPTIONS:



PRO-I
001924



PRO-V1-CORNER
001980



PRO-V2-CORNER
001983



PRO-P1-CORNER
001986



PRO-P2-CORNER
001989



001514
SET OF 4 PCS



001517
SET OF 3 PCS



001518
SET OF 2 PCS

LED STRIP FLUA-CV1-120XX80A24IP33-G 002936

LEDs/meter: 100 x SMD LED/m
Size / Cutting unit: 8000 x 811 6mm / DIVID-BLE PER 50mm
Power/meter: 7200m
Lumen output/meter: 7200Lum/m
Voltage input: 24Vdc
Color temperature: 4000K
Color Rendering Index: CRI80
Ingress protection: IP33

LED STRIP FLUA-CV1-120NWW80B24IP33-G 002940

LEDs/meter: 100 x SMD LED/m
Size / Cutting unit: 8000 x 811 6mm / DIVID-BLE PER 50mm
Power/meter: 4800m
Lumen output/meter: 4800Lum/m
Voltage input: 24Vdc
Color temperature: 2700K-3500K
Color Rendering Index: CRI80
Ingress protection: IP33



MW LRS SERIES (On Request)

Model No.	Power	Output	FLUA-CV3-120
LRS-50-24	50W	24Vdc 2.2A	max. 3 meter
LRS-100-24	100W	24Vdc 4.5A	max. 6.5 meter
LRS-200-24	200W	24Vdc 8.8A	max.13.5meter


1A INSTALLATION INSTRUCTIONS

DOWN




1B INSTALLATION INSTRUCTIONS

UP

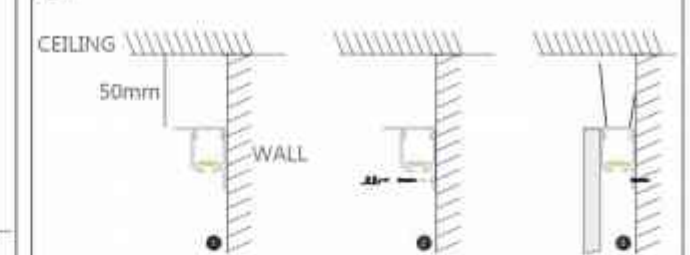

1C INSTALLATION INSTRUCTIONS

SIDE

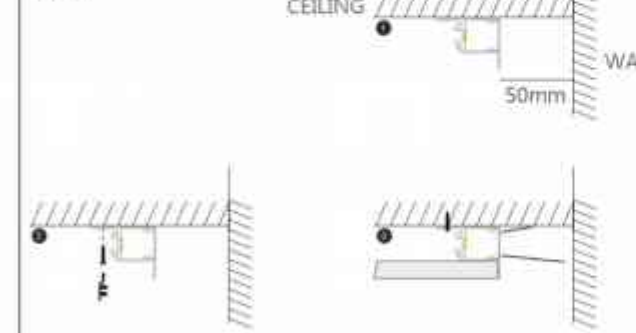

2 PLASTERBOARD



LARI

Recently profile has become necessary element for any interior design.
 FLUA presents LARI, recessed profile system.
 Thanks to its various accessories
 LARI enables to create liner patterns throughout the room,
 connecting and creating unique lighting
 ornaments from the wall to the ceiling.



S L 1500 PRO/S L 3100 PRO
 S L 1500 ECO/S L 3100 ECO



S SIDE
 001830



SET OF 2

S PC 1500/3100
 000808 / 001920



COLOR FINISHINGS:



AA0



M L 1500 PRO/M L 3100 PRO
M L 1500 ECO/M L 3100 ECO



002913 / 001940
002912 / 001939

M SIDE
001939



SET OF 2

M PC 1500/3100 PRO
002914 / 001941

M PC 1500/3100 ECO
002915 / 001942



S L 3100



S CORNER L1

001928



S CORNER L2

001929



S CORNER L3

001930



S I

001927

LED STRIP FLUA-CV1-240XX80B24IP33-G 002937


LEDs/meter:	120 x 30° LED CH
Size / Cutting unit:	6000*12*1.5mm / DIVIDABLE PER 50mm
Power/meter:	4500lm
Lumen output/meter:	4500lm/m
Voltage input:	24Vdc
Color temperature:	2700K-6500K
Color Rendering Index:	1-80
Ingress protection:	IP33

M L 3100



M CORNER L1

001935

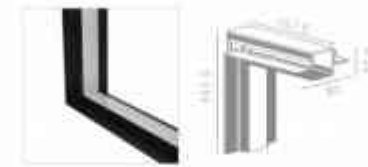

M CORNER L2

001936



M CORNER L3

001937




M I

001934

LED STRIP FLUA-CV1-120NWW80B24IP33-G 002940

LEDs/meter:	240 x 30° LED CH
Size / Cutting unit:	6000*15*1.5mm / DIVIDABLE PER 50mm
Power/meter:	4500lm
Lumen output/meter:	4500lm/m
Voltage input:	24Vdc
Color temperature:	2700K-6500K
Color Rendering Index:	1-80
Ingress protection:	IP33

LARI S PRO / M PRO INSTALLATION GUIDE

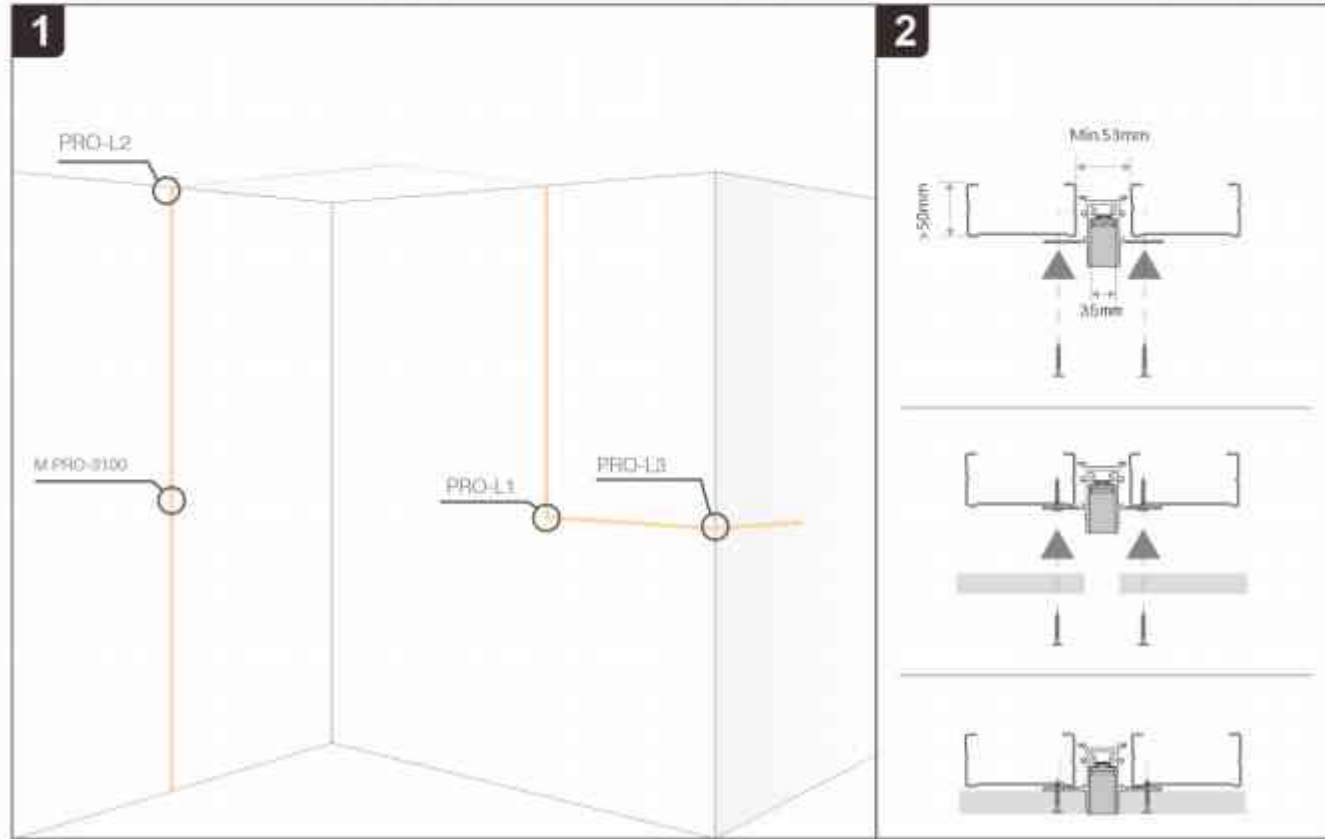



499

LINE

LINE is a profile that gives new lighting solution to the room. This graphically refined profile perfectly integrates with architecture, upgrading uniqueness of the room. Available in 2 variants: for inner and outer corners.



LINE IN L 1800/3100 PRO
LINE IN L 1800/3100 200



LINE OUT L 1800/3100 PRO
LINE OUT L 1800/3100 200



500




MW LRS SERIES (On Request)

LED STRIP FLUA-CV1-120		002939
LEDs/meter:	120 x 2832 LED/m	
Size / Cutting unit:	8000'S x 11.8mm / DIVISIBLE PER 50mm	
Power (5m):	45w	
Lumen output (5m):	4500lm	
Voltage input:	24Vdc	
Color temperature:		
Color Rendering Index:	90	
Ingress protection:	IP20	


Model No.	Power	Output	FLUA-CV3-120
LRS-50-24	50W	24Vdc 2.2A	max. 5 meter
LRS-100-24	100W	24Vdc 4.5A	max. 10 meter
LRS-200-24	200W	24Vdc 8.8A	max. 20 meter

LINE IN INSTALLATION GUIDE

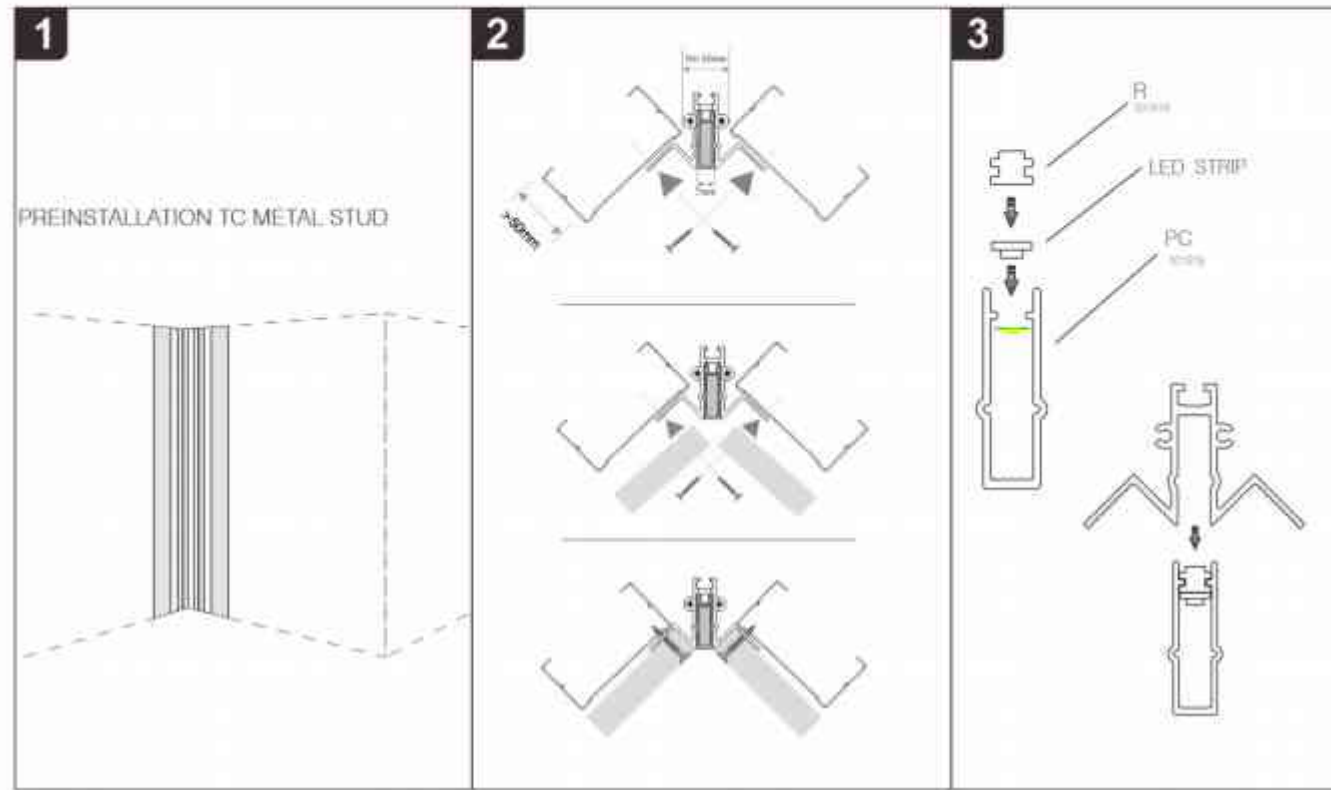

501

LINE OUT INSTALLATION GUIDE

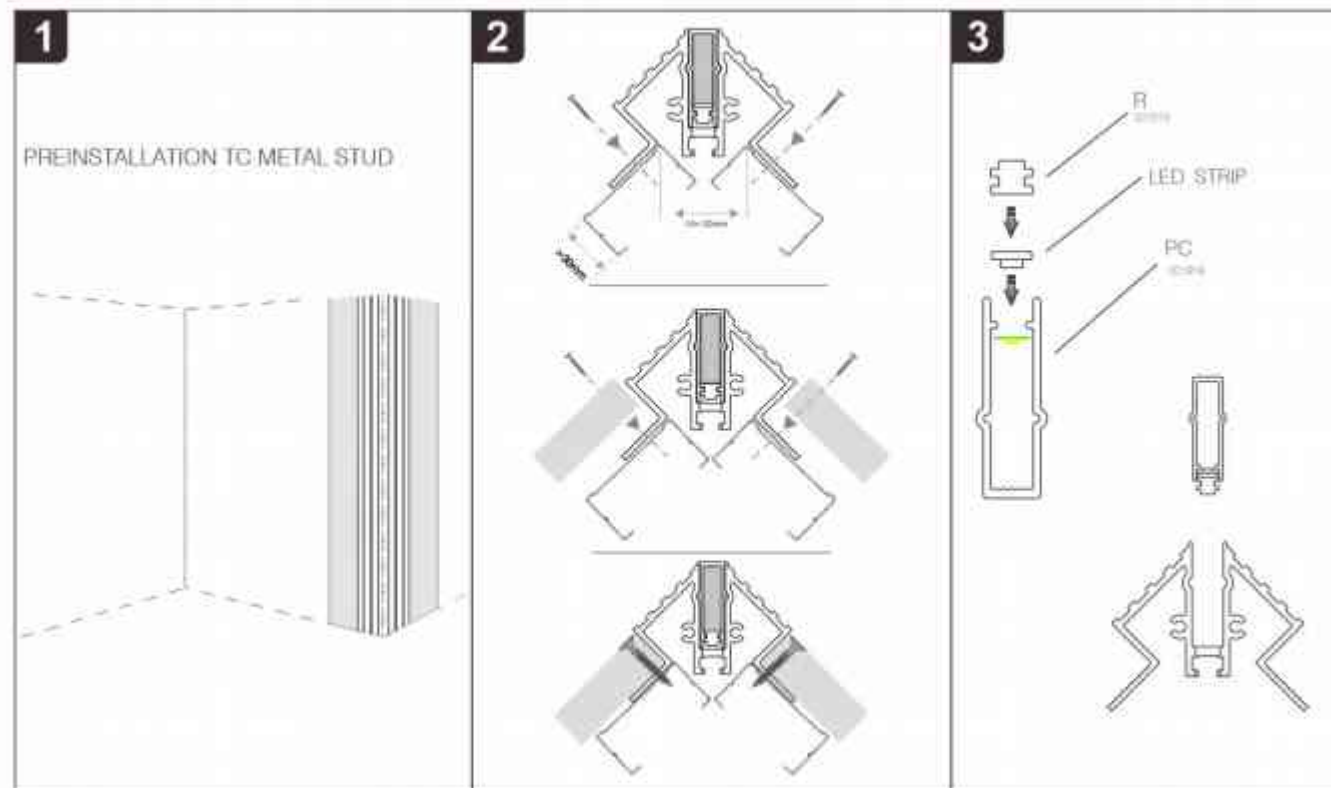

502

LOCUS

LOCUS is the newest member ceiling recessed family, specially designed to become one of most popular range in FLUA collection.

This splendid luminaire can give to any room additional dynamics and personalization, visually increasing the space.

Thanks to its unique designed structure (LED and cover plate are fixed by special magnetic mechanism), the maintenance is easy and convenient.

LOCUS is presented in 4 main dimensions with 2, 4, 8 or 12 LED.

© CE IP20 220-240VAC DIM TRIAC DALI





S2



S4




S8



S12

LOCUS S2/4/8/12

ITEM CODE	LED POWER	SYSTEM POWER	COLOR TEMPERATURE	CR	OUTPUT	INPUT	DIMENSION	HOLE SIZE
1952124	2*2W	6W	3000K	90	256 lm	220-240VAC 50/60Hz	212*141*80mm	215*80mm
1953124	4*2W	12W			482 lm		412*141*80mm	415*80mm
1954124	6*2W	18W			764 lm		612*141*80mm	615*80mm
1951124	12*2W	36W			1528 lm		1212*141*80mm	1215*80mm




LOCUS S2

RECOMMEND OTHER VERSIONS:



LOCUS S4/8/12

RECOMMEND OTHER VERSIONS:





LOE

Special design of LOE series provides the model unique and exclusive form. Compact size and pure geometry gives the fitting an elegant minimalist look.

The collection comes in different lengths that could be interconnected, thus could be easily adapted to different spaces. Thanks to its narrow shape, LOE can be easily integrated into any environment.

© CE IP20 100-240VAC



LOE ON 40 / 60 / 90 / 120 / 150 / 180


Item code	Led power	System power	Color temperature	CRI	OUTPUT	INPUT	DIMENSION
218115A	4.3 W	8.3 W	3000K	90	220 lm	100-240VAC, 50-60HZ	400*36*45mm
218116A	8.7 W	16.2 W			440 lm		600*36*45mm
218117A	13 W	25.3 W			600 lm		900*36*45mm
218118A	17.4 W	33.8 W			880 lm		1200*36*45mm
218119A	21.7 W	42.3 W			1100 lm		1500*36*45mm
218120A	26 W	50.8 W			1320 lm		1800*36*45mm




ANGLE 18°




4.3W 18° 3000K

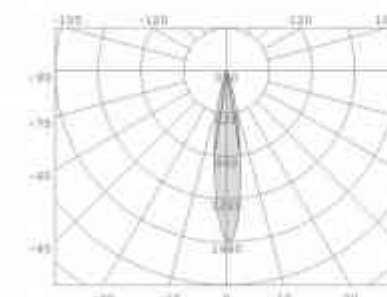


4.3W 18° 3000K






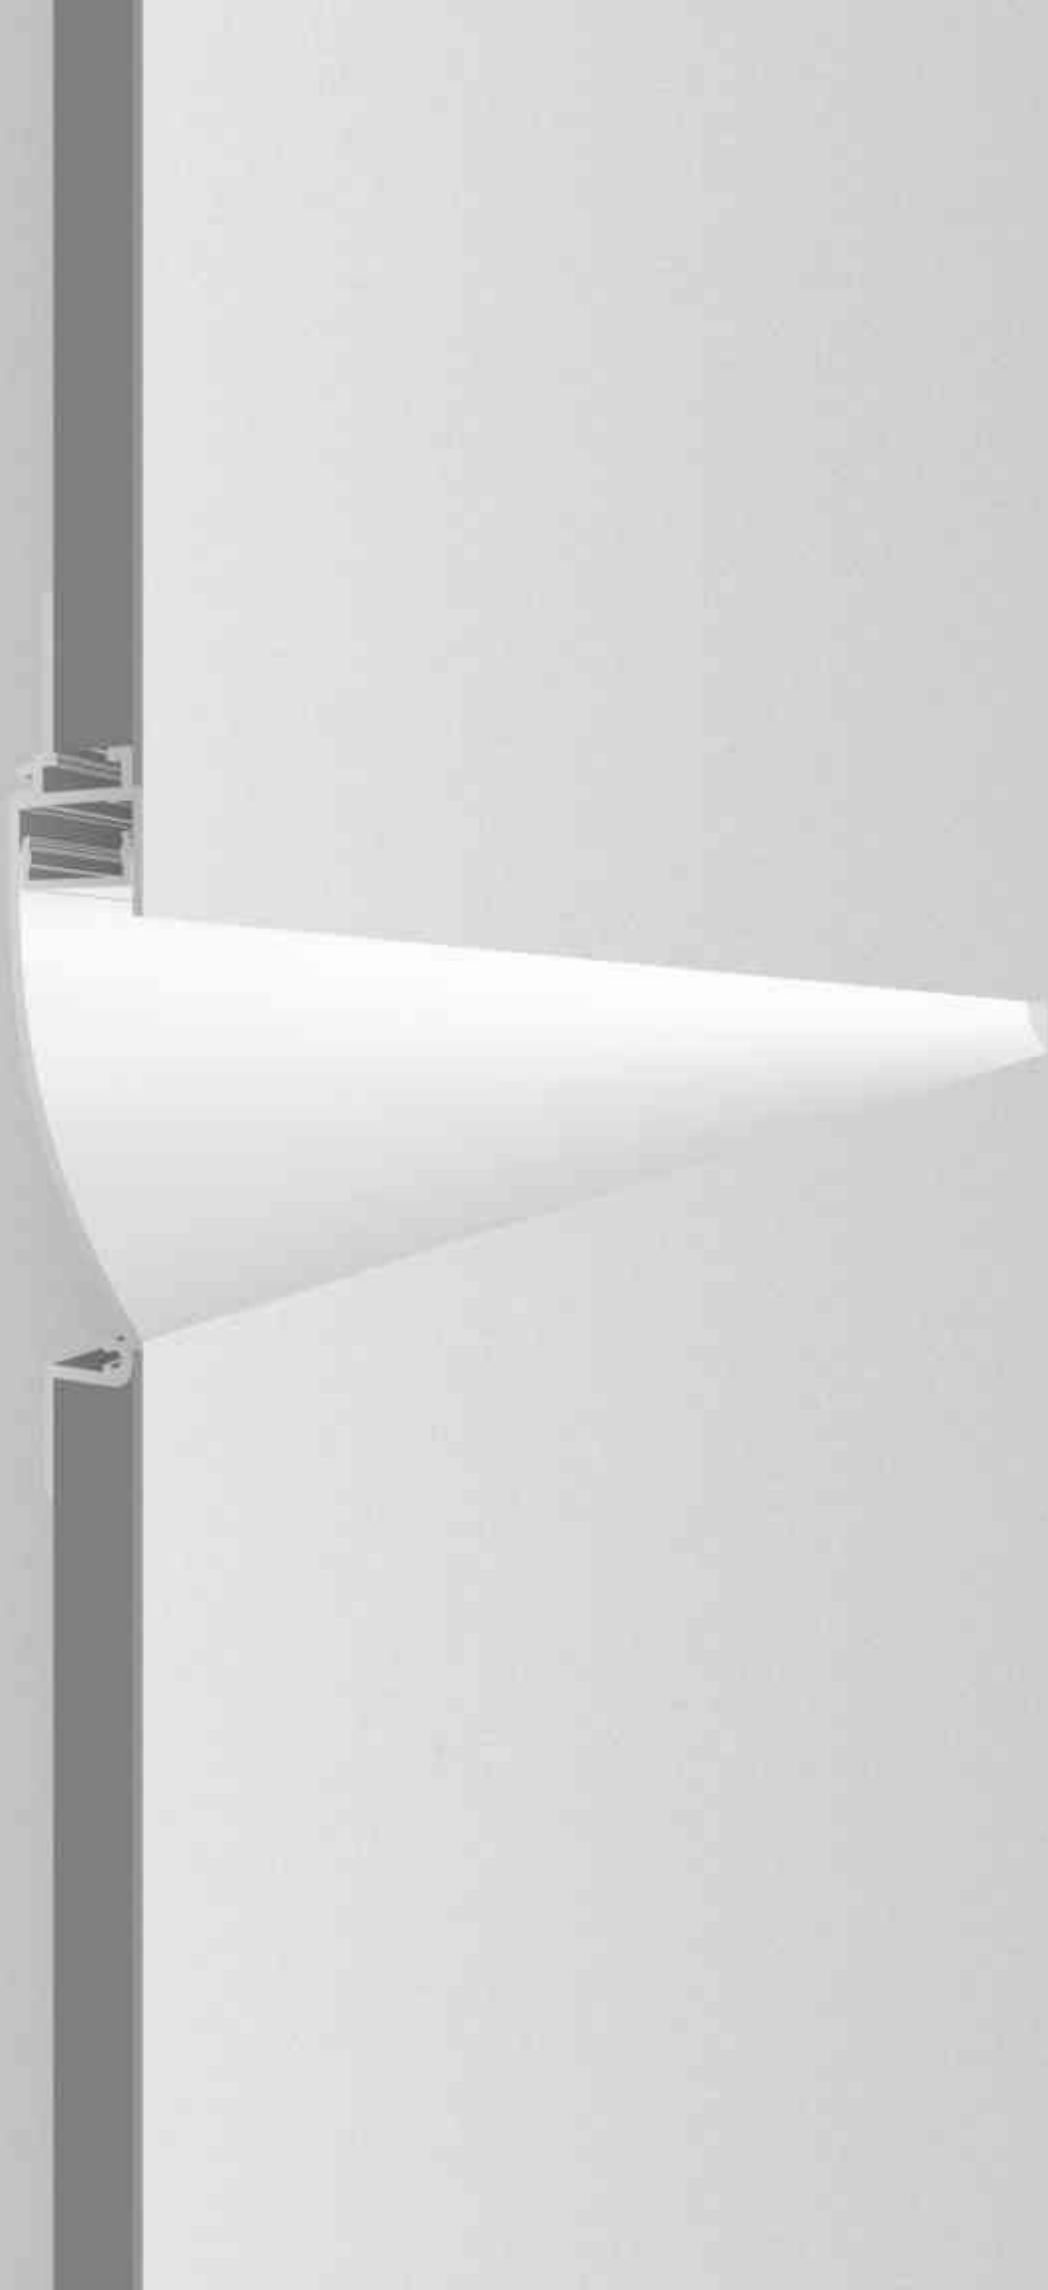

PROFILE INNER

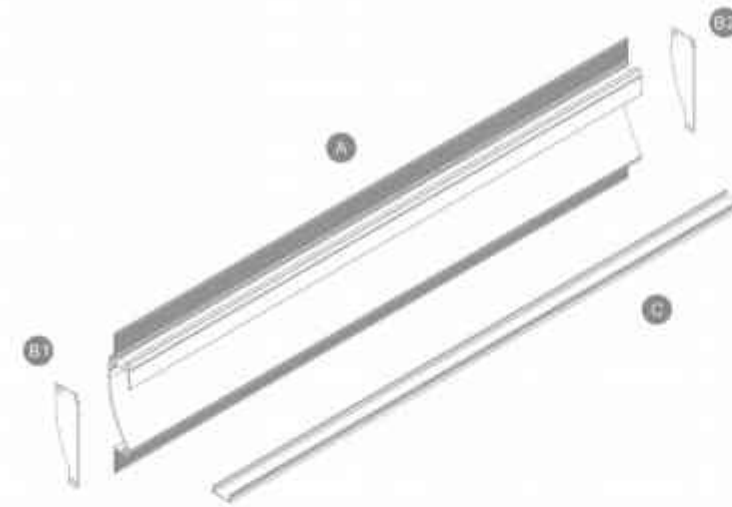

A
INNER ARC
002926/002571

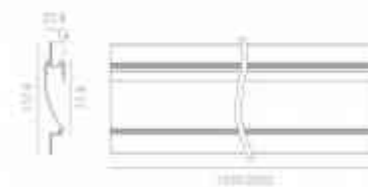

B1
INNER ARC L.
002575




B2
INNER ARC R.
002576




C
PC
002927/002582




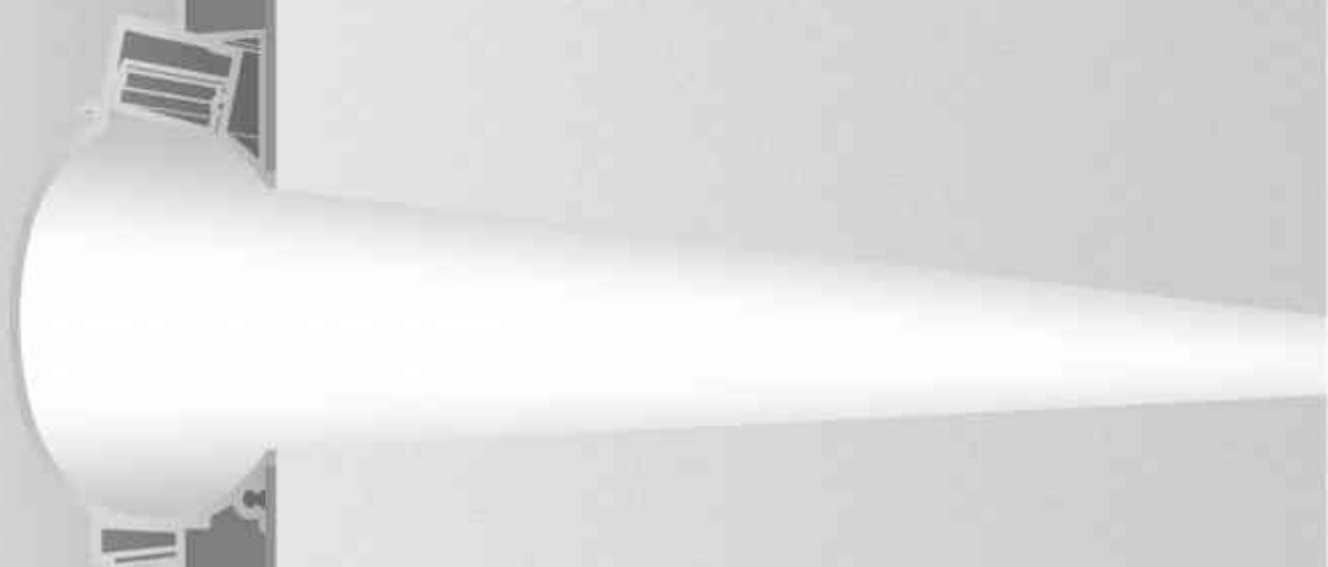

PROFILE OVAL

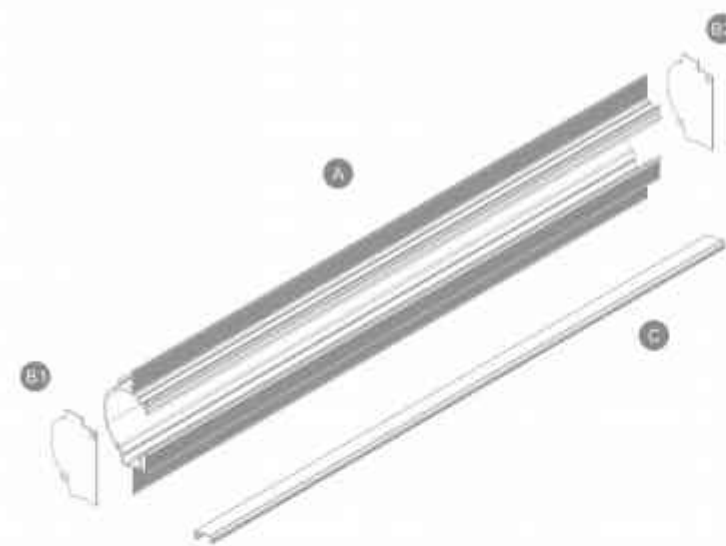

A
OVAL ARC
002625/002573

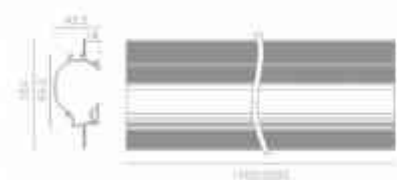

B1
OVAL ARC L
002574




B2
OVAL ARC R
002583




C
PC
002627/002582



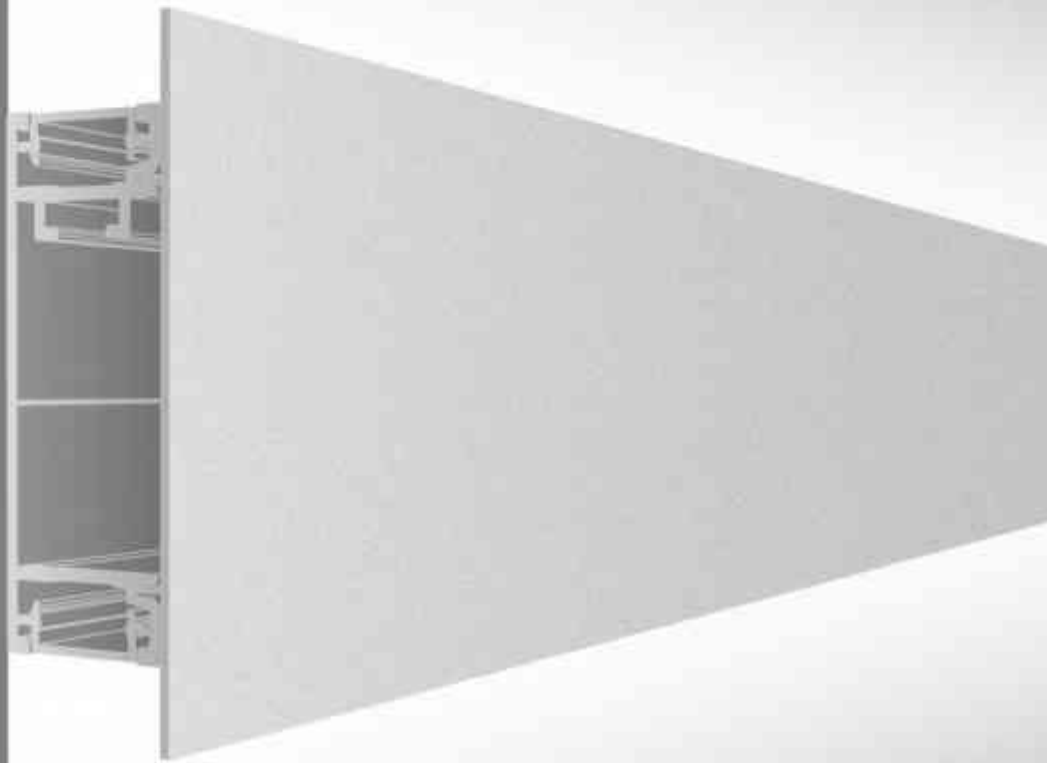


PROFILE 30

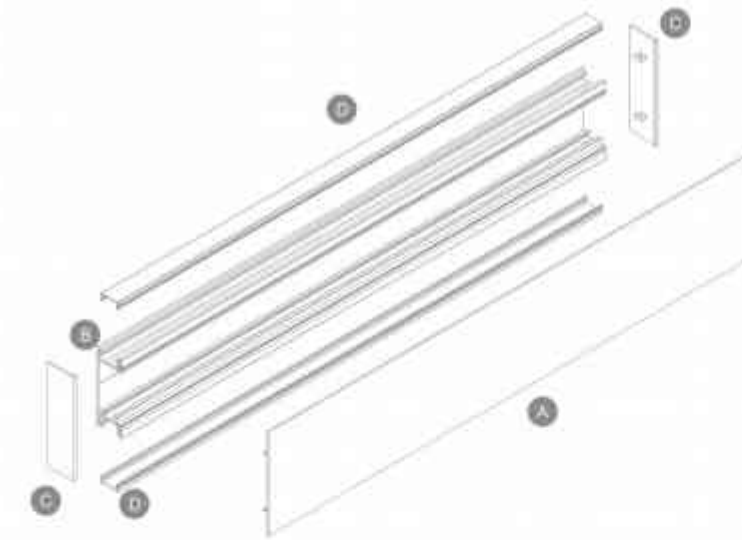

A
SQ COVER
002629/002574



B
SQ
002628/002563




C
SQ SIDE COVER
003581



D
PC
002627/002582



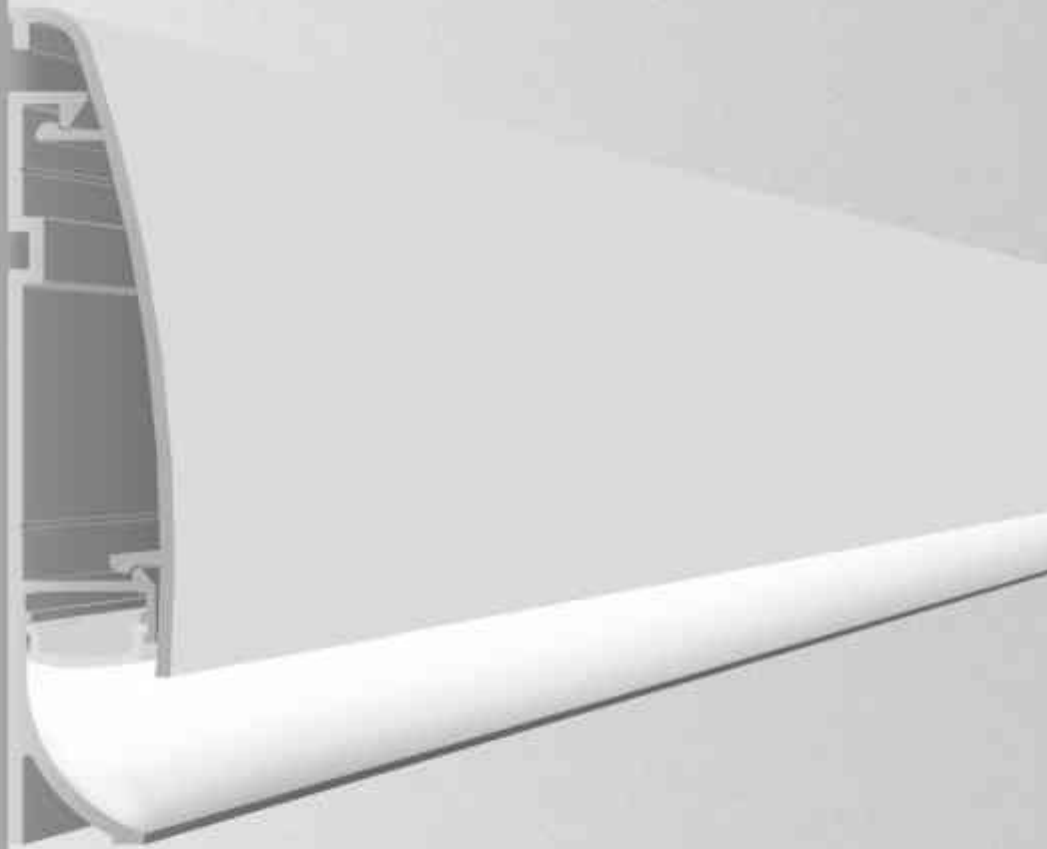

LED STRIP

PROFILE FL ON



A
FL COVER
002927

B
FL 2500
002928

C
FL PC
002925



PROFILE

521

PROFILE

LINEA LIGHTING



PROFILE FL IN



A
FL IN
000014

B
FL PC
000020



PROFILE


It can be cut to length and angle you want



PROFILE ON2



LED STRIP

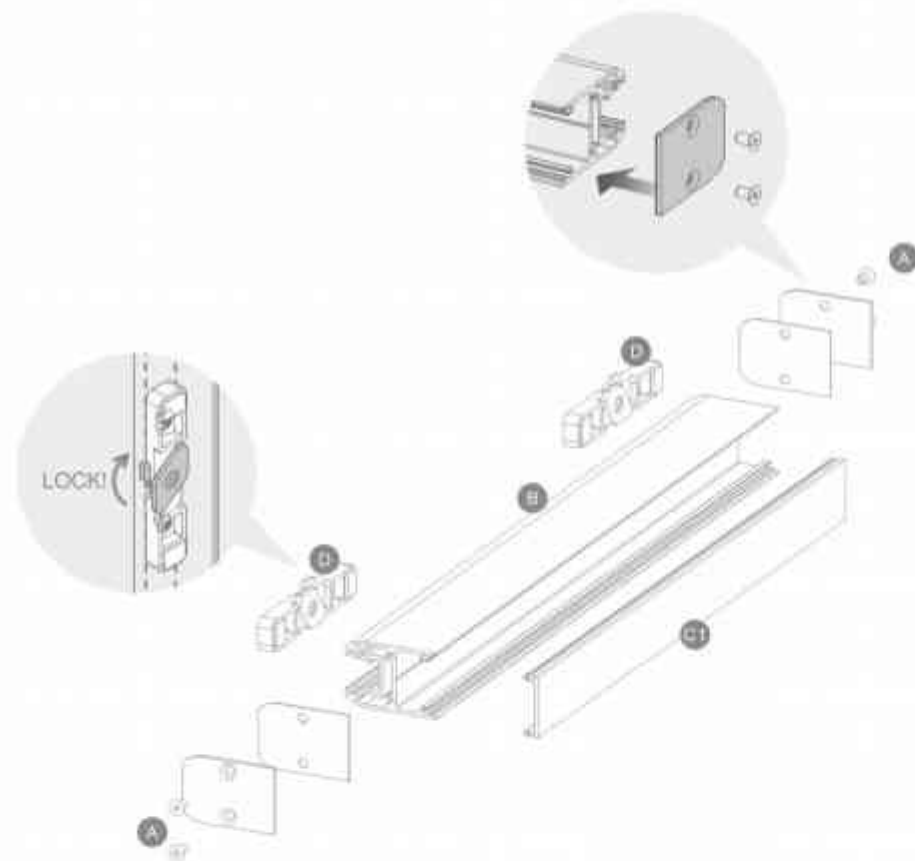

A
ON2 SIDE COVER
002745



B
ON2 1500/2500
002736/002744



C1
ON2 PC1
002746



D
ON DC-24/48-L3
001589



PROFILE


It can be cut to length and angle you want



PROFILE ON2 P



LED STRIP

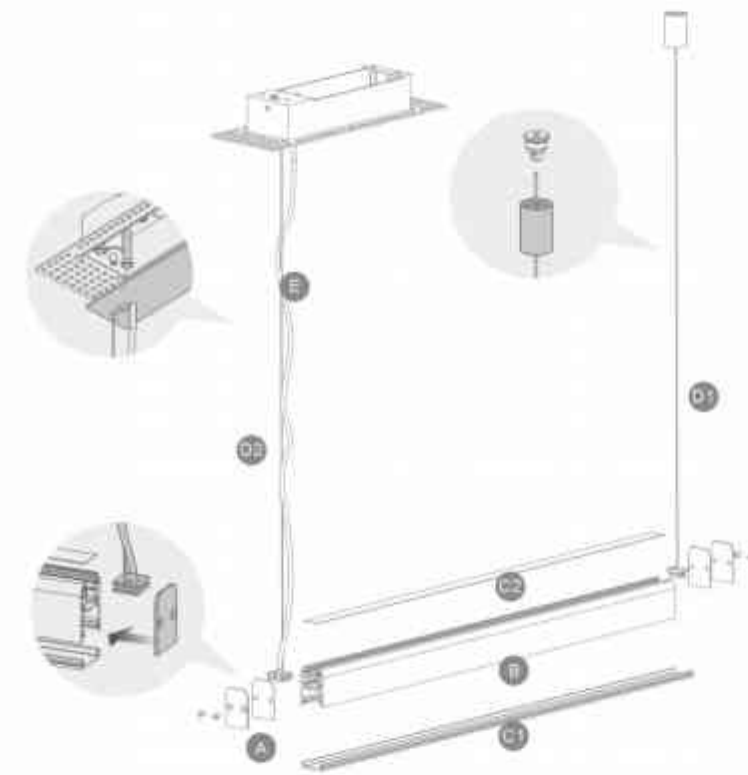

A
ON2 SIDE COVER
002745



B
ON2 1500/2500
002736/002744



C1
ON2 PC1
002746



C2
ON2 PC2
002747



D1
P1
002748




D2
P2
002749




E
P IN
002754




It can be cut to length and angle you want.



PROFILE ON IP

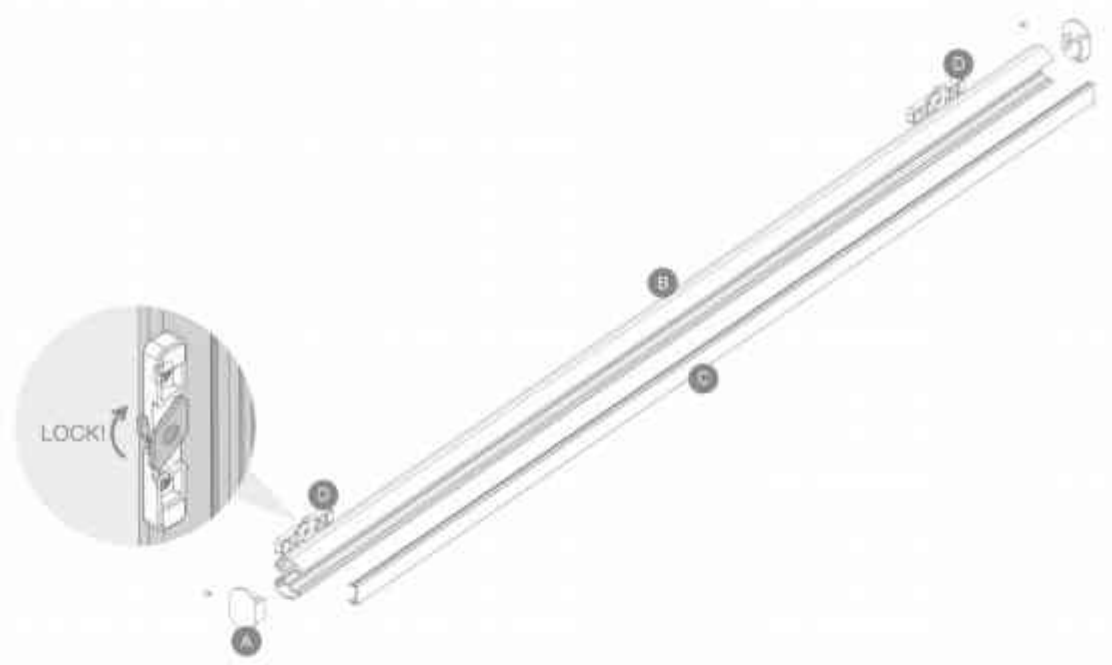

A ON IP SIDE COVER 002745



B ON IP 002755/002742



C PC 002982/002927







D ON DC-24/48-L3 001568



HEBE I 001804



PROFILE INSTALLATION GUIDE

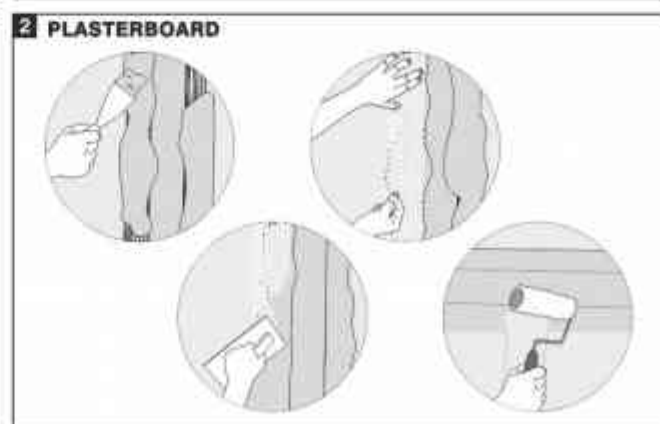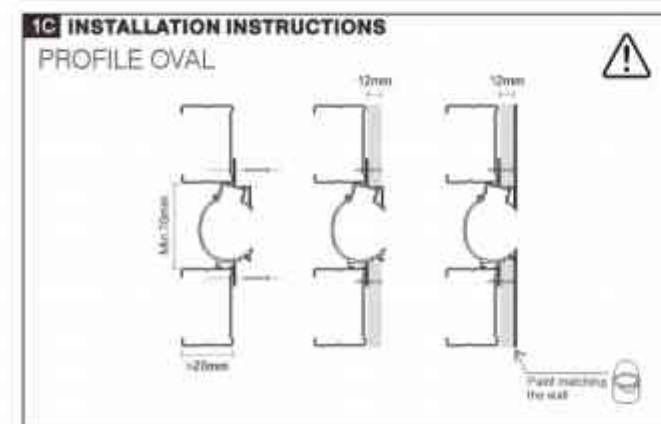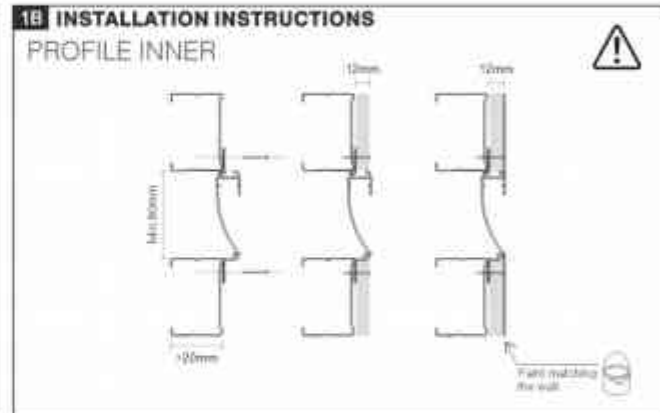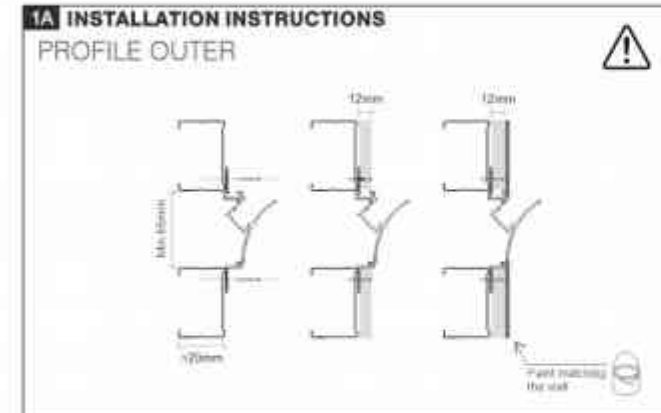

LED STRIP




002933 FLUA-CV1-120 002936 FLUA-CV1-120 002940 FLUA-CV1-120


LED STRIP FLUA-CV1-120		002933
LED diameter	120 x 24/10 LED mm	
Size / Cutting unit	3000x15x1.2mm / DIVIDIBLE PER 50mm	
Power (5m)	48W	
Lumen output (5m)	4300lm	
Voltage input	24Vdc	
Color temperature	3000K	
Color Rendering Index	90	
Ingress protection	IP67	



MW LRS SERIES (On Request)

Model No.	Power	Output	FLUA-CV1-120
LRS-50-24	50W	24Vdc 2.2A	max. 3 meter
LRS-100-24	100W	24Vdc 4.5A	max. 6.5 meter
LRS-200-24	200W	24Vdc 8.8A	max. 13.5meter

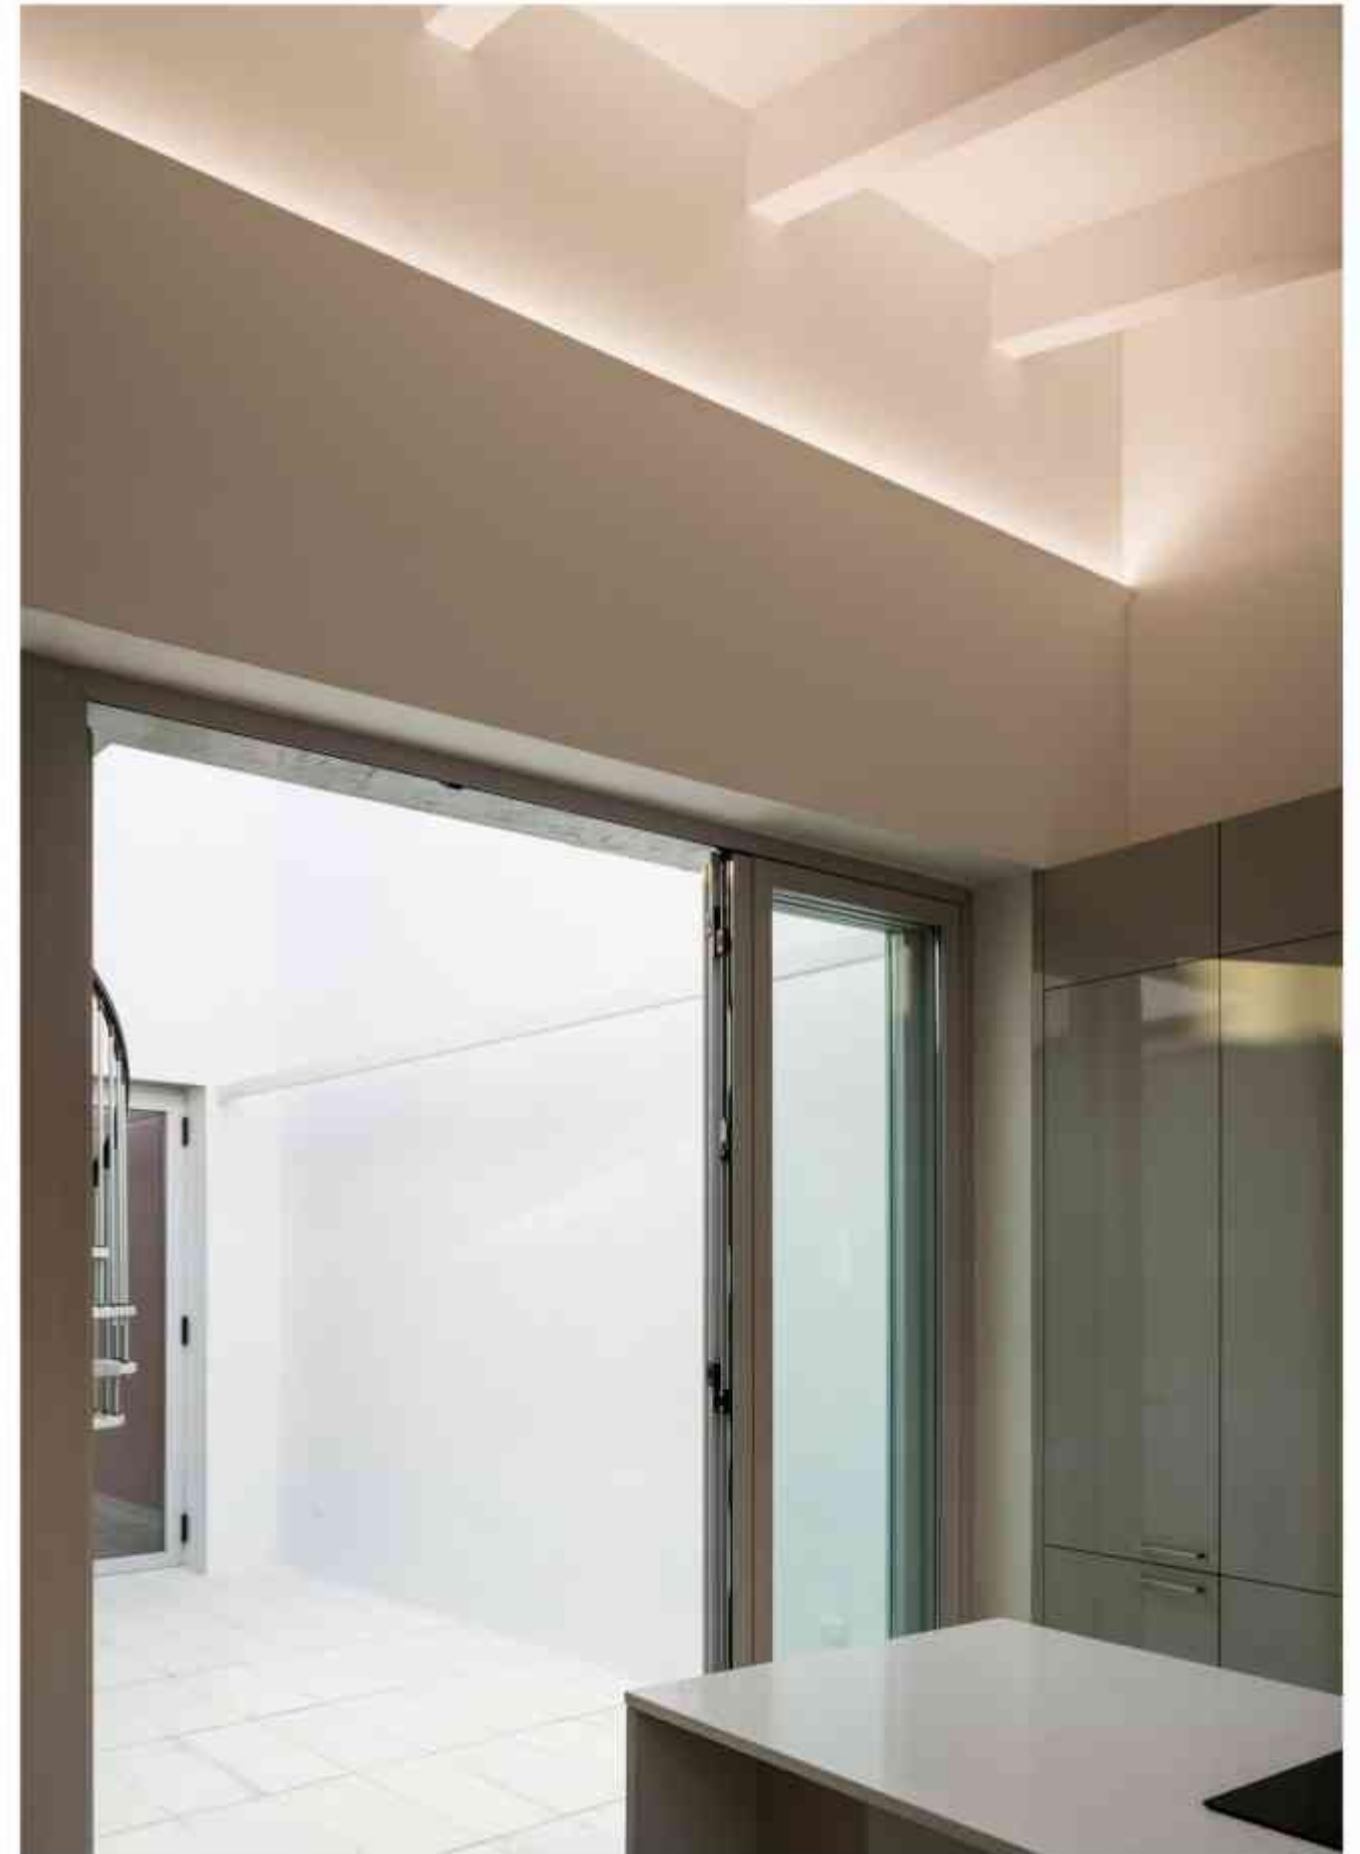

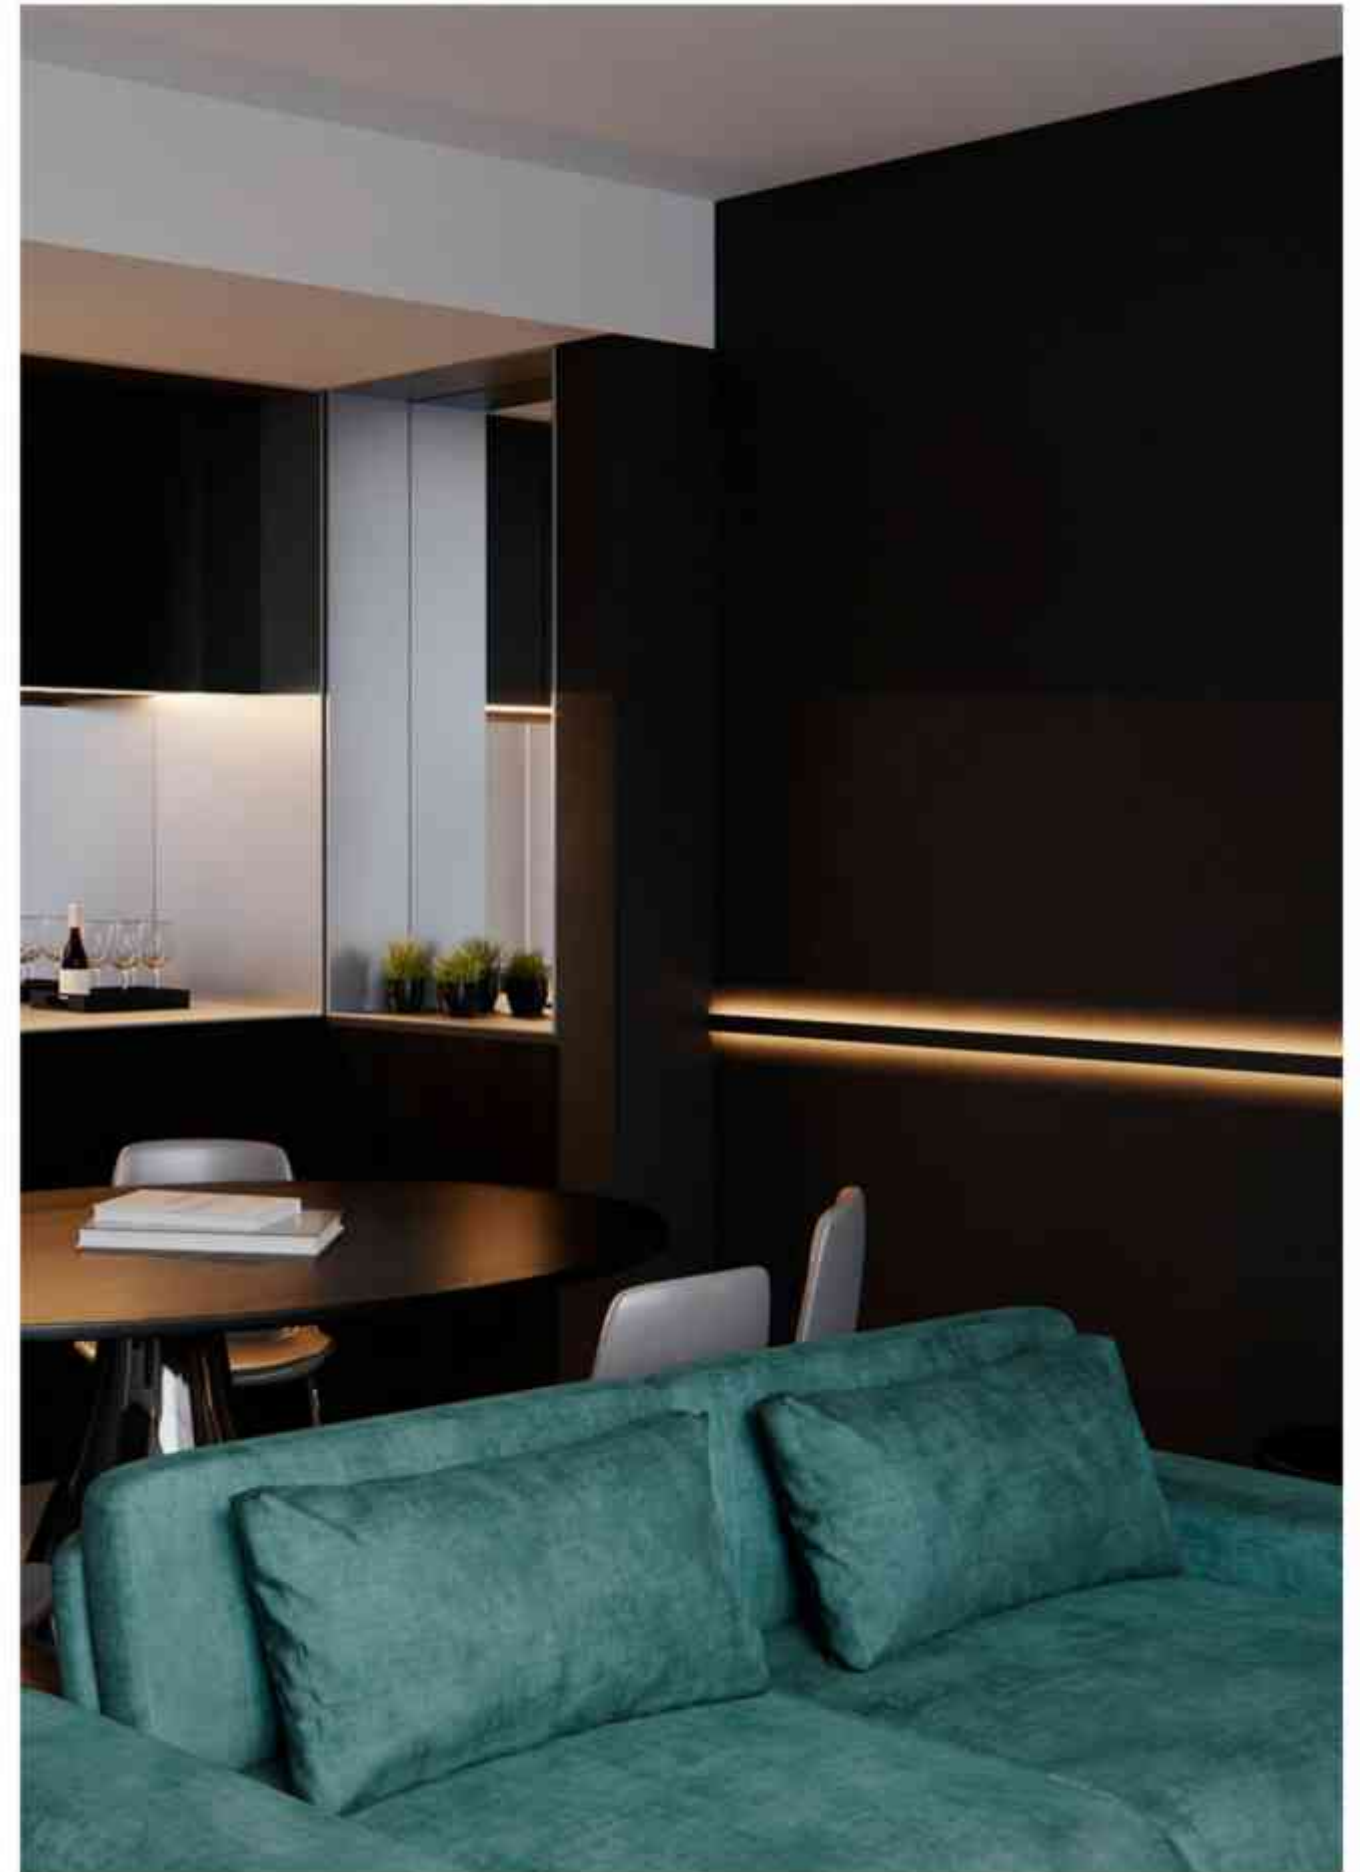



RADIAL



An appropriate lighting project allows the surface volumes and indentations to stand out, creates evocative atmospheres and adds dynamism to walls and building facades by alternating lights and shades.

By the concept of spatial infinity, RADIAL performs extensive light to delight the interior space with rhythm. Thanks to the very thin flexible tape, up to 10 meter length and only 30mm wide, it's possible to bring light to any corner of the interior to be furnished and enhance specific spots. The tailorable length design gives the flexibility to designers to adapt to different interior space, from wall to wall, from floor to ceiling.

© CE IP20 100-240VAC



RADIAL 5/10



COLOR FINISHINGS:



PAZ



5 / 10

533

RADIAL 5 

LED POWER: 70W
 LED OUTPUT: 1273lm/1m
 SYSTEM POWER: 70W
 SYSTEM OUTPUT: 7200lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 5130*52*20mm
 HOLE SIZE: 1



RECOMMEND:



ON/OFF
 430194

RADIAL 10 


LED POWER: 144W
 LED OUTPUT: 2580lm/1m
 SYSTEM POWER: 144W
 SYSTEM OUTPUT: 14400lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 10180*50*25mm
 HOLE SIZE: 1



RECOMMEND:




ON/OFF
 430194

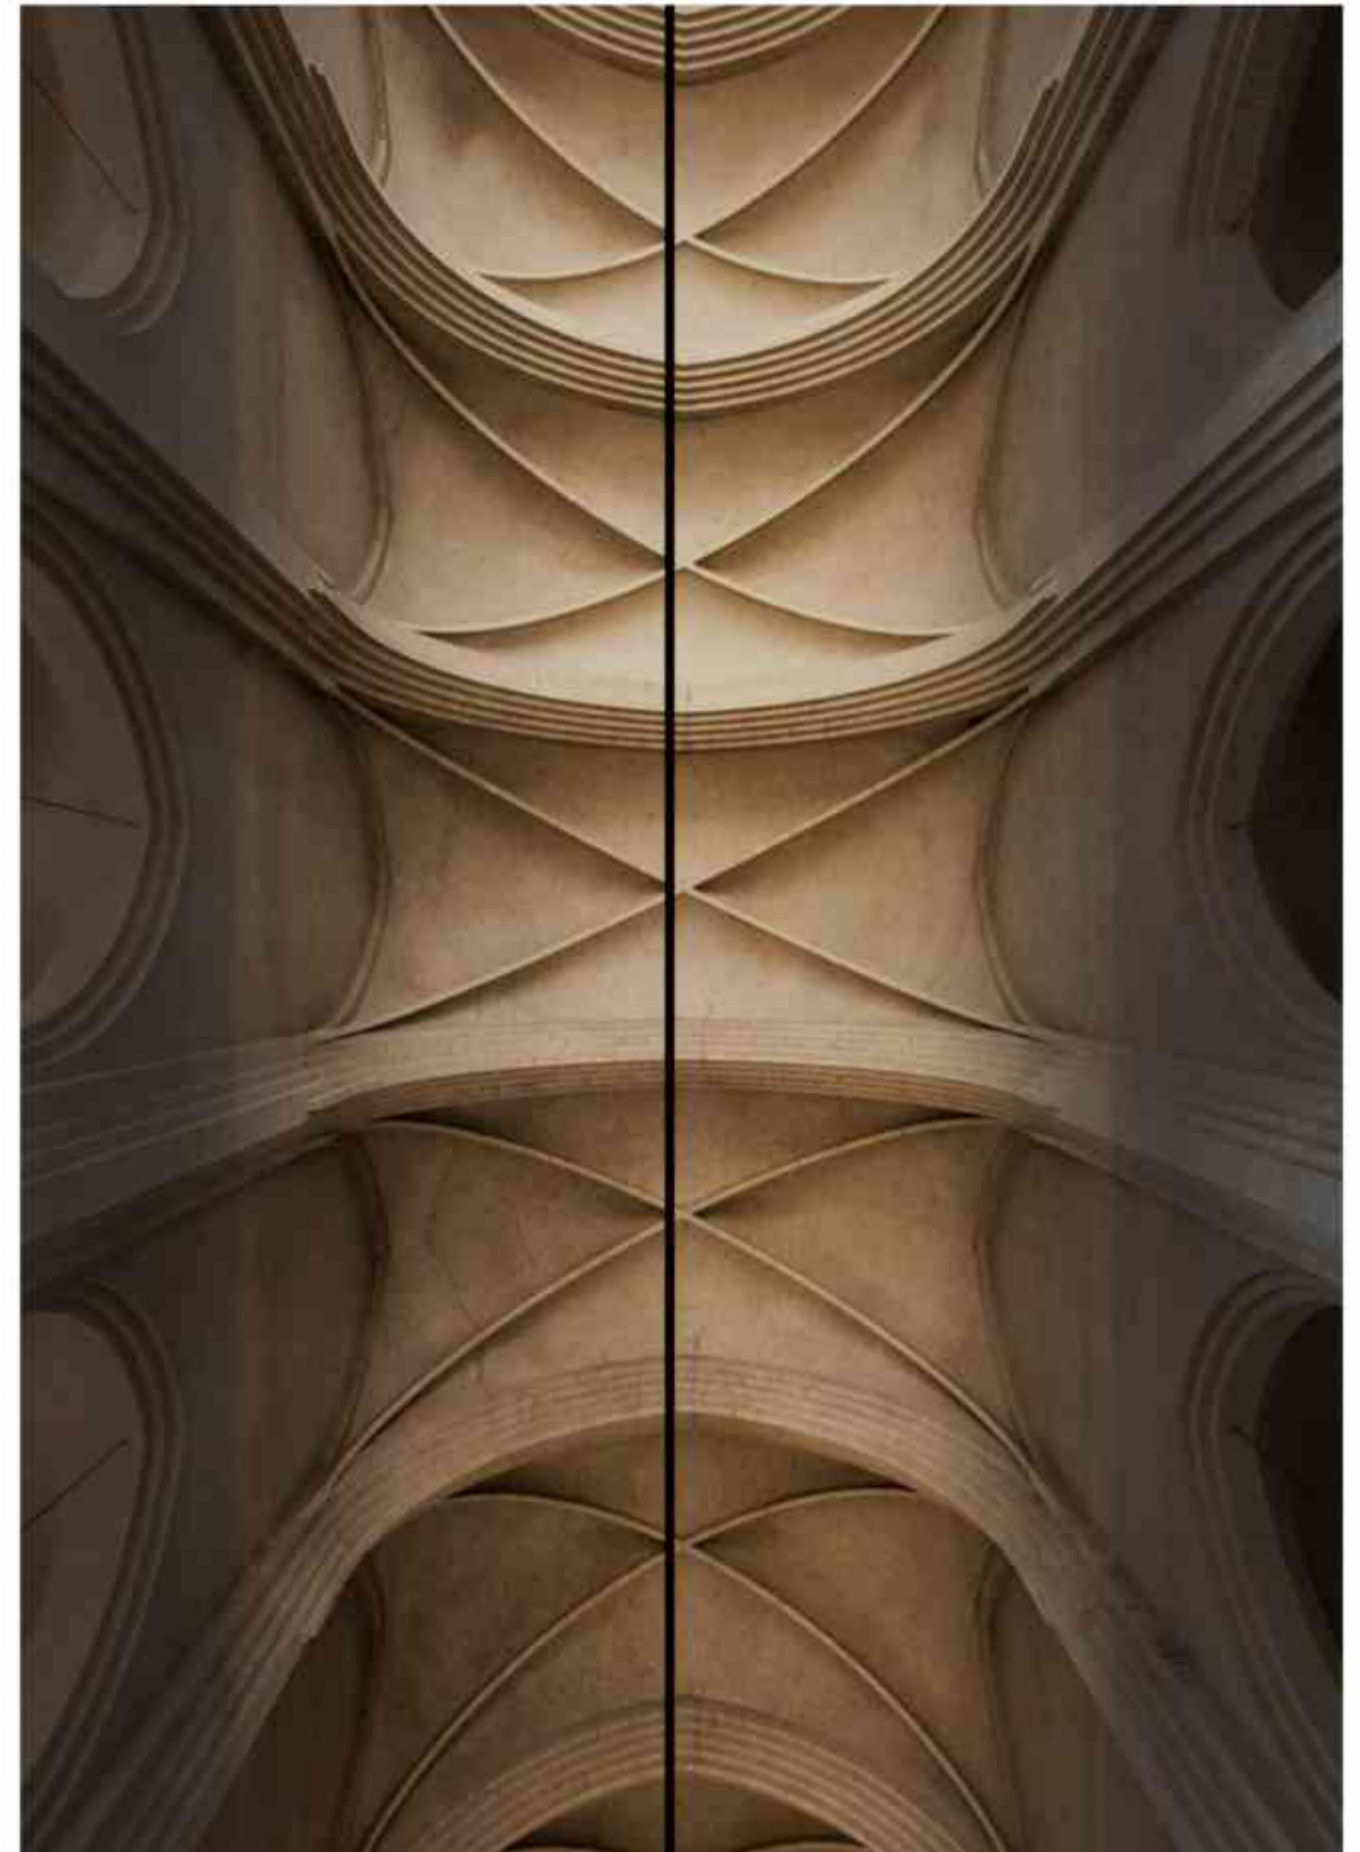

534



5 DO / 10 DO

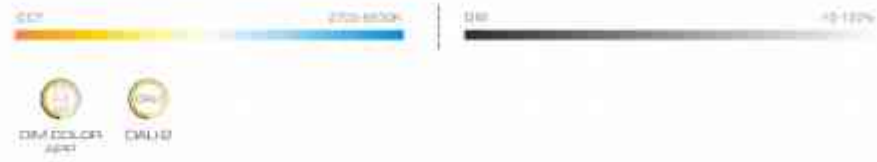

535

RADIAL 5 DO

LED POWER: 4W
 LED OUTPUT: 480LM/K
 SYSTEM POWER: 4W
 SYSTEM OUTPUT: 480LM/2700K-6500K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 5130*52*20mm
 HOLE SIZE: 1



RECOMMEND:




RADIAL 10 DO

LED POWER: 14W
 LED OUTPUT: 960LM/K
 SYSTEM POWER: 14W
 SYSTEM OUTPUT: 960LM/2700K-6500K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 10180*60*25mm
 HOLE SIZE: 1



RECOMMEND:

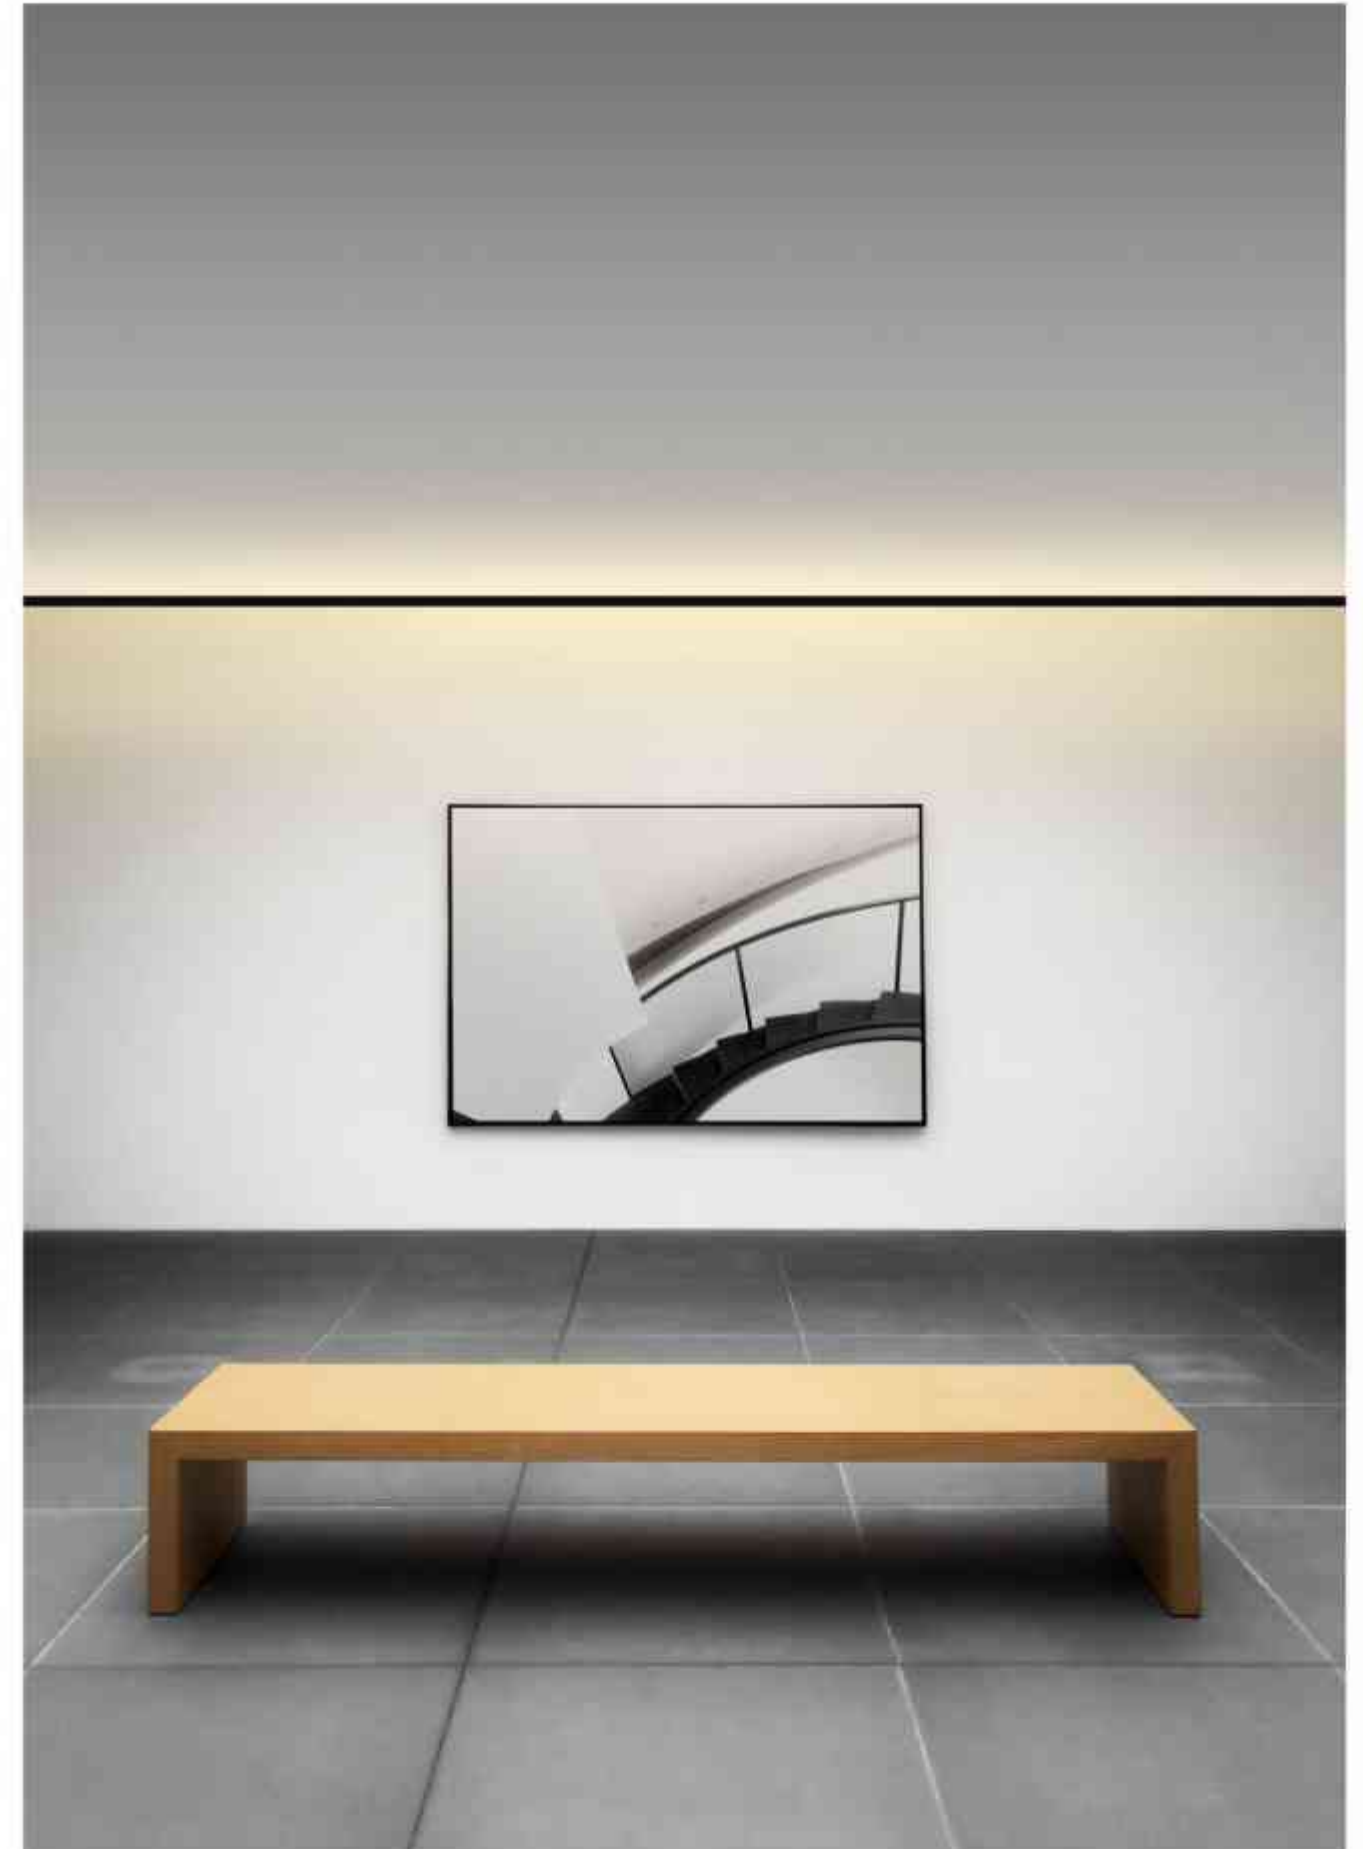

536



537

538

RIGA

RIGA, the newest family of embedded linear lights. As a supplement to linear lighting applications, RIGA provides more flexible and reliable solutions for space lighting design. The lamp and lamp body adopt a unique press-type buckle design, which is easy to install and maintain.

Ultra-narrow design reduces the visual effect of lamps.

Ordinary opening installation, borderless embedded installation optional.
4 length specifications to meet the application requirements of different regions.

© CE IP20 220-240VAC



SS



S



M



L

RIGA SS/S/M/L



539

Item Code	Led Power	System Power	Color Temperature	CRI	Output	Input	Dimension
112817	5.4 W	7.2W			310 lm		188*25.5*42mm
112817	10.9W	12 W			645 lm	220-240V	319*25.5*42mm
112817	16.2W	17 W	3000K/2700K/4000K	80	880 lm	220-240V	439*25.5*42mm
113117	27.9W	30 W			1016 lm		619*25.5*42mm

RECOMMEND



ANGLE 18°

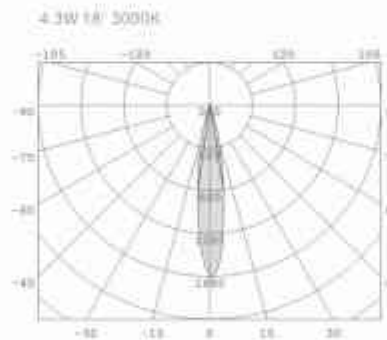

SS TRIMLESS



S TRIMLESS



M TRIMLESS



L TRIMLESS

RIGA SS/S/M/L/TRIMLESS




540

Item Code	Led Power	System Power	Color Temperature	CRI	Output	Input	Dimension
112817	5.4 W	7.2W			310 lm		188*30*42.5mm
112817	10.9W	12 W			645 lm	220-240V	340*30*42.5mm
113017	16.2W	17 W	3000K/2700K/4000K	80	880 lm	220-240V	480*30*42.5mm
113217	27.9W	30 W			1016 lm		640*30*42.5mm

RECOMMEND




ANGLE 18°

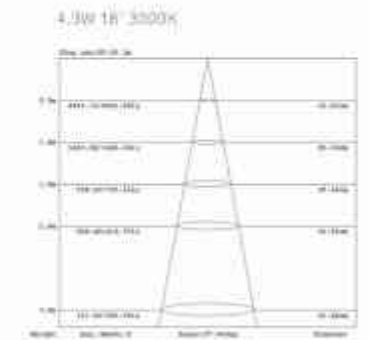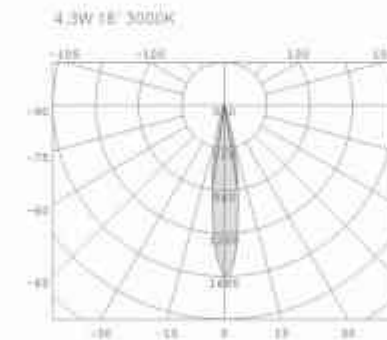

COLOR FINISHINGS:



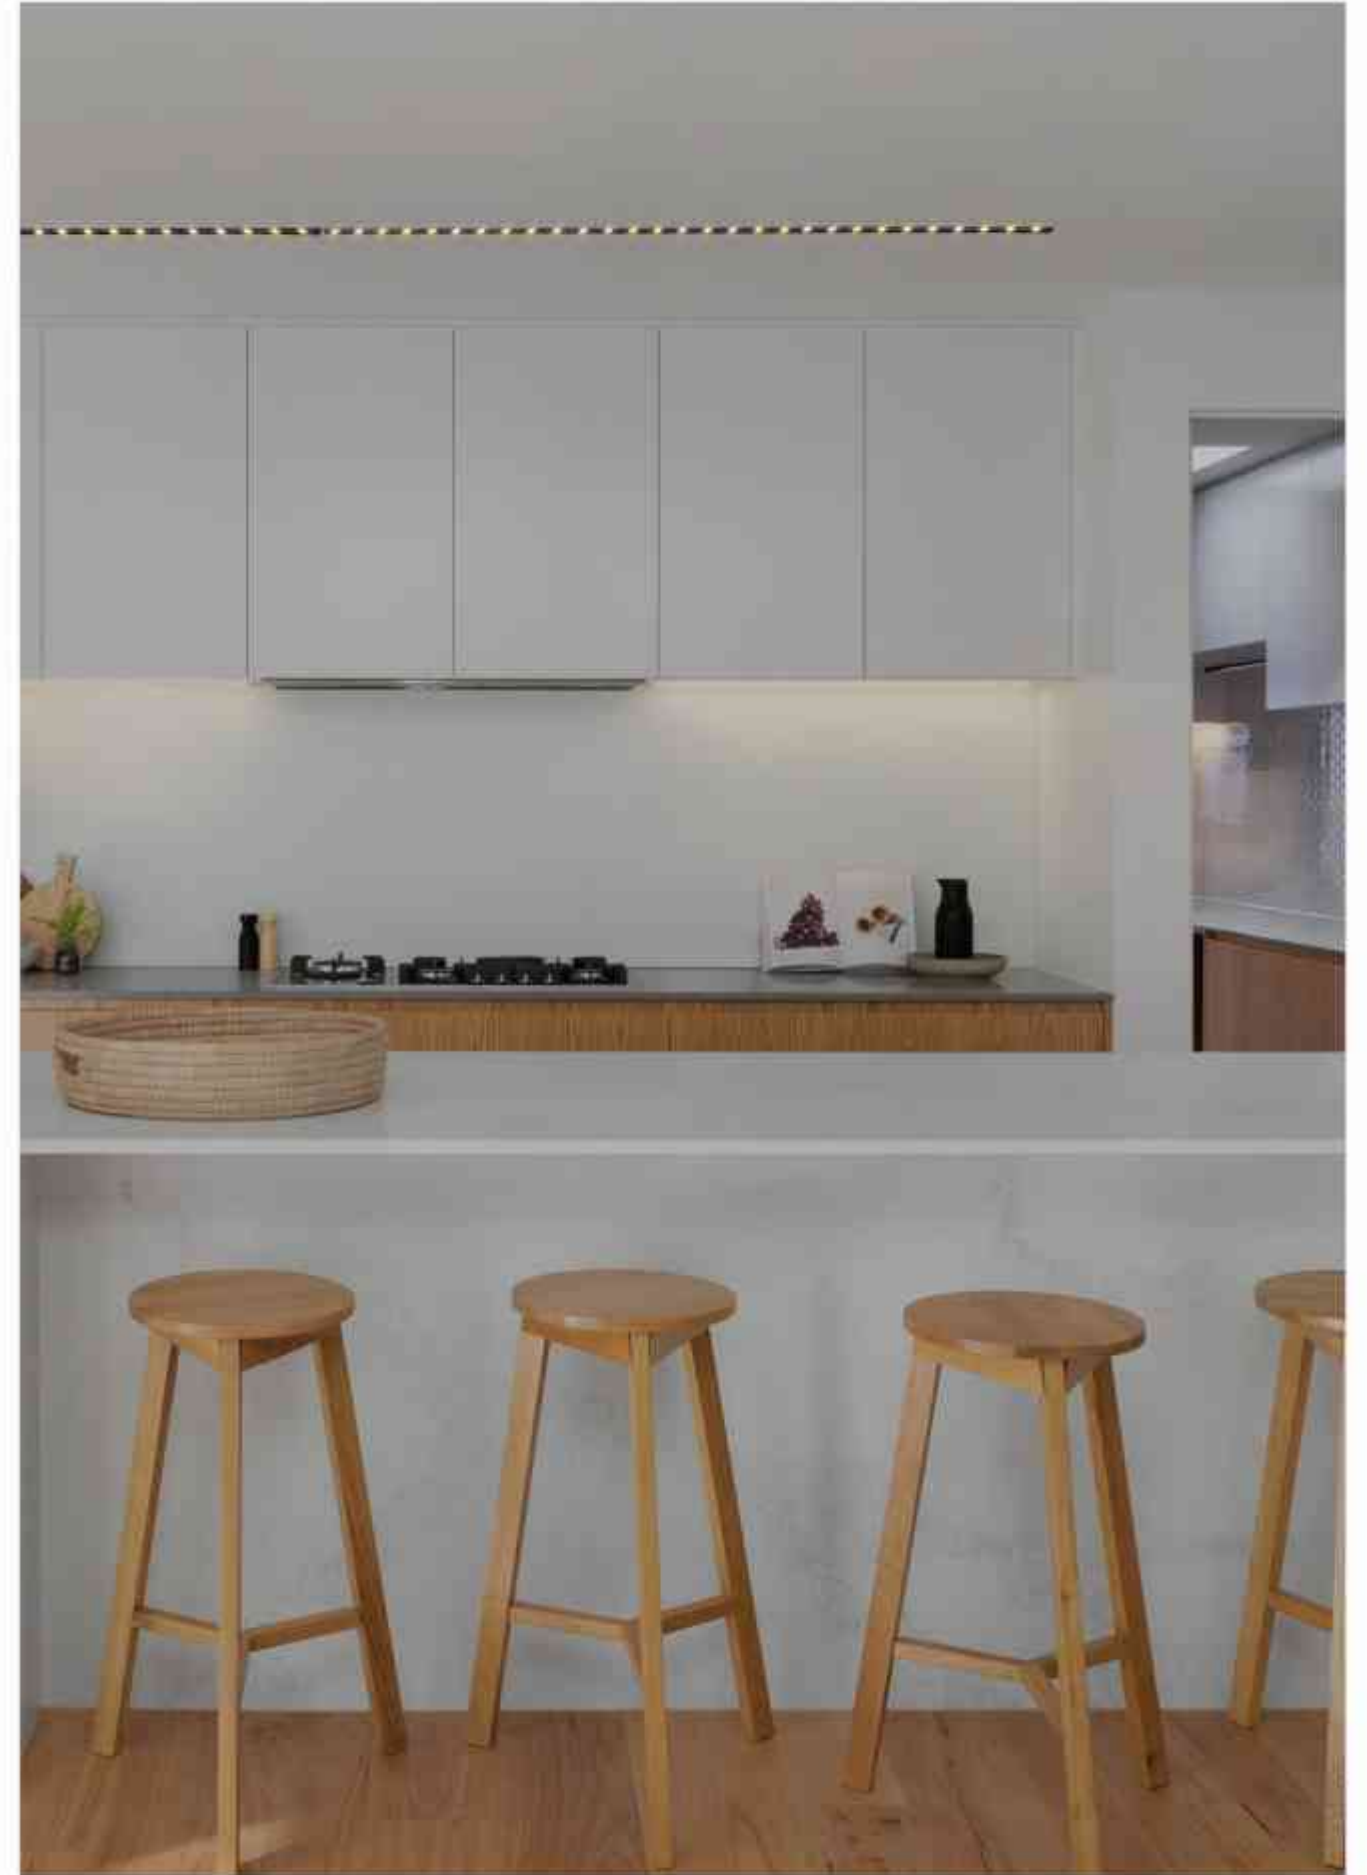

LED STRIP



FLUA-CC1
545-546




FLUA-CV1
545-546



FLUA-CV10-COB
545-546



FLUA-CV5
545-546

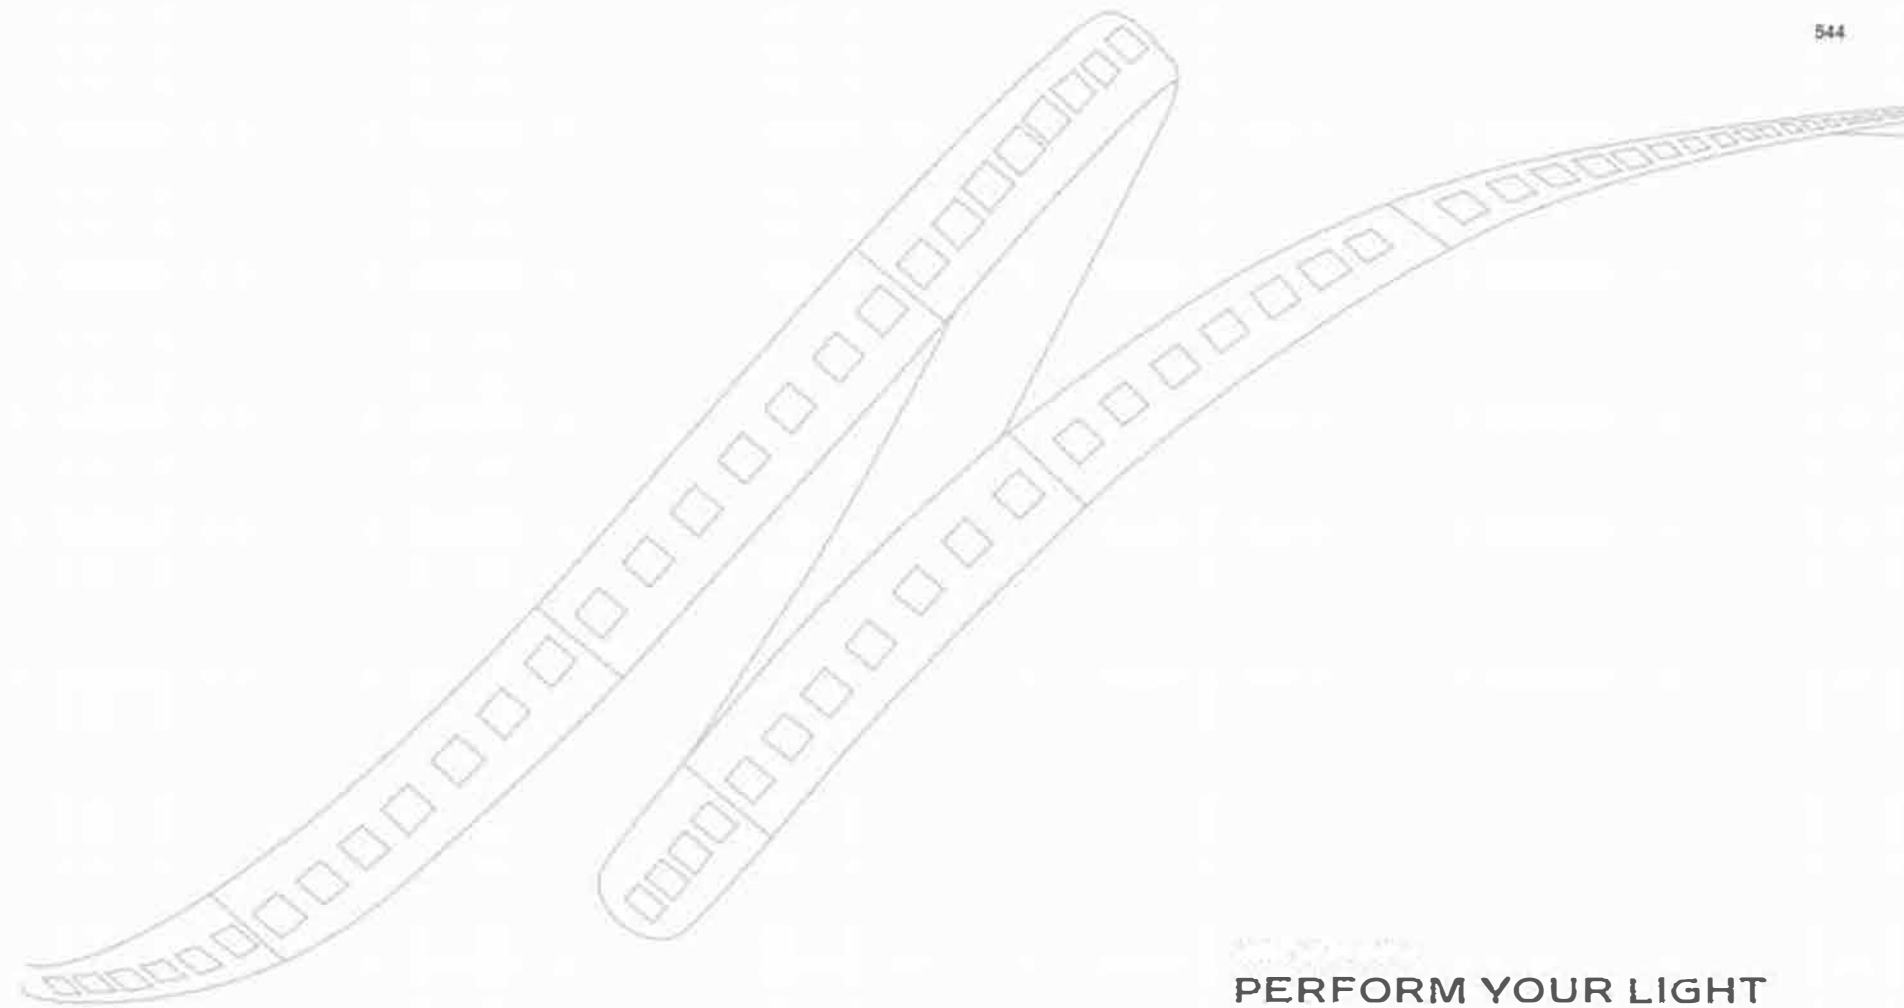

CC1-120



LEDs/meter: 120 x SMD LED/m
 Size / Cutting unit: 10000*10*1.5mm / DIVIDABLE PER 50mm
 Power(10m): 36W
 Lumen output(10m): 3600Lm/m
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: >80
 Ingress protection: IP33

CV1-120



LEDs/meter: 120 x SMD LED/m
 Size / Cutting unit: 10000*10*1.5mm / DIVIDABLE PER 100mm
 Power(10m): 2*24W
 Lumen output(10m): 4800Lm/m
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: >80, >90
 Ingress protection: IP33/IP55/IP67

CV1-240



LEDs/meter: 240 x SMD LED/m
 Size / Cutting unit: 5000*10*1.5mm / DIVIDABLE PER 50mm
 Power(10m): 48W
 Lumen output(10m): 4800Lm/m
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: >80
 Ingress protection: IP33

CV5-60(RGBWS)



LEDs/meter: 60 x SMD LED/m
 Size / Cutting unit: 5000*10*2mm / DIVIDABLE PER 100mm
 Power(10m): 3*23.3W
 Lumen output(10m): -
 Voltage input: 24Vdc
 Color temperature: -
 Color:
 Color Rendering Index: -
 Ingress protection: IP33 / IP55 / IP67

CV10-COB



LEDs/meter: COB
 Size / Cutting unit: 5000*8mm / DIVIDABLE PER 50mm
 Power(8m): 50W
 Lumen output/meter: /
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: /
 Ingress protection: IP20

CV10-COB



LEDs/meter: COB
 Size / Cutting unit: 5000*8mm / DIVIDABLE PER 50mm
 Power(8m): 75W
 Lumen output/meter: /
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: /
 Ingress protection: IP20/IP67

IP33

Not fixed



Applicable to the environment

IP55

Get cooling



Applicable to the environment

IP65

Silicone tube



Applicable to water environment




































IP67

Silicone filling




Applicable to short time flooded environment

CEILING LAMP

					
DOMO IN 16 AD 2.0 549-570	DOMO IN 26 AD 2.0 549-570	DOMO IN 35 AD 2.1 549-570	DOMO IN 45 AD 2.1 549-570	DOMO IN 65 AD 2.1 549-570	DOMO IN 95 AD 2.1 549-570
					
DOMO IN 35 2.1 549-570	DOMO IN 45 2.1 549-570	DOMO IN 65 2.1 549-570	DOMO IN 95 2.1 549-570	DOMO ON 11 2.0 549-570	DOMO ON 16 AC 2.1 549-570
					
DOMO ON 25 AC 2.1 549-570	DOMO ON 35 AC 2.1 549-570	DOMO ON 45 AC 2.1 549-570	DOMO ON 60 AC 2.1 549-570	DOMO ON 11 AD 2.0 549-570	DOMO ON 16 AD 2.0 549-570
					
DOMO ON 26 AD 2.0 549-570	DOMO ON 35 AD 2.0 549-570	DOMO ON2 35 DO 2.1 549-570	DOMO ON2 45 DO 2.1 549-570	DOMO ON2 65 DO 2.1 549-570	DOMO ON2 95 DO 2.1 549-570
					
DOMO ON2 35 CS-3 2.1 549-570	DOMO ON2 45 CS-3 2.1 549-570	DOMO ON2 65 CS-3 2.1 549-570	DOMO ON2 95 CS-3 2.1 549-570		
					
PAPER ONR SS 725	PAPER ONR S 725	PAPER ONR M 726	PAPER ONR L 726	RING ON 12 737	RING ON 24 737
					
RING ON 12 737	RING ON 24 737				

547

548

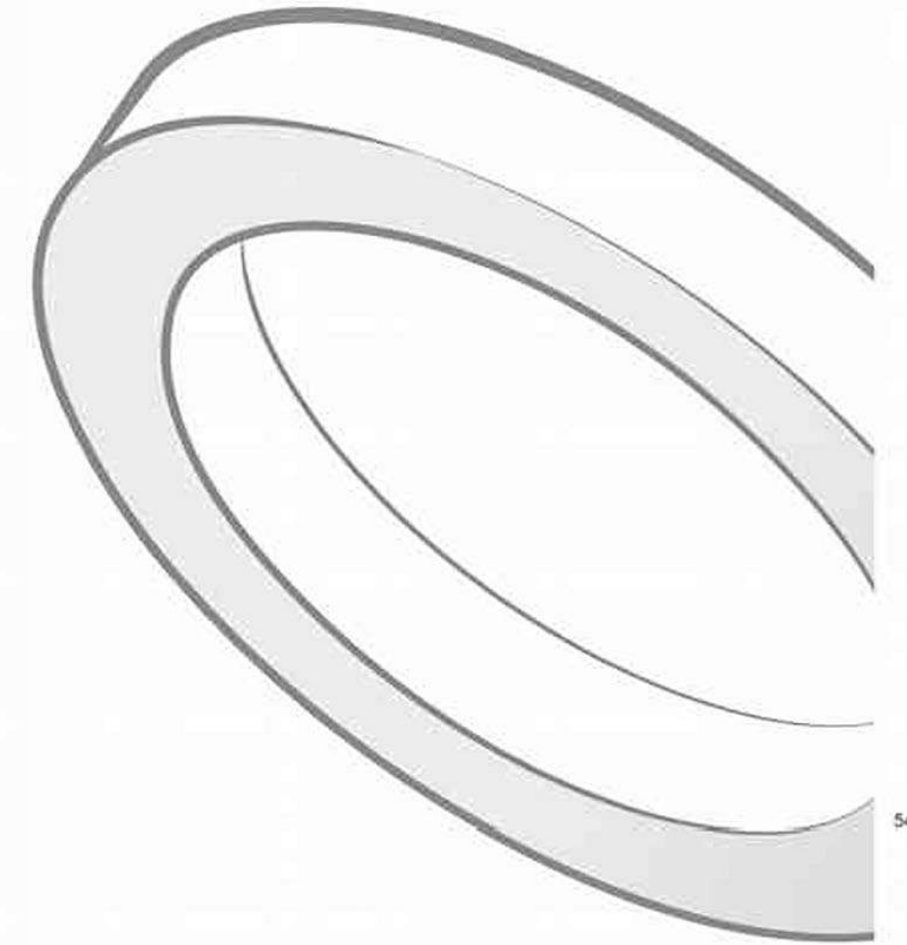

PERFORM YOUR LIGHT



DOMO

DOMO, with its pure geometrical shapes and perfect diffused light, creates unique harmonious atmosphere for any room, generating pleasant light effect. From direct surface mounted to installation with adjustable bracket, from trimless to pendant versions, DOMO series provides various installation choices. To enlarge DOMO collection, up/down version was specially created for surface mounted and suspended range.

© CE IP20 DIM COLOR DIM COLOR APP DIM TRIAC CS-3 DALI-2





ON2 38 DO 2.1



ON2 45 DO 2.1



ON2 65 DO 2.1



ON2 95 DO 2.1

CEILING LAMP

COLOR FINISHINGS:



FWW



FWB



ON2 36 CG-3 2.1



ON2 45 CG-3 2.1




ON2 65 CG-3 2.1




ON2 95 CG-3 2.1



IN 36 21



IN 45 21

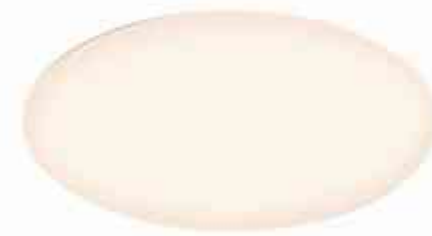

IN 65 21



IN 95 21





IN 18 AD 2.0



IN 26 AD 2.0



IN 36 AD 2.0



IN 65 AD 2.0



IN 95 AD 2.0





ON 1120



ON 16 AC 2.1



ON 25 AC 2.1



ON 36 AC 2.1



ON 48 AC 2.1



ON 60 AC 2.1



ON 11 AD 2.0



ON 16 AD 2.0



ON 26 AD 2.0



ON 35 AD 2.0





565



ITEM CODE	A	DT	DX	DA	CS-3	DO	AP	TD	DA2
ON 11	•	•							
ON 16 AC 2.1		•							
ON 25 AC 2.1		•							
ON 35 AC 2.1		•							
ON 45 AC 2.1		•							
ON 60 AC 2.1		•							
ON2 35 2.1					•	•	•		
ON2 45 2.1					•	•	•		
ON2 65 2.1					•	•	•		
ON2 95 2.1					•	•	•		
IN 16 AD 2.0	•	•							
IN 26 AD 2.0	•	•		•					
IN 35 AD 2.0	•			•					
IN 65 AD 2.0	•			•					
IN 95 AD 2.0	•			•					
ON 11 AD 2.0	•								
ON 16 AD 2.0	•								
ON 26 AD 2.0	•	•							
ON 35 AD 2.0	•								
IN 35 2.1							•		
IN 45 2.1							•		
IN 65 2.1							•		
IN 95 2.1							•		

CEILING LAMP

566

DOMO ONE 35 DO 2.1

LED POWER: 35-45W
CRI: 80
SYSTEM POWER: 49W
OUTPUT: 1855lm/2700-6000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø330*93.4mm
HOLE SIZE: 7



RECOMMEND OTHER VERSIONS:




DOMO ONE 35 CO-3 2.1

LED POWER: 25-35-45W
CRI: 80
SYSTEM POWER: 40.9W
OUTPUT: 1854lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø330*93.4mm
HOLE SIZE: 7



RECOMMEND



DOMO ON 11 2.0

LED POWER: 4.8W
CRI: 80
SYSTEM POWER: 5.5W
OUTPUT: 307lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø110*50mm
HOLE SIZE: 7



RECOMMEND



DOMO ON 16 AC 2.1

LED POWER: 14W
CRI: 80
SYSTEM POWER: 14W
OUTPUT: 112lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø180*50mm
HOLE SIZE: 7



RECOMMEND



DOMO ONE 45 DO 2.1

LED POWER: 35-45-53W
CRI: 80
SYSTEM POWER: 54.4W
OUTPUT: 2823lm/2700-6000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: 7



RECOMMEND OTHER VERSIONS:



DOMO ONE 45 CO-3 2.1

LED POWER: 35-45-53W
CRI: 80
SYSTEM POWER: 52.7W
OUTPUT: 2856lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: 7



RECOMMEND



DOMO ON 25 AC 2.1

LED POWER: 26W
CRI: 80
SYSTEM POWER: 35W
OUTPUT: 1205lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø250*90mm
HOLE SIZE: 7



RECOMMEND



DOMO ON 35 AC 2.1

LED POWER: 43W
CRI: 80
SYSTEM POWER: 43W
OUTPUT: 2381lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø350*90mm
HOLE SIZE: 7



RECOMMEND



DOMO ONE 65 DO 2.1

LED POWER: 54-7-9.9W
CRI: 80
SYSTEM POWER: 74W
OUTPUT: 5080lm/2700-6000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: 7



RECOMMEND OTHER VERSIONS:



DOMO ONE 65 CO-3 2.1

LED POWER: 54-7-9.9W
CRI: 80
SYSTEM POWER: 61.0W
OUTPUT: 4966lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: 7



RECOMMEND



DOMO ON 45 AC 2.1

LED POWER: 45.7W
CRI: 80
SYSTEM POWER: 45.7W
OUTPUT: 3880lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø450*90mm
HOLE SIZE: 7



RECOMMEND



DOMO ON 60 AC 2.1

LED POWER: 66.8W
CRI: 80
SYSTEM POWER: 66.8W
OUTPUT: 5166lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø600*90mm
HOLE SIZE: 7



RECOMMEND



DOMO ONE 95 DO 2.1

LED POWER: 130-12.4W
CRI: 80
SYSTEM POWER: 150W
OUTPUT: 8664lm/2700-6000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø950*93.2mm
HOLE SIZE: 7



RECOMMEND OTHER VERSIONS:



DOMO ONE 95 CO-3 2.1

LED POWER: 95-95-12.4W
CRI: 80
SYSTEM POWER: 118W
OUTPUT: 8266lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø950*93.2mm
HOLE SIZE: 7



RECOMMEND




DOMO IN 16 AD 2.0

LED POWER 9.6W
CRI: 90
SYSTEM POWER 11.2W
OUTPUT: 875lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø190*100mm
HOLE SIZE: Ø200mm



OTHER VERSIONS:




DOMO IN 26 AD 2.0

LED POWER 15.7W
CRI: 90
SYSTEM POWER 18.2W
OUTPUT: 1055lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø260*105.7mm
HOLE SIZE: Ø280mm



OTHER VERSIONS:



DOMO ON 11 AD 2.0

LED POWER 4.2W
CRI: 90
SYSTEM POWER 5.8W
OUTPUT: 307lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø110*75.5mm
HOLE SIZE: /



RECOMMEND



DOMO ON 16 AD 2.0

LED POWER 5.8W
CRI: 90
SYSTEM POWER 11.2W
OUTPUT: 870lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø160*80.3mm
HOLE SIZE: /



RECOMMEND



DOMO IN 35 AD 2.0

LED POWER 20.1W
CRI: 90
SYSTEM POWER 23.7W
OUTPUT: 1344lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø290*104.7mm
HOLE SIZE: Ø300mm



OTHER VERSIONS:




DOMO IN 65 AD 2.0

LED POWER 43.6W
CRI: 90
SYSTEM POWER 48.3W
OUTPUT: 2857lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø650*118mm
HOLE SIZE: Ø690mm



OTHER VERSIONS:

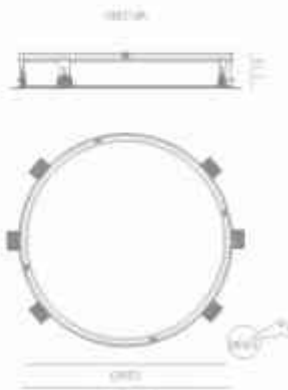

DOMO ON 35 AD 2.0

LED POWER 26.1W
CRI: 90
SYSTEM POWER 29.7W
OUTPUT: 1344lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø350*104.8mm
HOLE SIZE: /



RECOMMEND



DOMO ON 26 AD 2.0


LED POWER 45.7W
CRI: 90
SYSTEM POWER 48.7W
OUTPUT: 2881lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø260*104.8mm
HOLE SIZE: /



RECOMMEND



OTHER VERSIONS:



DOMO IN 95 AD 2.0

LED POWER 85W
CRI: 90
SYSTEM POWER 106W
OUTPUT: 5835lm/3000K
INPUT: 220-240VAC 50/60Hz
DIMENSION: Ø950*119mm
HOLE SIZE: Ø980mm



OTHER VERSIONS:



DOMO IN 35 2.1

LED POWER 19W
CRI: 90
SYSTEM POWER 4.2W
OUTPUT: 1030lm/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø370*85mm
HOLE SIZE: Ø380mm



OTHER VERSIONS:



DOMO IN 45 2.1

LED POWER 46.5W
CRI: 90
SYSTEM POWER 52.5W
OUTPUT: 2540lm/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø470*85mm
HOLE SIZE: Ø480mm



OTHER VERSIONS:



DOMO IN 65 2.1

LED POWER 60W
CRI: 90
SYSTEM POWER 68W
OUTPUT: 3120lm/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø670*85mm
HOLE SIZE: Ø680mm



OTHER VERSIONS:




DOMO IN 95 2.1

LED POWER 112W
CRI: 90
SYSTEM POWER 130W
OUTPUT: 5940lm/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø970*85mm
HOLE SIZE: Ø980mm










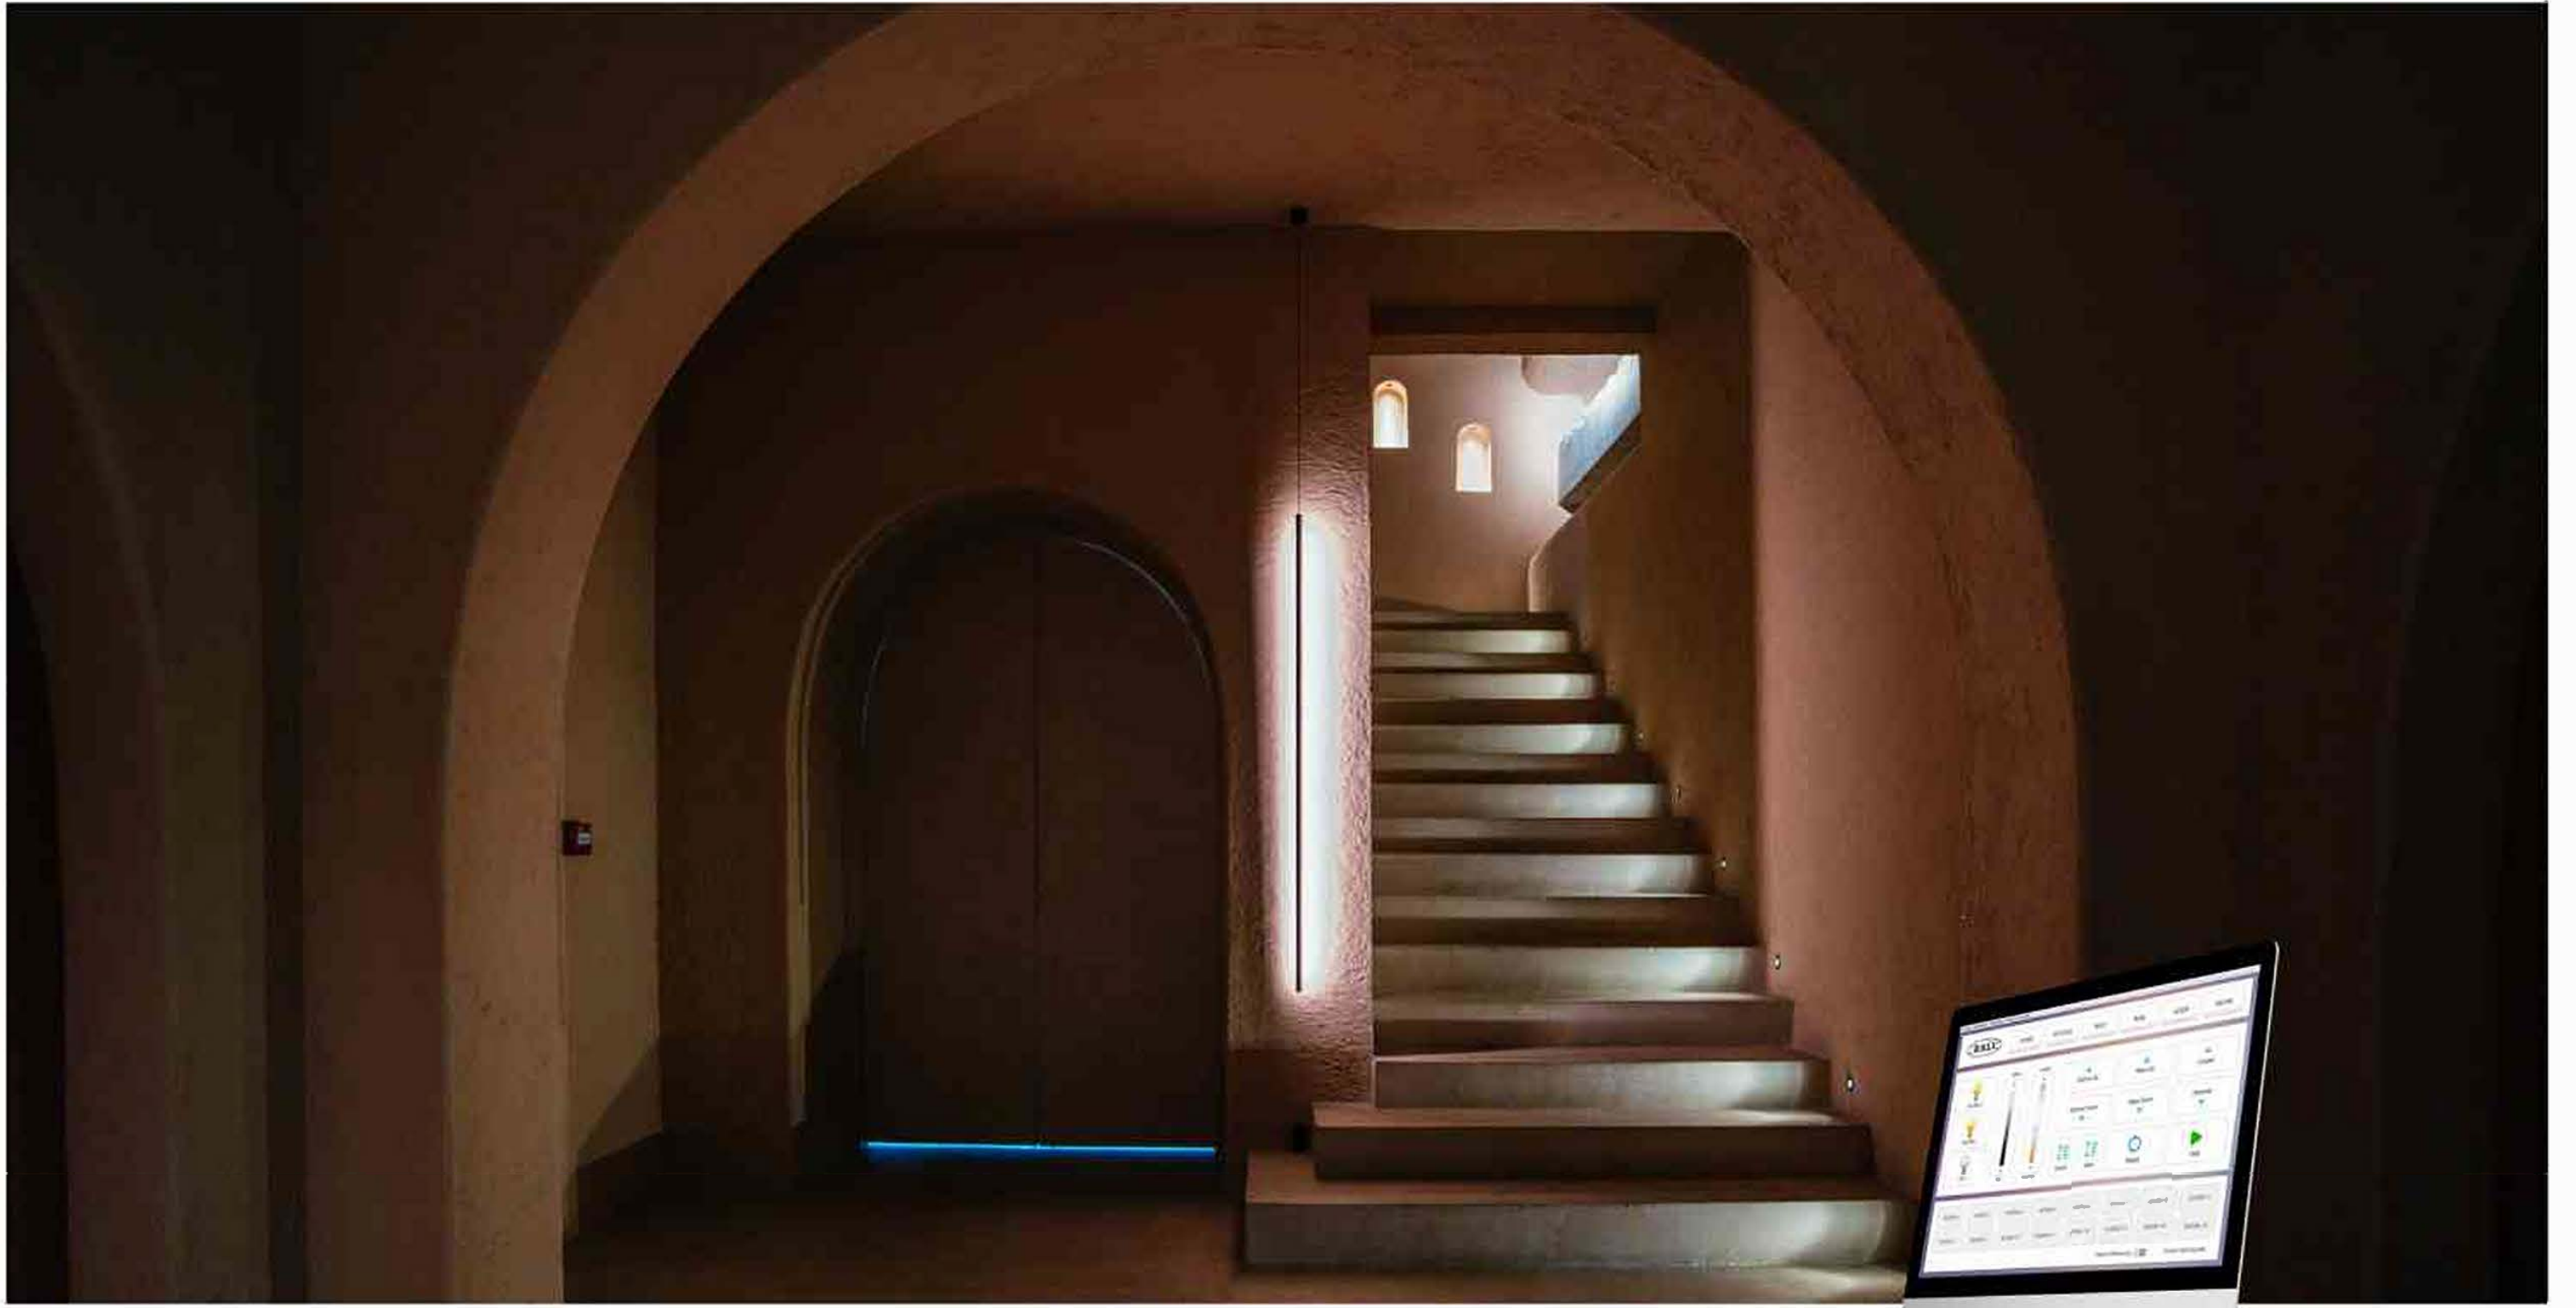


































OTHER VERSIONS:















































PENDANTLAMP

					
ARTE P GROUP P1 579	ARTE P GROUP P2 580	ARTE C GROUP C1 577	ARTE C GROUP C2 578	ATHENA SPOT 587-590	BERT RS DO 591-598
					
BERT RM DO 591-598	BERT RL DO 591-598	BERT VS DO 591-598	BERT VM DO 591-598	BERT VL DO 591-598	CLASSIC ROUND 599-608
					
CLASSIC ELLIPSE 599-608	CLASSIC RO AD 12 / 18 599-608	CLASSIC OVAL AD 17 / 25 599-608	CLIP 1360 609-612	COBIN P 18 613-618	COBIN P 25 613-618
					
COBIN P 18 TRIMLESS 613-618	COBIN P 25 TRIMLESS 613-618	COMET P 619-620	CORONA P3 621-624	CORONA P5 621-624	DARDY W 1 625-632
					
DARDY W 3 625-632	DARDY W 6 625-632	ELISA 300DO 2.0 633-638	ELISA 400DO 2.0 633-638	ELISA 600DO 2.0 633-638	FAIRY G4 639-642
					
FAIRY G7 639-642	FAIRY G11 639-642	FILOLUCE P 2 643-650	FLASH M P SQ 651-660	FLASH M V RO / M V RO SENSOR 651-660	FORMULIA 350 2.1 661-670
					
FORMULIA 550 2.1 661-670	FORMULIA 750 2.1 661-670	FORMULIA 350 TRIMLESS 2.0 661-670	FORMULIA 550 TRIMLESS 2.0 661-670	FORMULIA 750 TRIMLESS 2.0 661-670	FORMULIA L 350 GROUP 2.0 661-670

573

PENDANTLAMP


					
FORMULIA L 550 GROUP 2.0 661-670	FORMULIA L 750 GROUP 2.0 661-670	GESSO S RO DO 671-680	GESSO M RO DO 671-680	GESSO CRYSTAL DO 671-680	GESSO NABLA DO 671-680
					
HOPPER S 681-688	HOPPER M 681-688	HOPPER S TRIMLESS 681-688	HOPPER M TRIMLESS 681-688	LINK 689-696	LISSO P ON 697-700
					
LISSO P IN 697-700	LYNX 701-710	MELA P ON 711-714	MELA P IN 711-714	MIA S 1.1 715-718	MIA S TRIMLESS 715-718
					
MIA GROUP 715-718	PALLAS FUNNEL 719-722	PALLAS EGG 719-722	PALLAS DIAMOND 719-722	PALLAS FUNNEL TRIMLESS 719-722	PALLAS EGG TRIMLESS 719-722
					
PALLAS DIAMOND TRIMLESS 719-722	PAPER SS 723-732	PAPER S 723-732	PAPER M 723-732	PAPER L 723-732	PAPER PR S AD 723-732
					
PROMEO L1 1.1 733-734	PROMEO L2 1.1 733-734	PROMEO L3 1.1 733-734	RING P 24 735-740	RING P 45 1.1 735-740	WAVE H S 10 DN 741-754
					
WAVE H S 20 DN 741-754	WAVE H S 30 DN 741-754	WAVE H L 10 DN 741-754	WAVE H L 20 DN 741-754	WAVE H L 30 DN 741-754	WAVE H LS 10 DN 741-754

574


PENDANTLAMP



WAVE H LS 20 DN
741-754



WAVE H LS 30 DN
741-754



WAVE V S 10 DN
741-754



WAVE V S 20 DN
741-754



WAVE V S 30 DN
741-754



WAVE V L 10 DN
741-754



WAVE V L 20 DN
741-754




WAVE V L 30 DN
741-754




WAVE V LS 10 DN
741-754




WAVE V LS 20 DN
741-754



WAVE V LS 30 DN
741-754

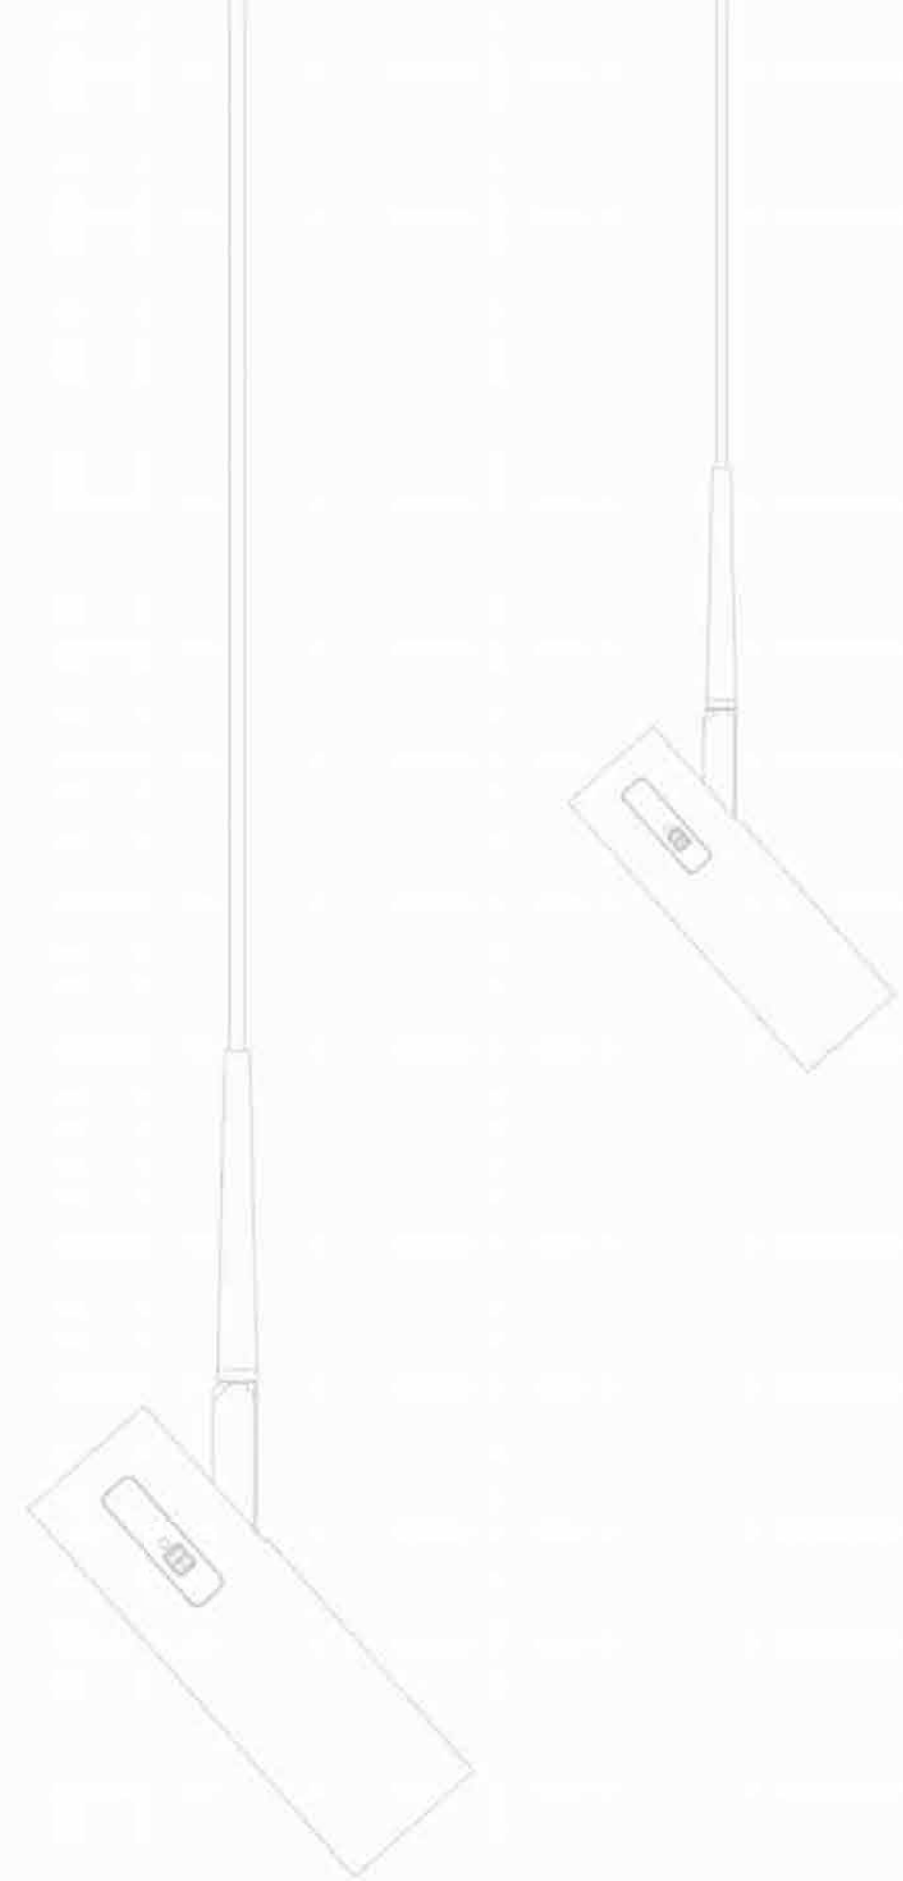

PERFORM YOUR LIGHT

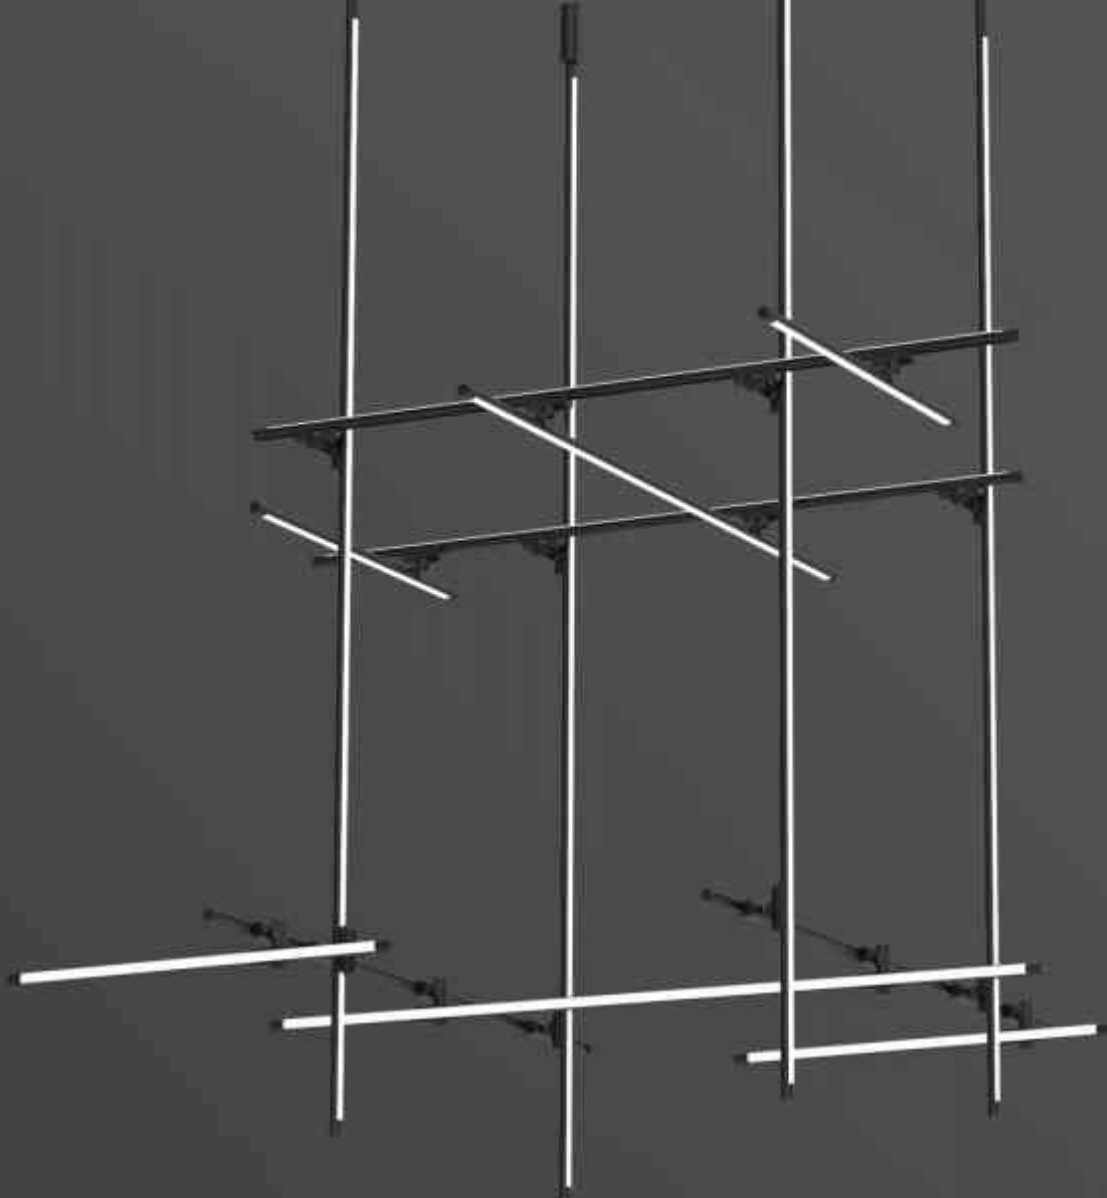

575

ARTE

The frame outside the frame, the space within the space.
 The ARTE, is a lamp, also an infinite extension of the XYZ axis, ARTE can be used as a space of number axis, through the connection of the interfaces, it can move on the XYZ axis. When a designer accepts a new project, the first task is to divide the layout of the space, and the application of ARTE can almost adapt to all types of spaces. Such as hotel lobbies with high ceilings, long meeting rooms, and elegant French restaurants, private offices, can even be used as atmosphere decorations in indoor and outdoor spaces.

© CE IP20 100-240VAC rE

ARTE can be used as a space of number axis,
 through the connection of the interfaces,
 it can move on the XYZ axis.



vertical rotate shaft
 (opposite to the luminous direction)



576



horizontal rotate shaft
 (same direction with the luminaire)

COLOR FINISHES

■ RBL ■ RWH ■ RLG



ARTE C GROUP C1

ARTE C GROUP C1 
LED POWER: 18W
SYSTEM POWER: 18W
SYSTEM OUTPUT: 730LM
INPUT: 100-240VAC
CRI: 90
DIMENSION: Ø200x1035x1140mm

RECOMMEND:



ON/OFF
A

ANGLE:



ARTE C GROUP C2

ARTE C GROUP C2 
LED POWER: 18W
SYSTEM POWER: 18W
SYSTEM OUTPUT: 810LM
INPUT: 100-240VAC
CRI: 90
DIMENSION: Ø240x1035x1030mm

RECOMMEND:



ON/OFF
A

ANGLE:





ARTE P GROUP P1

ARTE P GROUP P1


LED POWER: 8 W
SYSTEM POWER: 11 W
SYSTEM OUTPUT: 420LM
INPUT: 100-240VAC
CRI: 90
DIMENSION: Ø110x415x52mm

RECOMMEND:



ON/OFF
A

ANGLE L

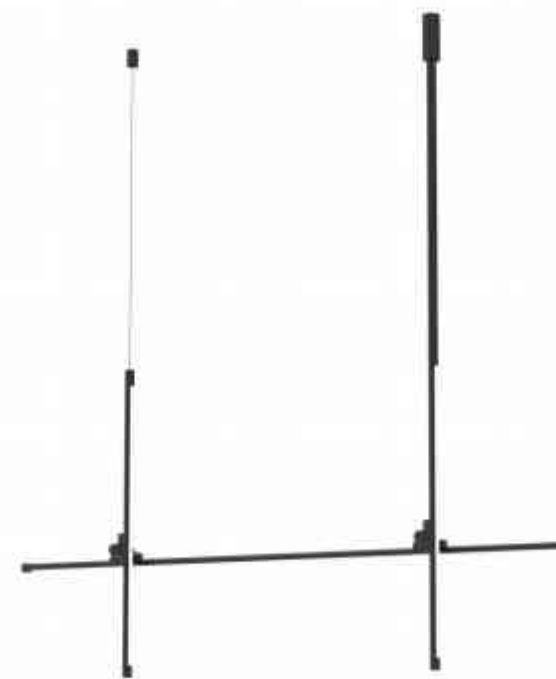

ARTE P GROUP P2

ARTE P GROUP P2

LED POWER: 20W
SYSTEM POWER: 27W
SYSTEM OUTPUT: 880LM
INPUT: 100-240VAC
CRI: 90
DIMENSION: Ø110x400x52mm


RECOMMEND:



ON/OFF
A

ANGLE L



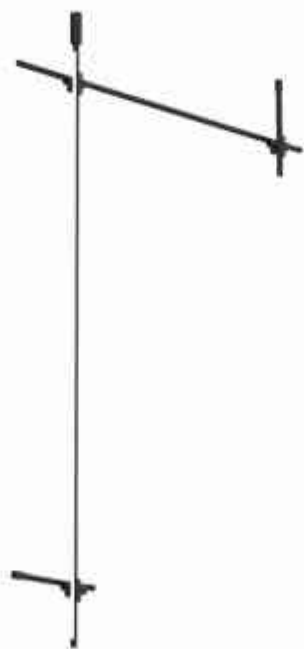

ARTE W GROUP W1

581

ARTE W GROUP W1

LED POWER 2800W
 SYSTEM POWER 330V
 SYSTEM OUTPUT 1300LM
 INPUT 24VDC / 100 3A03AC
 CRI 90
 DIMENSIONS: Ø140x1025-1035mm

RECOMMEND:




ANGLE L




PENDANT LAMP

582

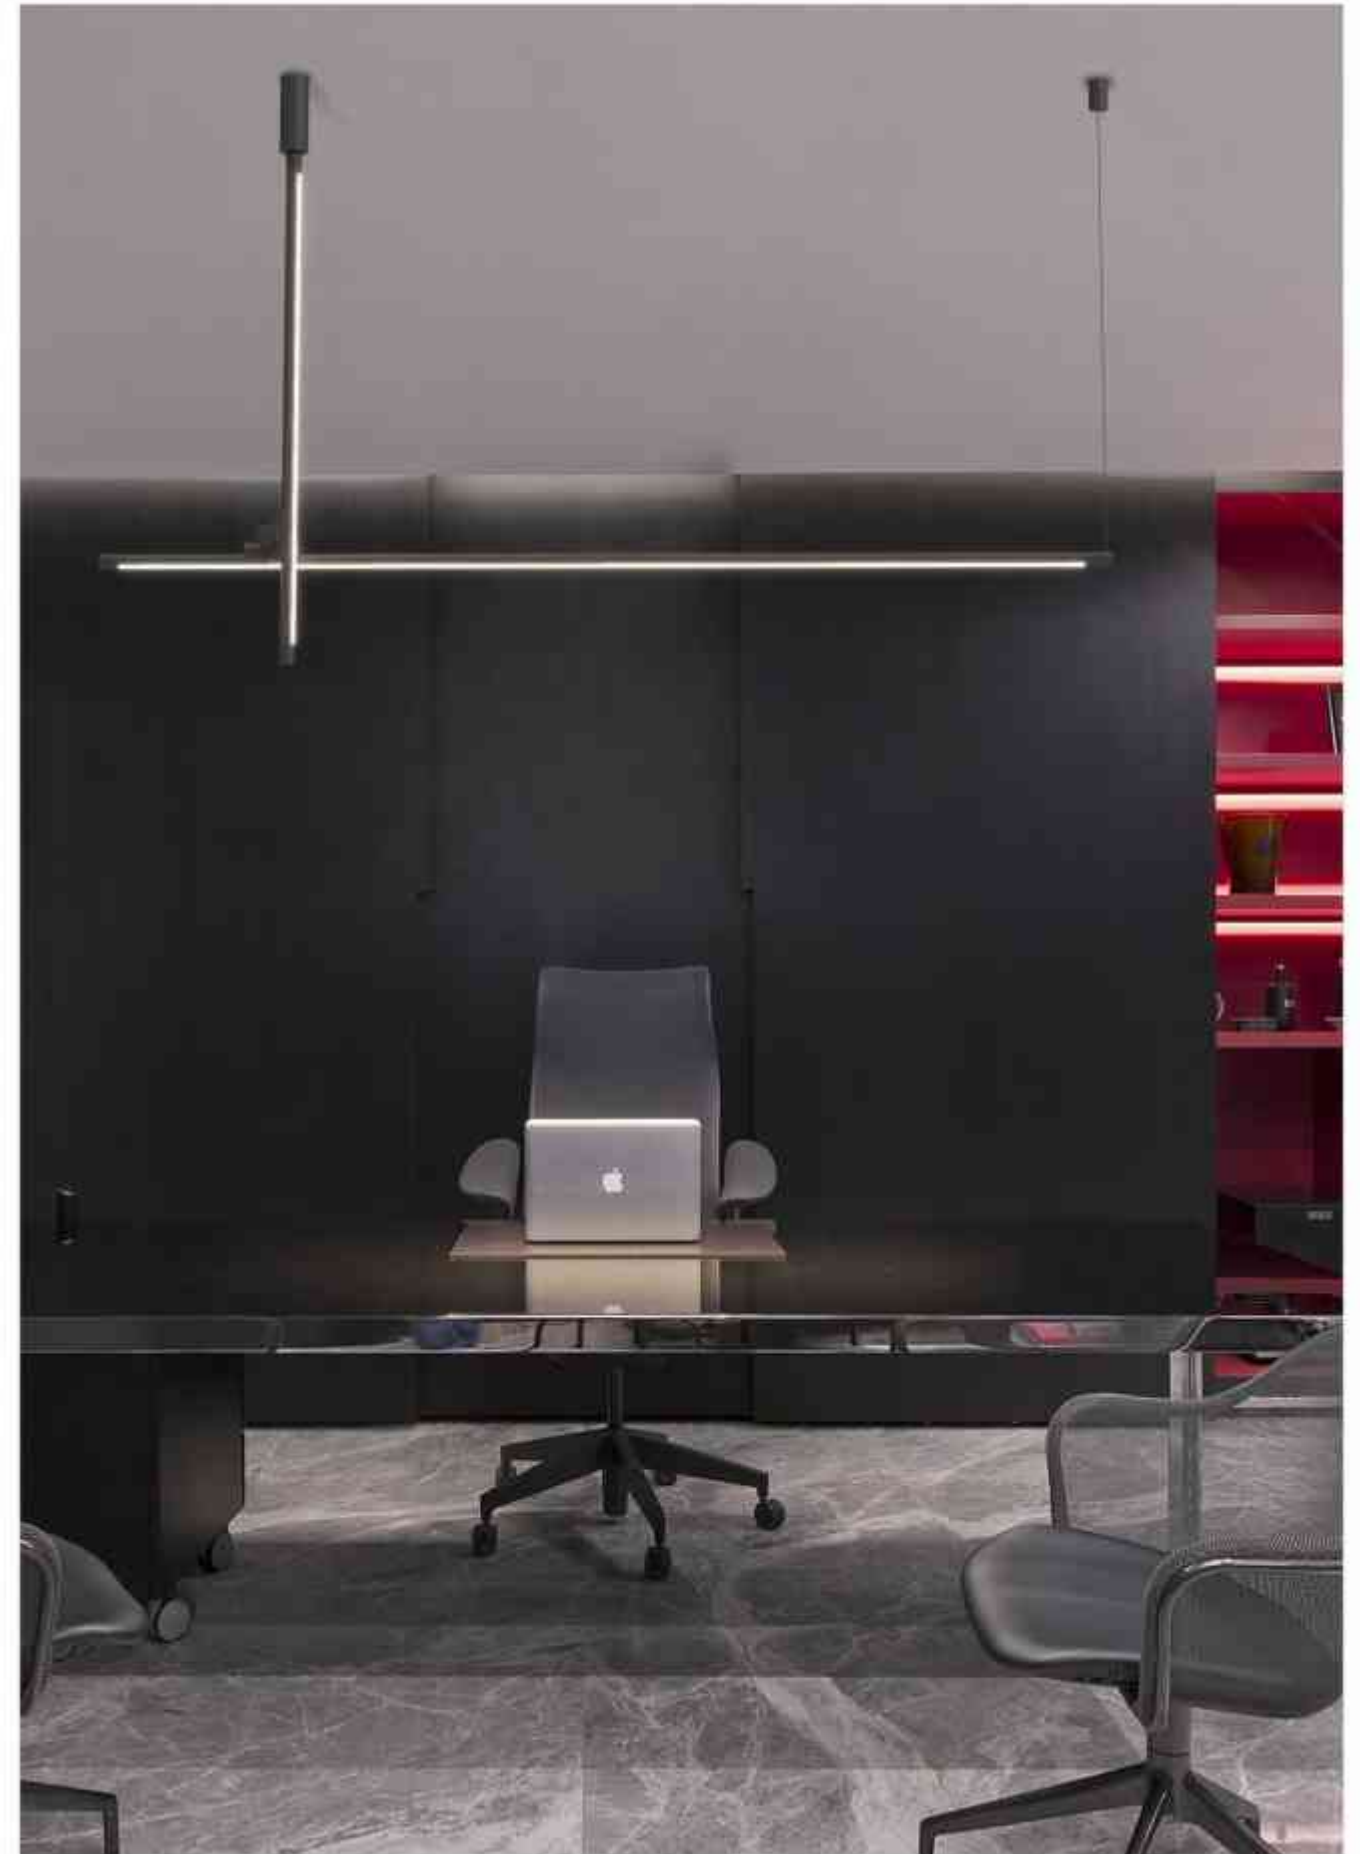

585

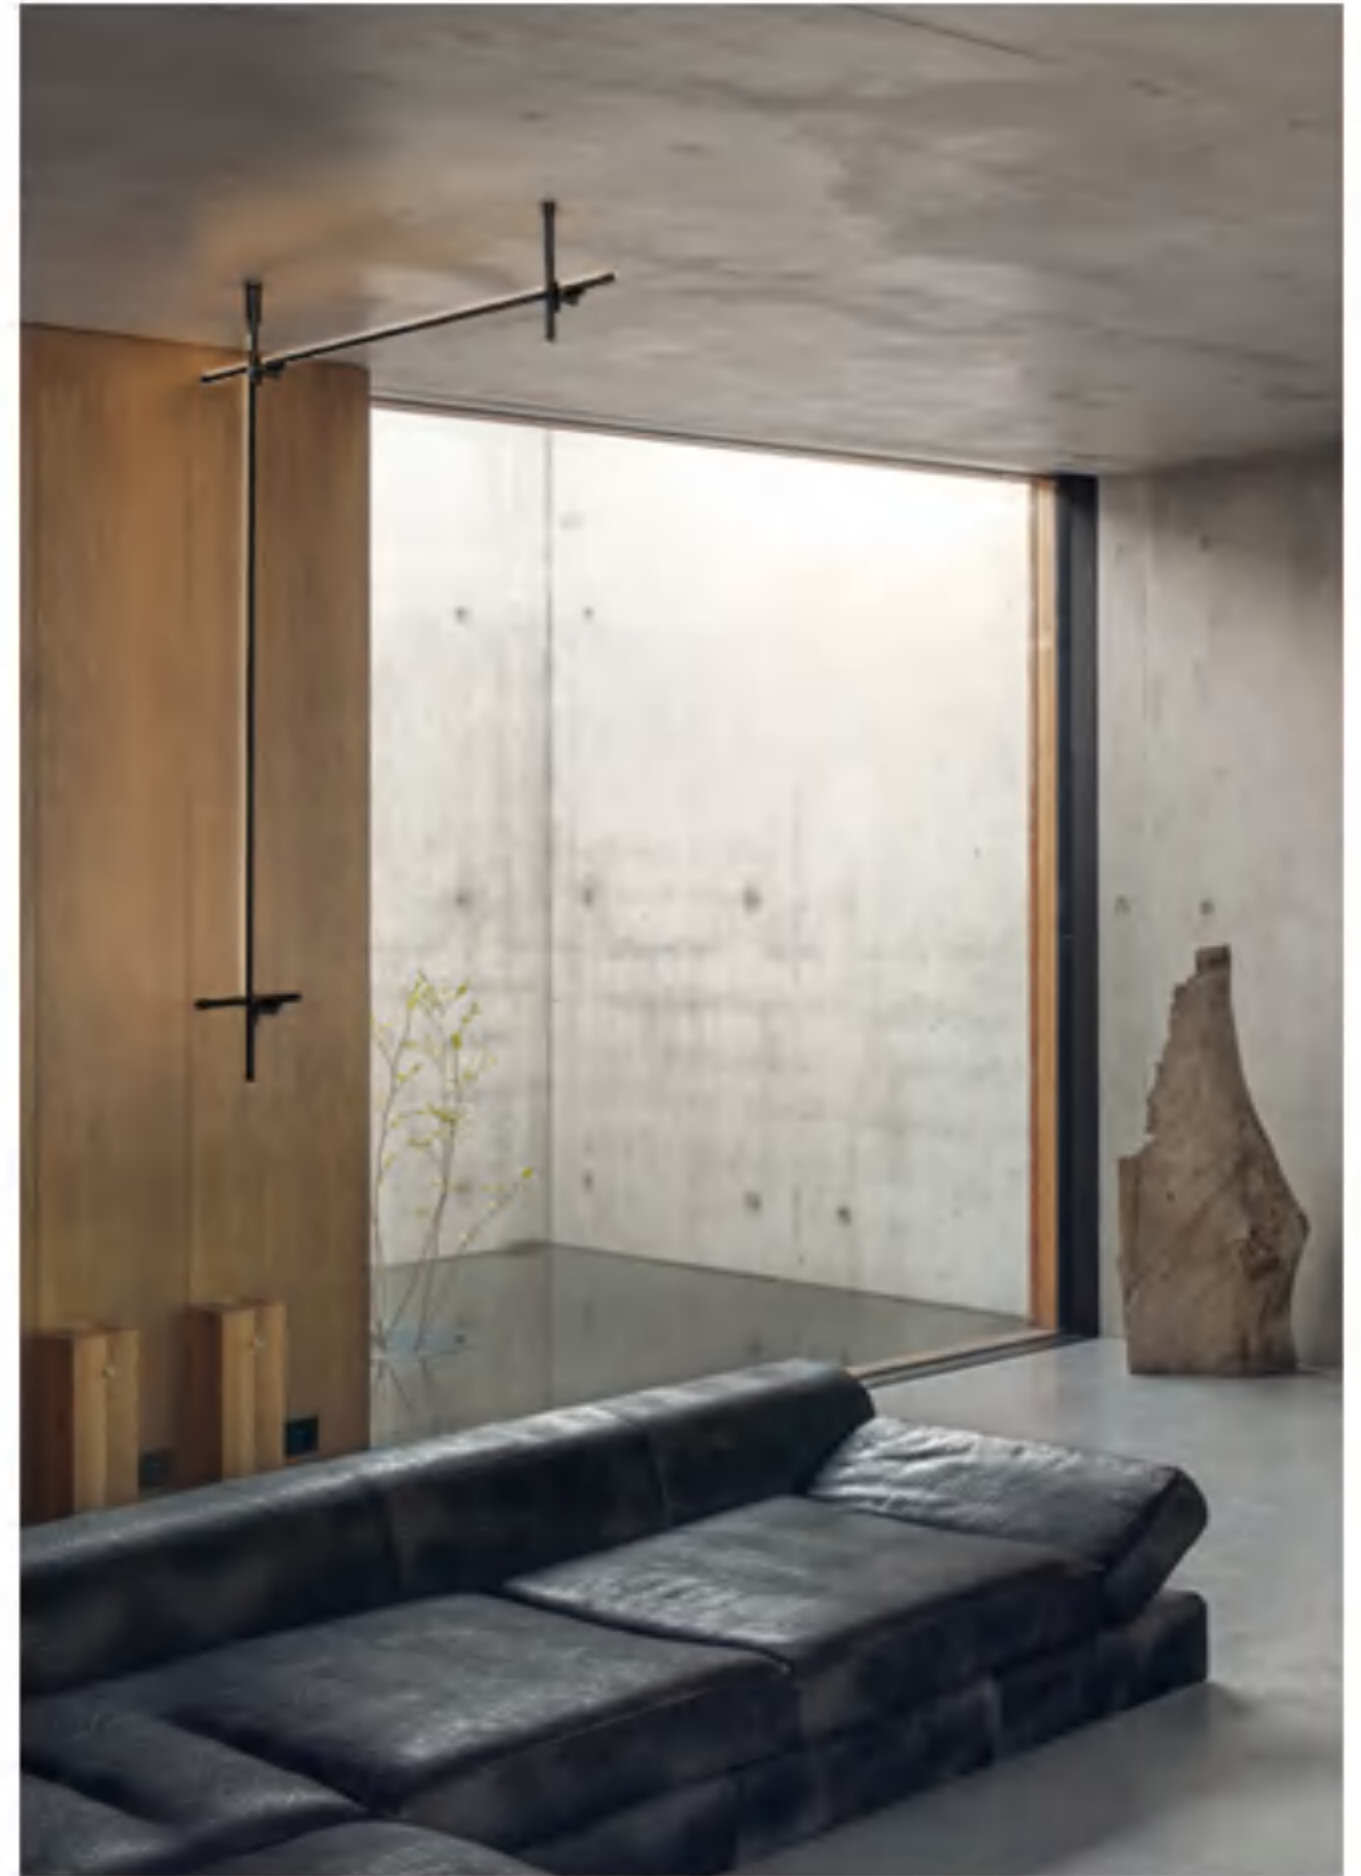

PENDANT LAMP

586



587

ATHENA

PENDANT LAMP



588

ATHENA

Minimalism is coming in each tiny detail, minimal decoration and maximum comfort, functionality and laconism.

ATHENA is a great example of design with minimal details.

This is a great integration of furniture and lighting.

This splendid pendant spot is designed specially to provide new solution for reading lamp.

The maximum length of suspending system, 130 mm, can be easily adjusted in accordance to required design. In addition, touch DIM function makes it easy to DIM the lamp.

© CE (IP20) (DIM TOUCH)



ATHENA SPOT 

LED POWER: 3.6W
 SYSTEM POWER: 5W
 OUTPUT: 38LM/3000K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: Ø42x130mm
 HOLE SIZE: 1


RECOMMEND:



ANGLE 23°

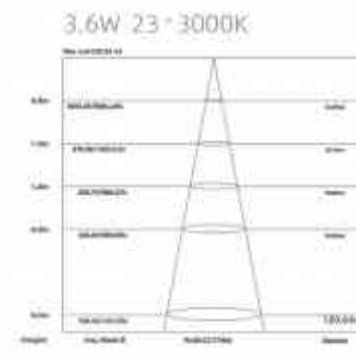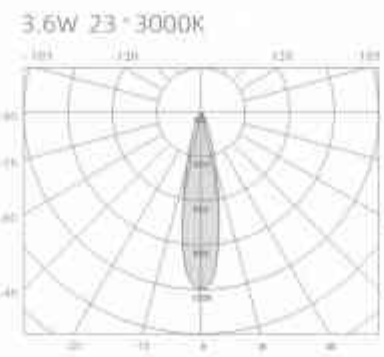

COLOR FINISHINGS:

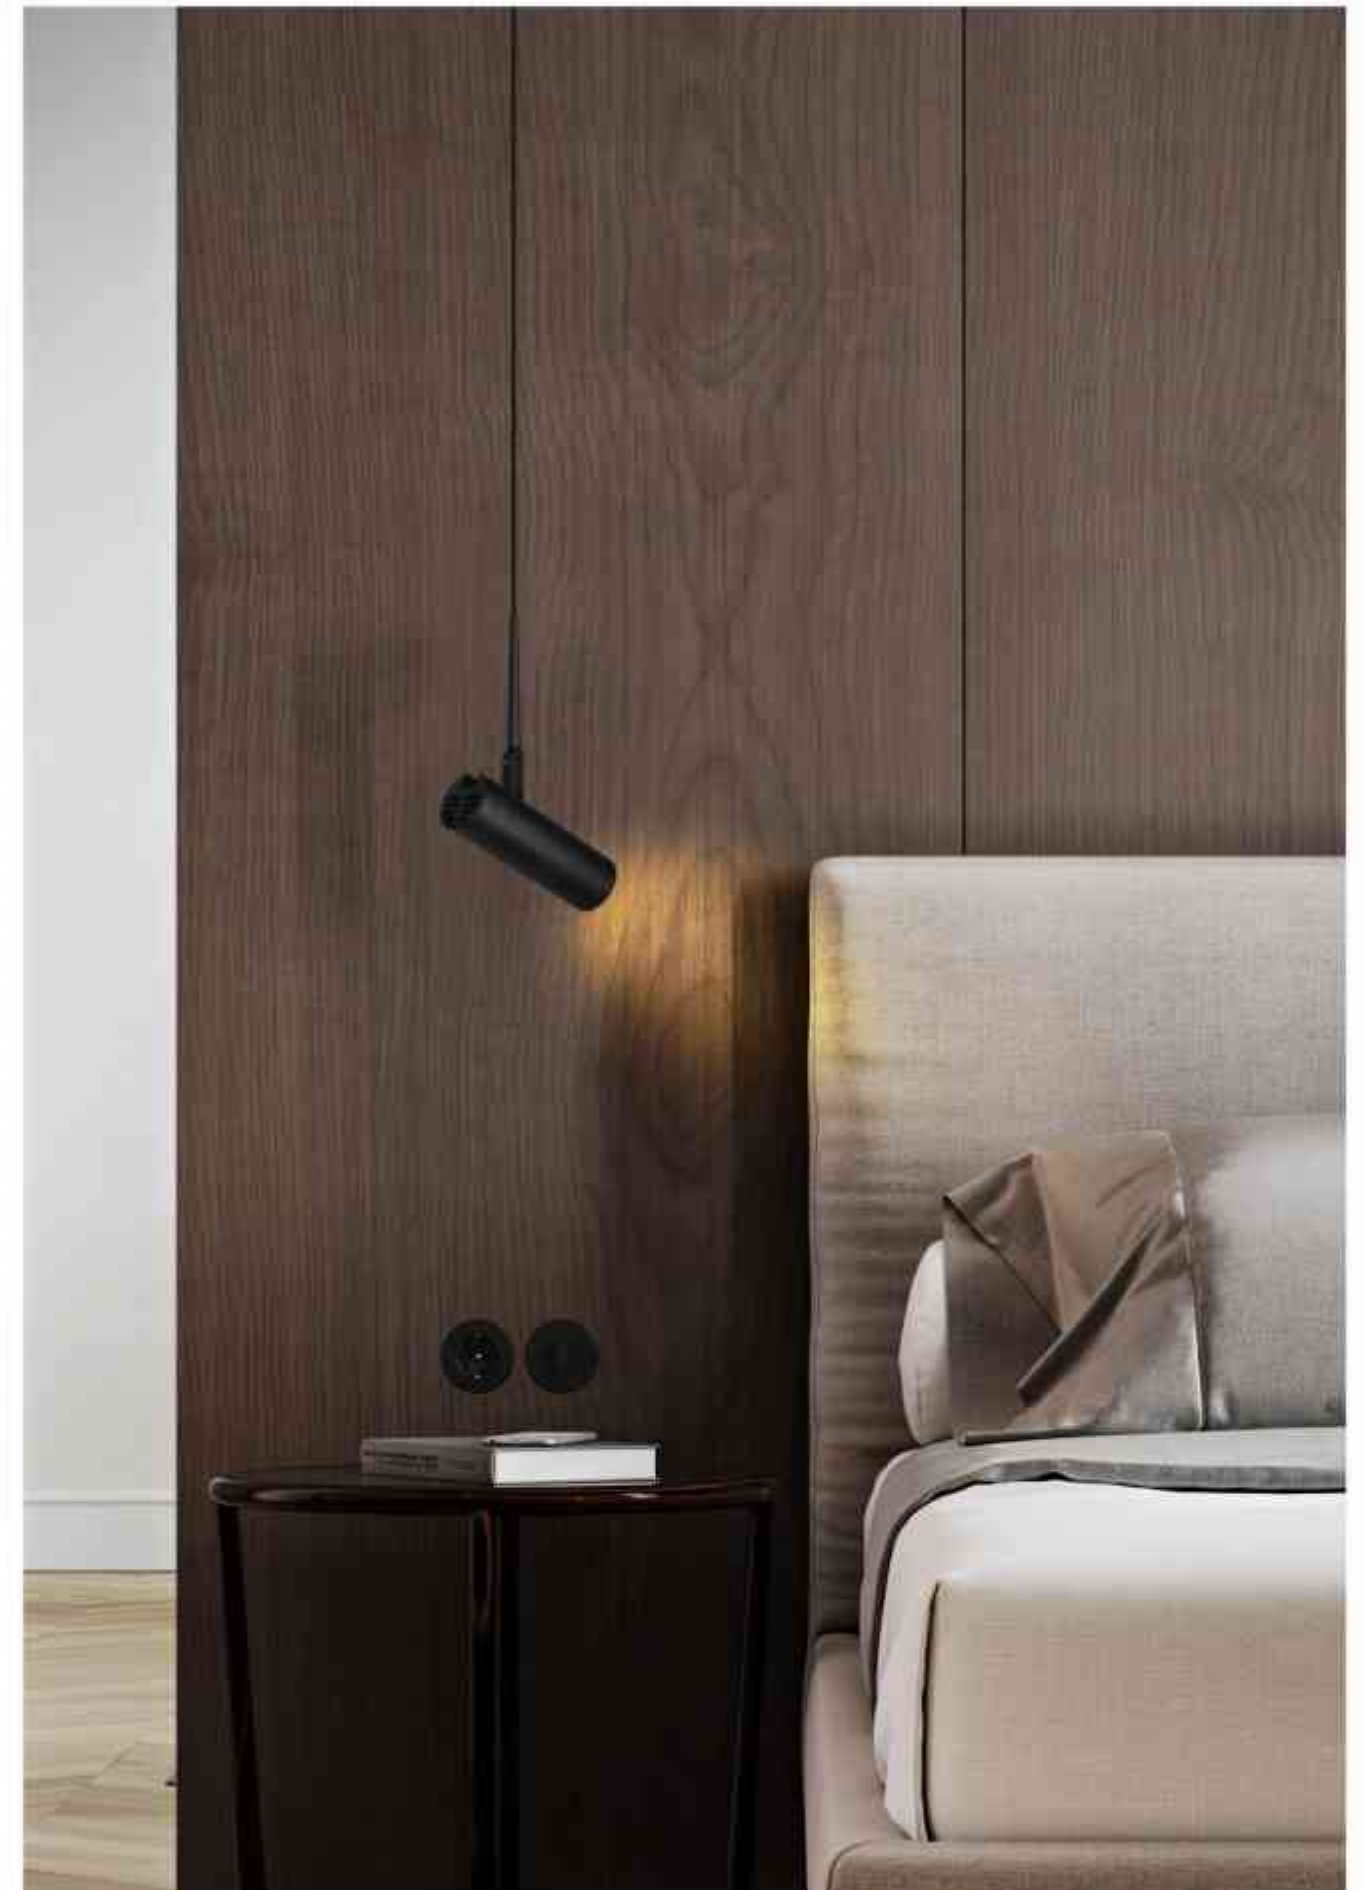



BERT

A series of slim rings floating through space, with its retro-look appearance is the best choice for many applications. 3 diameters are available for choice. This circle of leds is specially designed to guarantee a uniform and perfectly balanced light output, resulting in a very enjoyable diffuse lighting effect.

© CE IP20 100/220-240VAC DIM COLOR APP DIM 1-10V DALI

BERT

PENDANT LAMP



TURN OFF



TURN ON

592

BERT RS ϕ 0/RM ϕ 0/ RL ϕ 0/ VS ϕ 0/ VM ϕ 0/ VL ϕ 0
 Suggestions for supporting use in the above products



COLOR FINISHINGS:





RL 50

RS 50

RM 50



VM 50

VS 50

VL 50

BERT RD DO

LED POWER: 4W
CRI: 90
SYSTEM POWER: 4W
OUTPUT: 360LM (2700-6000K)
INPUT: 100-240VAC 50/60HZ
DIMENSION: Ø732*18mm
HOLE SIZE: 1



RECOMMEND



BERT RM DO

LED POWER: 30.6W
CRI: 90
SYSTEM POWER: 30W
OUTPUT: 3180LM (2700-6000K)
INPUT: 100-240VAC 50/60HZ
DIMENSION: Ø760*18mm
HOLE SIZE: 1



RECOMMEND



BERT VG DO

LED POWER: 4W
CRI: 90
SYSTEM POWER: 4W
OUTPUT: 360LM (2700-6000K)
INPUT: 100-240VAC 50/60HZ
DIMENSION: Ø732*18mm
HOLE SIZE: 1



RECOMMEND



BERT VM DO

LED POWER: 30.6W
CRI: 90
SYSTEM POWER: 30W
OUTPUT: 3180LM (2700-6000K)
INPUT: 100-240VAC 50/60HZ
DIMENSION: Ø760*18mm
HOLE SIZE: 1



RECOMMEND



BERT RL DO

LED POWER: 60.3W
CRI: 90
SYSTEM POWER: 72W
OUTPUT: 5860LM (2700-6000K)
INPUT: 100-240VAC 50/60HZ
DIMENSION: Ø1080*18mm
HOLE SIZE: 1



RECOMMEND



BERT VL DO

LED POWER: 60.3W
CRI: 90
SYSTEM POWER: 72W
OUTPUT: 5860LM (2700-6000K)
INPUT: 100-240VAC 50/60HZ
DIMENSION: Ø1080*18mm
HOLE SIZE: 1



RECOMMEND





597



PENDANT LAMP

598

Color Temperature Adjustable:
2700K-6000K






PENDANT LAMP

600

CLASSIC

CLASSIC is more than just a chandelier but rather a new concept, where we include our inspiration with creative process, allowing the light fitting to be perfectly integrated with interior design. The result of our work is Classic, constructed from slim metal rods that forms a lighting sculpture. CLASSIC is available in round and ellipse versions. This marvelous chandelier is the best choice for hotel lobbies, restaurants, halls and boutiques.

© CE (IP20) (220-240VAC) (DIM 1-10V)

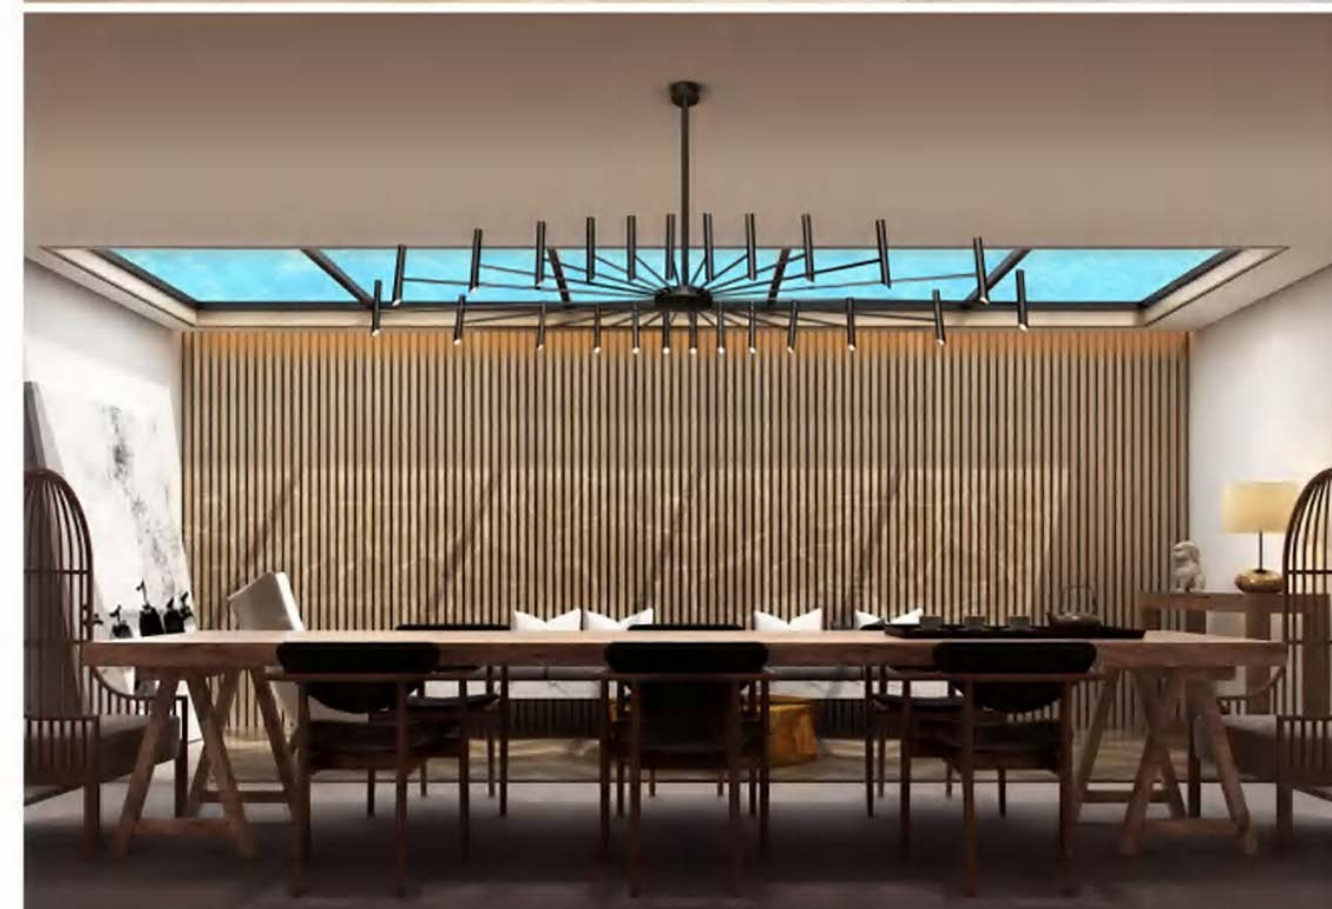



ROUND



ELLIPSE

601

CLASSIC ROUND

LED POWER: 24*2.2W=52.8W
 CRI: 90
 SYSTEM POWER: 53.8W=11.4W
 OUTPUT: 24*188lm=3000K
 INPUT: 220-240VAC/50/60Hz
 DIMENSION: Ø2000*1033mm
 HOLE SIZE: -



RECOMMEND




DALI 1-10V
3/10V/10V

OTHER VERSIONS:



DALI
3/10V/10V

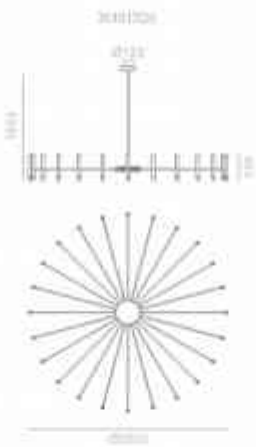

602

CLASSIC ELLIPSE

LED POWER: 24*2.2W=52.8W
 CRI: 90
 SYSTEM POWER: 53.8W=11.4W
 OUTPUT: 24*188lm=3000K
 INPUT: 220-240VAC/50/60Hz
 DIMENSION: 2500*1033mm
 HOLE SIZE: -



RECOMMEND




DALI 1-10V
3/10V/10V

OTHER VERSIONS:




DALI
3/10V/10V

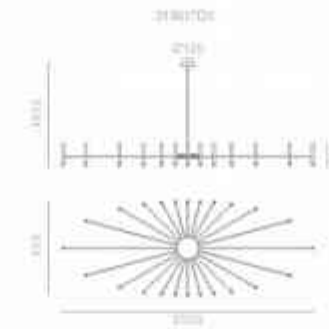


COLOR FINISHINGS:




ANGLE 26°



2.2W 26°3000K

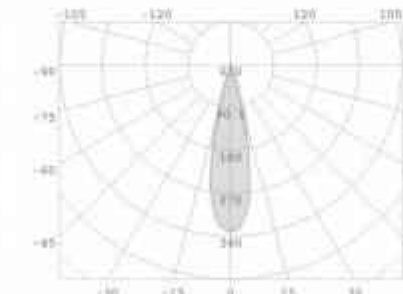

2.2W 26°3000K

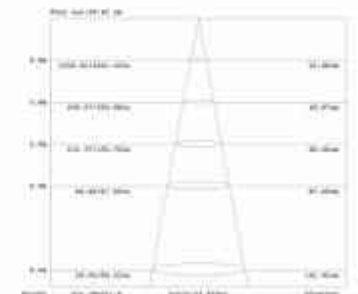



CLASSIC ROAD 12




CLASSIC ROAD 18

CLASSIC ROAD 12

LED POWER: 32.8W+10.3W
 CR: 90
 SYSTEM POWER: 53.75W+11.43W
 OUTPUT: 3984lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 DIMENSION: 1200*1180mm/1200*1162mm
 HOLE SIZE: 1



RECOMMEND OTHER VERSIONS:




CLASSIC ROAD 18


LED POWER: 62.8W+10.3W
 CR: 90
 SYSTEM POWER: 53.75W+11.43W
 OUTPUT: 3984lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 DIMENSION: 1800*1180mm/1800*1162mm
 HOLE SIZE: 1




RECOMMEND OTHER VERSIONS:

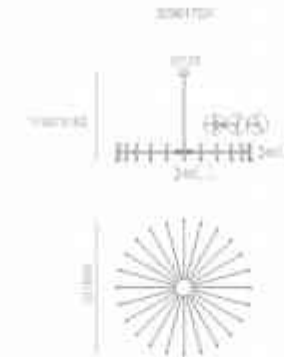


ANGLE 26°



2.2W 26°3000K

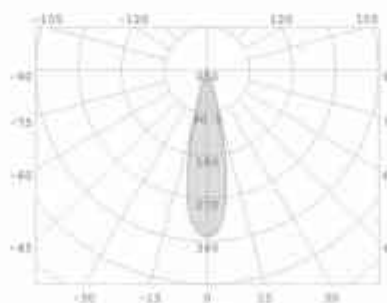


2.2W 26°3000K




ANGLE 26°




2.2W 26°3000K

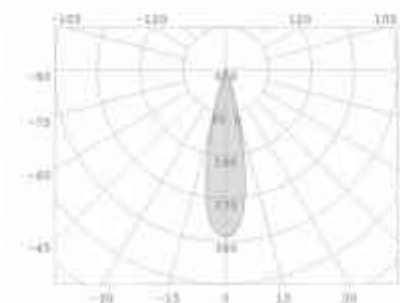


2.2W 26°3000K

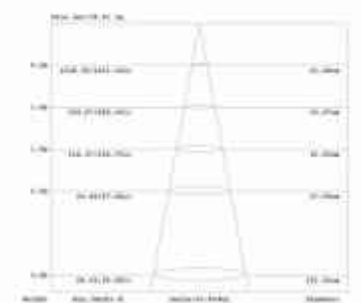

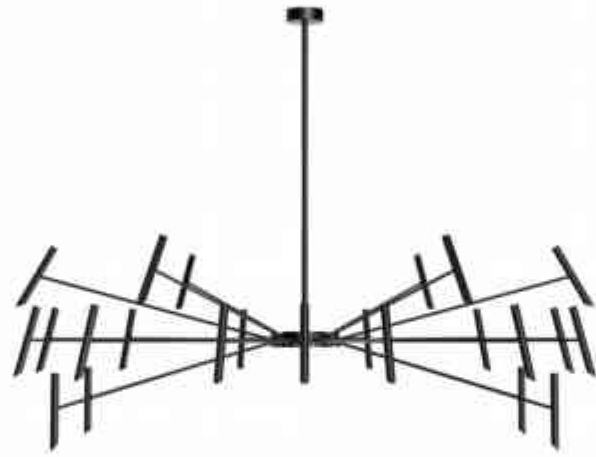


CLASSIC OVAL AD 17

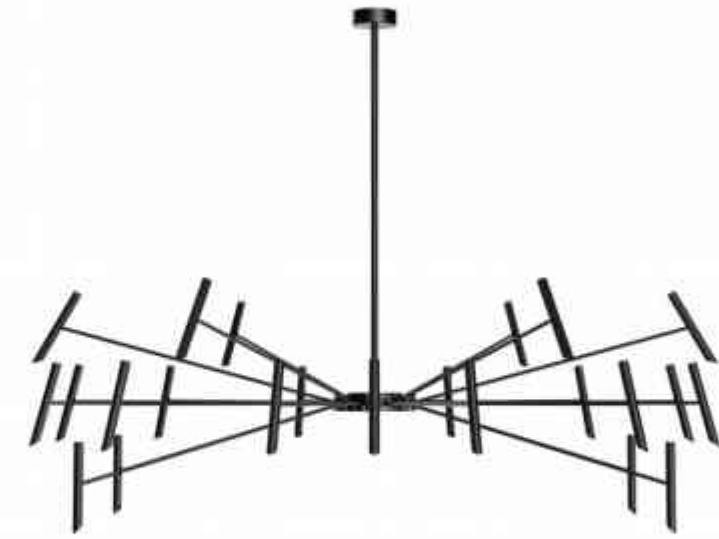

CLASSIC OVAL AD 25

CLASSIC OVAL AD 17

LED POWER: 32.8W+10.5W
 CR: 90
 SYSTEM POWER: 53.75W+11.43W
 OUTPUT: 3084lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 DIMENSION: 1700x102x1100mm/1100x607x162mm
 HOLE SIZE: 1

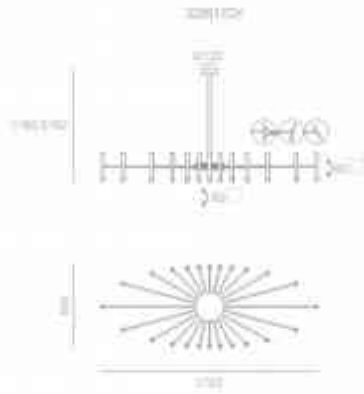


RECOMMEND OTHER VERSIONS:



CLASSIC OVAL AD 25

LED POWER: 62.8W+10.5W
 CR: 90
 SYSTEM POWER: 53.75W+11.43W
 OUTPUT: 3084lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 DIMENSION: 2500x102x1100mm/2500x907x162mm
 HOLE SIZE: 1

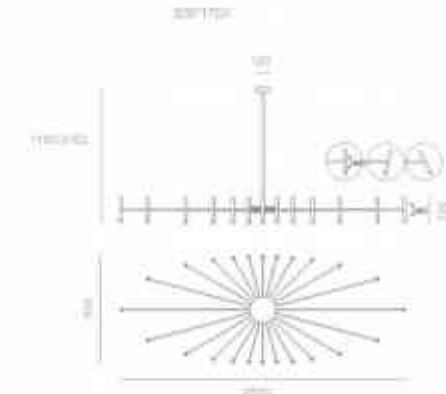


RECOMMEND OTHER VERSIONS:




ANGLE 26°




2.2W 26° 3000K

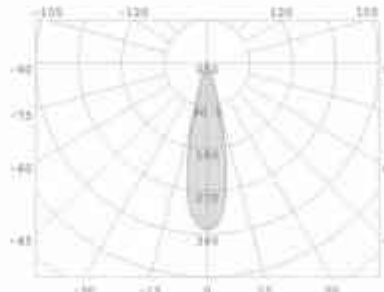


2.2W 26° 3000K




ANGLE 26°



2.2W 26° 3000K

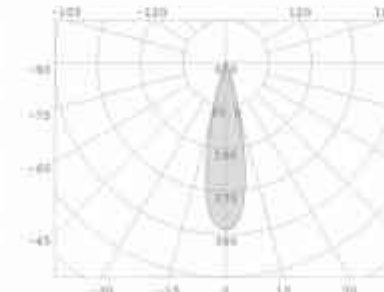


2.2W 26° 3000K

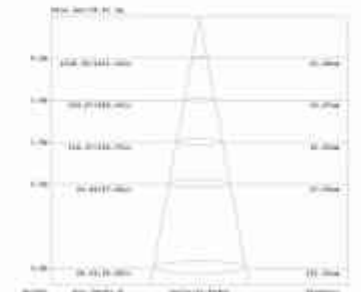



607

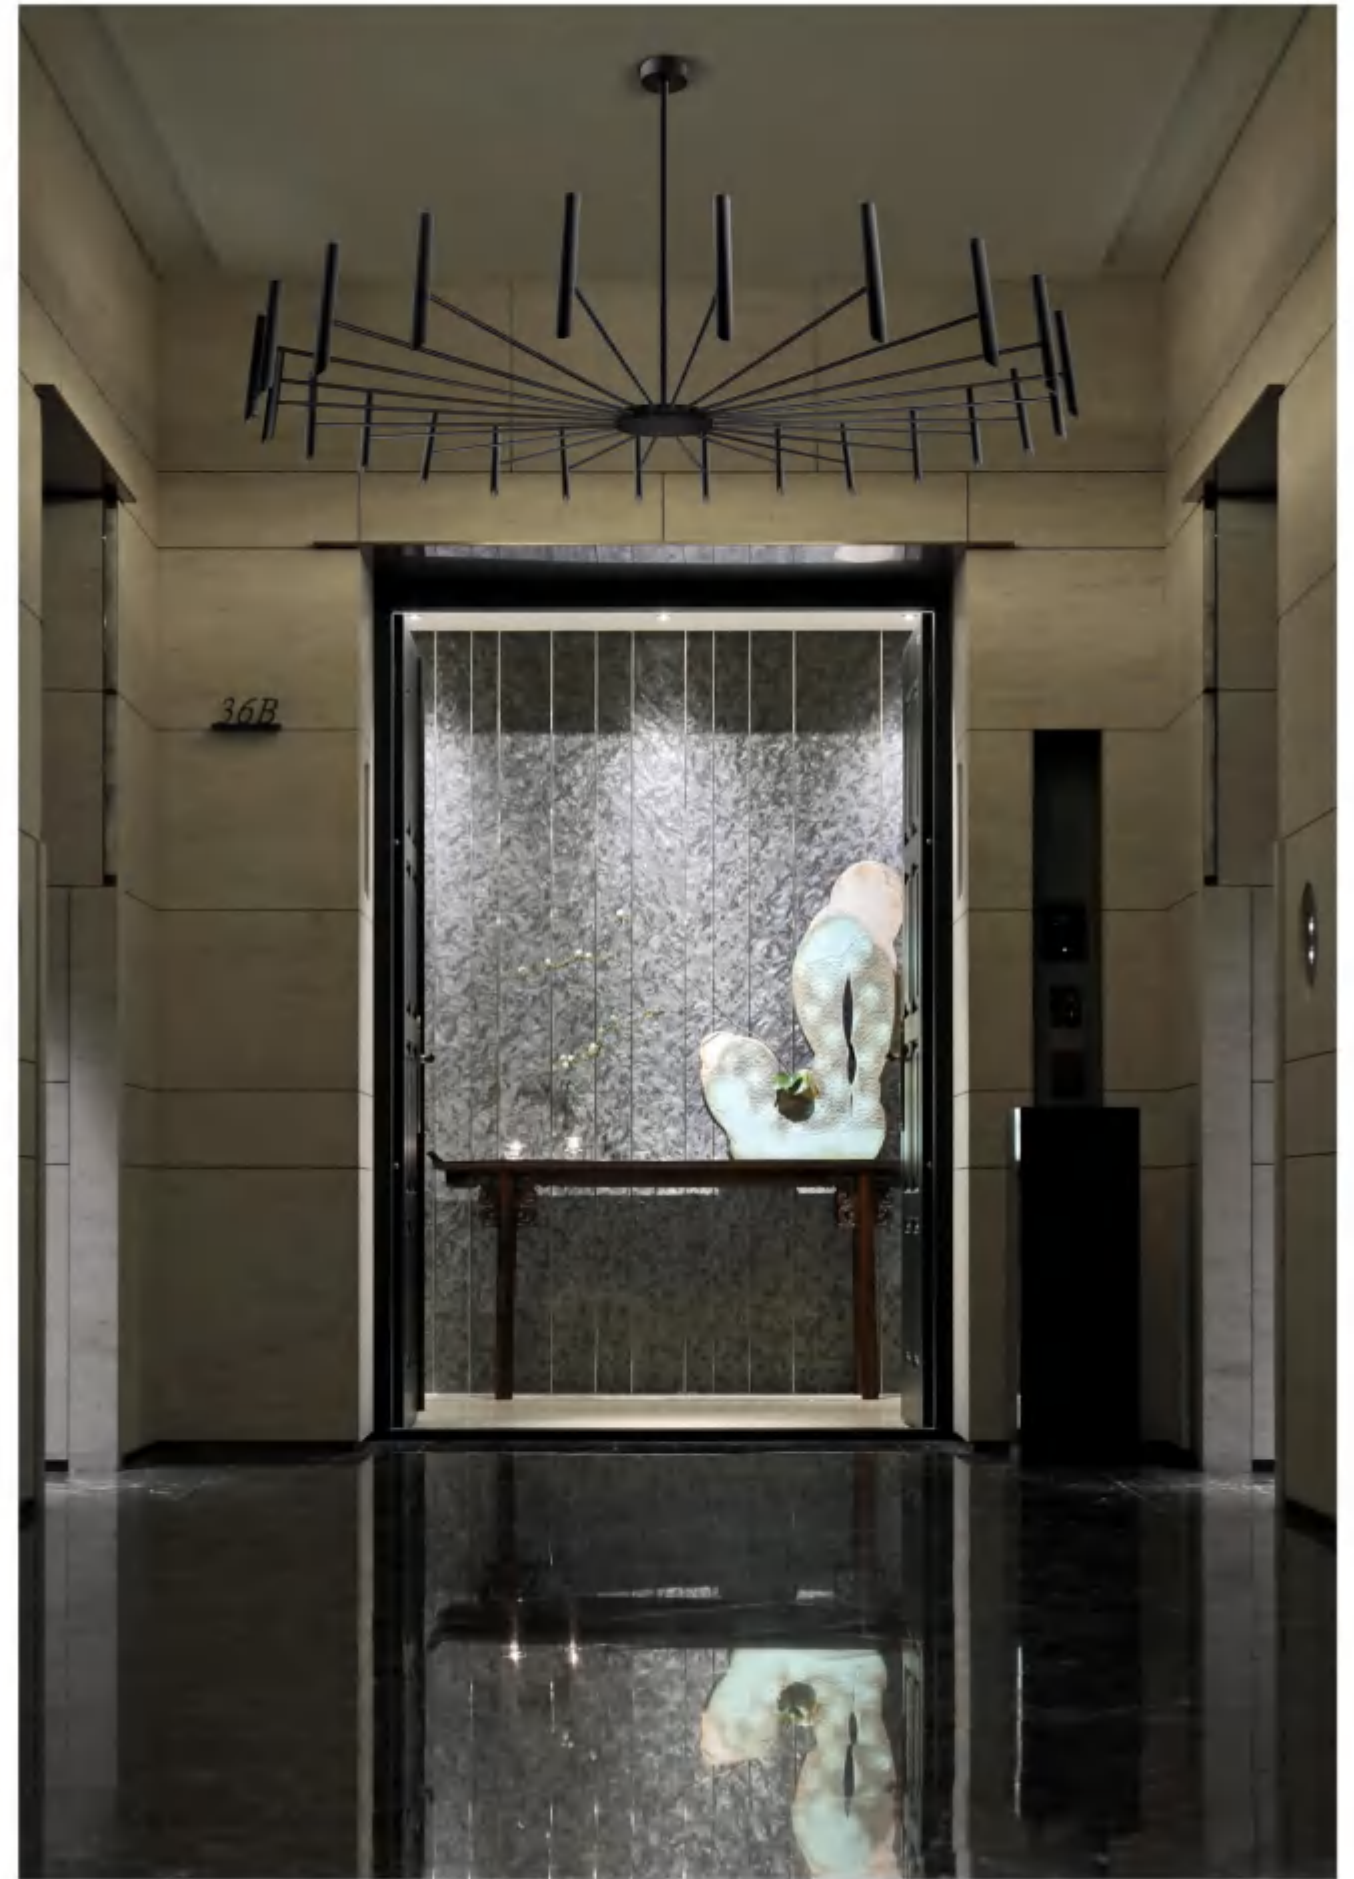

PENDANT LAMP

608



CLIP

CLIP, light up the passenation of work , it is a type of professional office lighting which can be supported dimming color by APP.
It is applied with soft lighting performance, the light out area can be adjusted via housing side parts. It has a splendid application no matter in office , even in design office or lyceum so on areas.

© CE IP20 100-240V

CLIP

PENDANT LAMP



1360



610

CLIP 1360 ⚡
LED POWER 24.6W
SYSTEM POWER 41.8W
OUTPUT 423lm/100K-6000K
INPUT 200-240VAC/50-60Hz
DIM. 80
DIMENSION
HOLE SIZE



RECOMMEND



ANGLE L



COLOR FINISHINGS:



8x8



611



PENDANT LAMP


612



COBIN

COBIN, the new design of FLUA inspiration chandelier family, with mini exquisite appearance made by the transparent light guide creating a very soft lighting effect. It can be installed in various ways and widely used in furniture and commercial spaces including bedrooms, restaurants, hotel receptions, bar counters and etc. What's more, it's also adapted to FLUA typical track system. The lamp body can be flexibly rotated which makes the crystal-clear lighting effect fully displayed.

© CE IP20 100-240V 2700K-6000K

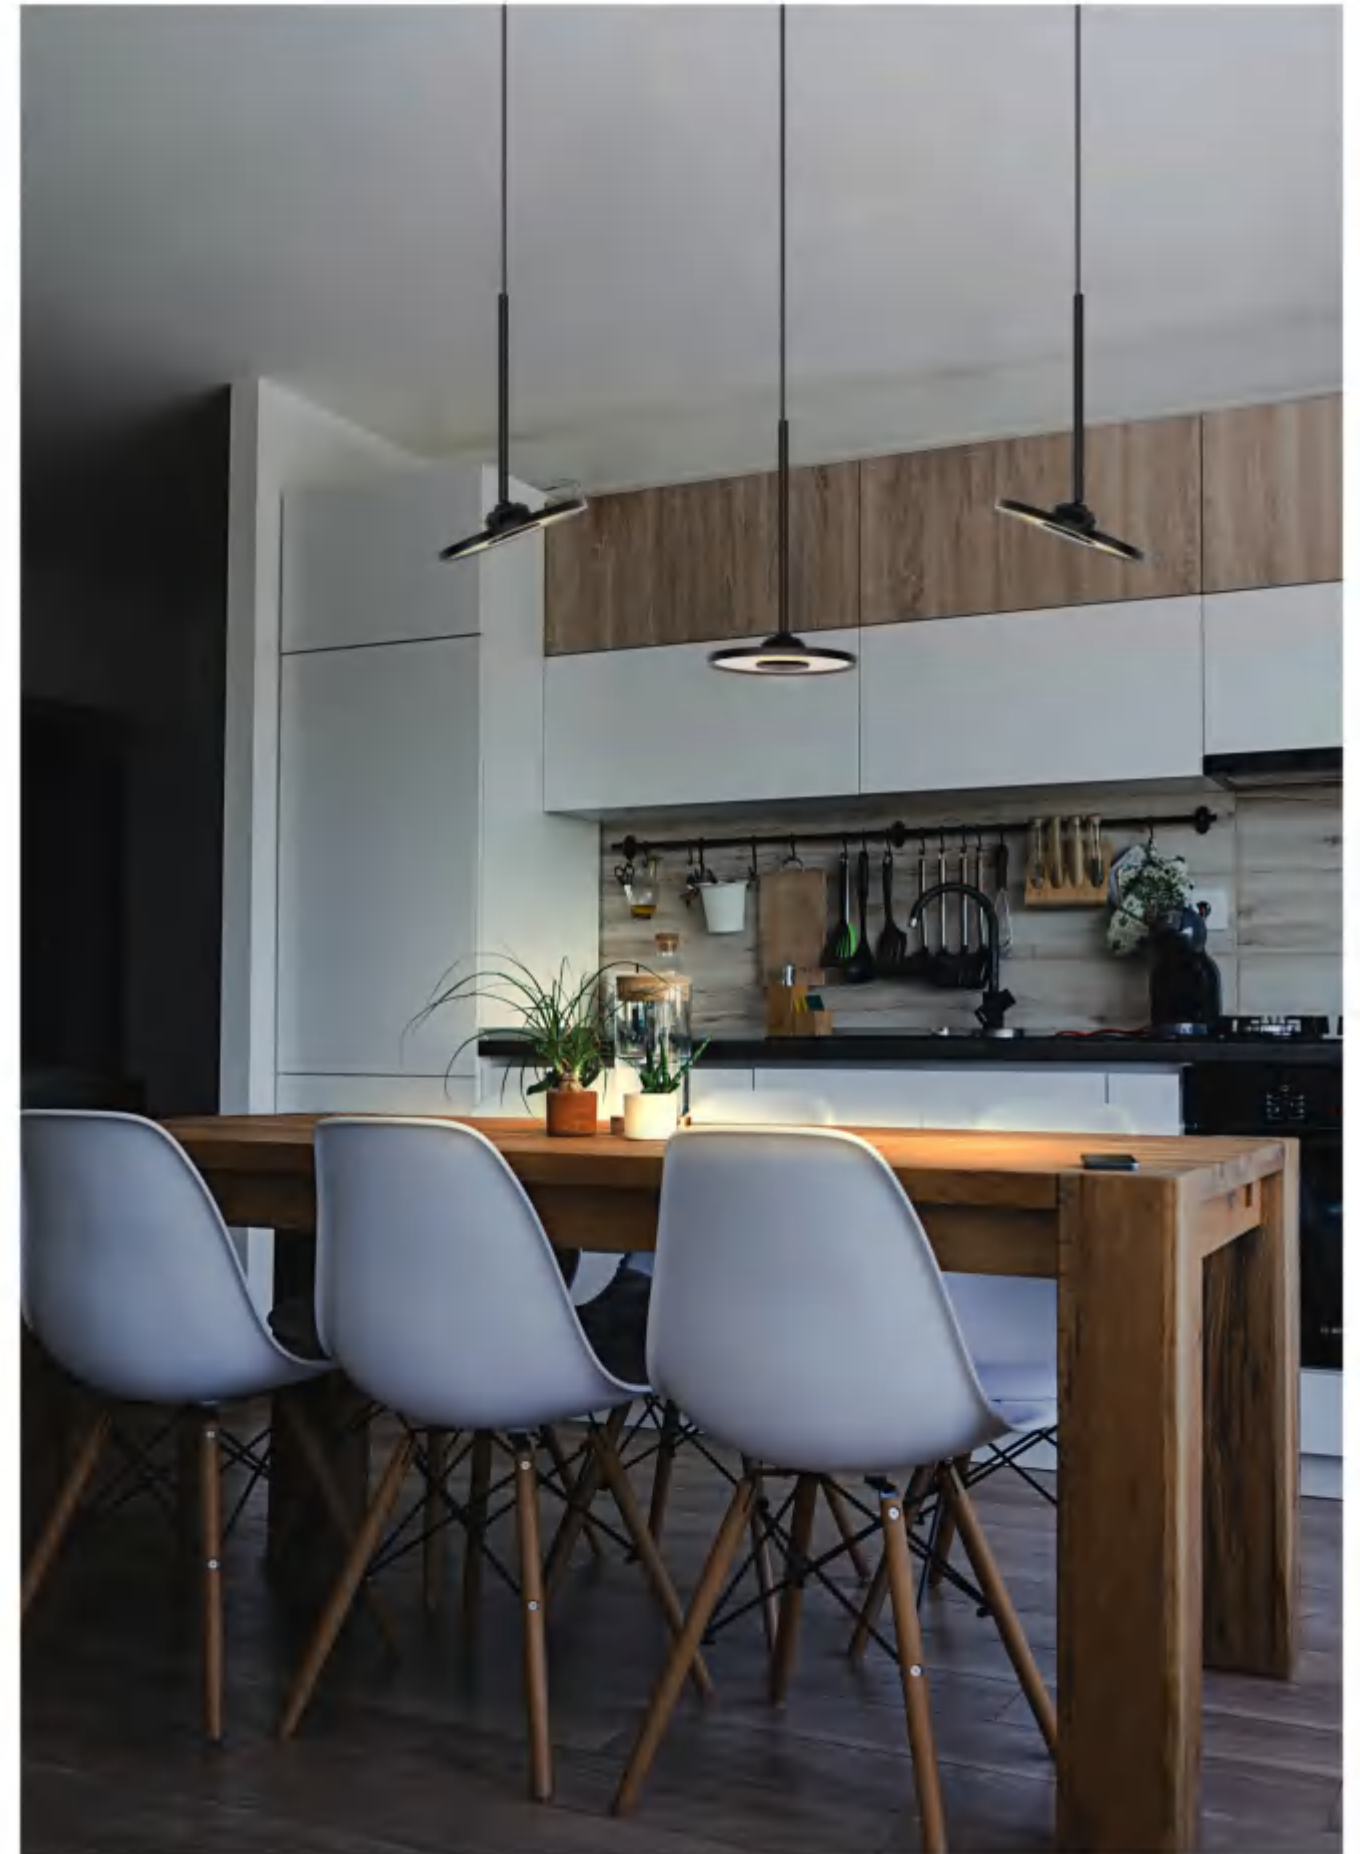



COBIN P 18 

LED POWER: 5.5W
 SYSTEM POWER: 7.4W
 OUTPUT: 100lm/2700K-6000K
 INPUT: 100-240VAC
 CRI: 80
 DIMENSION:  140*325mm
 HOLE SIZE: 



COBIN P 25 

LED POWER: 5.5W
 SYSTEM POWER: 7.4W
 OUTPUT: 100lm/2700K-6000K
 INPUT: 100-240VAC
 CRI: 80
 DIMENSION:  140*325mm
 HOLE SIZE: 



COBIN P 18 TRIMLESS 

LED POWER: 5.5W
 SYSTEM POWER: 7.4W
 OUTPUT: 100lm/2700K-6000K
 INPUT: 100-240VAC
 CRI: 80
 DIMENSION:  140*325mm
 HOLE SIZE: 



COBIN P 25 TRIMLESS 

LED POWER: 5.5W
 SYSTEM POWER: 7.4W
 OUTPUT: 100lm/2700K-6000K
 INPUT: 100-240VAC
 CRI: 80
 DIMENSION:  140*325mm
 HOLE SIZE: 



RECOMMEND



DMV COLOR APP

ANGLE L



RECOMMEND



DMV COLOR APP

ANGLE L



RECOMMEND



DMV COLOR APP

ANGLE L



RECOMMEND



DMV COLOR APP

ANGLE L







COMET

This marvelous spot is presented with various selections: with or without frame, direct or adjustable, ceiling recessed, surfaced mounted or pendant versions. Deeply installed LED source provides perfect anti-glare effect. Thanks to narrow beam angle, just 15°, COMET creates special intimate atmosphere to any environment, playing with light and shade.

© CE IP20 220-240VAC DIM TRIAC

COMET

PENDANT LAMP



P

COMET P


LED POWER: UP 9.8W DOWN 8.4W
CRI: 90
SYSTEM POWER: 21.2W
OUTPUT: 353lm+480lm/3000K
INPUT: 220-240VAC, 50-60Hz
DIMENSION: Ø600*40.5mm
HOLE SIZE: 1




ANGLE 15°



8.4W 15° 3000K

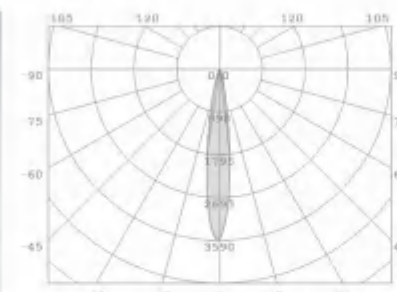

8.4W 15° 3000K



RECOMMEND



ON/OFF
3000-4A

OTHER VERSIONS:



DIM TRIAC
3000-4C13

COLOR FINISHINGS:



PAB




PAW



CORONA

Unique chandelier with 3 or 5 globes for choice have become the best selection for dining rooms, restaurants, coffee shops.

© CE IP20

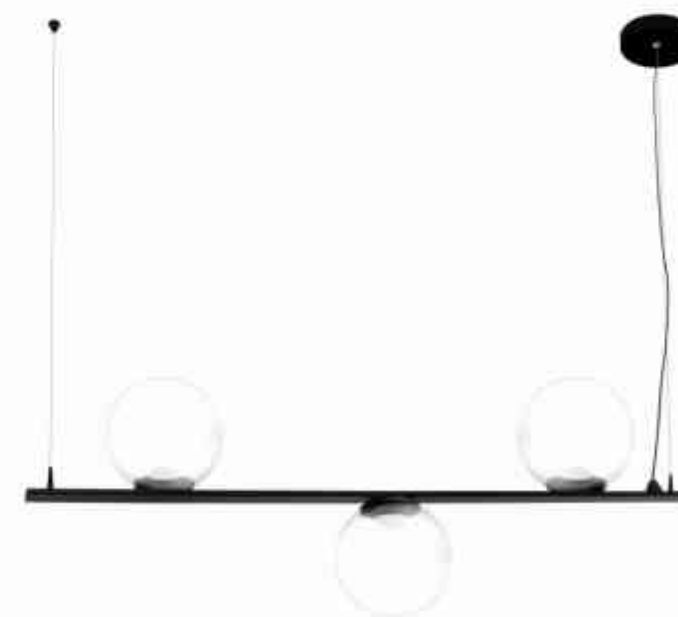

P3

CORONA P3 
 SYSTEM POWER 15 W
 OUTPUT 3 W x 3000K
 INPUT 100-240VAC 50/60Hz
 CRI 90
 DIMENSION 300x150x120mm
 HOLE SIZE 7



RECOMMEND



ON/OFF


2110000

OTHER VERSIONS:




DIM TRAC

2110000



COLOR FINISHINGS:

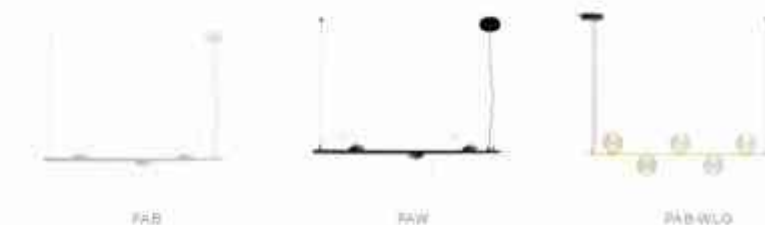



623

P5


CORONA P5 
 SYSTEM POWER: 25W
 OUTPUT: 1200lm/3000K
 INPUT: 100-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 1380x100x312mm
 HOLE SIZE: -



RECOMMEND



OTHER VERSIONS:

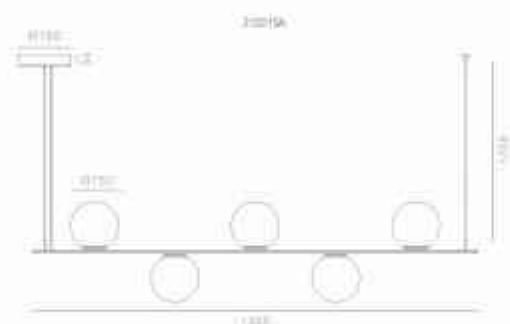

PENDANT LAMP

624

625



DARDY is much more than just a lamp,
but rather innovative design
concept in lighting, integration of lighting fitting into the interior design.
DARDY is a pendant light collection constructed from
slim wires and combination of lighting fittings with different shapes.
DARDY is available with 3 different sizes as long as lamps are available in 3 shapes.
The artistic combination of different configurations can bring absolutely
new decorative effect to any room. Recommended for both residential
and hospitality projects applications.

CE IP20 100-240VAC

626



W1


COLOR FINISHINGS:




FWB




FWW

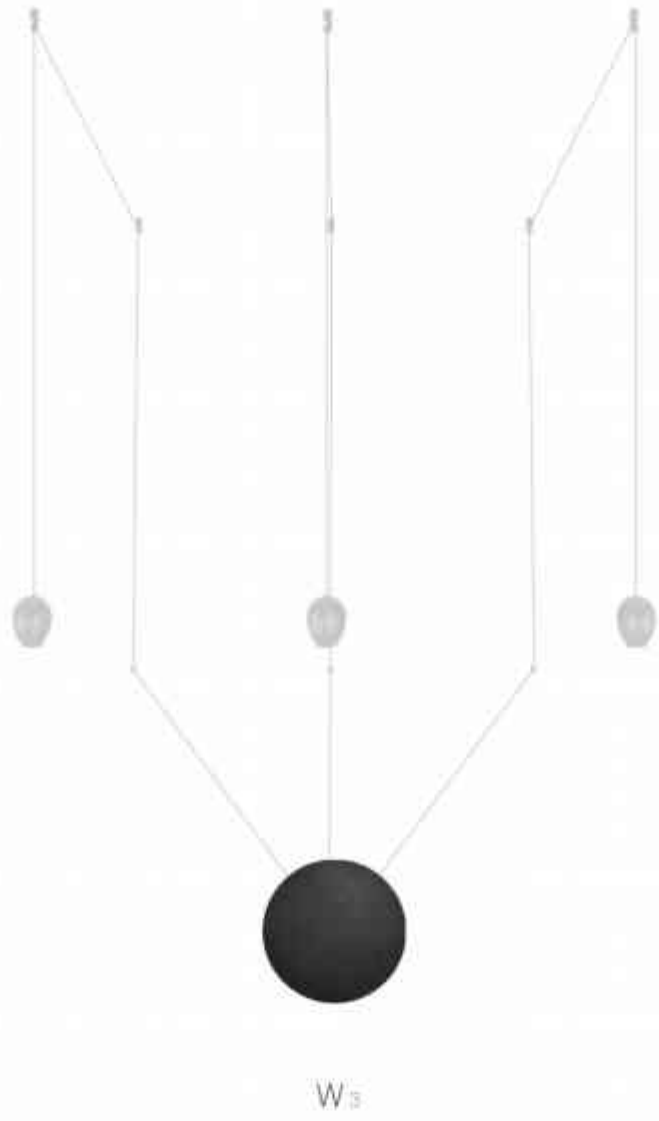

627

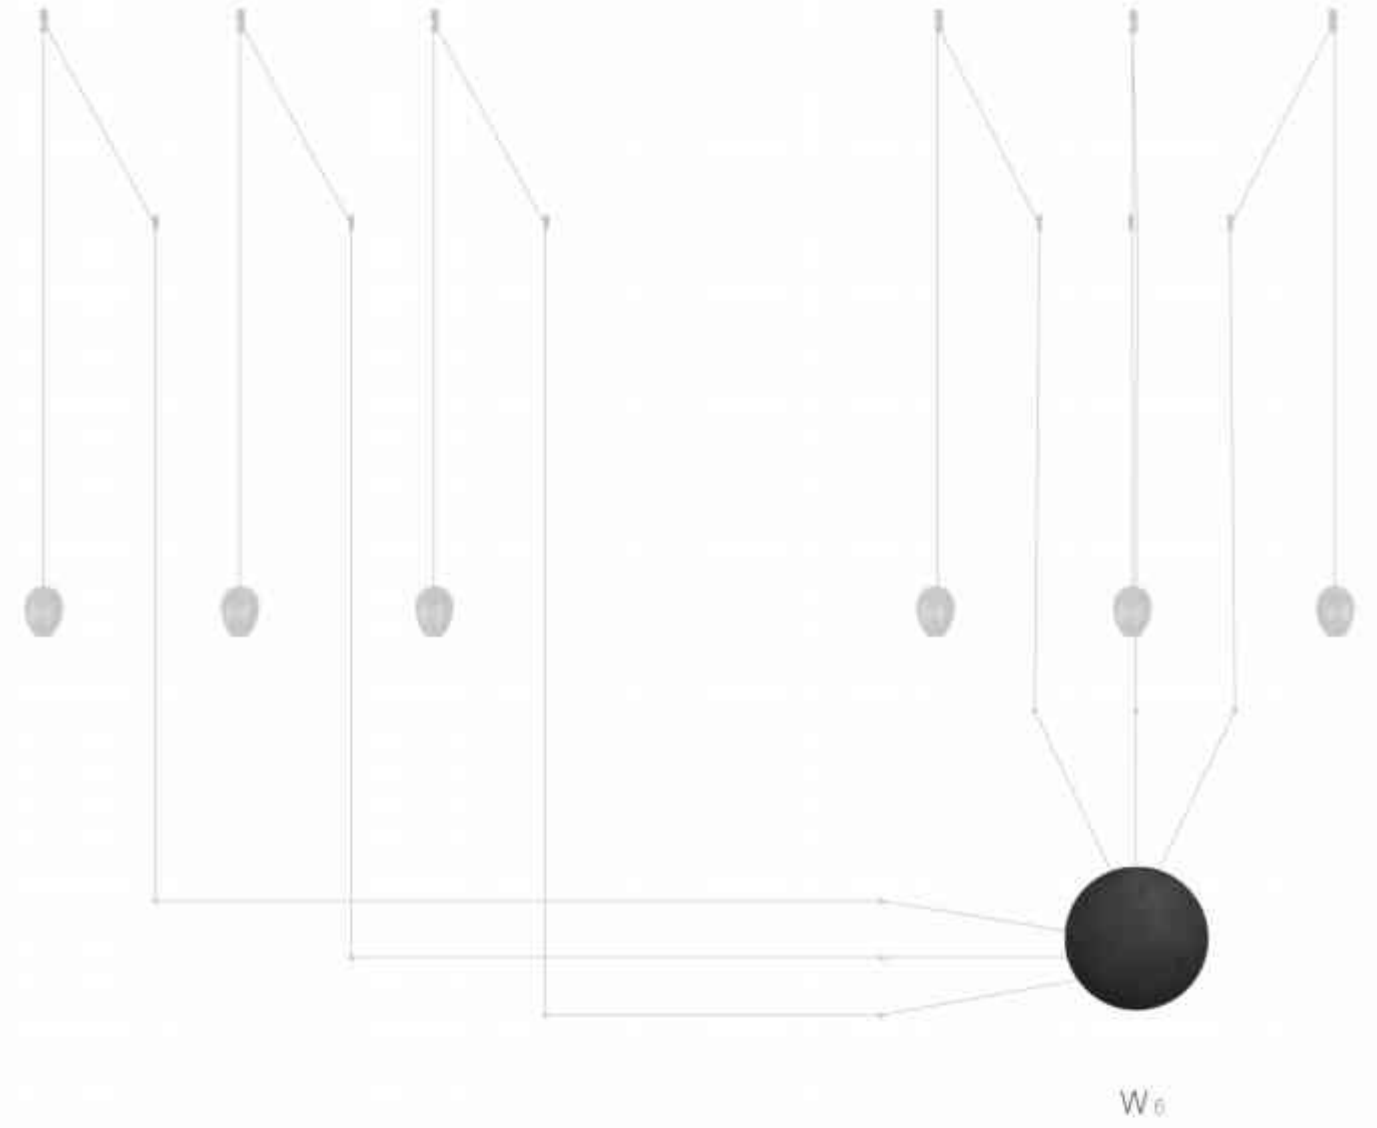

628

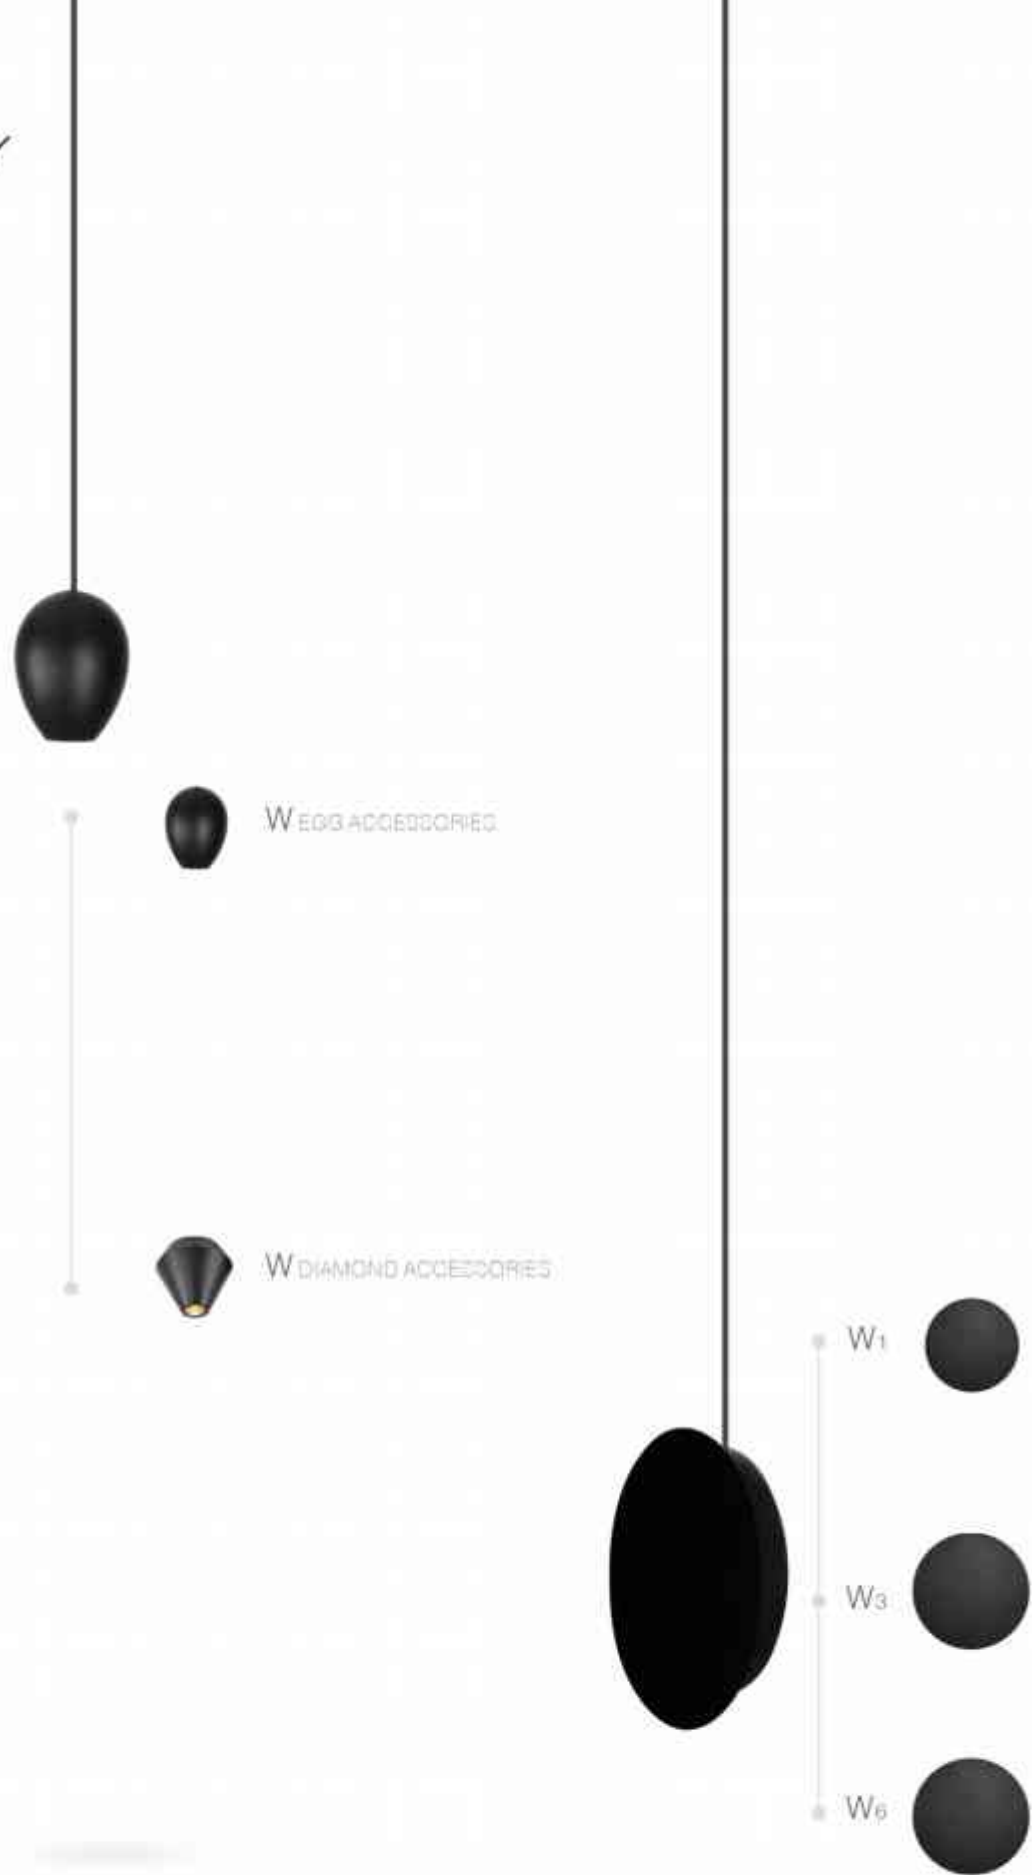

FREE COMBINATION





DARDY DIAMOND / EGG

LED POWER: 2.2W
 SYSTEM POWER: 2.2W
 OUTPUT: 150lm/3000K
 INPUT: 100VAC
 CRI: 90
 DIMENSION: Ø73x68mm/Ø60x78mm
 HOLE SIZE: 1



COLOR FINISHINGS:



DARDY W1
 INPUT: 100-240VAC
 DIMENSION: Ø130x25mm
 HOLE SIZE: 1

001703



DARDY W3
 INPUT: 100-240VAC
 DIMENSION: Ø204x38.8mm
 HOLE SIZE: 1

001710



DARDY W8
 INPUT: 100-240VAC
 DIMENSION: Ø204x38.8mm
 HOLE SIZE: 1

001711





ELISA

Elegance and functionality are key words to describe ELISA pendant collection. ELISA has timeless design and can easily match both classic and modern style of the environment.

This splendid series are a great choice for dining and coffee table lighting. 3-product sizes are available for choice.

© CE IP20 DIM COLOR DIM COLOR APP

ELISA

PENDANT LAMP



0 DIM COLLECTION RP-21-4
 1 DIM COLLECTION AP-1

834



635



PENDANT LAMP

636



ELISA 300 DO 1:1

SYSTEM POWER: 17.9W
 OUTPUT: 1015LM/2700-5700K
 INPUT: 100-240VAC/50/60HZ
 CRI: 90
 DIMENSION: Ø200*150mm
 HOLE SIZE: -



RECOMMEND



DMV COLOR APP
 300 LAMP



ELISA 400 DO 1:1

SYSTEM POWER: 39W
 OUTPUT: 1737LM/2700-5700K
 INPUT: 100-240VAC/50/60HZ
 CRI: 90
 DIMENSION: Ø400*300mm
 HOLE SIZE: -



RECOMMEND



DMV COLOR APP
 400 LAMP



ELISA 600 DO 1:1

SYSTEM POWER: 69W
 OUTPUT: 2560LM/2700-5700K
 INPUT: 100-240VAC/50/60HZ
 CRI: 90
 DIMENSION: Ø600*300mm
 HOLE SIZE: -



RECOMMEND



DMV COLOR APP
 600 LAMP



COLOR FINISHINGS:



FAIRY

FAIRY G is a transparent glass globe fixed on long cord, its simple and pure design will bring light aerial decorative effect to any room. Available in 2 different diameters and different colors.

© CE IP20 TOUCH DIM




FAIRY

PENDANT LAMP



G4

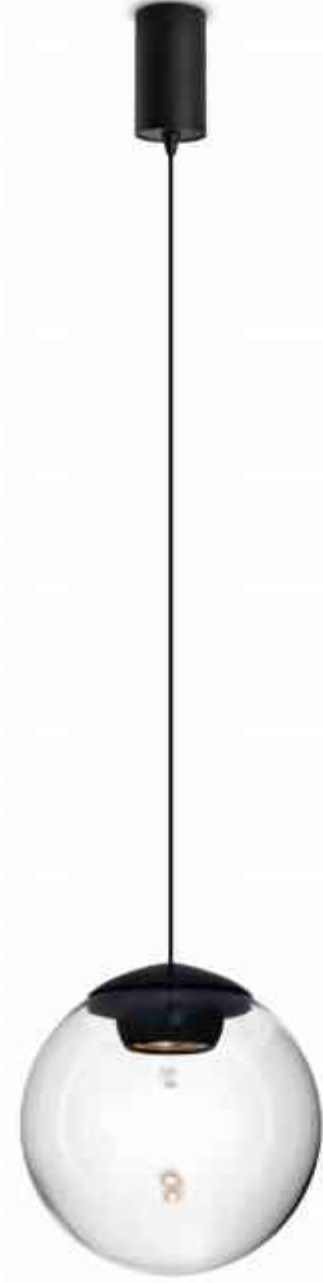

G7



G11

COLOR FINISHINGS:



FAIRY G4

LED POWER: 3.8W
 SYSTEM POWER: 4.1W
 OUTPUT: 170lm/3000K
 INPUT: 100-240VAC,50/60HZ
 CRI: 90
 DIMENSION: Ø150mm
 HOLE SIZE: /



RECOMMEND



ON/OFF
 3239195A

FAIRY G7

LED POWER: 5.3W
 SYSTEM POWER: 6.5W
 OUTPUT: 409lm/3000K
 INPUT: 100-240VAC,50/60HZ
 CRI: 90
 DIMENSION: Ø200mm
 HOLE SIZE: /



RECOMMEND



ON/OFF
 3266195A

FAIRY G11

LED POWER: 9.5W
 SYSTEM POWER: 10.9W
 OUTPUT: 738lm/3000K
 INPUT: 100-240VAC,50/60HZ
 CRI: 90
 DIMENSION: Ø300mm
 HOLE SIZE: /



RECOMMEND




ON/OFF
 3240195A


ANGLE 36°



3.8W 36° 3000K




3.8W 36° 3000K




ANGLE 20°



9.5W 20° 3000K




9.5W 20° 3000K




ANGLE 24°



9.5W 24° 3000K



9.5W 24° 3000K



OPTICS:



24






FILOLUCE

Thanks to the very unique silicon material, FILOLUCE is a linear light that is very flexible and designable for designers to create various shapes for different spaces. The diverse accessories allow users to personalize their very own FILOLUCE shape to be the wall decor or ceiling suspended art piece.

Through the APP control, it's available with tunable white or RGB function for options. Ideal for residential, hotel, bars and other various interior spaces with artistic temperament.

© CE IP20 100-240VAC

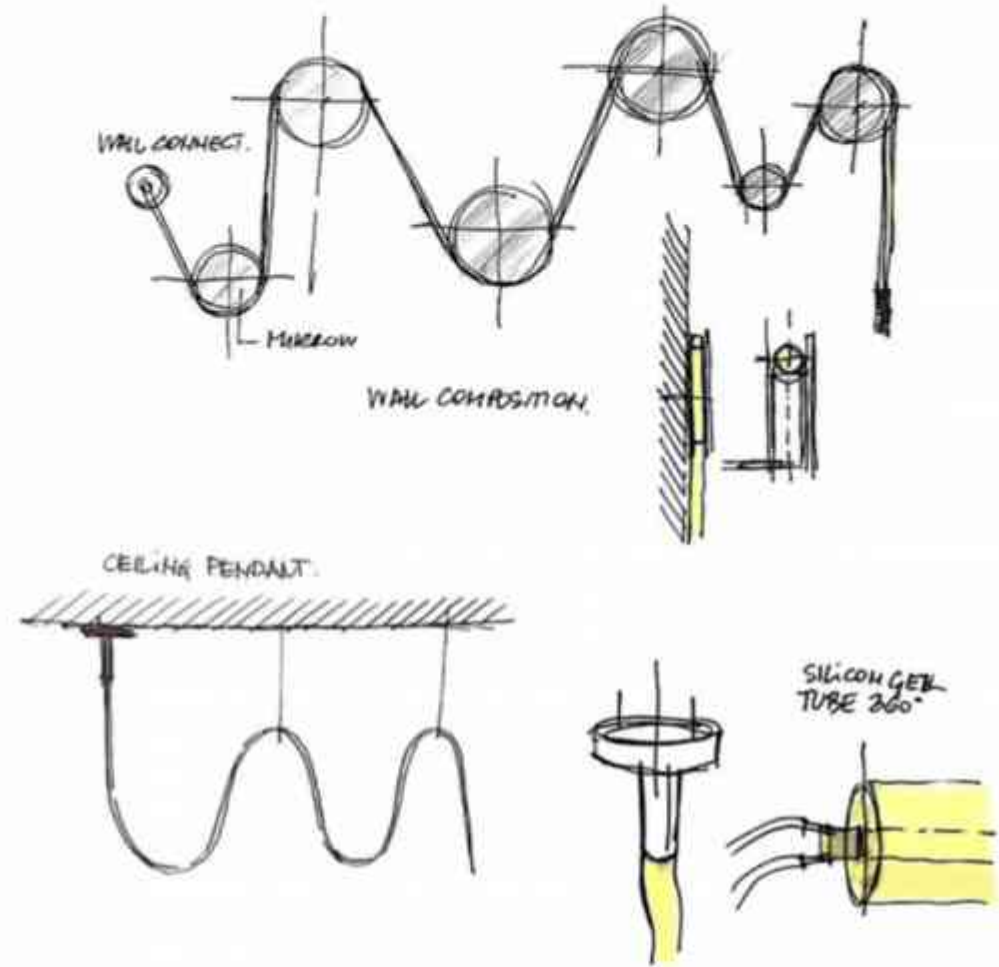

Designed by:

Antonio Pagani *Maria Piantola*


COLOR FINISHINGS:




WALL LAMP
PENDANT LAMP




W1/W1 RGB

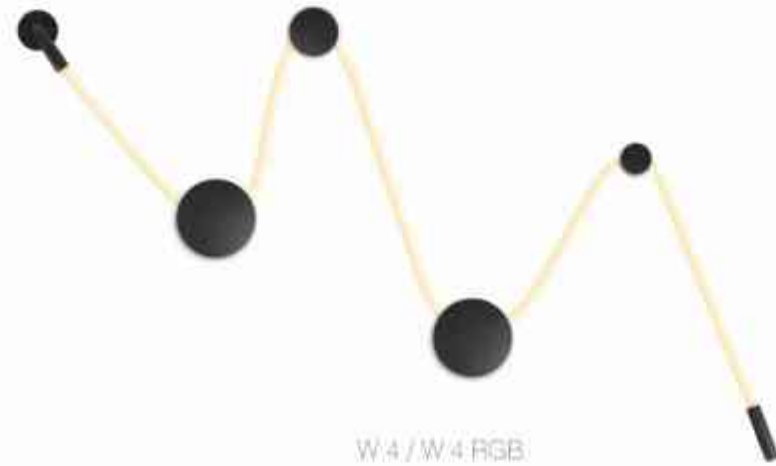

W4/W4 RGB

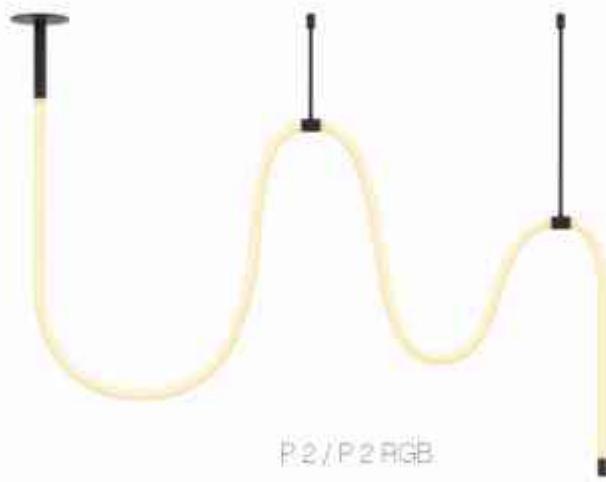

P2/P2 RGB

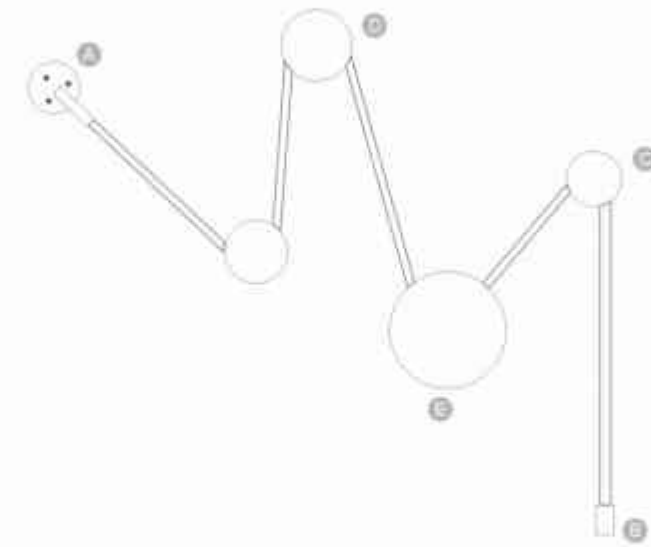

W CONNECTOR



W END



PLATE C



PLATE M



PLATE L



P END



P CONNECTOR



POLE



FILOLUCE

FILOLUCE W1 / W1 RGB

LED POWER: 65W
 SYSTEM POWER: 80W / 90W
 OUTPUT: 2400K-4700K / RGB
 INPUT: 100-240VAC/50/60Hz
 CRI: 90
 DIMENSION: /
 HOLE SIZE: /


RECOMMEND



ANGLE



400mm / 400mm



FILOLUCE W4 / W4 RGB

LED POWER: /
 SYSTEM POWER: 85W / 90W
 OUTPUT: 2400K-4700K / RGB
 INPUT: 100-240VAC/50/60Hz
 CRI: 90
 DIMENSION: /
 HOLE SIZE: /


RECOMMEND



ANGLE



400mm / 400mm

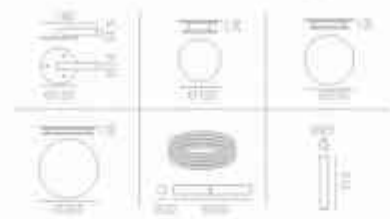

FILOLUCE P2 / P2 RGB

LED POWER: /
 SYSTEM POWER: 85W / 90W
 OUTPUT: 2400K-4700K / RGB
 INPUT: 100-240VAC/50/60Hz
 CRI: 90
 DIMENSION: /
 HOLE SIZE: /

RECOMMEND




ANGLE



320mm / 320mm



FILOLUCE

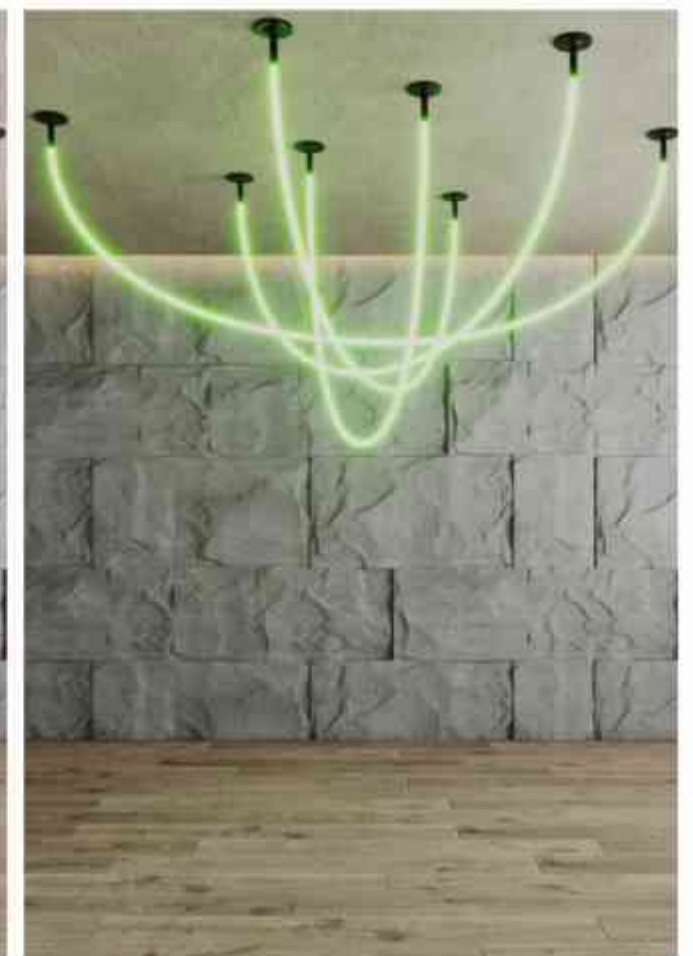

WALL LAMP
 PENDANT LAMP



649



WALL LAMP

PENDANT LAMP

650

FLASH

FLASH is completely new concept idea of pendant lighting.
This elegant and sophisticated fitting is the best example of artistic and creative vision.
Ultra-thin line, suspended vertically or horizontally,
gives the best creative effect to any room, being it residential or public area.

© CE IP20 220-240VAC DIM TRIAC



653

FLASH M P CO. 
 LED POWER 31W
 SYSTEM POWER 34W
 OUTPUT: 1411lm @ 3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 16" x 15" x 52cm
 HOLE SIZE: 1"



RECOMMEND



COLOR FINISHINGS:




PENDANT LAMP

654

FLASH

655

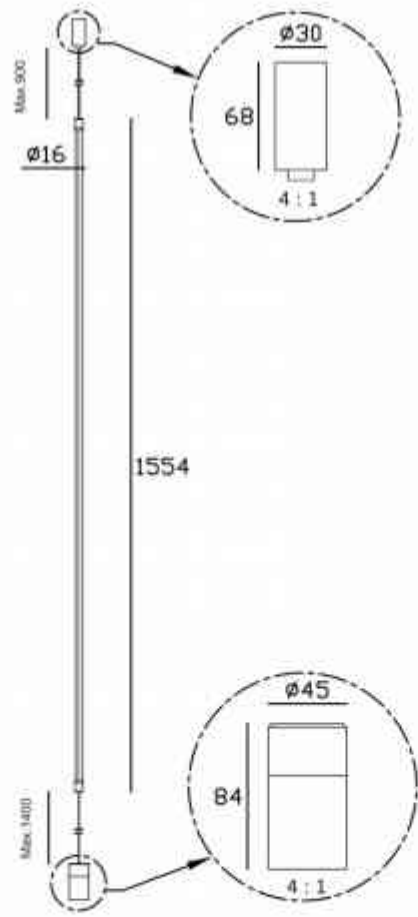

FLASH M V RD

LED POWER 33W
 SYSTEM POWER 33.8W
 OUTPUT: 1476lm 3000K
 INPUT: 220-240VAC 50/60Hz
 CR: 90
 DIMENSION: 16*1554mm




RECOMMEND



FLASH

PENDANT LAMP

656

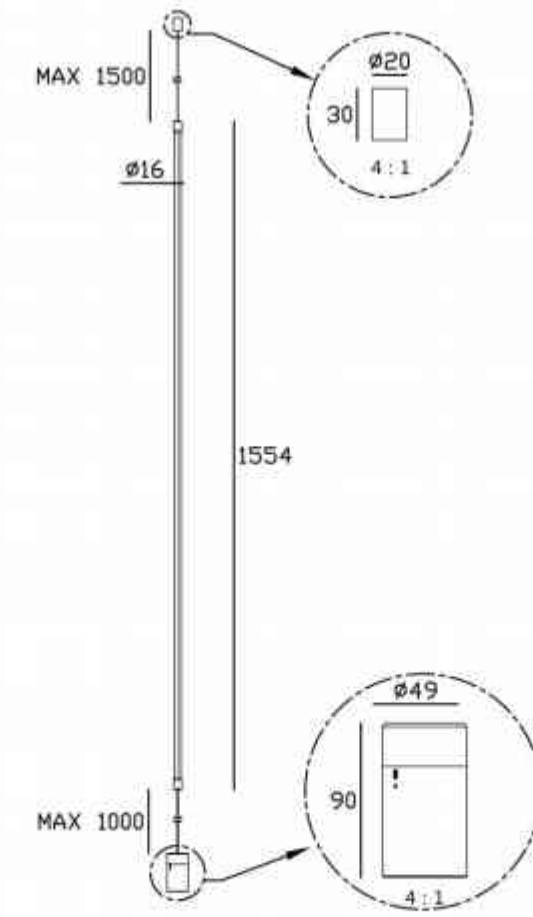

FLASH M V RD SENSOR



LED POWER 33W
 SYSTEM POWER 33.8W
 OUTPUT: 1476lm 3000K
 INPUT: 220-240VAC 50/60Hz
 CR: 90
 DIMENSION: 16*1554mm



RECOMMEND





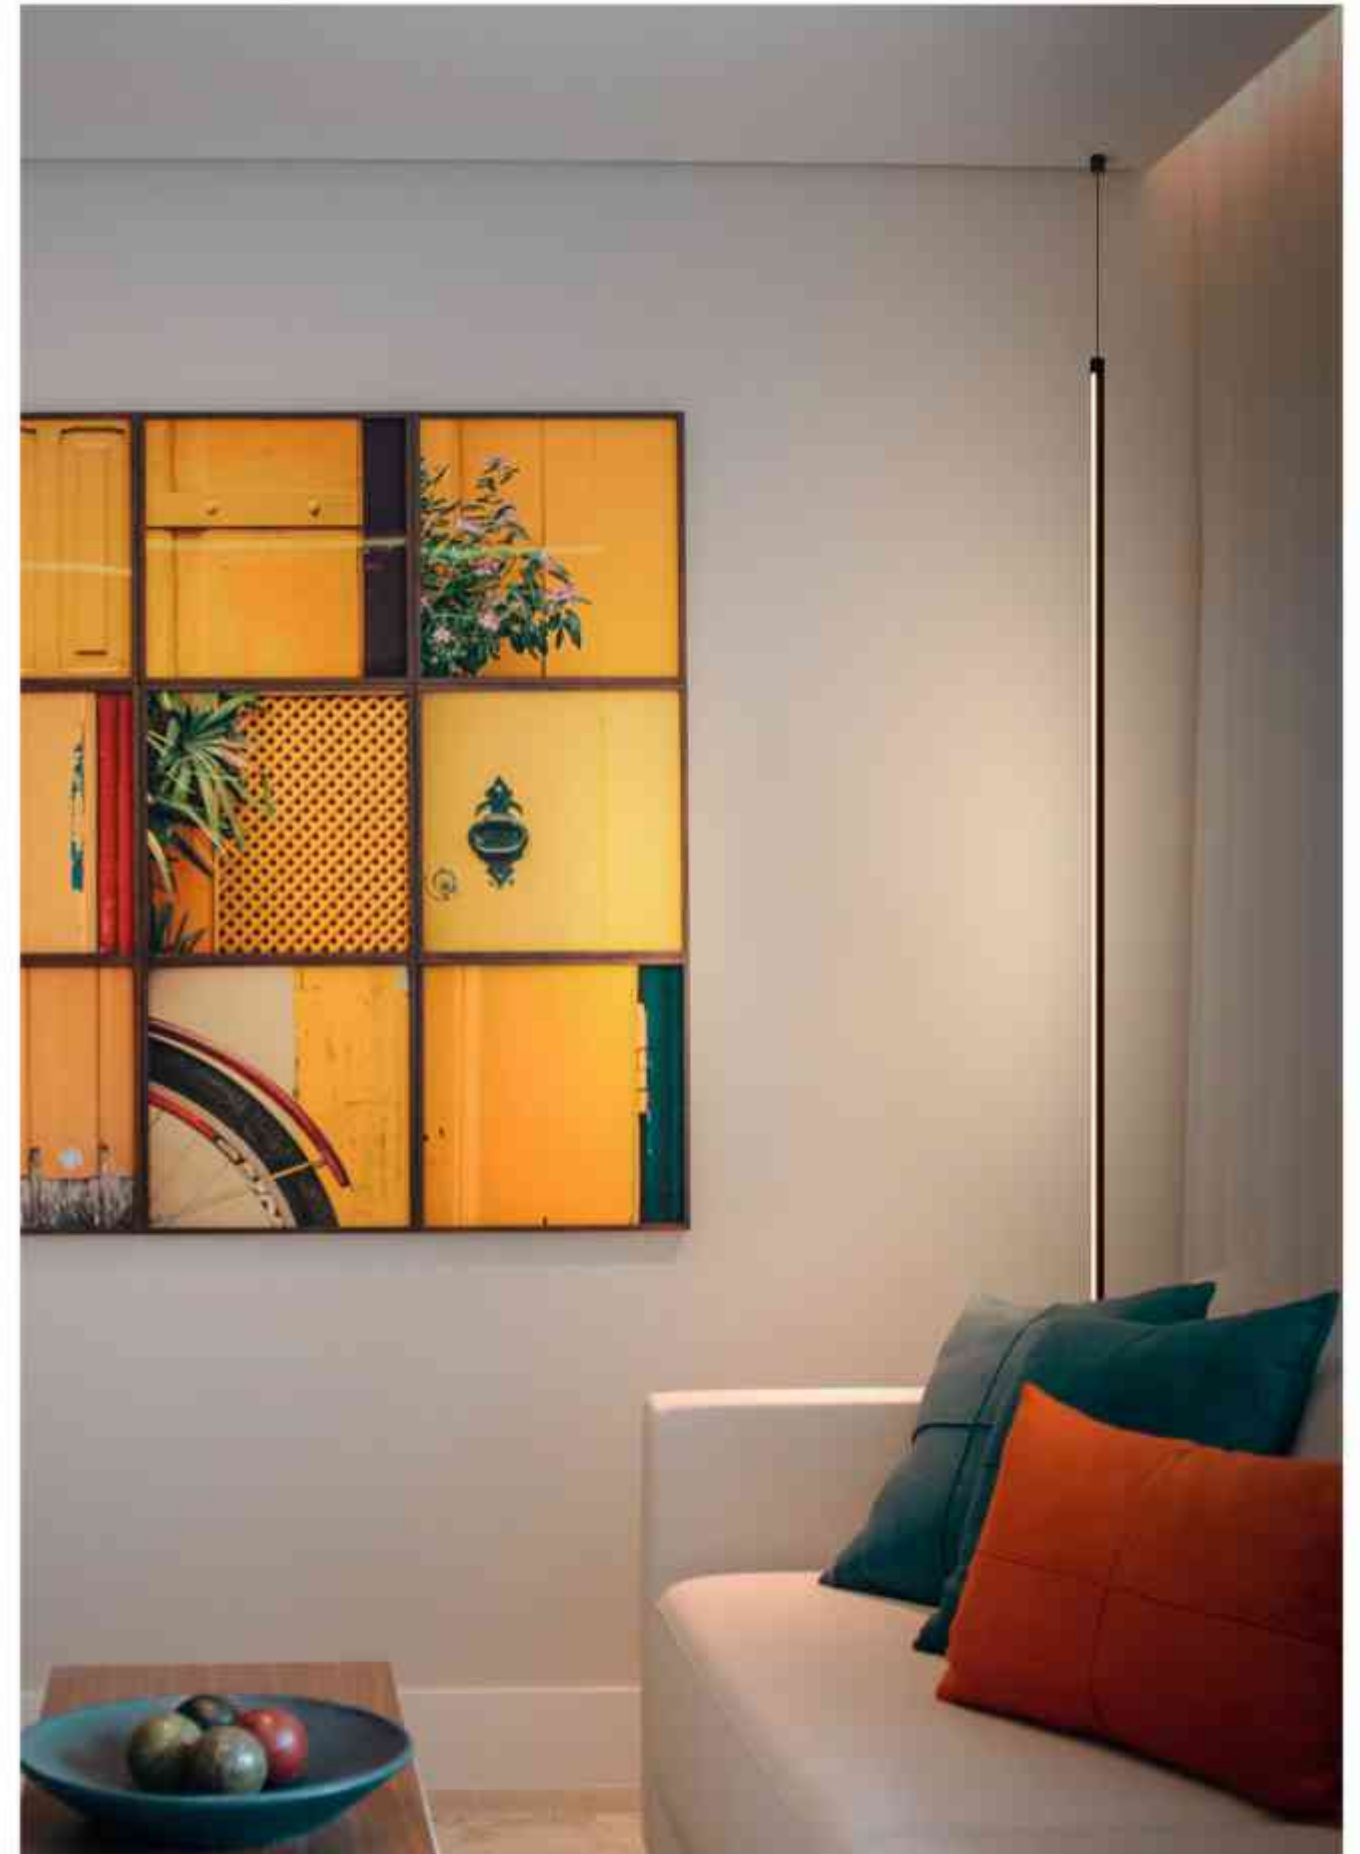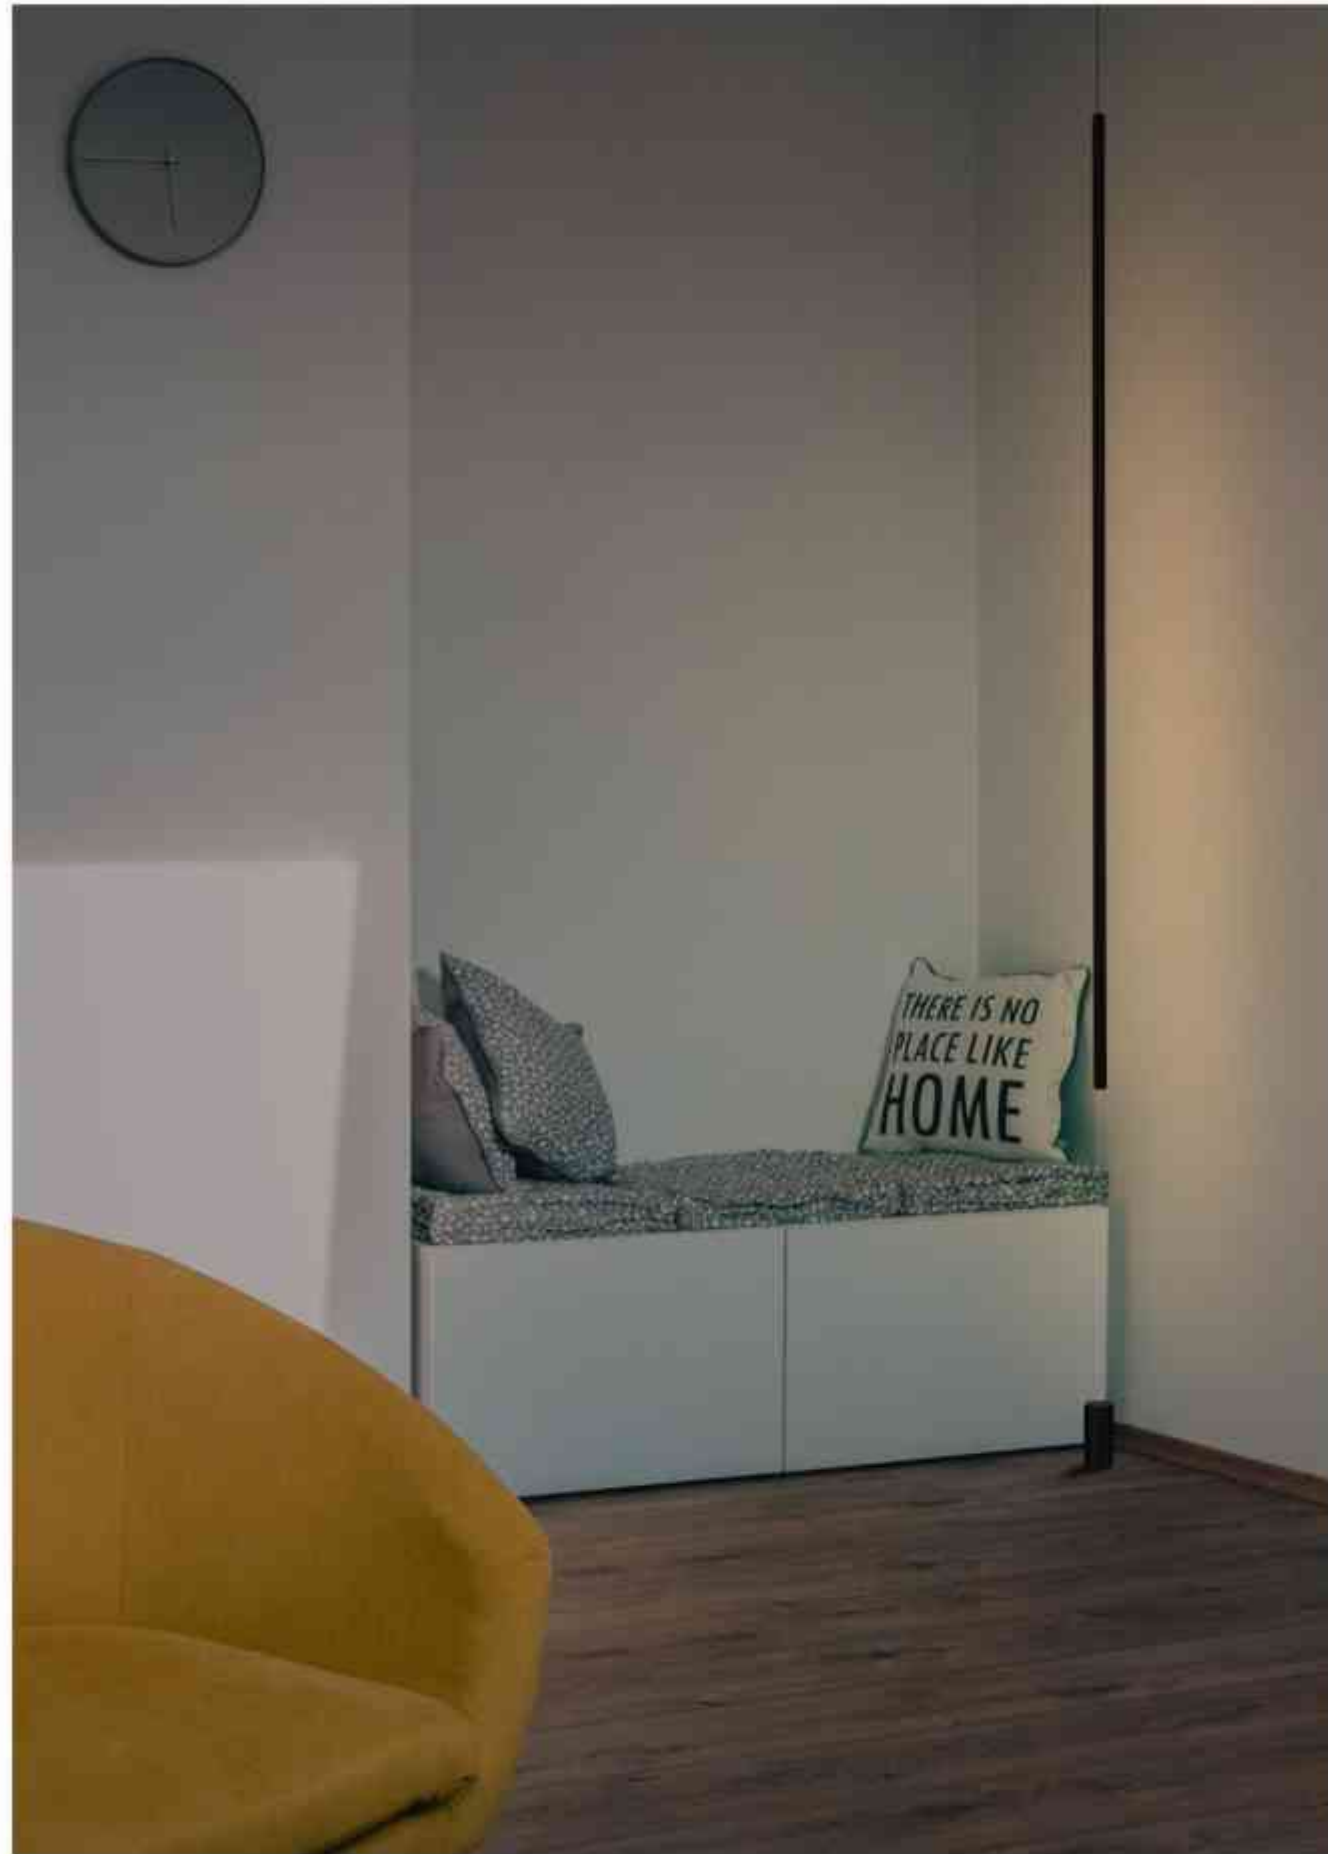

FORMULIA

Minimalism, elegance and functionality are key words to describe the new collection FORMULIA.

It was specially designed to meet multiple lighting requirements for both residential and commercial spaces.

Elegant slim suspended tubes are going in different lengths for choice: 350 mm, 550 mm, 750 mm.

All versions can be installed with mounting plate or trimless.

FORMULIA L chandelier was created to extend FORMULIA collection.

6 tubes are hung at different heights, providing organic atmosphere to any room.

© CE IP20 PWM TOUCH DIM

FORMULIA



COLOR FINISHINGS:







FORMULIA L 550 GROUP




FORMULIA L 750 GROUP

FORMULIA 350/550/750 2.1


LED POWER: 6W
 SYSTEM POWER: 7.1W
 OUTPUT: 446lm/3000K
 INPUT: 100-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø20*50mm
 Ø20*100mm
 Ø20*150mm
 HOLE SIZE: 7




ANGLE 19°



6W 19° 3000K



6W 19° 3000K




FORMULIA 350 TRIMLEGO/550 TRIMLEGO/750 TRIMLEGO 2.0


LED POWER: 6W
 SYSTEM POWER: 7.1W
 OUTPUT: 446lm/3000K
 INPUT: 100-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø20*50mm
 Ø20*100mm
 Ø20*150mm
 HOLE SIZE: Ø7.5mm




ANGLE 19°



6W 19° 3000K



6W 19° 3000K




FORMULIA L 350 GROUP 2.0


LED POWER: 13.2W
 SYSTEM POWER: 15W
 OUTPUT: 946lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø20*30*Ø35mm
 HOLE SIZE: 7




ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K



OTHER VERSIONS:




FORMULIA L 550 GROUP 2.0


LED POWER: 13.2W
 SYSTEM POWER: 15W
 OUTPUT: 946lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø20*30*Ø35mm
 HOLE SIZE: 7




ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K




FORMULIA L 750 GROUP 2.0


LED POWER: 13.2W
 SYSTEM POWER: 15W
 OUTPUT: 946lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 90
 DIMENSION: Ø20*30*Ø35mm
 HOLE SIZE: 7




ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K



669



PENDANT LAMP

670





GYPSUM LIGHTING

671

672

GEDSO

GEDSO , a new member of GYPSUM family, With plaster material, it would be a stylish design for suspended.

Dim color and dim triac version can be selected.

GEDSO can perfectly meet
your demand of texture.

© CE IP20 DIM COLOR 24 DIM COLOR APP DIM TRIAC



GISSO



673

GISSO



PENDANT LAMP

674





675



PENDANT LAMP

676



S R0 DD 2.0



M R0 DD 2.0

GEDSO S R0 DD 2.0

LED POWER: 2.5W
 SYSTEM POWER: 7.3W
 OUTPUT: 185lm/2700K-5000K
 INPUT: 100-240VAC/50/60HZ
 CRI: 80
 DIMENSION: Ø150*102mm
 HOLE SIZE: J



OTHER VERSIONS:



ORA COLOR: J
 201704



GEDSO M R0 DD 2.0

LED POWER: 15.3W
 SYSTEM POWER: 16.4W
 OUTPUT: 522lm/2700K-4000K
 INPUT: 100-240VAC/50/60HZ
 CRI: 90
 DIMENSION: Ø280*110mm
 HOLE SIZE: J



OTHER VERSIONS:



ORA COLOR: J
 201704





CRYSTAL DO 2.0

GEDSO CRYSTAL DO 2.0

LED POWER: 8.64W
 SYSTEM POWER: 10.5W
 OUTPUT: 272lm (2700K-6000K)
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 190*190*130mm
 HOLE SIZE: Ø80



OTHER VERSIONS:



CRYSTAL DO 2.0
 ALUMINUM



NABLA DO 2.0

GEDSO NABLA DO 2.0

LED POWER: 8.64W
 SYSTEM POWER: 10.5W
 OUTPUT: 418lm (2700K-6000K)
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 210*190*190mm
 HOLE SIZE: Ø80




RECOMMEND



CRYSTAL DO 2.0
 ALUMINUM



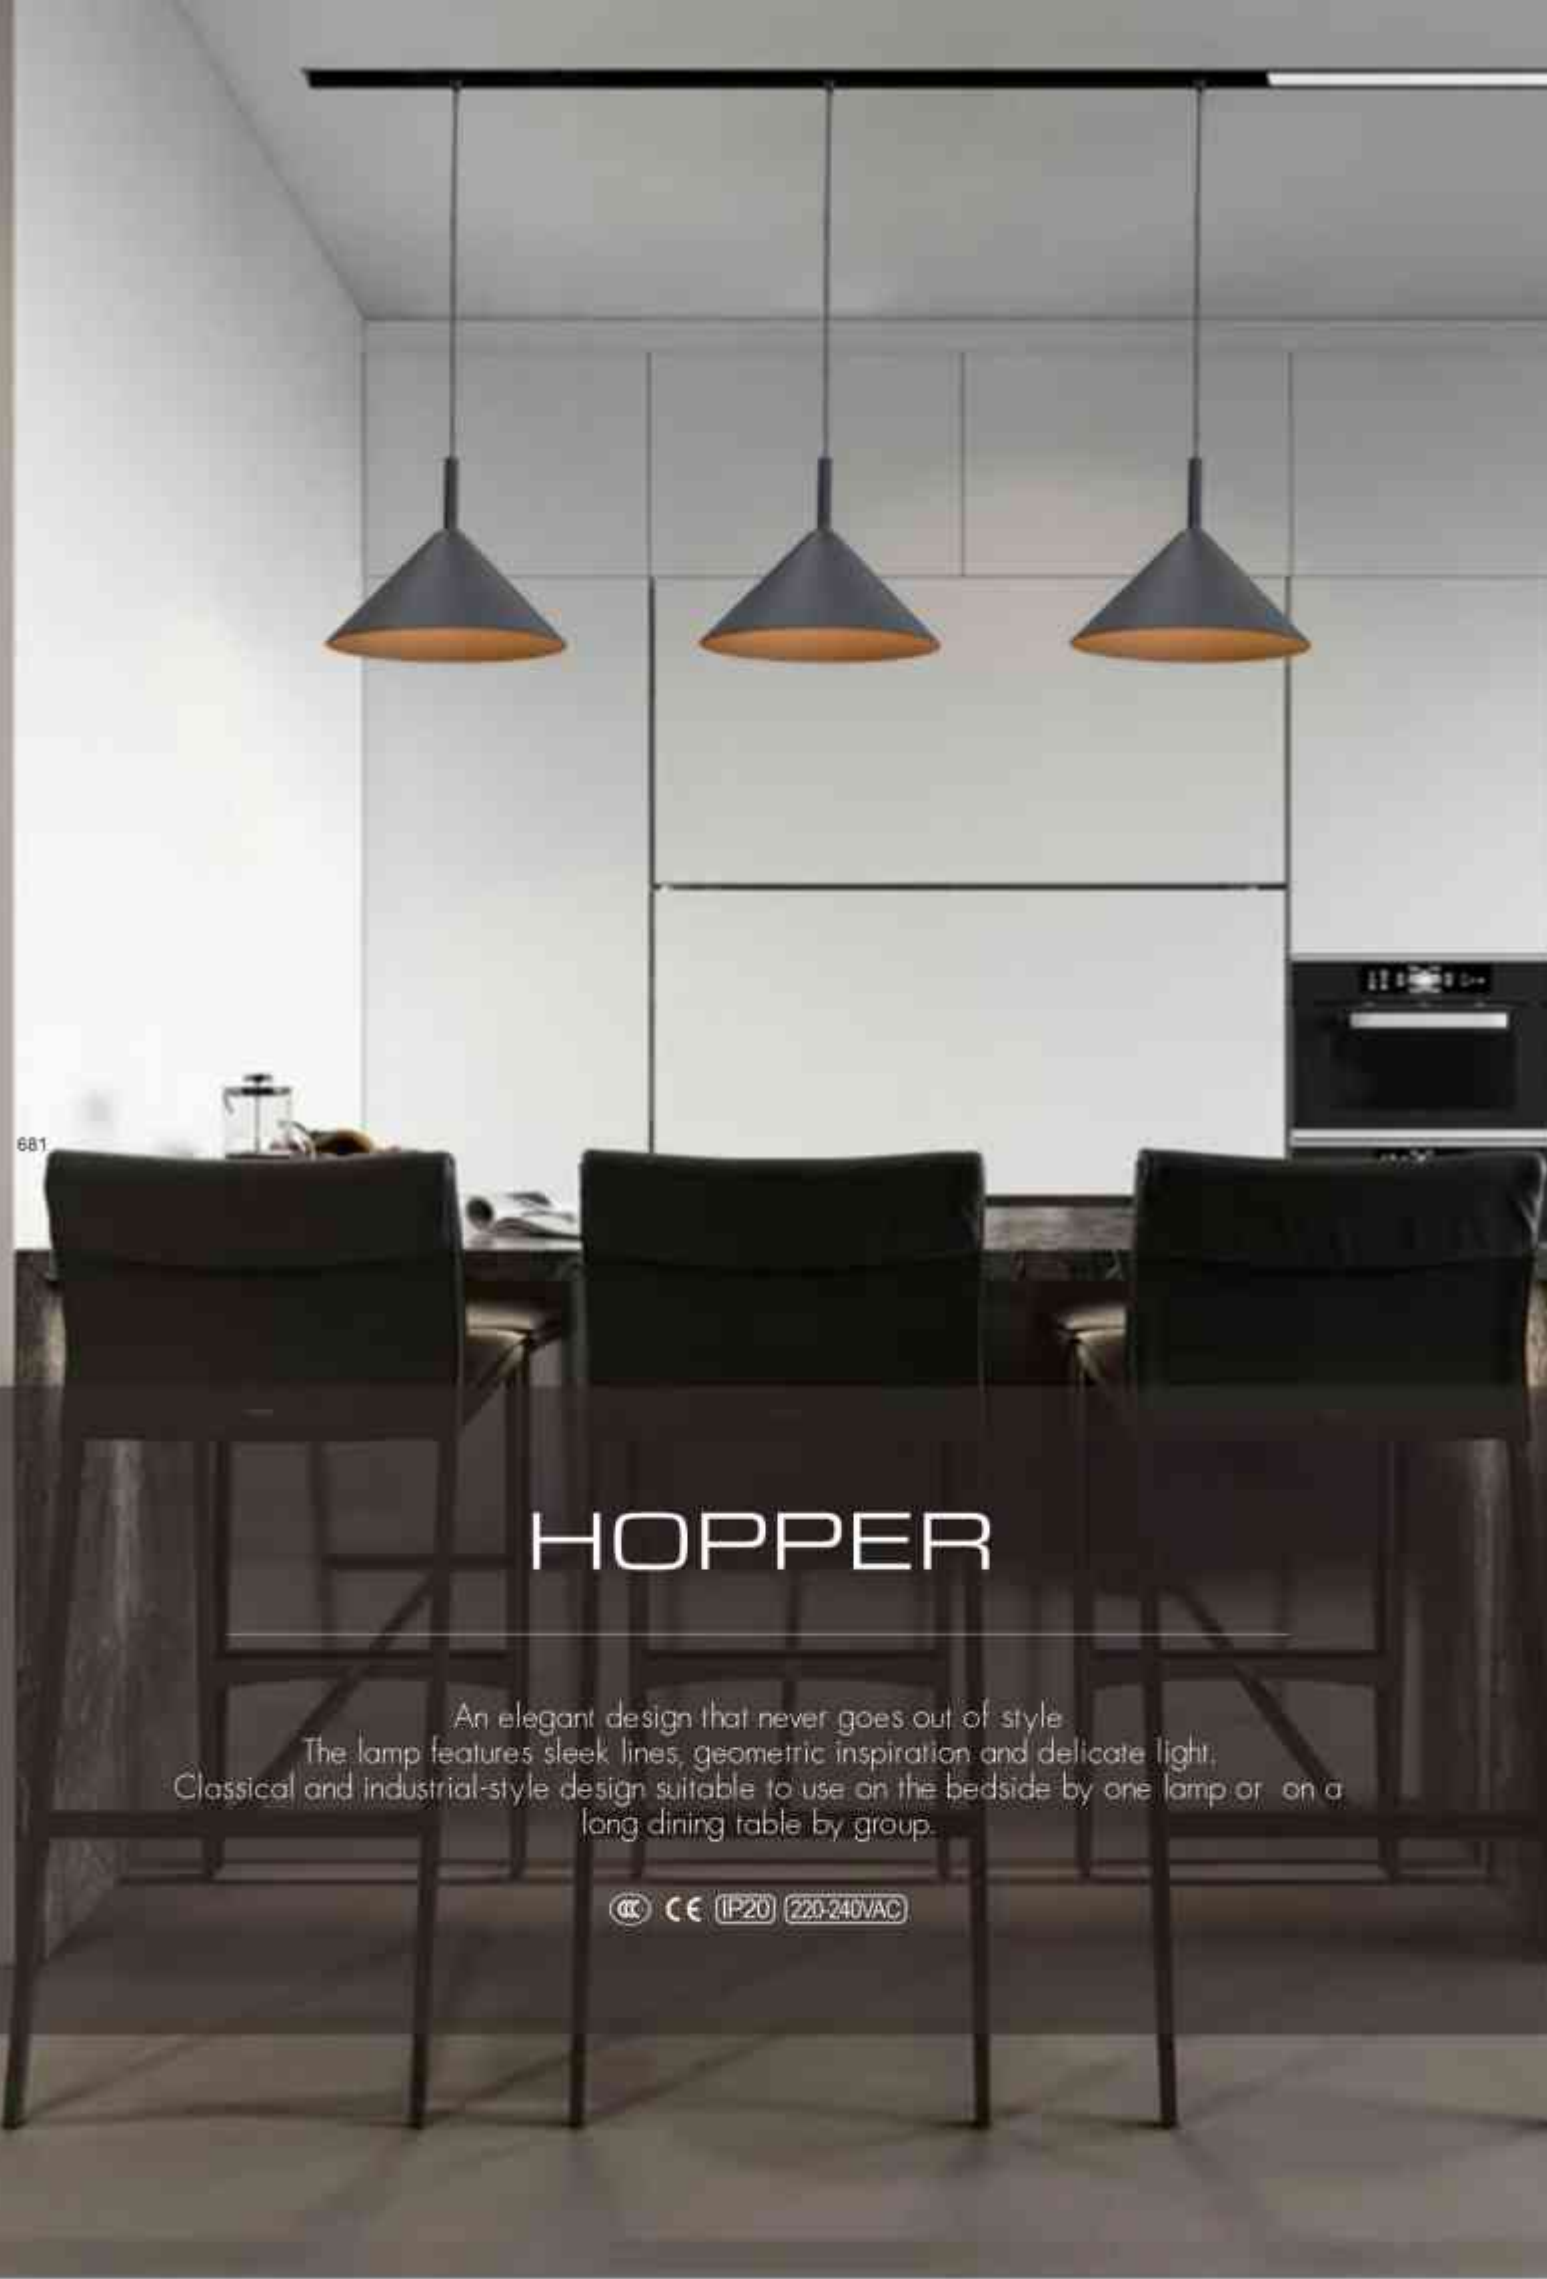

HOPPER

An elegant design that never goes out of style. The lamp features sleek lines, geometric inspiration and delicate light. Classical and industrial-style design suitable to use on the bedside by one lamp or on a long dining table by group.

© CE IP20 220-240VAC

HOPPER



HOPPER Ø



HOPPER Ø TRIMLESS

PENDANT LAMP
WALL LAMP

HOPPER Ø

LED POWER 8.5W
SYSTEM POWER 10.9W
OUTPUT: 300lm/3000K
CRI: 90
INPUT: 220-240VAC
DIMENSION: Ø200x300mm
HOLE SIZE: /

RECOMMEND:



ON/OFF



HOPPER Ø TRIMLESS

LED POWER 8.5W
SYSTEM POWER 10.9W
OUTPUT: 300lm/3000K
CRI: 90
INPUT: 220-240VAC
DIMENSION: Ø200x300mm
HOLE SIZE: /

RECOMMEND:



ON/OFF



ANGLE



HOPPER



HOPPER M



HOPPER M TRIMLESS



HOPPER W.C.

HOPPER W.M.

PENDANT LAMP

WALL LAMP

HOPPER M

LED POWER: 14.8W
SYSTEM POWER: 17W
OUTPUT: 541LM/3000K
CRI: 90
INPUT: 220-240VAC
DIMENSION: Ø130x240mm
HOLE SIZE: 7

RECOMMEND:



ON/OFF



ANGLE L




HOPPER M TRIMLESS

LED POWER: 14.8W
SYSTEM POWER: 17W
OUTPUT: 541LM/3000K
CRI: 90
INPUT: 220-240VAC
DIMENSION: Ø130x240mm
HOLE SIZE: 7

RECOMMEND:



ON/OFF




HOPPER W.C.

LED POWER: 8.5W
SYSTEM POWER: 10.5W
OUTPUT: 302LM/2411K/3000K
CRI: 90
INPUT: 220-240VAC
DIMENSION: Ø100x140x120mm
HOLE SIZE: 7

RECOMMEND:



ON/OFF



ANGLE L



HOPPER W.M.

LED POWER: 14.8W
SYSTEM POWER: 17W
OUTPUT: 541LM/3000K
CRI: 90
INPUT: 220-240VAC
DIMENSION: Ø130x130x120mm
HOLE SIZE: 7

RECOMMEND:



ON/OFF



ANGLE L







687



PENDANT LAMP

WALL LAMP

688




689

SHAPES CAN BE FREELY MATCHED

LINK

There is nothing called "limited",
 it's just the absence of an idea to find a solution.
 Compared to the conventional panel lights, LINK is like
 a crisscross of light and shadow,
 perfect for a modern creative office or display stand.
 The different light effects of floodlights and spotlights, three optional lengths of
 600/1200/1800,
 can simultaneously achieve infinite length connection
 and dancing inspiration with 1-180° corner


CE IP20 48VDC DIM APP

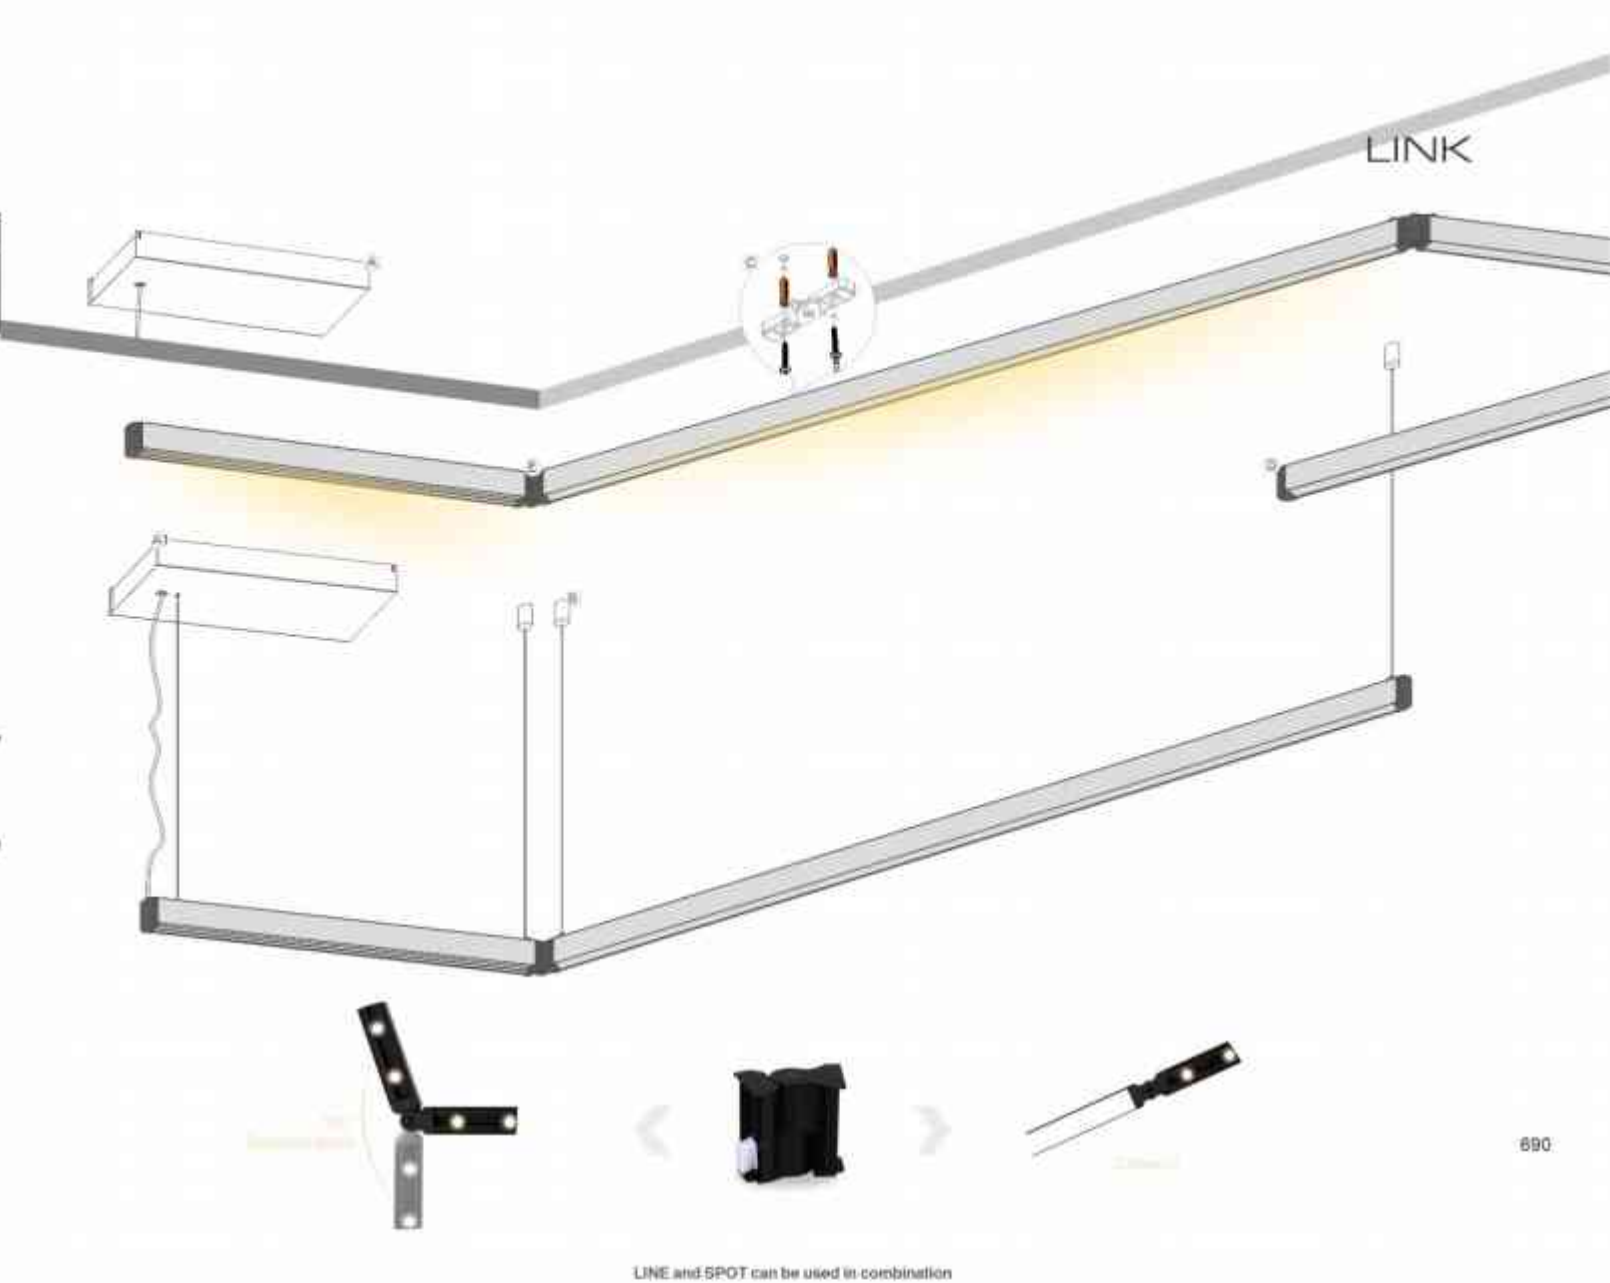

LINK

LINE and SPOT can be used in combination

690

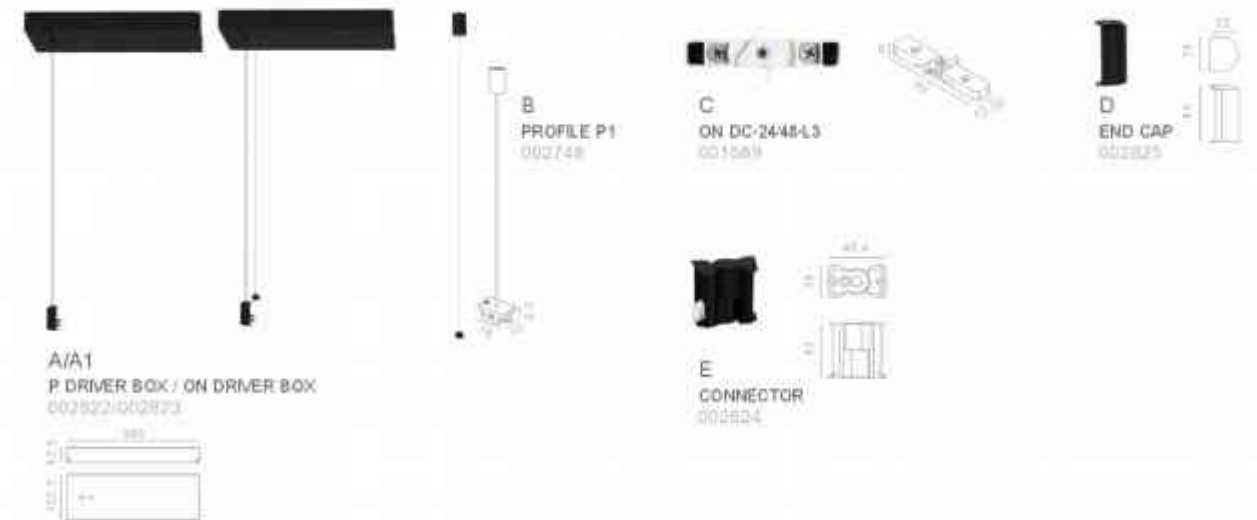

LINK

LINK



SPOT 600/1200/1800

SPOT+L 600/1200/1800

PENDANT LAMP

691

692

LINK SPOT 600/1200/1800

LED POWER: 12W/24W/36W
LED OUTPUT: >
SYSTEM POWER: 12W/24W/36W
SYSTEM OUTPUT: 622LM/1244LM/1866LM
INPUT: 48V DC
CRI: 90
DIMENSIONS: 600/26*42mm/1200/26*42mm/1800/26*42mm
HOLE SIZE: >



COLOR FINISHINGS:



RAL

LINK SPOT+L 600/1200/1800

LED POWER: 12W/24W/36W/48W/72W
LED OUTPUT: >
SYSTEM POWER: 12W/24W/36W/48W/72W
SYSTEM OUTPUT: >
INPUT: 48V DC
CRI: 90
DIMENSIONS: 600/26*42mm/1200/26*42mm/1800/26*42mm
HOLE SIZE: >





LINE2 600 DO/1200 DO/1800 DO

LINK LINE2 600 DO/1200 DO/1800 DO

LED POWER: 13.6W/19.6W/26.3W/33.4W/40W/26.3W
 LED OUTPUT: / / / / / / / /
 SYSTEM POWER: 13.6W/19.6W/26.3W/33.4W/40W/26.3W
 SYSTEM OUTPUT: 12700K/6000K
 INPUT: 48V DC
 CR: 90
 DIMENSION: 600*26*42mm/1200*26*42mm/1800*26*42mm
 HOLE SIZE: /



RECOMMEND:



DALI COLOR







P ON



P ON

LISSO P ON 

CR: 90
 SYSTEM POWER: 18.3W
 OUTPUT: 875LM/3000K
 INPUT: 220-240VAC
 DIMENSION: Ø132x109mm
 HOLE SIZE: 1



LISSO P ON 

CR: 90
 SYSTEM POWER: 18.3W
 OUTPUT: 875LM/3000K
 INPUT: 220-240VAC
 DIMENSION: Ø132x109mm
 HOLE SIZE: Ø75





701

702

LYNX

Born for DIY.

LYNX falls under FLUA Architectural Lighting with 4 designs, which includes Single-side Spot Light, Dual-side Light (Spot Light on the bottom, Floodlight on the Top),

Single-side Floodlight and Track compatible with LUCA S lights.


Each design was made with 3 different length, 600mm, 1200mm and 1800mm.

LYNX supports 0-10V dimming, except for the LYNX track and LUCA S series luminaires.


© CE IP20 DIM 1-10V

 SHAPES CAN BE FREELY MATCHED



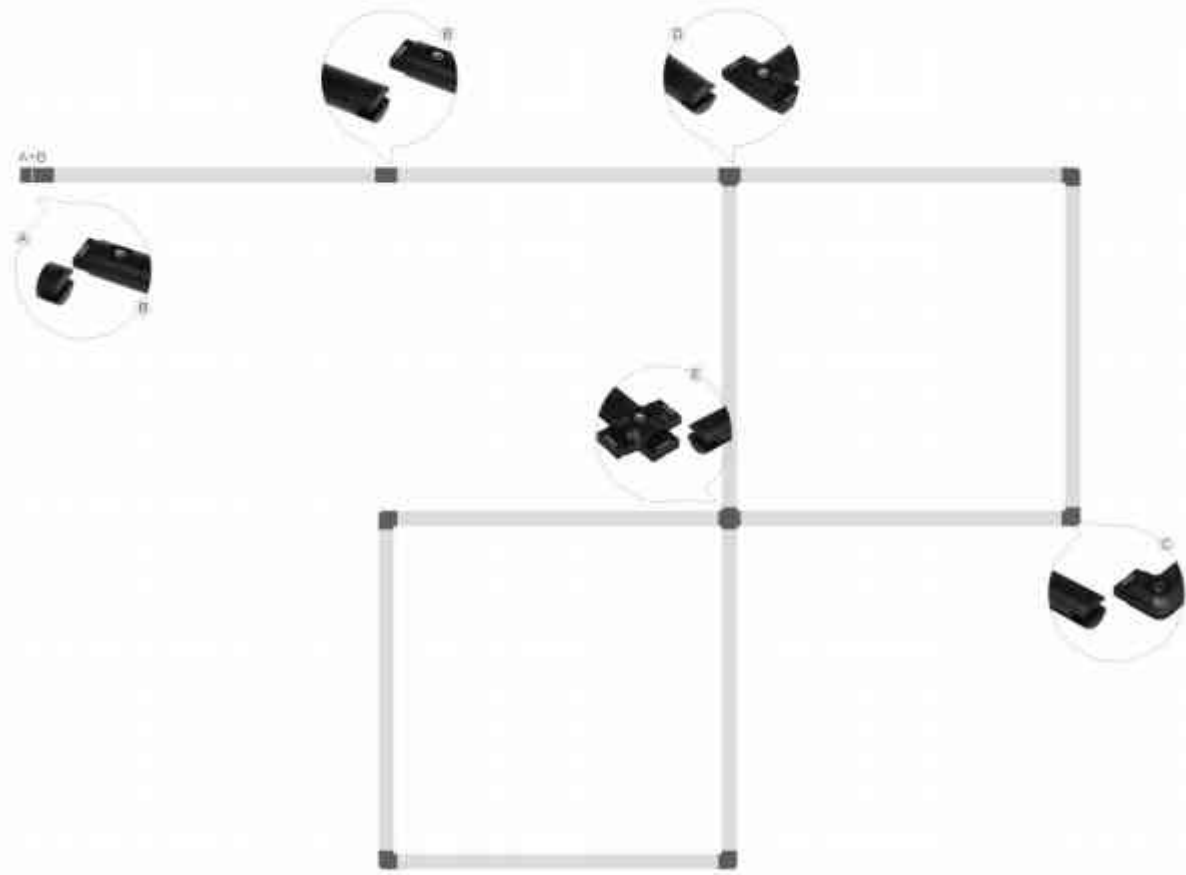

703

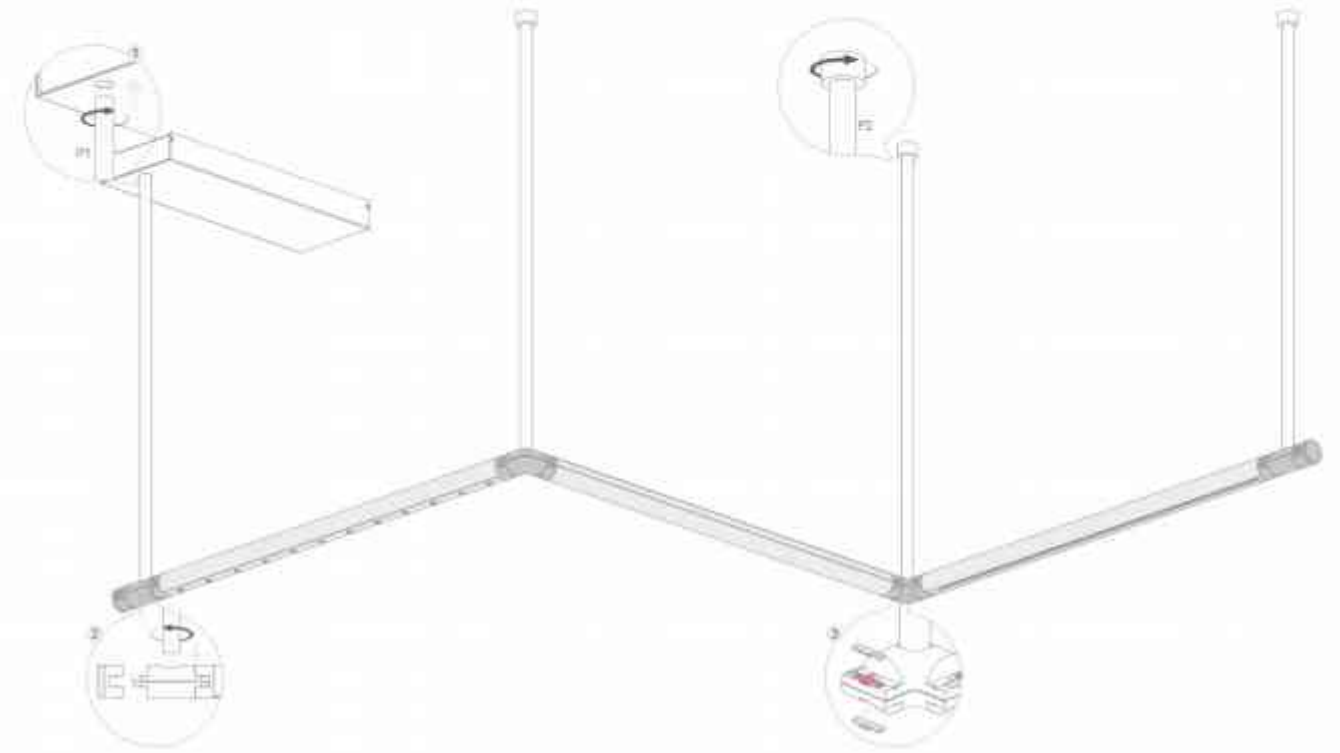


PENDANT LAMP

704

Luminaire characteristics

- LYNX 48V
- 1. Drilling is not supported;
 - 2. Support installation of track module;
 - 1. Overall support for DIM 1-10V mode;
 - 3. Lighting can be shared with LUCA S series track.

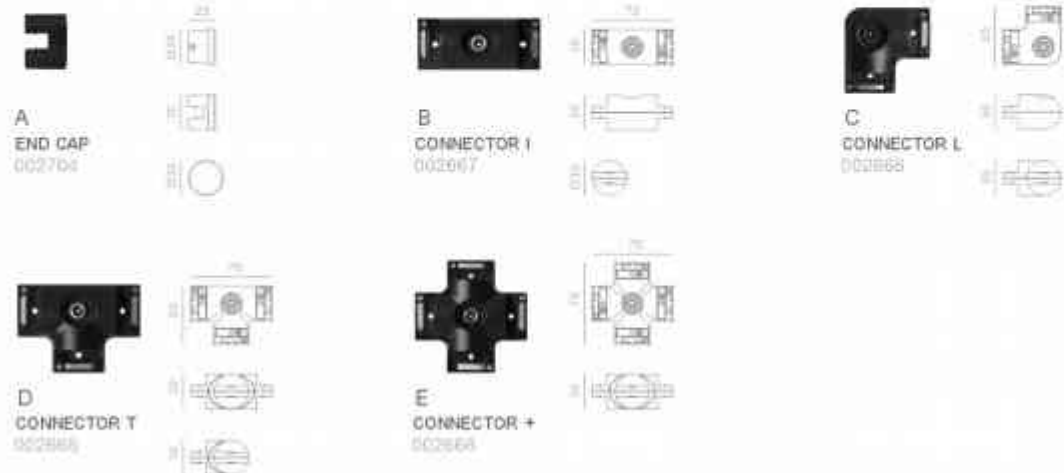

- 1. P1 600/800 needs to be used in conjunction with DRIVER 004 48V.
- 2. END CAP and CONNECTOR I is needed at combined set end.
- 3. Each group of circuits should not exceed 20W. Power factor should be used to control growing.





PENDANT LAMP

L 600 48V/1200 48V/1800 48V

SPOT 600 48V/1200 48V/1800 48V

LYNX L 600 48V/1200 48V/1800 48V

LED POWER: 12W/24W/36W
 LED OUTPUT: 1190lm/2380lm/3570lm
 SYSTEM POWER: 13.0W/26.0W/39.0W
 SYSTEM OUTPUT: 174lm/348lm/522lm/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø30x330mm/Ø30x1230mm/Ø30x1830mm
 HOLE SIZE: 1




RECOMMEND: OTHER VERSIONS:




ANGLE



8.4W L 3000K

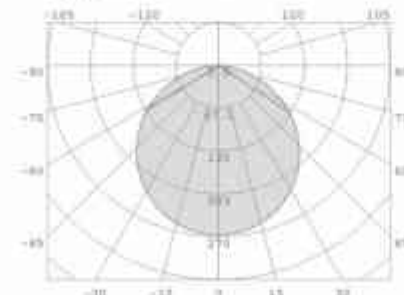

6.4W 35° 3000K



LYNX SPOT 600 48V/1200 48V/1800 48V

LED POWER: 10W/20W/30W
 LED OUTPUT: 1100lm/2200lm/3300lm
 SYSTEM POWER: 12.5W/25.0W/37.5W
 SYSTEM OUTPUT: 461lm/922lm/1383lm/3000K
 INPUT: 48V DC
 CRI: 90
 DIMENSION: Ø30x330mm/Ø30x1230mm/Ø30x1830mm
 HOLE SIZE: 1



RECOMMEND: OTHER VERSIONS:



COLOR FINISHINGS:



WBL



SPOT L-600 48V/1200 48V/1800 48V



PENDANT LAMP

TRACK 600/1200/1800
0026-48/0028-48/0032-60

LYNX SPOT L 600 48V/SPOT L 1200 48V/SPOT L 1800 48V

LED POWER: 20W/44W/55W
LED OUTPUT: 2250LM/4500LM/5875LM
SYSTEM POWER: 25.3W/50.6W/64.7W
SYSTEM OUTPUT: 1235LM/2470LM/3225LM/3000K
INPUT: 48V DC
CRI: 90
DIM (0-10V): 0/30°/65°/90°/000°/120°/180°/270°/360°
HOSE SIZE: 1



RECOMMEND:



OTHER VERSIONS:



ARCA KS SPOT 7 DIM
00591427



ARCA KS SPOT 12 DIM
00591407



TURN KS MINI
00491727



FLAT KS
00491427



FORMULA KS S60
00891327



MIA KS S
00891327



ATHENA KS
00891327



PALLAS KS EG3
00891327



FAIRY KS G4
00711307



ELF KS P
00911627



ELF KS
00911627



MOONLINE
KS 300 / 600 / 900 / 1200 / 1500
009414 / 009414 / 009414 / 009414 / 009414



SHINY KS ON 5 DIM
00201427



SHINY KS ON 10 DIM
00201427



SHINY KS ON SPOT 5 DIM
00201427




SHINY KS ON SPOT 10 DIM
00201427

LYNX TRACK series can share amps with LUCA S series.



709

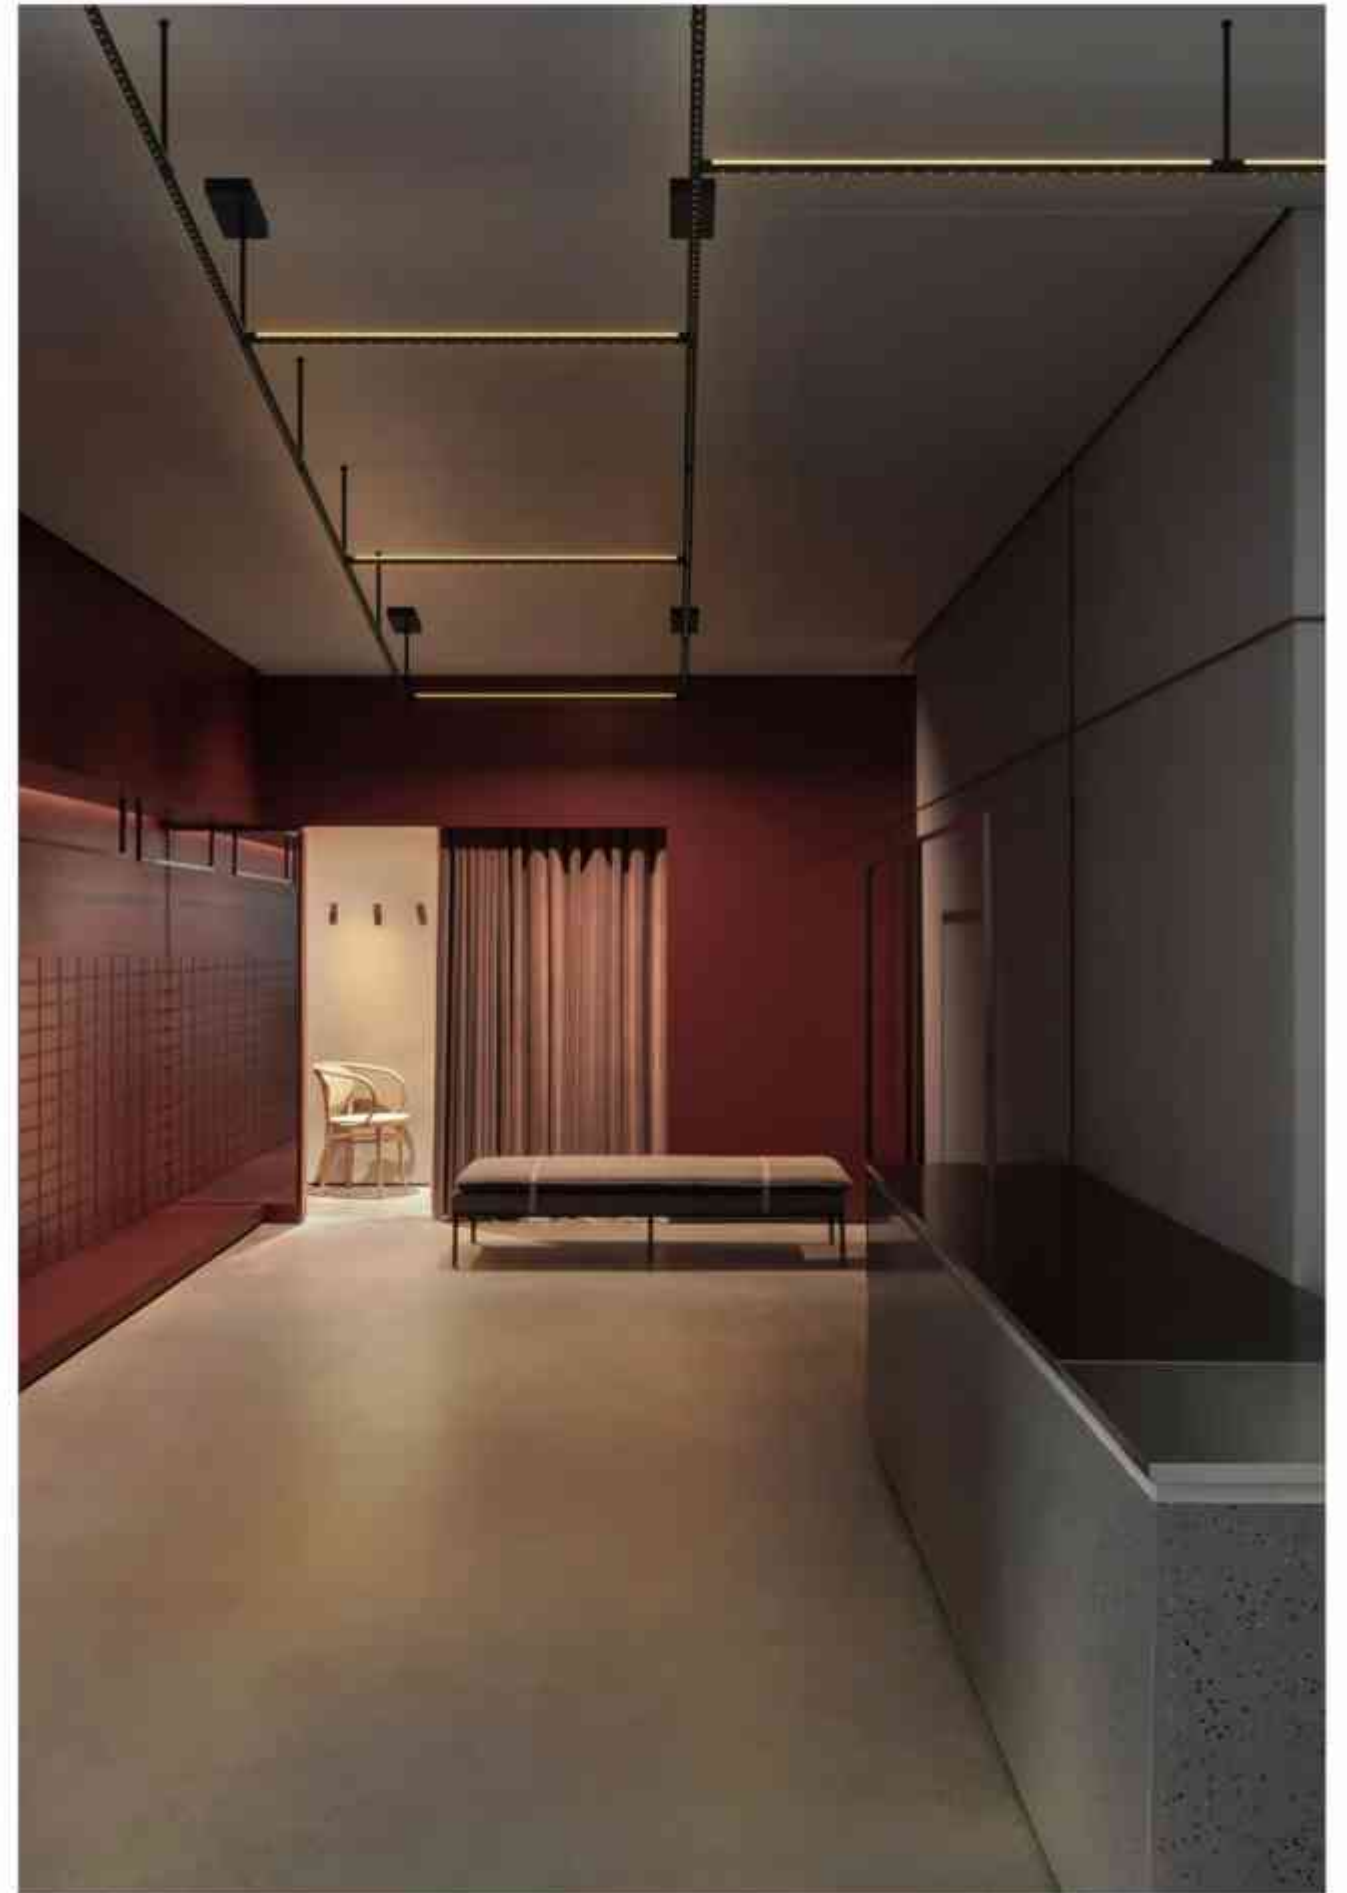

PENDANT LAMP

710

MELA

MARC ROSS

There were 3 apple-milestones in the history,
 Eden's apple opens the human era;
 Newton's apple helps us understand the world;
 Steve Job's apple let us experience the world.
 Now the 4th apple is born, MELA by FLUA.

It's the one that lights up your home in such a dynamic and artsy way,
 the mid-hollow ring creates soft ambient light through
 diffuse reflection while the
 lower emitting fulfill your light demand to conquer the daily tasks.
 Available with various installation, from ceiling suspension,
 magnetic track absorption to track suspension.

© CE IP20 DIM TRIAC DIM 1-10V DALI

MELA

PENDANT LAMP



COLOR FINISHINGS:





P ON 1.1



P IN 1.1



MELA P ON 1.1

LED POWER: 14 W
CRI: 90
SYSTEM POWER: 17 W
OUTPUT: 500LM/3000K
INPUT: 100-240VAC
DIMENSION: Ø110x130mm
HOLE SIZE: ∅75mm



RECOMMEND:




MELA P IN 1.1

LED POWER: 14 W
CRI: 90
SYSTEM POWER: 17 W
OUTPUT: 500LM/3000K
INPUT: 100-240VAC
DIMENSION: Ø110x130mm
HOLE SIZE: Ø75mm



RECOMMEND:



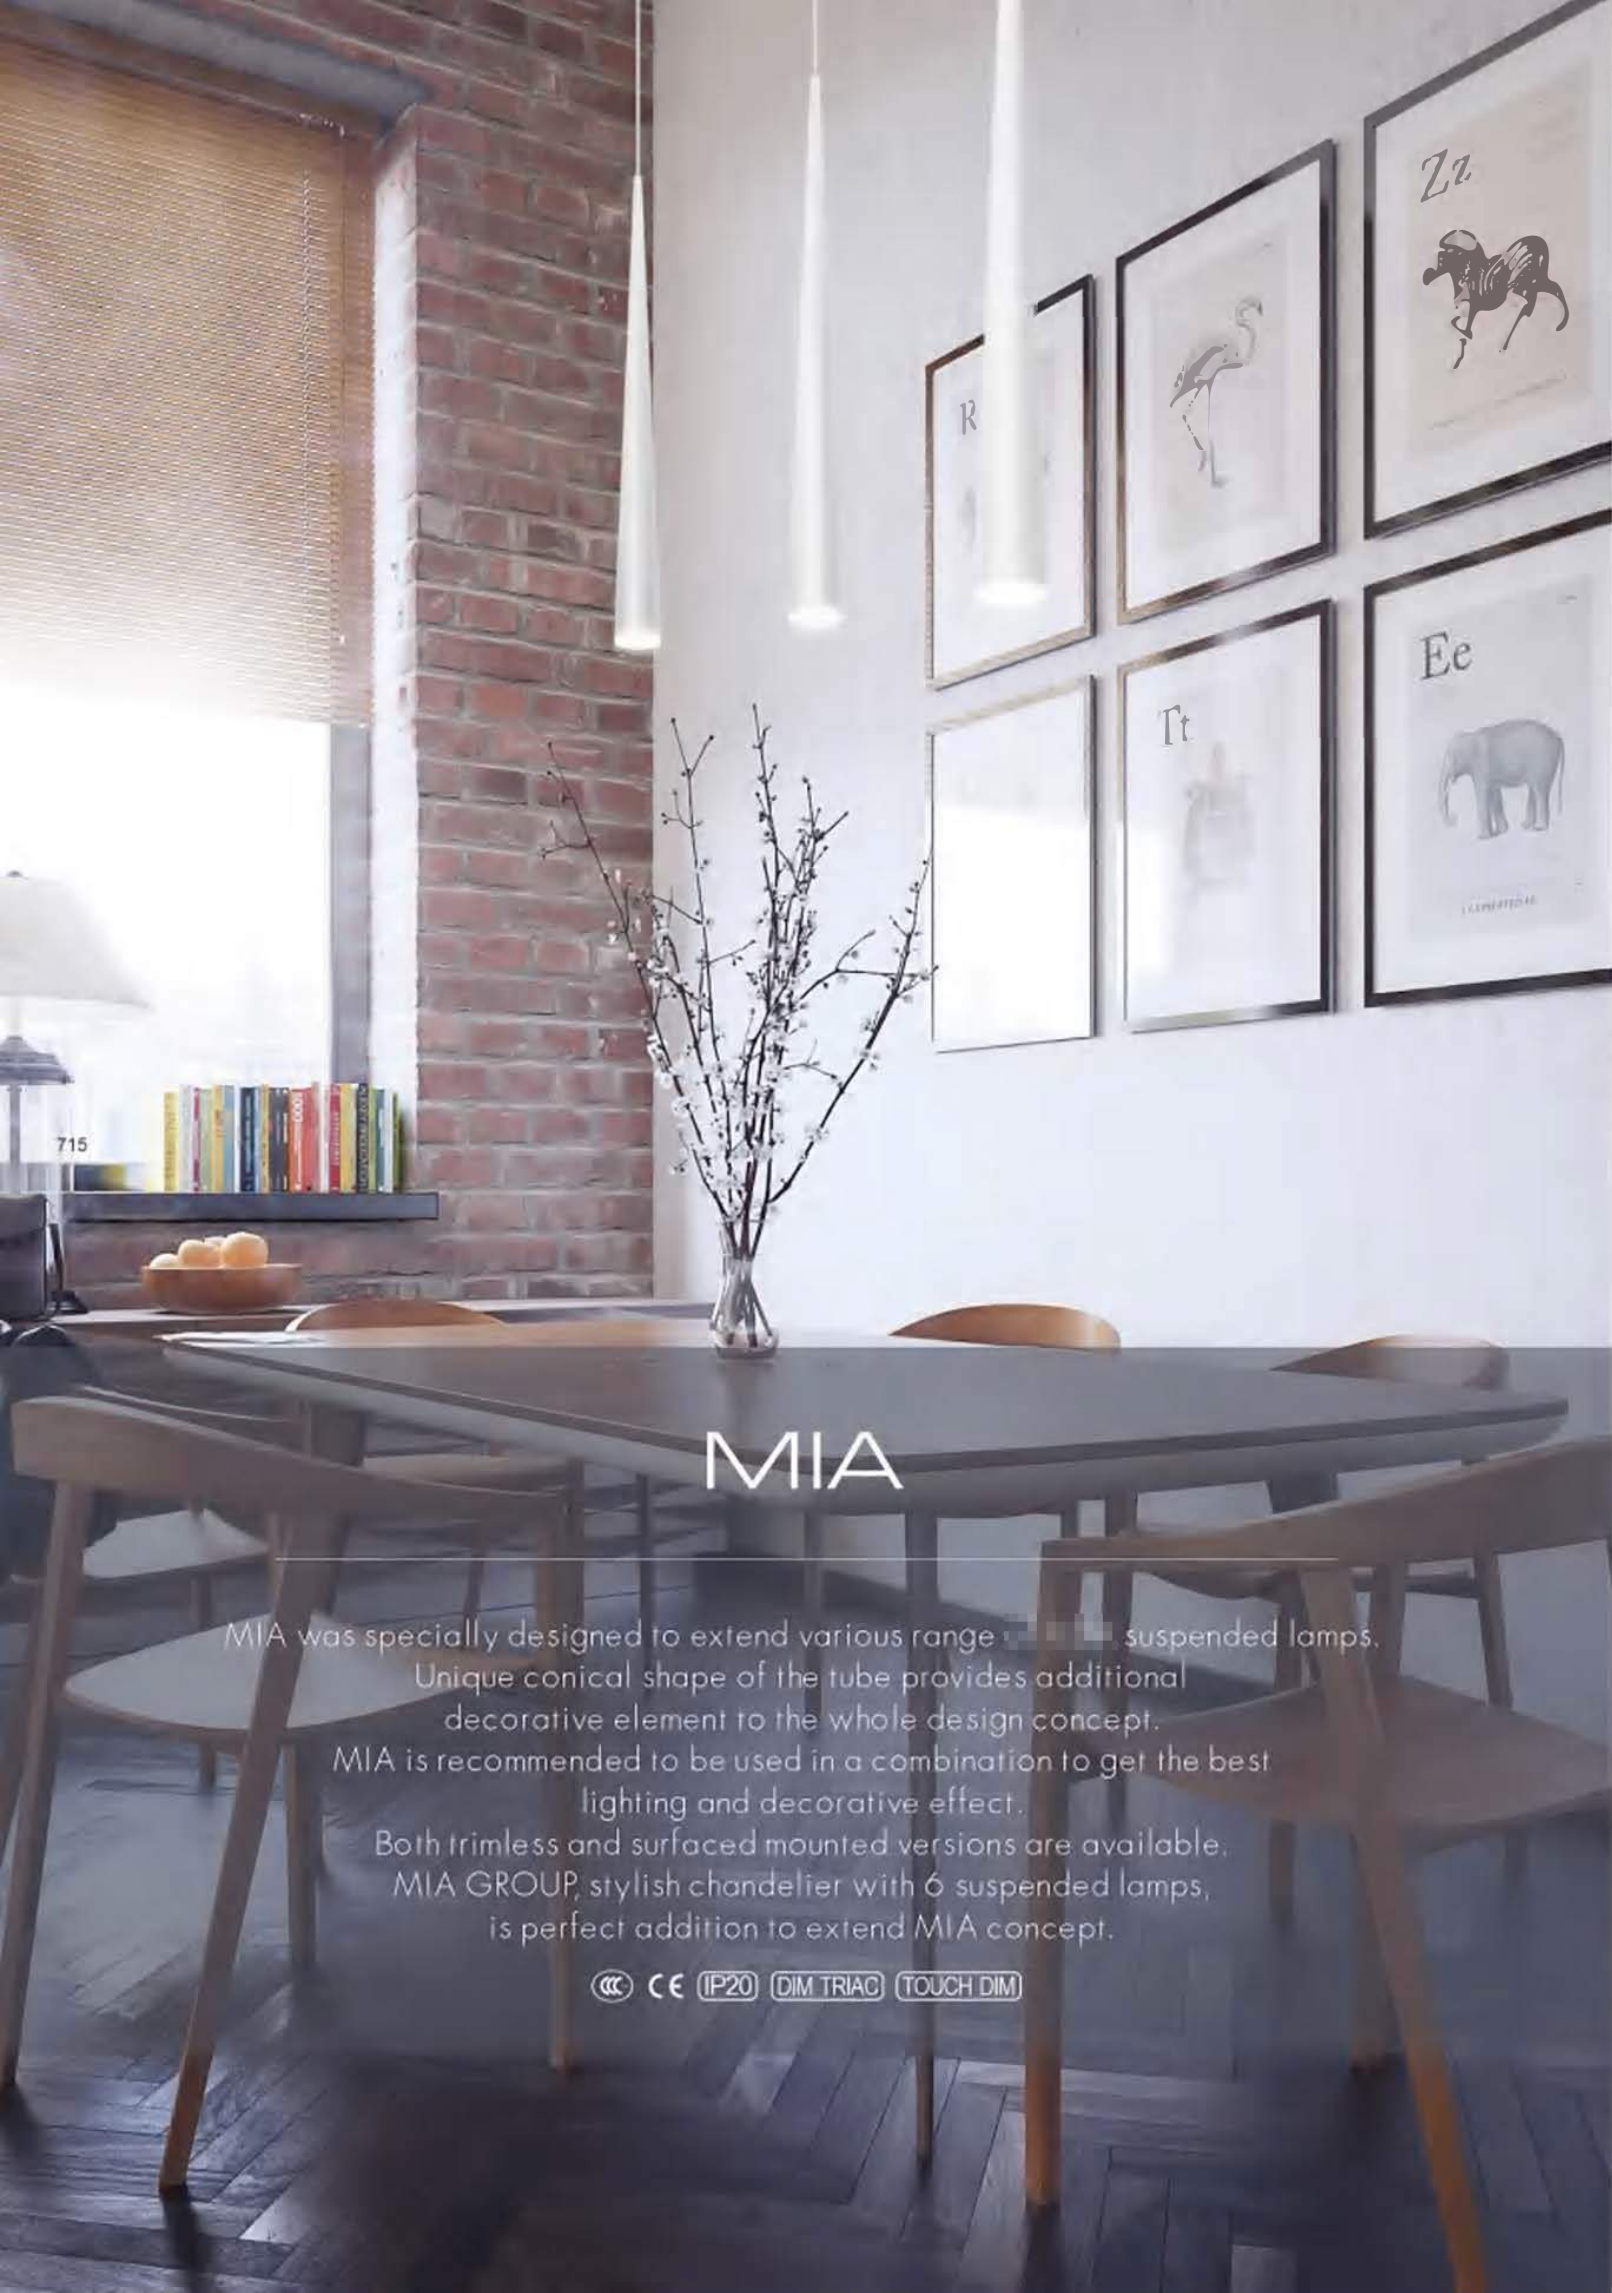

MIA

MIA was specially designed to extend various range of suspended lamps. Unique conical shape of the tube provides additional decorative element to the whole design concept. MIA is recommended to be used in a combination to get the best lighting and decorative effect. Both trimless and surfaced mounted versions are available. MIA GROUP, stylish chandelier with 6 suspended lamps, is perfect addition to extend MIA concept.

© CE IP20 DIM TRIAC TOUCH DIM



MIA S 1 1 ⊕

LED POWER 6W
SYSTEM POWER 7.1W
OUTPUT 446lm/3000K
INPUT 100-240VAC, 50/60HZ
CRI 90
DIMENSION: Ø40*401mm
HOLE SIZE: /

RECOMMEND:




ON/OFF

ANGLE 19°



6W 19°3000K



MIA S TRIMLESS ⊕


LED POWER 6W
SYSTEM POWER 7.1W
OUTPUT 446lm/3000K
INPUT 100-240VAC, 50/60HZ
CRI 90
DIMENSION: Ø40*401mm
HOLE SIZE: Ø55mm

RECOMMEND:



ON/OFF

6W 19°3000K



COLOR FINISHINGS:





GROUP


MIA GROUP

LED POWER: 13.2W
 SYSTEM POWER: 19W
 OUTPUT: 346LM/3000K
 INPUT: 230-240VAC/50/60Hz
 CR: 90
 DIMENSION: Ø2040x1235mm
 HOLE SIZE: 1


OTHER VERSIONS:




ANGLE 11°



2.2W 11/3000K



2.2W 11/3000K



PALLAS

PALLAS is a new collection of suspended lamps, presented with three different designs of lamp for choice.

All three versions can be installed with the ceiling installation plate or trimless. PALLAS W series' concept makes it possible to create unique patterns in the room, breaking the spaces from the wall to the ceiling, visually enhancing the space.

© CE IP20 TOUCH DIM



PALLAS

PENDANT LAMP



FUNNEL T.1

FUNNEL TRIMLESS

720

PALLAS FUNNEL T.1


LED POWER 6W
SYSTEM POWER 1.1W
OUTPUT 440LM/3000K
INPUT: 100-240VAC/50/60Hz
CRI 90
DIMENSION Ø19x150mm
HOLE SIZE ~120mm




RECOMMEND




ANGLE 19°



6W 19°3000K



6W 19°3000K



COLOR FINISHINGS:






EGG 1.1



EGG TRIMLESS 1.1




DIAMOND 1.1



DIAMOND TRIMLESS 1.1

PALLAS EGG 1.1 
 PALLAS EGG TRIMLESS 1.1 

LED POWER: 6W
 SYSTEM POWER: 7.1W
 OUTPUT: 448lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CR: 90
 DIMENSION: 200*180mm
 HOLE SIZE: -Ø25mm




RECOMMEND:




ANGLE 19°



6W 19°3000K




6W 19°3000K



PALLAS DIAMOND 1.1 
 PALLAS DIAMOND TRIMLESS 1.1 

LED POWER: 6W
 SYSTEM POWER: 7.1W
 OUTPUT: 448lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CR: 90
 DIMENSION: Ø73*100mm
 HOLE SIZE: -Ø25mm




RECOMMEND:




ANGLE 19°



6W 19°3000K



6W 19°3000K





723

724

PAPER

PAPER with its pure geometrical shapes and soft diffused light guarantees splendid atmosphere to the room. PAPER collection comes with 4 sizes for round shaped version and 2 sizes for rectangular shaped fixture. Both versions can be suspended or surface mounted.

In addition, PAPER has DIM COLOR function. Suspended version is equipped by special adjustable function.

CE (IP20) DIM COLOR DIM COLOR APP DIM 1-10V DIM PUSH

COLOR FINISHINGS:





ONR SS DO/ONR SS 2.0



ONR S DO/ONR S 2.0



ONR M DO/ONR M DO 2.0



ONR L DO/ONR L DO 2.0





729



 Color Temperature Adjustable
 2700K-5700K

Warm White

Cool White

DIM

100%



PENDANT LAMP

730

PAPER ONR 02 DO 2.0

LED POWER: 36.5W
CRI: 90
SYSTEM POWER: 44W
OUTPUT: 1720lm/2700-5700K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø243*22mm
HOLE SIZE: /



OTHER VERSIONS



DMX COLOR
40W
220VAC

PAPER ONR 03 DO 2.0

LED POWER: 63W
CRI: 90
SYSTEM POWER: 82W
OUTPUT: 2480lm/2700-5700K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø243*22mm
HOLE SIZE: /



OTHER VERSIONS



DMX COLOR
40W
220VAC

PAPER ONR 04 DO 2.0

LED POWER: 96.5W
CRI: 90
SYSTEM POWER: 116W
OUTPUT: 3480lm/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø243*22mm
HOLE SIZE: /



OTHER VERSIONS



DMX 1-10V
220VAC

PAPER PR 02 DO 2.0

CRI: 90
SYSTEM POWER: 44W
OUTPUT: 1760lm/2700-5700K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø243*22mm
HOLE SIZE: /



OTHER VERSIONS



DMX COLOR
40W
220VAC

PAPER PR 03 DO 2.0

LED POWER: 63W
CRI: 90
SYSTEM POWER: 82W
OUTPUT: 2480lm/2700-5700K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø243*22mm
HOLE SIZE: /



OTHER VERSIONS



DMX COLOR
40W
220VAC

PAPER PR 04 DO 2.0

LED POWER: 96W
CRI: 90
SYSTEM POWER: 126W
OUTPUT: 3480lm/2700-5700K
INPUT: 100-240VAC 50/60Hz
DIMENSION: Ø243*22mm
HOLE SIZE: /



OTHER VERSIONS



DMX COLOR
40W
220VAC

PROMEIO

Simple and elegant PROMEIO has already become classic collection suspended range. This splendid slim fitting is the best choice for both residential and commercial spaces. Small lighting ring around the cylinder gives additional decorative element to the whole design concept. 12° beam angle provides special lighting effect emphasizing separately objects in the room. 3 sizes are available.

CE IP20 TOUCH DIM



PROMEIO

L1 11

L2 11

L3 11

PENDANT LAMP

PROMEIO L1 11 / L2 11 / L3 11


SYSTEM POWER 40W
 INPUT 230V/50Hz
 OUTPUT 1600lm/4000K/2000lm
 CRI 80
 DIMENSION (DxHxW)
 L1: 203mm
 L2: 203mm
 L3: 203mm
 HOLE SIZE




ANGLE 12°



2.2W 18° 4000K

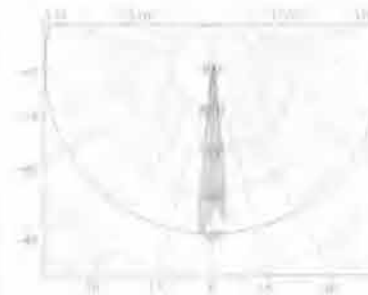

2.2W 12° 3000K

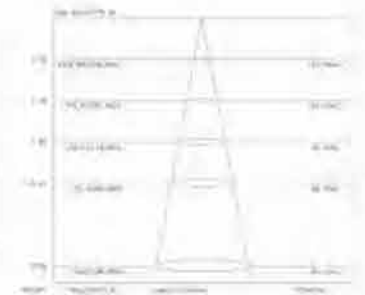

COLOR FINISHINGS:



RING

A combination of slim lighting disks, floating in the space, could bring unforgettable enigmatic atmosphere to any room, be it residential or commercial areas. Diffused light produces uniformed and perfectly balanced lighting effect. RING could be installed directly, or with flexible bracket, that can tilt the disk up to 45°. rack mounted version is also available. Trimless version was created specially to complete RING collection.

CCC CE IP20 DALI



RING



ON 12



ON 24



ON 12 AD



ON 24 AD

737

RING



P 24



P 45

PENDANT LAMP

CEILING LIGHT

738

COLOR FINISHINGS:



RAW



RA2



WCP



RING DN12 

LED POWER: 10.5W
CRI: 80
SYSTEM POWER: 12W
OUTPUT: 850lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: Ø202*30mm
HOLE SIZE: 



RECOMMEND



RING DN24 

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1660lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: Ø280*30mm
HOLE SIZE: 



RECOMMEND



RING DN12-AD 

LED POWER: 10.5W
CRI: 80
SYSTEM POWER: 12W
OUTPUT: 850lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: Ø202*30mm
HOLE SIZE: 



RECOMMEND



RING DN24-AD 

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1660lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: Ø280*30mm
HOLE SIZE: 



RECOMMEND



RING P 24 

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1660lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: Ø280*120mm
HOLE SIZE: 




RECOMMEND



RING P 45 

LED POWER: 33.5W
CRI: 80
SYSTEM POWER: 40W
OUTPUT: 2650lm/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø280*120mm
HOLE SIZE: 

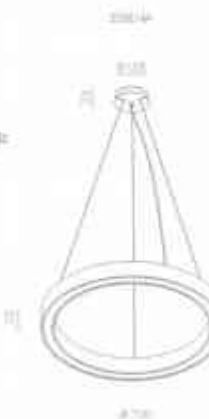


RECOMMEND





WAVE H S 30 Dm

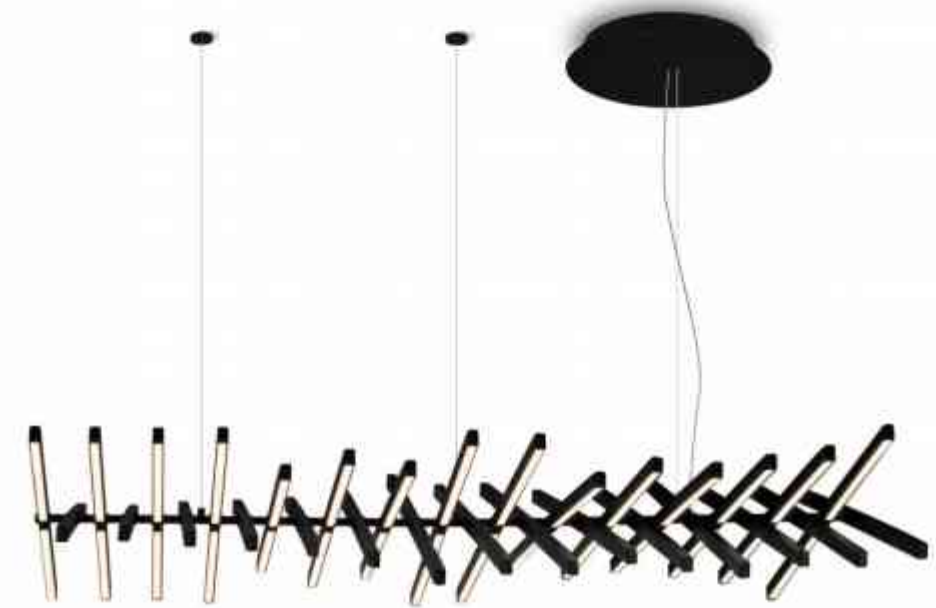

WAVE H L 30 Dm

WAVE

FLUA presents new design for the pendant lights, WAVE, with 2 options to choose: horizontal and vertical. Vertical range is possible with downwards focused light providing general ambient light effect and up-light, providing indirect illumination. Wave vertical collection is available in several sizes depending on the length and the number of the light sticks. WAVE with its unique minimalist design is the best choice both for living areas and public zones.

© CE IP20 100-240VAC DIM 1-10V

COLOR FINISHINGS:





WAVE V C 20 LP




WAVE V L 30 LP




WAVE V L 30 LR



WAVE V D 10 DN / VLS 10 DN / VL 10 DN

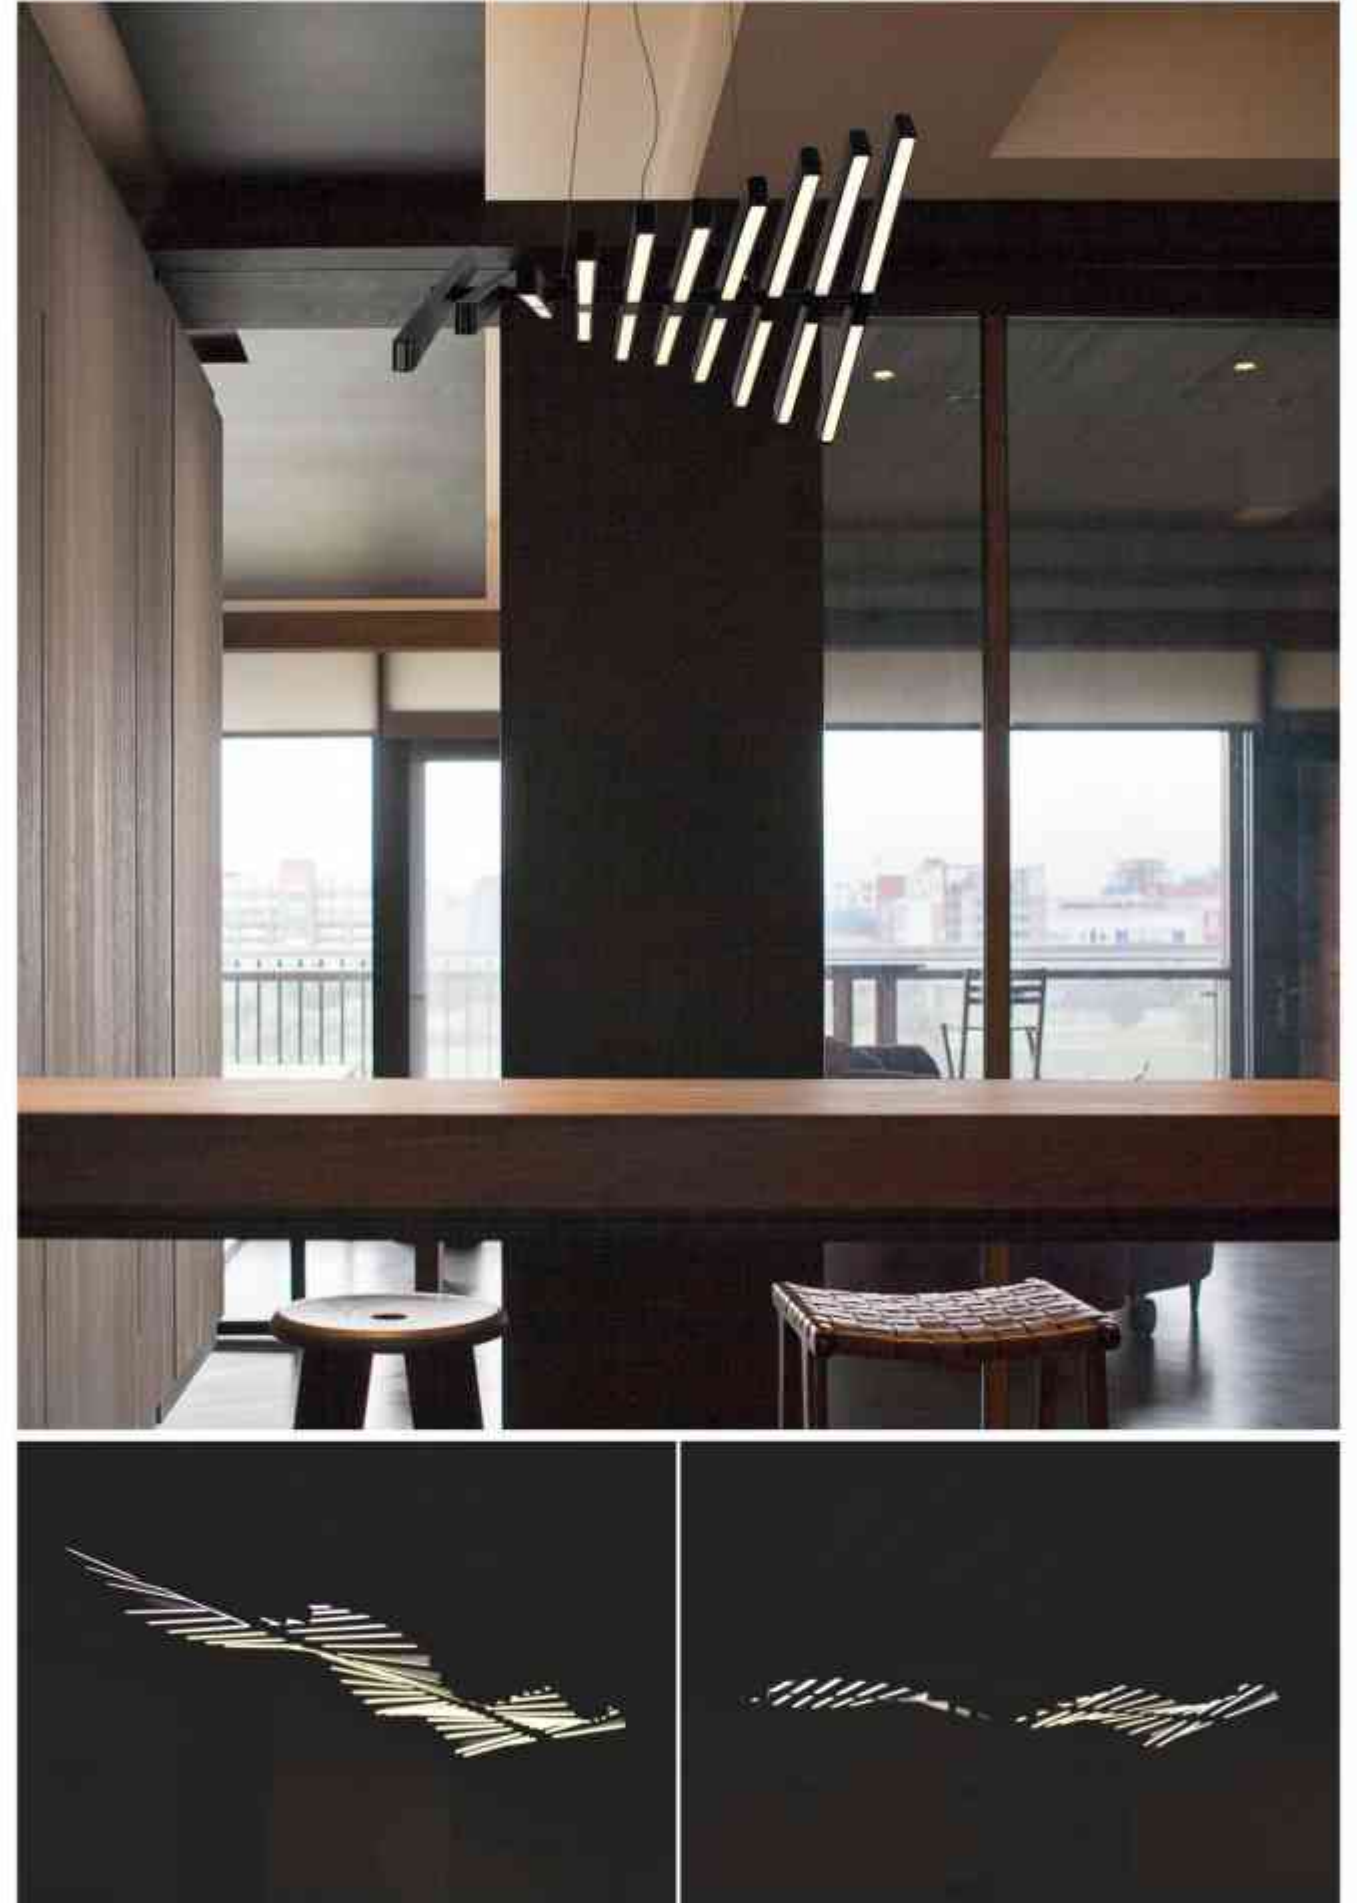

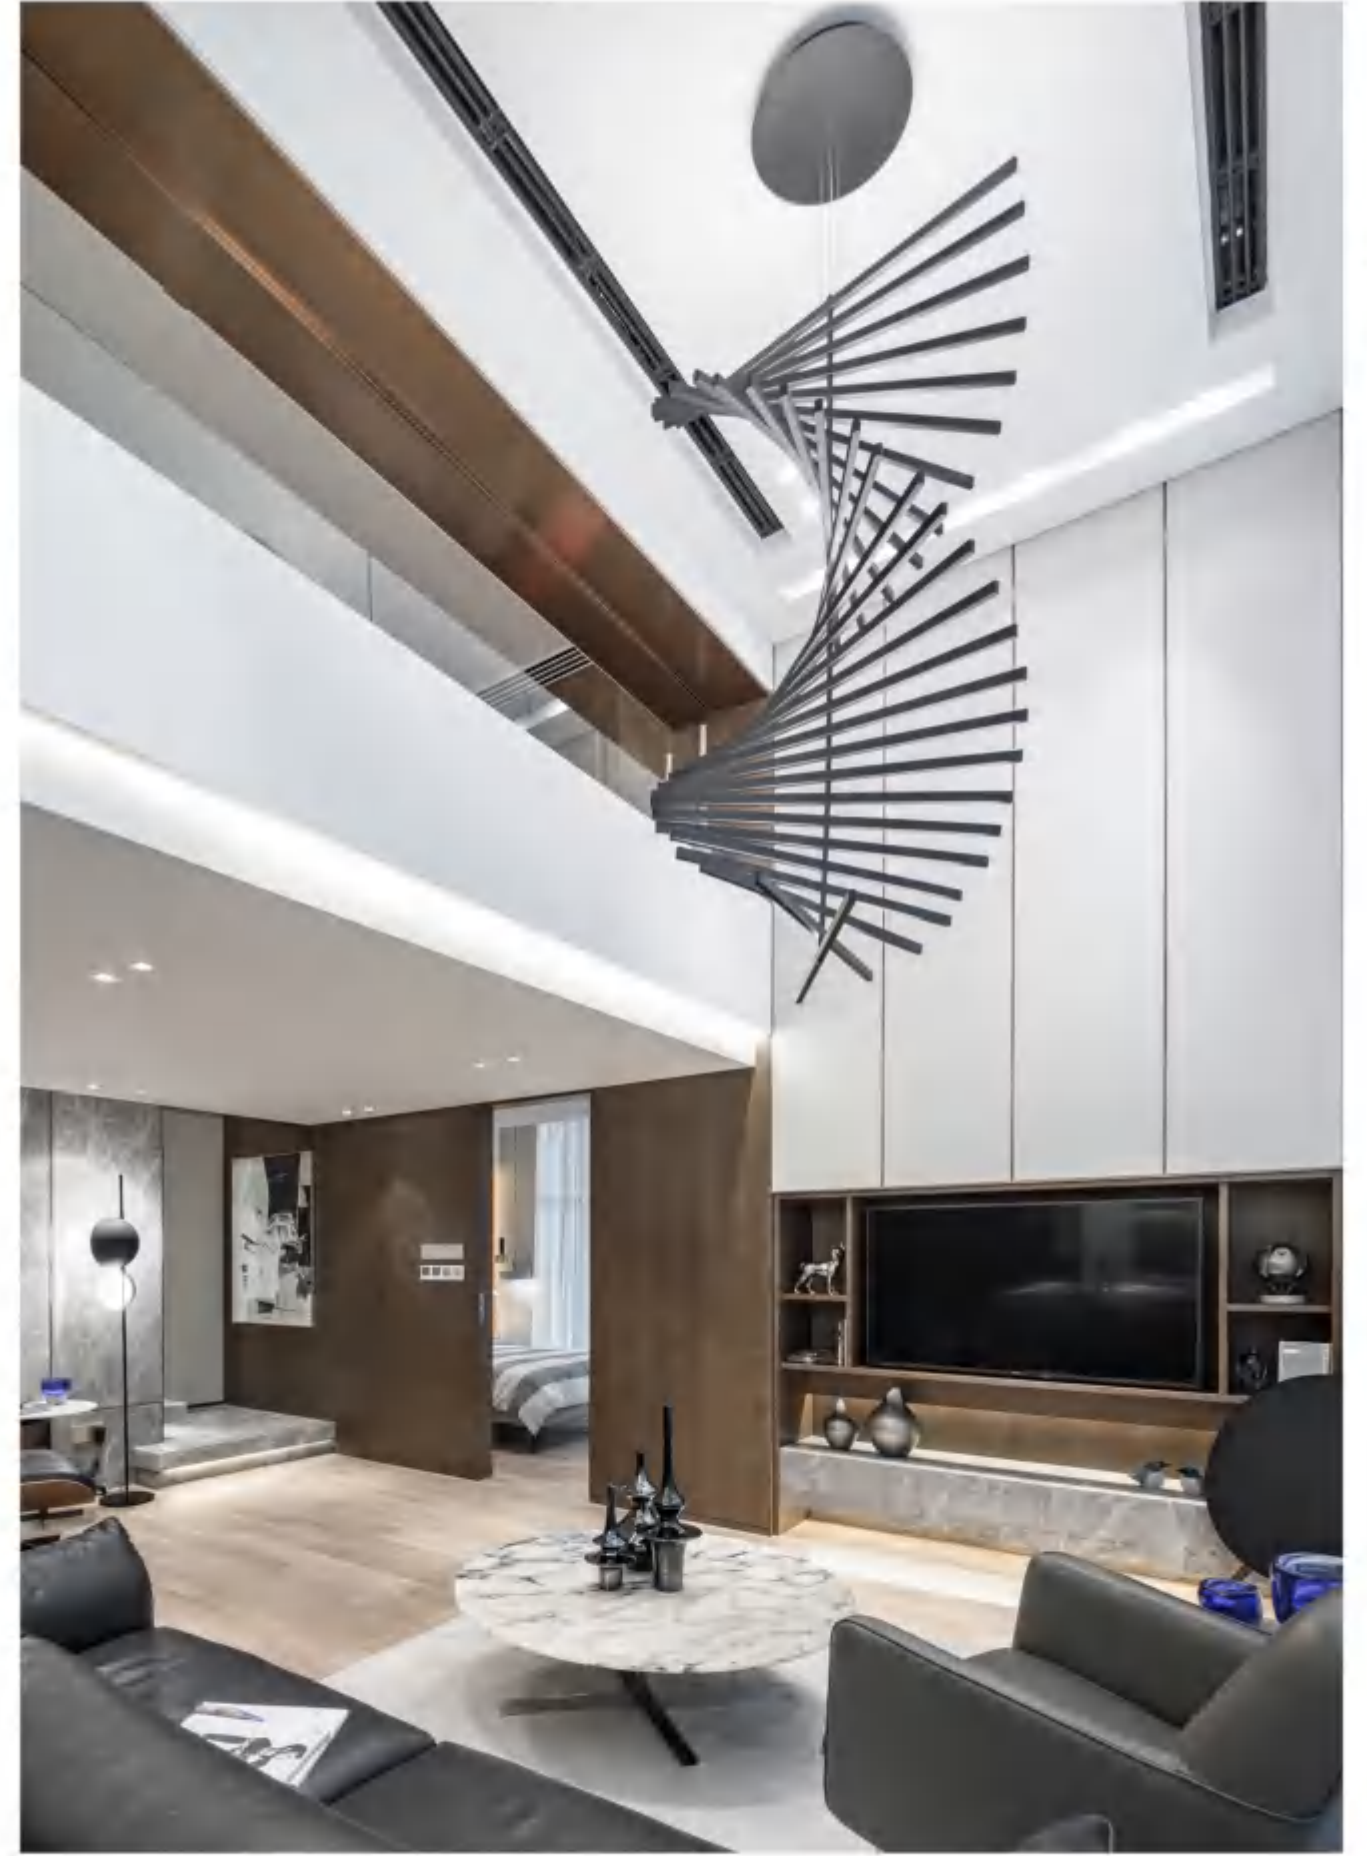




WAVE H L 10 DN

LED POWER: 50W
CRI: 80
SYSTEM POWER: 63W
OUTPUT: 2770lm/3000K
INPUT: 100-240V/AC/50/60Hz
DIMENSION: 468*870*26mm
HOLE SIZE: /mm



RECOMMEND




WAVE H S 10 DN

LED POWER: 25W
CRI: 80
SYSTEM POWER: 32.9W
OUTPUT: 1380lm/3000K
INPUT: 100-240V/AC/50/60Hz
DIMENSION: 468*25*472mm
HOLE SIZE: /



RECOMMEND

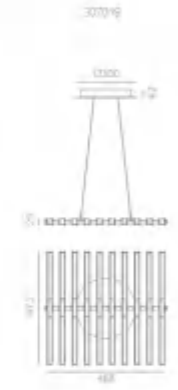


WAVE H L 20 DN

LED POWER: 100W
CRI: 80
SYSTEM POWER: 111W
OUTPUT: 5500lm/3000K
INPUT: 100-240V/AC/50/60Hz
DIMENSION: 933*870*26mm
HOLE SIZE: /



RECOMMEND




WAVE H S 20 DN

LED POWER: 55W
CRI: 80
SYSTEM POWER: 64.7W
OUTPUT: 2770lm/3000K
INPUT: 100-240V/AC/50/60Hz
DIMENSION: 933*25*472mm
HOLE SIZE: /



RECOMMEND





WAVE H L 30 DN

LED POWER: 150W
CRI: 80
SYSTEM POWER: 163W
OUTPUT: 8250lm/3000K
INPUT: 100-240V/AC/50/60Hz
DIMENSION: 1403*870*26mm
HOLE SIZE: /



RECOMMEND

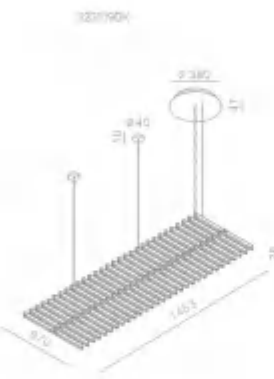


WAVE H S 30 DN

LED POWER: 75W
CRI: 80
SYSTEM POWER: 83W
OUTPUT: 4150lm/3000K
INPUT: 100-240V/AC/50/60Hz
DIMENSION: 1453*25*472mm
HOLE SIZE: /




RECOMMEND

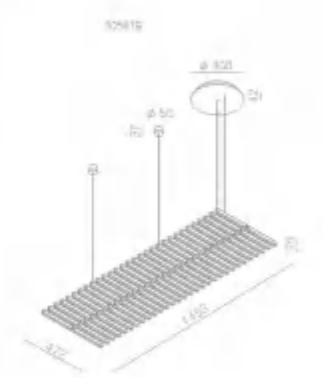

WAVE H 0 30 DN

LED POWER 79W
CRI: 80
SYSTEM POWER 83W
OUTPUT: 4150LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 145*220*473mm
HOLE SIZE: 1



RECOMMEND



WAVE V 0 10 DN

LED POWER 29W
CRI: 80
SYSTEM POWER 29W
OUTPUT: 1380LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 472*525*20mm
HOLE SIZE: 1




RECOMMEND



WAVE Y LS 30 LP

LED POWER 129W
CRI: 80
SYSTEM POWER 134W
OUTPUT: 6180LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 870*1580*20mm
HOLE SIZE: 1



RECOMMEND



WAVE Y LS 30 LP

LED POWER 129W
CRI: 80
SYSTEM POWER 134W
OUTPUT: 6180LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 870*1620*20mm
HOLE SIZE: 1



RECOMMEND



WAVE Y L 20 LP

LED POWER 100W
CRI: 80
SYSTEM POWER 110W
OUTPUT: 4330LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 870*1580*20mm
HOLE SIZE: 1



RECOMMEND



WAVE Y L 30 LP

LED POWER 110W
CRI: 80
SYSTEM POWER 120W
OUTPUT: 4330LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 870*1620*20mm
HOLE SIZE: 1




RECOMMEND



WAVE Y 0 20 LP

LED POWER 50W
CRI: 80
SYSTEM POWER 54W
OUTPUT: 2770LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 472*1080*20mm
HOLE SIZE: 1




RECOMMEND



WAVE Y 30 20 LP

LED POWER 79W
CRI: 80
SYSTEM POWER 83W
OUTPUT: 4150LM/3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 472*1620*20mm
HOLE SIZE: 1

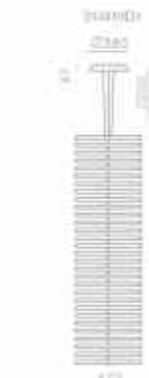

RECOMMEND



WAVE H 0 10 DN



WAVE H 0 20 DN



WAVE H 0 30 DN



WAVE V 0 10 LP



WAVE V LS 10 LP



WAVE V L 10 LP



WAVE Y 0 20 LP



WAVE Y LS 20 LP



WAVE V L 20 LP



WAVE Y 0 30 LP



WAVE Y LS 30 LP













































WAVE V L 30 LP



WAVE V 0 10 DN / V LS 10 DN / V L 10 DN



























WALL LAMP

					
ADRAY SQ SINGLE 757-758	ADRAY RO SINGLE 757-758	ADRAY SQ DOUBLE 757-758	ADRAY SQ DOUBLE 757-758	AKALI L 330 759-762	AKALI L 630 759-762
					
AKALI L 930 759-762	AKALI L 1230 759-762	AKALI L 1530 759-762	ARTE W 581	ASTRA SINGLE 763-766	ASTRA DOUBLE 763-766
					
AUREOLE 767-768	AVVOLGO M 769-774	BALANCE 775-778	BEETLE 779-782	BEL SINGLE 783-786	BEL DOUBLE 783-786
					
BOW 787-790	CONSTELL 5 CAP 791-796	CONSTELL 7 CNC 791-796	CONSTELL 9 SGR 791-796	CUBO R 797-800	CUBO L 797-800
					
CURES LONG 801-804	CURES ROUND 801-804	DONNA 1 805-808	DONNA 3 805-808	DREAM 809-810	ELF 811-812
					
FILOLUCE W 1 813-814	FILOLUCE W 4 813-814	GEMO ROUND 813-814	GEMO SQUARED 813-814	HEMLINE 815-816	HOPPER W S 684
					
HOPPER W M 664	HYPNOS 817-820	KARINA RS 821-826	KARINA RM 821-826	KARINA RHOMBUS 821-826	KARINA ST 821-826

755

WALL LAMP

					
KARINASO 821-826	LEGGO 827-830	LUXURY SINGLE 831-834	LUXURY DOUBLE 831-834	MIRO 300 1.1 835-840	MIRO 550 1.1 835-840
					
OTLY IO 841-844	OTLY IN ROUND 841-844	ROSAIN 845-846	SET 847-848	SHELL ROUND 849-850	SHELL SQUARE 849-850
					
SIKA RO 851-856	SIKA H 851-856	SONG C 857-860	SONG D 857-860	SONG E 857-860	TATOU USB 861-864
					
TATOU BOX 861-864	TATOU BOX IO 861-864	TV 865-868	VIKA WALL S 869-872	VIKA WALL M 869-872	WING 873-876

756

PERFORM YOUR LIGHT

ADRAY

A new eye catcher ADRAY is a great example of simplicity, elegance and creativity. Thanks to its structure, ADRAY can change light beam angle from 0° to 90°. It is ideal for playful effect in both residential and public areas. 2 versions, round and square, are available for choice, both are going with single or double lamps.

© CE IP20

COLOR FINISHINGS:



SQ SINGLE



SQ DOUBLE



RO SINGLE




RO DOUBLE




ADRAY SQ SINGLE/RO SINGLE

LED POWER: 6.6W
 SYSTEM POWER: 7.7W
 OUTPUT: 378lm/3000K
 INPUT: 100-240VAC/50/60Hz
 CRI: 80
 DIMENSION: 30*30*30mm
 Ø120*30mm




ADRAY SQ DOUBLE/RO DOUBLE

LED POWER: 13.8W
 SYSTEM POWER: 14.3W
 OUTPUT: 756lm/3000K
 INPUT: 220-240VAC/50/60Hz
 CRI: 80
 DIMENSION: 42*30*30mm
 Ø130*30*30mm

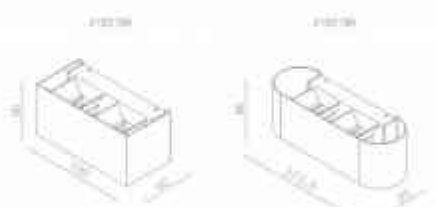

COLOR FINISHINGS:



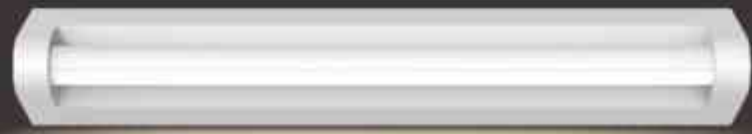

AKALI

With five different dimensions for options and adjustable lamp tube, AKALI can fully meet different lighting needs. IP54 rate allows it to install in the bathroom or washing rooms, and it's built-in power switch on the lamp body makes it convenient to control.

CE IP54 220-240VAC

AKALI

WALL LAMP



L 330



L 630



L 930



L 1230



L 1530

AKALI L 330 / L 630 / L 930 / L 1230 / L 1530

Item Code	Led Power	System Power	Color Temperature	On	Output	Input	Dimension
442119A	4.8 W	8.8 W	4000K	0	170 lm	220-240V 50/60Hz	331*61*48.7mm
442119A	8.3 W	11 W			420 lm		631*61*48.7mm
442119A	12.2W	17.1W			590 lm		931*61*48.7mm
442119A	14.5W	21 W			648 lm		1231*61*48.7mm
442119A	16.7W	24.7W			1000lm		1531*61*48.7mm

RECOMMEND



ANGLE L



COLOR FINISHINGS:



White



Black



761



WALL LAMP

762

ASTRA

Thanks to its simple, and at the same time, elegant appearance, ASTRA has become the best choice for both residential and public spaces. 4° beam angle gives special light performance. ASTRA is a splendid wall lamp, available in two sizes. Smaller version is providing up light, while longer version is available with up and down light direction.

© CE IP20 100-240VAC



SINGLE



DOUBLE

ASTRA SINGLE

LED POWER: 2.2W
LED OUTPUT: 164lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 184lm
INPUT: 100-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø49*75mm
HOLE SIZE: 1"



RECOMMEND:



ON/OFF
0001A

ASTRA DOUBLE

LED POWER: 4.4W
LED OUTPUT: 328lm/3000K
SYSTEM POWER: 8W
SYSTEM OUTPUT: 368lm
INPUT: 100-240VAC/50/60Hz
CRI: 90
DIMENSION: Ø49*105mm
HOLE SIZE: 1"



RECOMMEND:




ON/OFF
0002A


ANGLE 4°



2.2W 4° 3000K

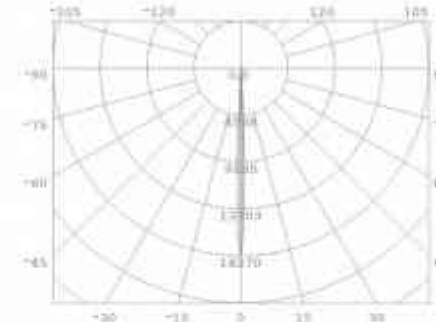

2.2W 4° 3000K

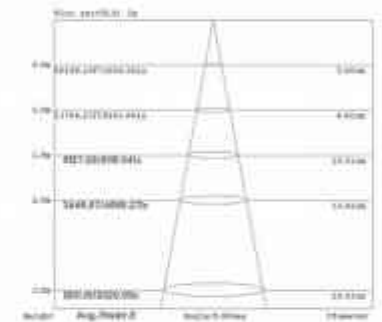


COLOR FINISHINGS:





765

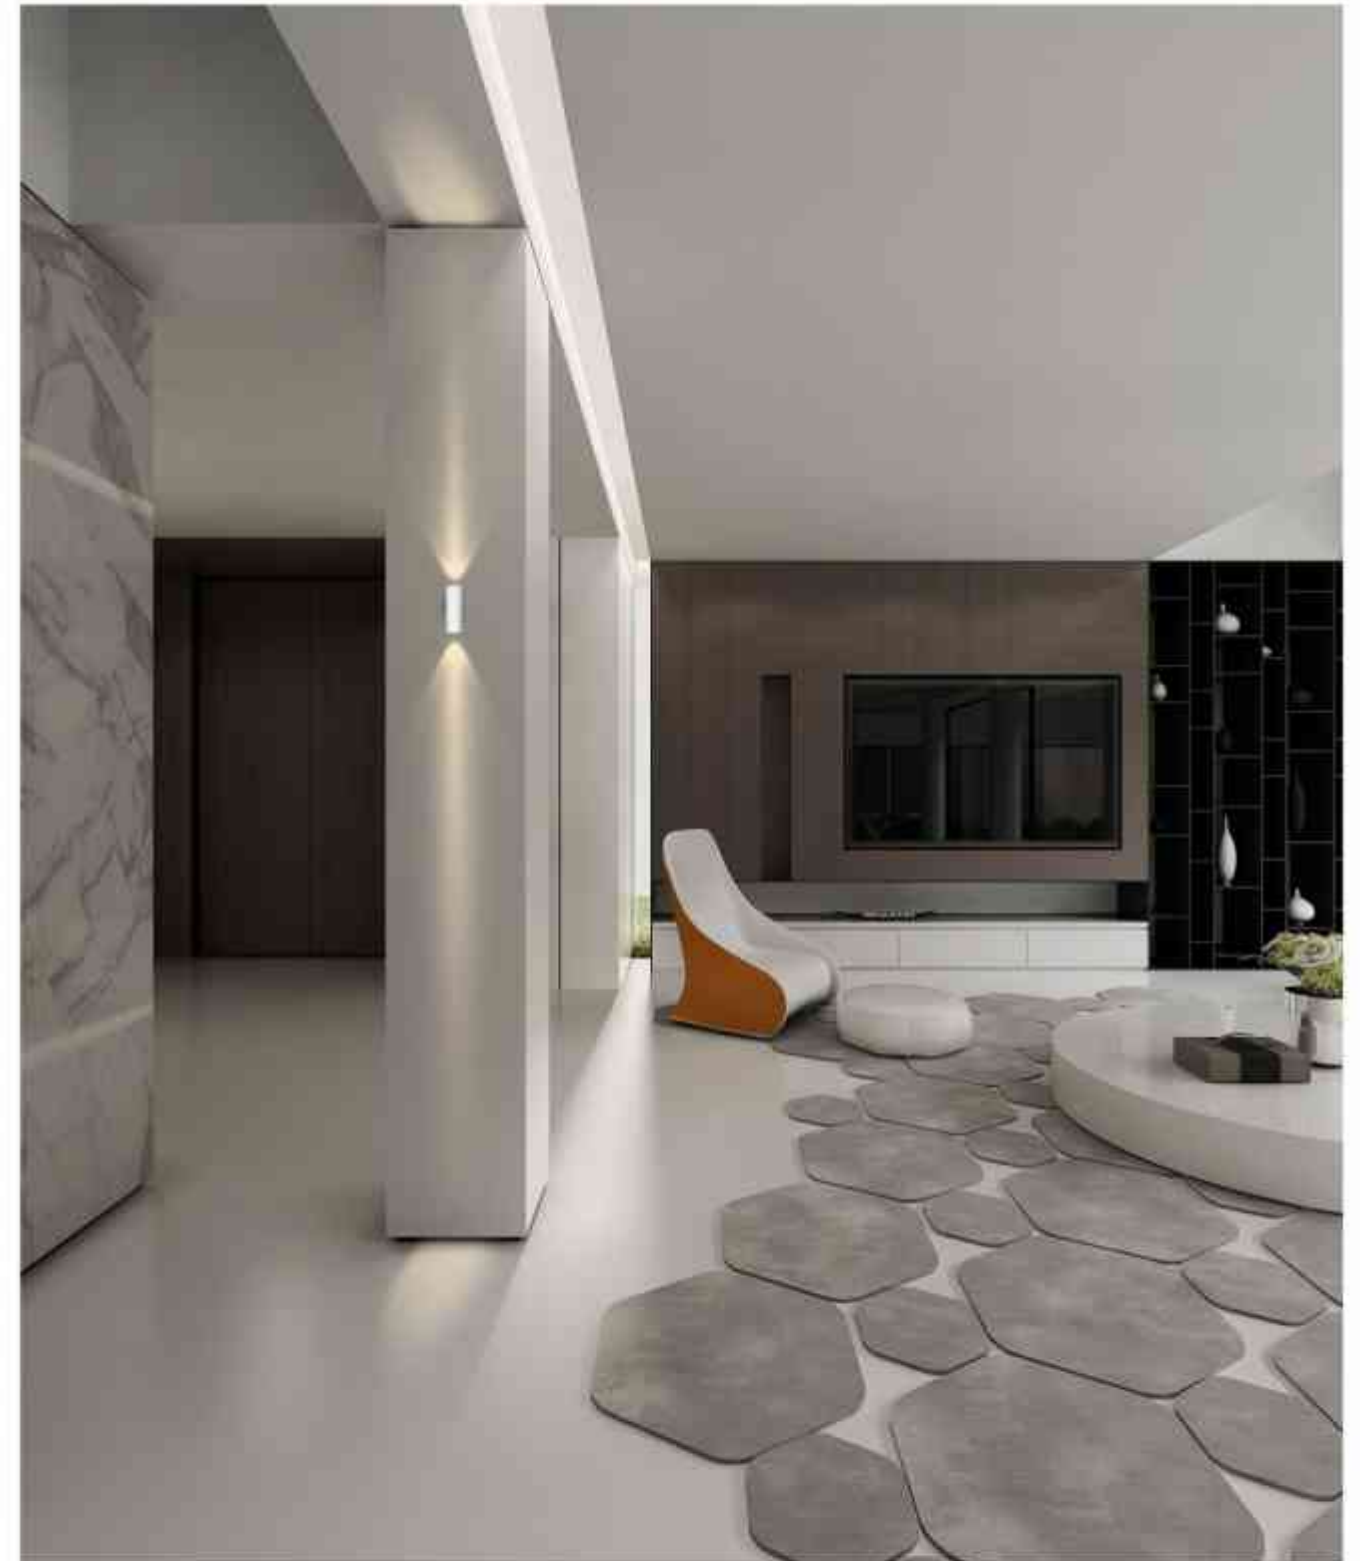

WALL LAMP

766



AUREOLE

The AUREOLE is a wall fixture with its 3.55° rotatable function is the best choice for auxiliary lighting for both private and public places. Its indirect light creates unforgettable patterns on the wall.

© CE IP20 220-240VAC



AUREOLE 
LED POWER 6.5W
SYSTEM POWER 6.5W
OUTPUT: 216lm/3000K
INPUT: 220-240VAC/50/60HZ
CRI: 90
DIMENSION: Ø118x47.5mm
HOLE SIZE: 1



COLOR FINISHINGS:






769

AVVOLGO

AVVOLGO is an excellent example which present the rich inspiration of FLUA to different lamp types. Wall lamps usually used as auxiliary lighting but AVVOLGO's highly designed appearance also makes it become the protagonist in the space. which stimulate the inspired designer to install the lamps in different heights and shapes.

© CE IP20 220-240VAC

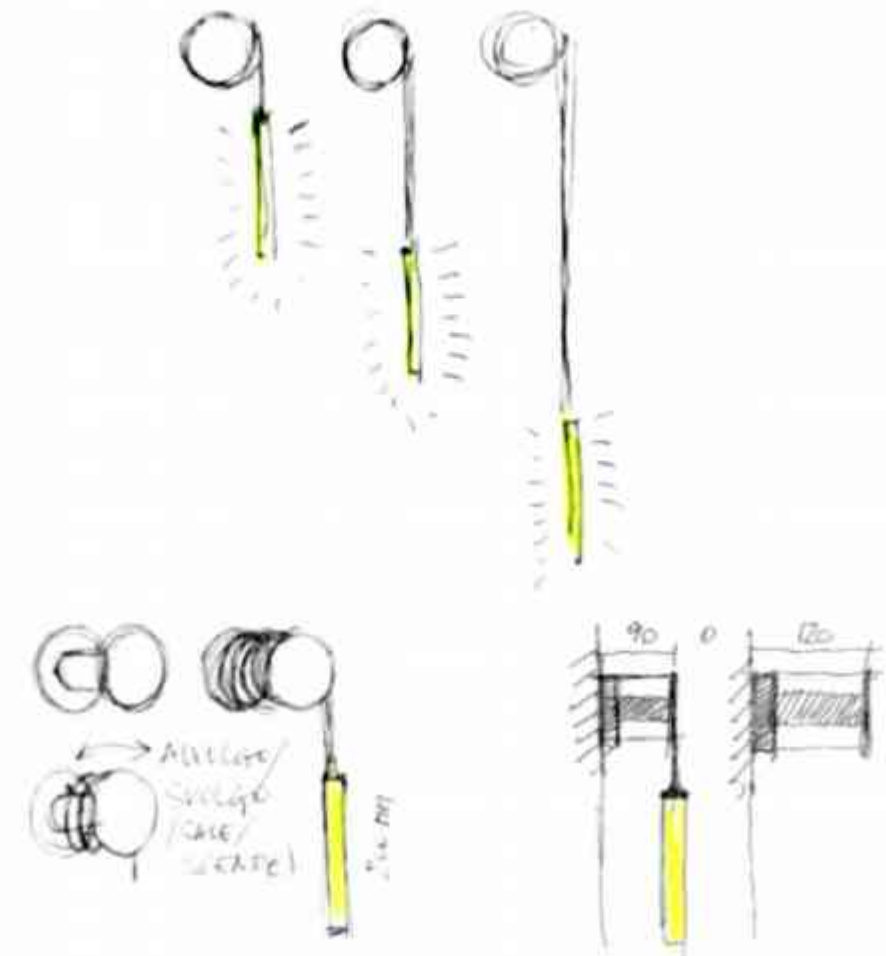

770


Designed by:

Luca Foggiato *Matteo Pignatelli*


COLOR FINISHINGS:



WSD-RED WSD-CROWNBLUE WSD-SILVER WLD-RED WLD-WLD FAW-RED FAW-WLD FAW-CROWNBLUE

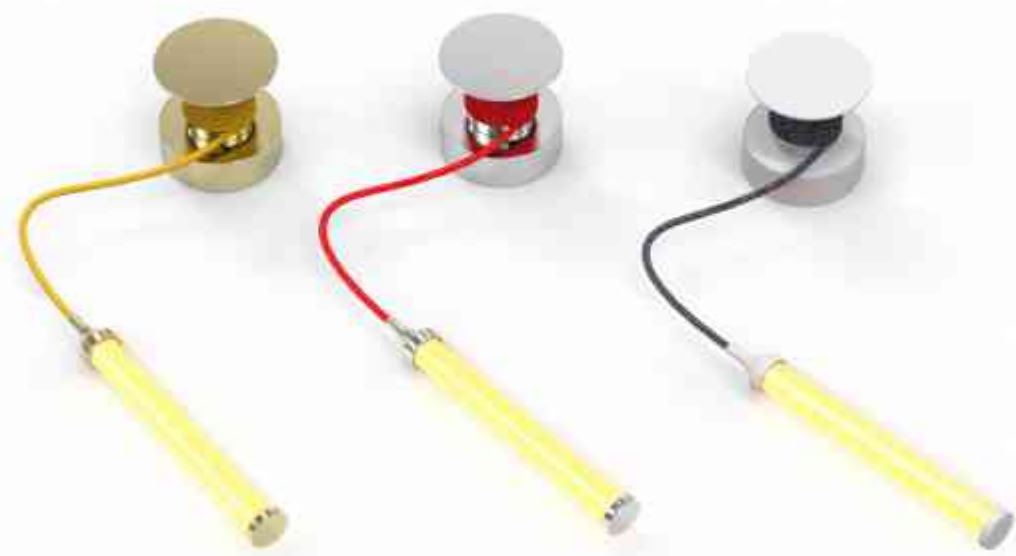

M

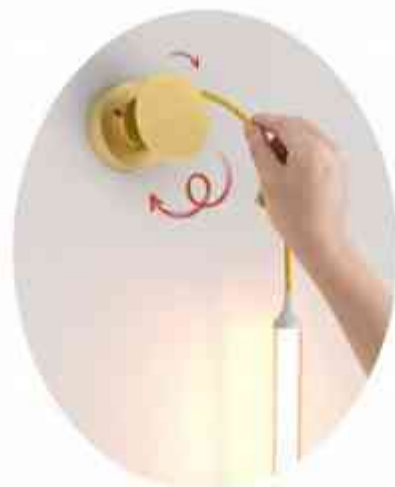

771

AVVOLGO M ④

LED POWER: 4W
 SYSTEM POWER: 5W
 OUTPUT: 212LM/2700K-8000K
 INPUT: 230-240VAC/50/60Hz
 CR: 80
 DIMENSION: Ø30/241mm
 HOLE SIZE: 1

RECOMMEND



ANGLE: L



WALL LAMP

772



773



774

WALL LAMP

BALANCE

With its slim and long shape, with soft light emitting – BALANCE is a great solution for living rooms, restaurants, lobby zones etc. Combination of several pieces will create unique patterns suitable for any modern and creative space.

© CE IP20 220-240VAC

BALANCE

WALL LAMP



BALANCE

BALANCE

LED POWER: 32 W
CRI: 90
SYSTEM POWER: 36W
OUTPUT: 1843 Lm/3000K
INPUT: 220-240VAC
DIMENSION: 1800*52.5*45mm
HOLE SIZE: 1"



433474A



COLOR FINISHINGS:





777



WALL LAMP

778



WALL

BEETLE

Nature is the finest designer of all.
 Inspired by bug, BEETLE is a bionic-design wall lamp.
 The well designed embowed lamp body gives
 dynamic and rhythm to the flat wall.

Whether positioning it to perform a upward lighting or downward lighting,
 with the 3.2° beam angle, BEETLE enhances the interior space with soft,
 warm and comfortable lighting.

© CE IP20 220-240VAC

BEETLE WALL

LED POWER: 9.8W
 CRI: 95
 SYSTEM POWER: 7.8W
 OUTPUT: 330 Lm/3000K
 INPUT: 220-240VAC 50/60Hz
 DIMENSION: 161*160*80mm
 HOLE SIZE: /



RECOMMEND



COLOR FINISHINGS:





781



WALL LAMP

782



783

BEL

This splendid wall lamp is the best choice for bed side lighting. Classic bell-shaped lamp creates vintage atmosphere in a bed room. Thanks to its rotatable 3.50° function, BEL can be easily adjusted however need. BEL is available in 2 versions: single and double. DIM function is included.



SINGLE



DOUBLE

BEL SINGLE

LED POWER: 3W AC Module
 SYSTEM POWER: 5W
 OUTPUT: 198lm/3000K
 INPUT: 220-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 50*74*93mm
 HOLE SIZE: 1



RECOMMEND



BEL DOUBLE

LED POWER: 6W AC Module
 SYSTEM POWER: 10W
 OUTPUT: 276lm/3000K
 INPUT: 220V-240VAC 50/60Hz
 CRI: 90
 DIMENSION: 172*93*63mm
 HOLE SIZE: 1



RECOMMEND



784

COLOR FINISHINGS:





787



BOW

Small elegant tubular shapes BOW has already become classic ring wall mounted collection. This splendid fitting consists of two cylinders: one is fixed on the wall while the other can be adjusted. Both single use or installed in group, BOW creates perfect light effect on the wall.

Thanks to variety of color combinations, BOW can match any design of the room. Recommended both for residential and public spaces.

CE (IP20) (100-240VAC)


BOW 
 LED POWER 23 WATT
 LED OUTPUT 1400 LUMEN
 SYSTEM POWER 2.8 W
 SYSTEM OUTPUT 1772 LM
 INPUT 100-240VAC 50/60Hz
 CRI 90
 DIMENSION 120x33mm
 HOLE SIZE




RECOMMEND:




3.2W 40° 300lm



3.2W 10° 300lm

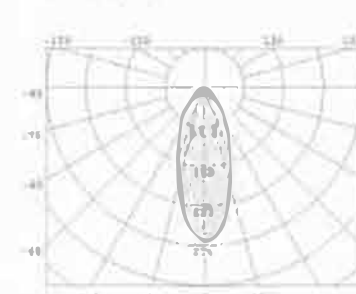

3.2W 40° 300lm



788



789



WALL LAMP

790

COLOR FINISHINGS:



#AW

#BS

#AW-WG

#BS-WG



CONSTELL

FLUA brand new constellation wall lamp design, has a rich shape, and its imaginative shape gives the designer unlimited space.
 CONSTELL series full with creative inspiration and can be DIY according to different spaces. Products can be widely used in home and commercial spaces (bedrooms, hotel rooms, bar counters, etc.)


© CE IP20 100-240V 2700K-6000K




Lamp body




Connecting cable

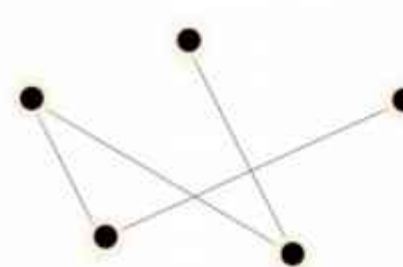

Shaped with 5 lamp bodies

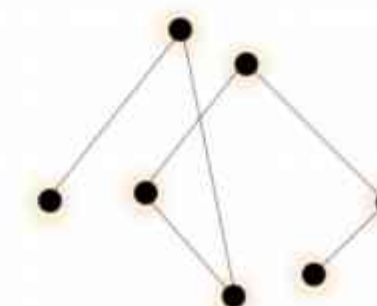




Shaped with 7 lamp bodies

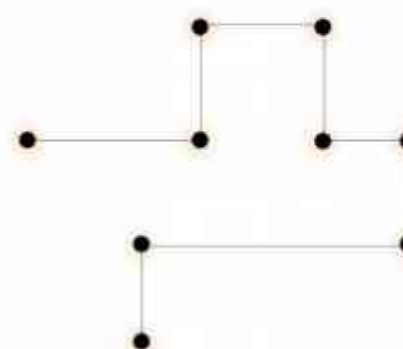

Shaped with 9 lamp bodies

COLOR FINISHINGS:



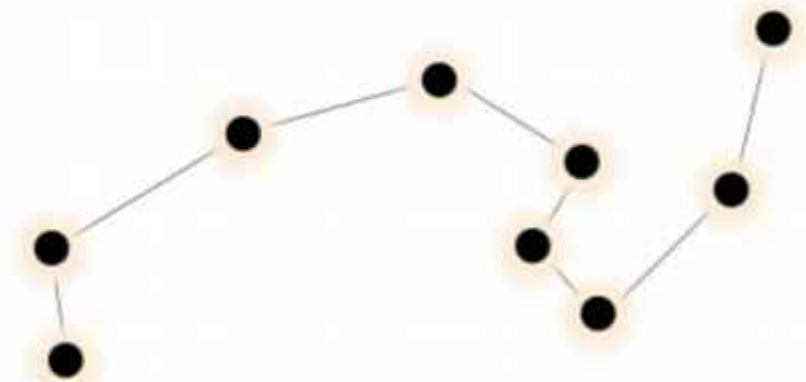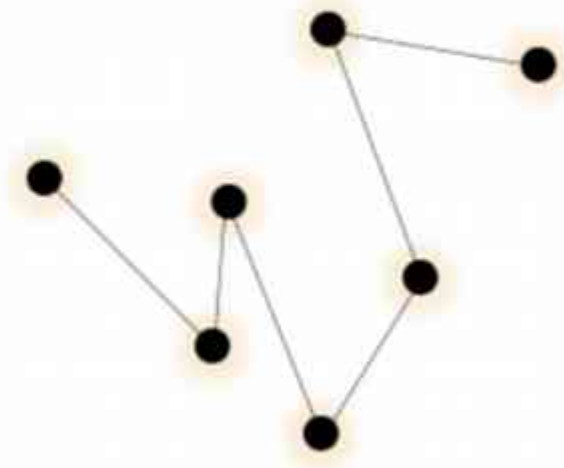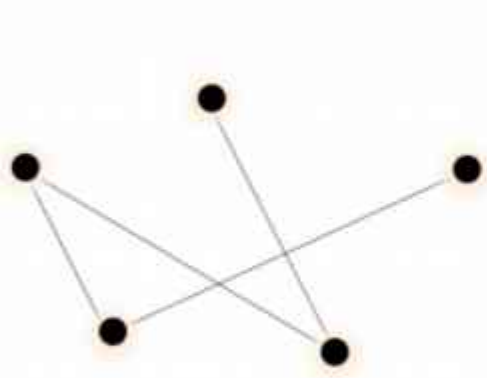

CONSTELL 5 CAP

LED POWER 314 W
 SYSTEM POWER 314 W
 OUTPUT: 3000K/3700K/6000K
 CRI: 90
 INPUT: 100-240V
 DIMENSION: /
 HOLE SIZE: /



RECOMMEND:



ANGLE L



CONSTELL 7 CNO

LED POWER 714 W
 SYSTEM POWER 714 W
 OUTPUT: 1300K/2700K/4000K
 CRI: 90
 INPUT: 100-240V
 DIMENSION: /
 HOLE SIZE: /



RECOMMEND:



ANGLE L



CONSTELL 9 DGR

LED POWER 314 W
 SYSTEM POWER 314 W
 OUTPUT: 1700K/2700K/4000K
 CRI: 90
 INPUT: 100-240V
 DIMENSION: /
 HOLE SIZE: /




RECOMMEND:



ANGLE L



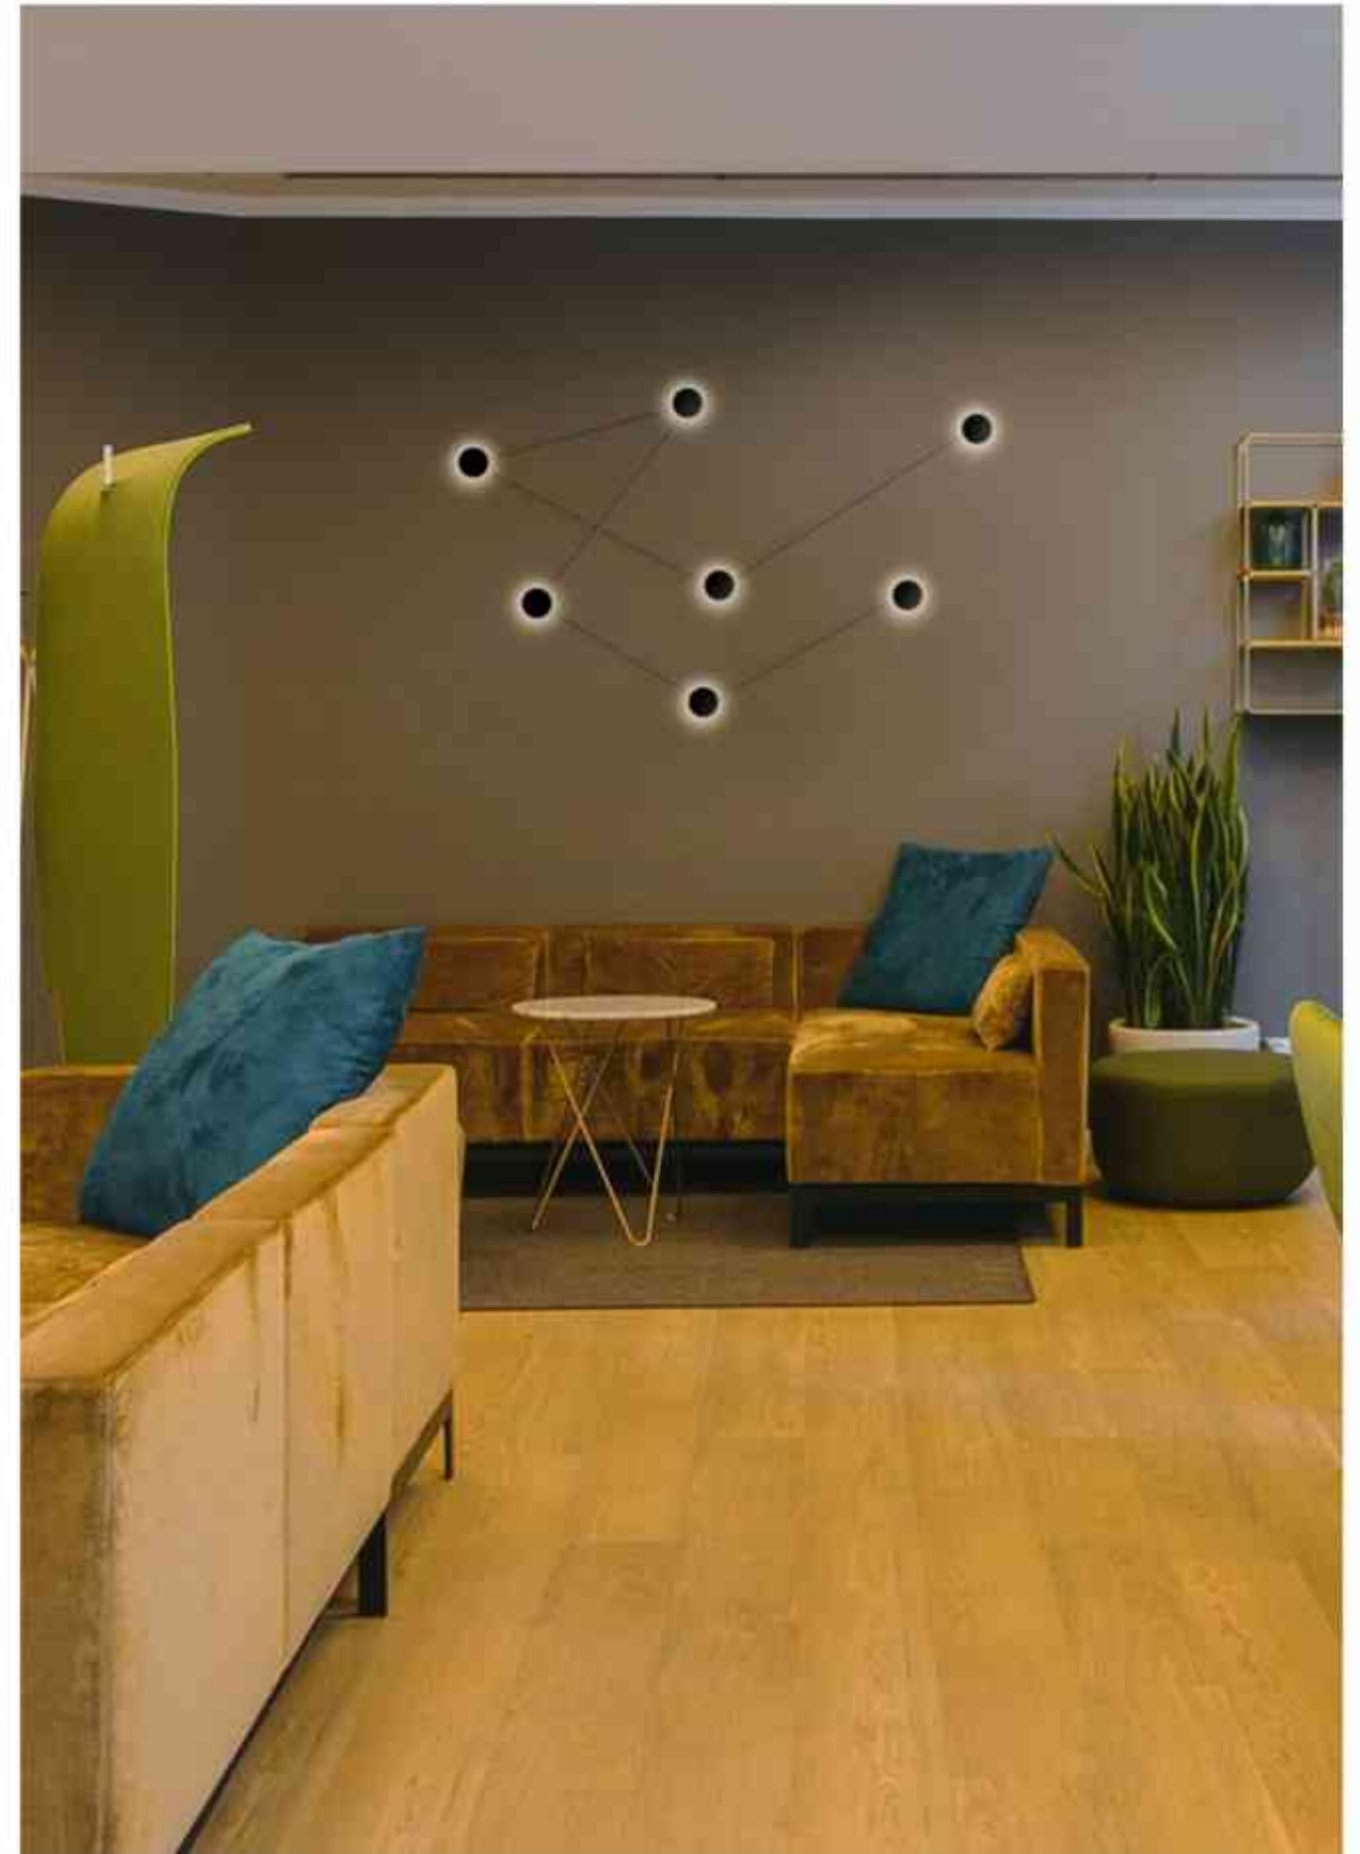

CUBO

CUBO is a new eye-catching architectural design, a new step of lighting creation that erase the border between reality and abstraction. CUBO with its 3D lighting performance bring us from dream to reality and back. Sharp rectangular shape makes the light going according to the straight trajectory. CUBO consists of two square lighting making mirror reflection from one to the other. LED source and driver are integrated and hidden into the fitting. CUBO is a great choice for residential areas, halls, hotels, office receptions.

CE CE IP20 220-240VAC

797



WALL LAMP

798



R




L

CUBO R/L
 LED POWER: 6.3W
 CRF: 90
 SYSTEM POWER: 8W
 OUTPUT: 385lm/3000K
 INPUT: 220-240VAC 50/60Hz
 DIMENSION: 254*254*54mm
 HOLE SIZE: 1




C



COLOR FINISHINGS:



RAW

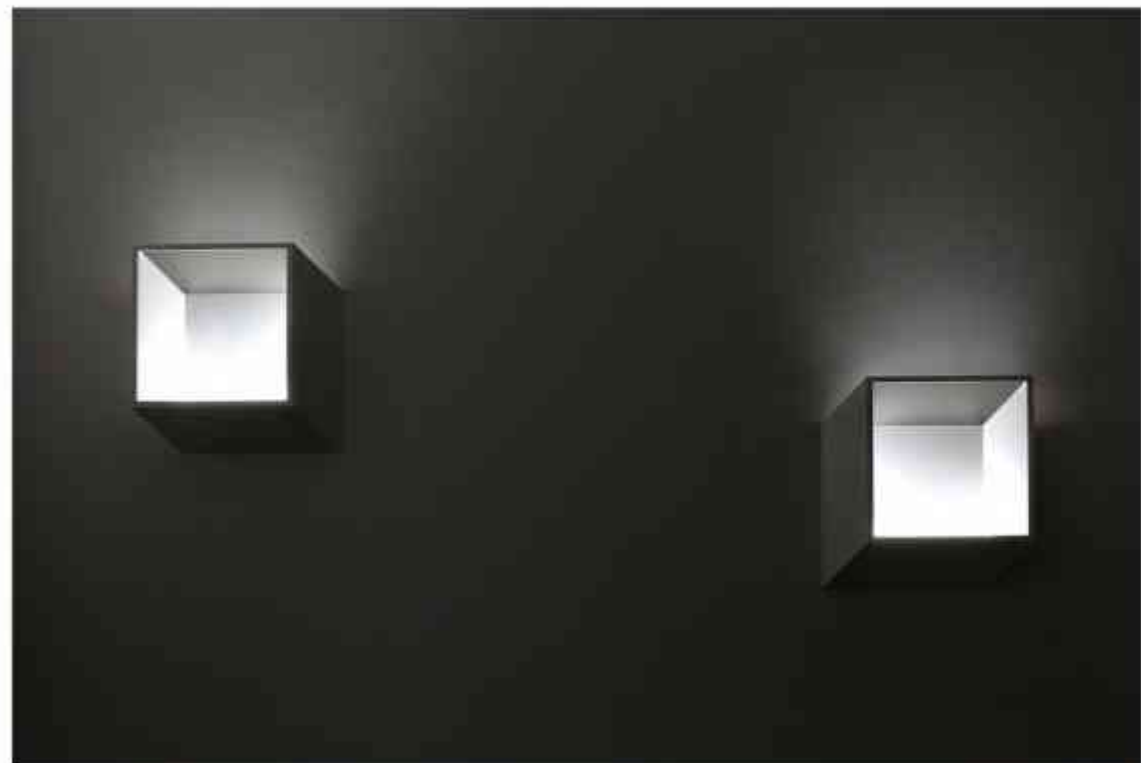

799



WALL LAMP

800



LONG



ROUND

CURES

Thin as paper with slightly curved side,
CURES is presented unique elegant design.
This splendid wall lamp is available in two versions,
CURES ROUND and CURES LONG.

© CE IP20





803

CURES ROUND

LED POWER: 6W
 SYSTEM POWER: 4.5W
 OUTPUT: 110lm/3000K
 INPUT: 100-240V~0.30/0.04Hz
 CRI: 90
 DIMENSION: 140*121*2140 (mm)
 HOLE SIZE: 70



RECOMMEND:



ON/OFF
 0-10V

CURES LONG

LED POWER: 6.5W
 SYSTEM POWER: 7.5W
 OUTPUT: 114lm/3000K
 INPUT: 100-240V~0.30/0.04Hz
 CRI: 90
 DIMENSION: 250*93*1164 (mm)
 HOLE SIZE: 70



RECOMMEND:



ON/OFF
 0-10V

WALL LAMP

804

COLOR FINISHINGS:



PCS-WH



BLK



DONNA

DONNA is a great example of elegance, simplicity and at the same time, usability. This splendid reading lamp with USB charging connector makes it more functional and useful. The lighting fitting is available with different design of the lamp shade and arm's length to match any possible user's demands.

© CE IP20 100-240VAC DIM PUSH USB CHARGER



DONNA 1

LED POWER 2.2W
CRI 90
SYSTEM POWER 8.8W
OUTPUT: 136lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 100*90*480mm
HOLE SIZE: 1


RECOMMEND




ANGLE 15°



2.2W 15° 3000K

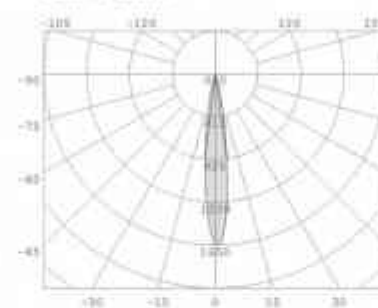

2.2W 15° 3000K



COLOR FINISHINGS:



PAW

PAB

PAB WGL



3



USB/ANDROID CHARGER



DONNA S


LED POWER 3.2W
CRI 90
SYSTEM POWER 8 W
OUTPUT 255LM-3000K
INPUT 100-240V AC, 50/60Hz
DIMENSIONS 100*80*50mm
HOLE SIZE 1

RECOMMEND



DATA FLUSH 1400/1700


ANGLE 22°

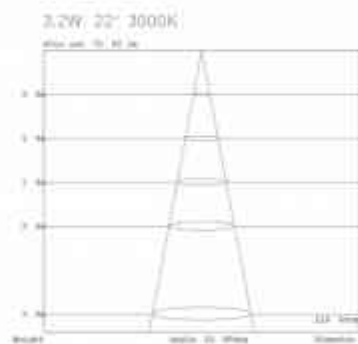

COLOR FINISHINGS:



RAW / BLACK

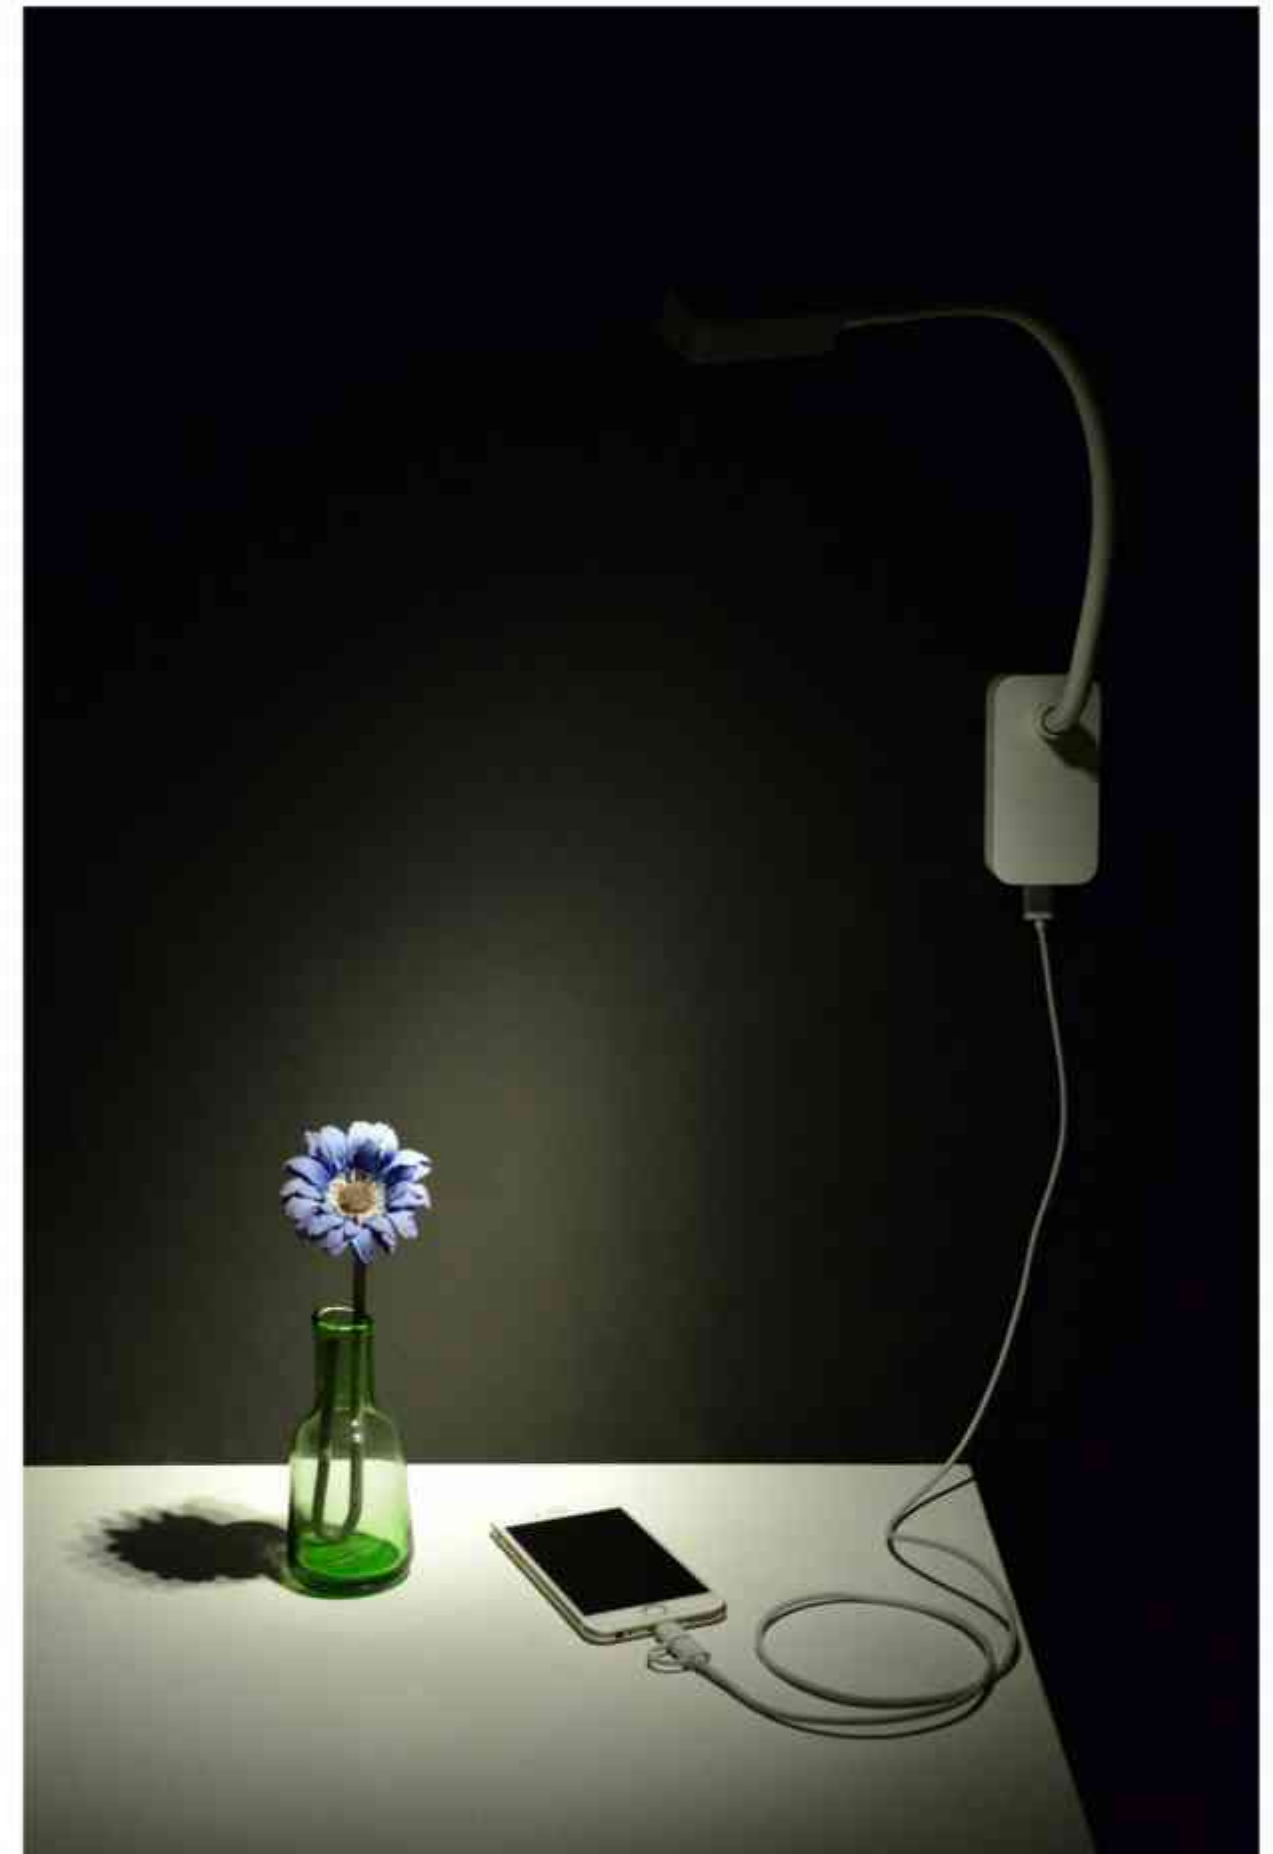



DREAM

Lighting as an art, forms beautiful and unforgettable shapes and performances, turned to become a DREAM.

DREAM is a new design concept of wall lighting, with the shape that reminds slightly opened book, giving light from its core. DREAM is the best choice for residential areas, offices, hotels.

© CE IP20 100-240VAC

DREAM 
 LED POWER 6.1W
 SYSTEM POWER 7.3W
 OUTPUT 525lm/3000K
 INPUT 100-240VAC/50/60Hz
 CRI: 80
 DIMENSION: 230*75*55mm
 HOLE SIZE: 7



COLOR FINISHINGS:





811



WALL LAMP

812

ELF

Best decorative effect is coming from pure simple forms and materials. Pure transparent glass globe fixed on elegantly bended aluminum arm. The light inside the glass creates unique lighting patterns in the room. Be it residential or public spaces, ELF is a great choice for wall lighting solution.

© CE IP20 TOUCH DIM

ELF W 
 LED POWER 4.2W
 SYSTEM POWER 5.2W
 OUTPUT 233lm/3000K
 INPUT 200-240VAC/50/60Hz
 CRI 90
 DIMENSION 150x229x110mm
 HOLE SIZE 1



RECOMMEND



ON/OFF
 0.015s

COLOR FINISHINGS:



RAW

FAB

FAB-WL3




813

GEMO

Simple elegant design of GEMO is making great decorative effect for the wall. The indirect lighting is coming from inside of the fitting that is slightly bended in the middle. GEMO can be perfectly integrated with almost any concept of interior design. DIM function is included.

© CE IP20 220-240VAC DIM TRIAC

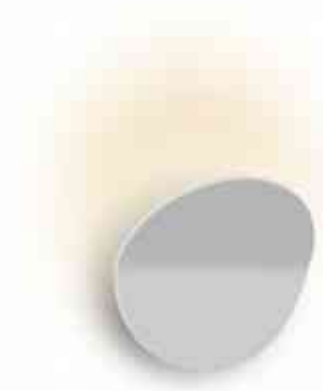

ROUND



SQUARED

814

GEMO ROUND / SQUARED

LED POWER: 3 WwAC Module
 CRI: 80
 SYSTEM POWER: 3 W
 OUTPUT: 320lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 DIMENSION: Ø160x81mm
 150°x100°x25mm

HOLE SIZE: ∅



RECOMMEND




DIM TRIAC



COLOR FINISHINGS:




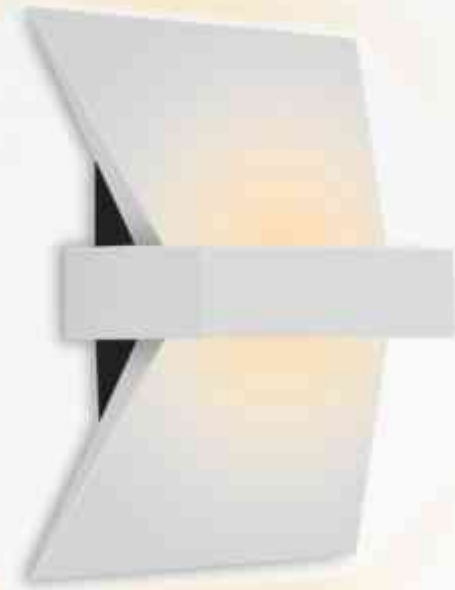

HEMLINE

HEMLINE is a great example of timeless design, the art of light. Installed in a row one by one on the wall, HEMLINE is creating enigmatic ornaments on the wall playing with light and shade. It is a great choice for halls, corridors and living rooms be it residential area or public space.

© CE IP20 220-240VAC

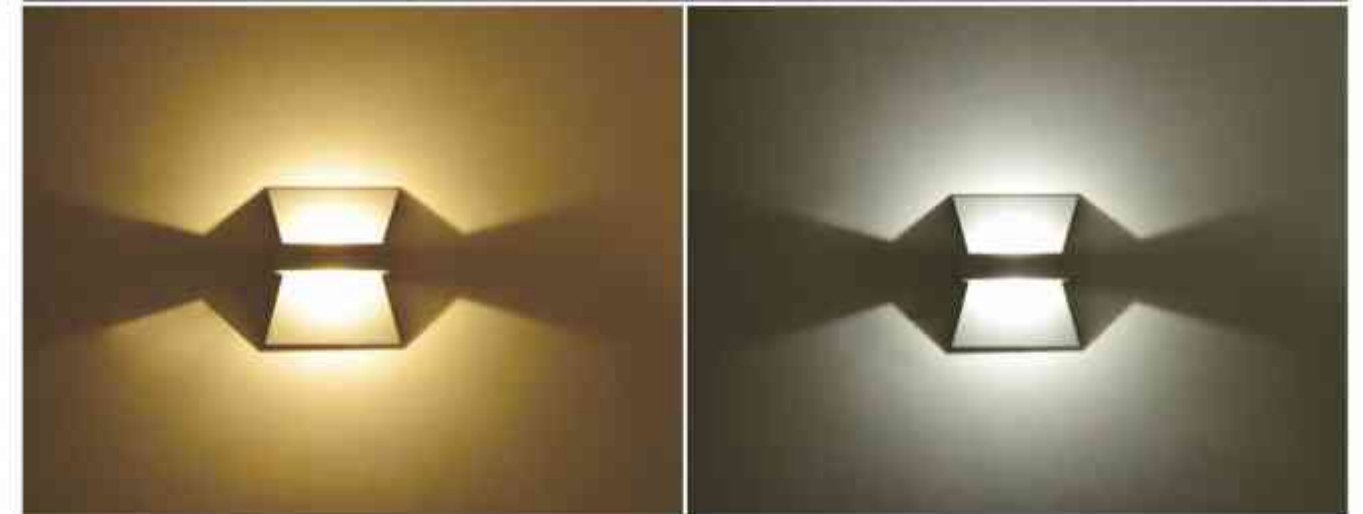

WALL LAMP

HEMLINE Ⓡ
LED POWER 8.7W
CRI: 90
SYSTEM POWER 8.8W
OUTPUT: 326LM/2600K
INPUT: 220-240VAC/50/60Hz
DIMENSION: 188*100*53mm
HOLE SIZE: 7



RECOMMEND



DM-TYRAC



COLOR FINISHINGS:



PAV

HYPNOS

HYPNOS- has the charm of industrial aesthetics. The overall shape is outlined in the way of circular connection, with a classic lampshade design, combining retro and modern unique shapes to achieve the aesthetic balance of the design. The light pole can support swinging left and right, and the flood light performance helps protecting your eyes. The intimate night light design under the base, combined with the USB charging part, HYPNOS greatly meets everyone's needs for different function.

© CE IP20 100-240VAC

COLOR FINISHINGS:



817



HYPNOS



WALL LAMP



SHORT PRESS
ON/OFF



LONG PRESS
Adjust brightness 10-100%

818

HYPNOS IN 
 LED OUTPUT: 283lm
 SYSTEM POWER: 13.5W
 SYSTEM DUTY CYCLE: 210lm/3000h
 INPUT: 100-240VAC 50/60Hz
 CH: 90
 DIMENSION: Ø100*478*220mm
 HOLE SIZE: /



RECOMMEND



COLOR FINISHINGS:





819



WALL LAMP

820




KARINA

Special design of KARINA has already become one of FLUA classical collections. Splendid aureole-shaped light is smoothly diffused on the wall around the lamp.

Aluminum cover fixed by special magnetic mechanism, could be easily changed to create new patterns on the wall.

KARINA is available with different 4 designs and 2 sizes.

Combination of shapes, sizes and colors installed randomly on the wall, can provide best decorative effect for any room.

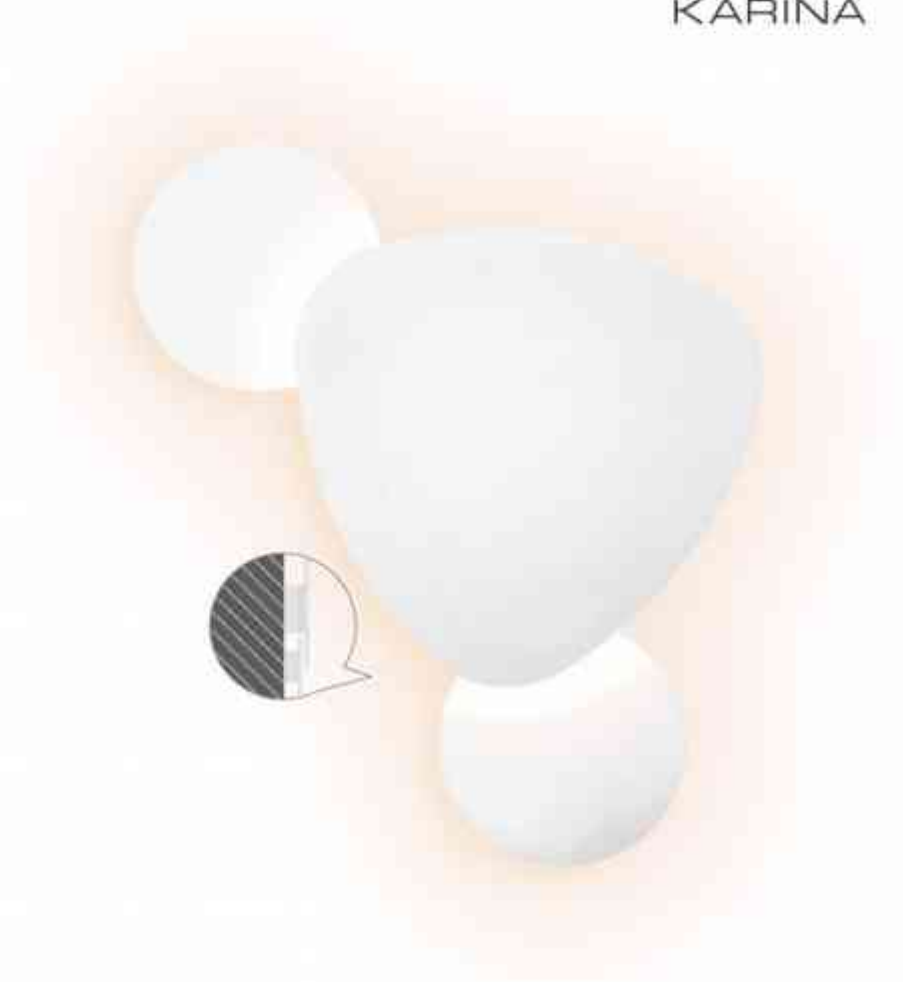

WALL LAMP

822



RS

EASY CHANGE



RM



RHOMBUS



ST



SO

COLOR FINISHINGS:




RAW



RAL



RS

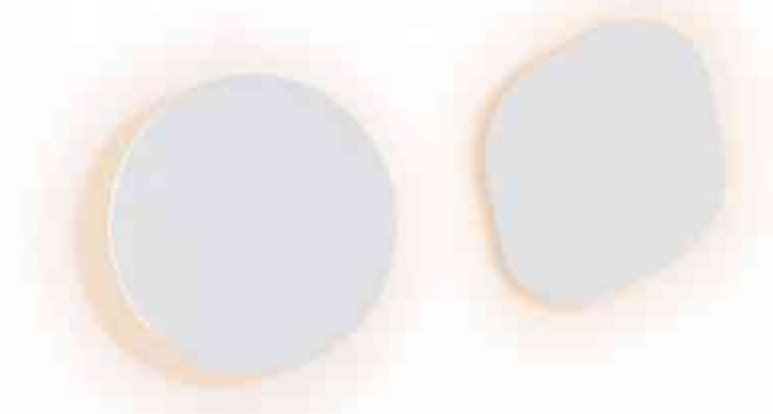

RM

RHOMBUS

KARINA RS

LED POWER: 3.1W
 SYSTEM POWER: 4W
 OUTPUT: 346lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: (112x)M, 5mm
 HOLE SIZE: 1

RECOMMEND:

DALI/DMZ



KARINA RM

LED POWER: 4.4W
 SYSTEM POWER: 7.9W
 OUTPUT: 625lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: (125x)M, 5mm
 HOLE SIZE: 1

RECOMMEND:

DALI/DMZ

DALI/DMZ



KARINA RHOMBUS


LED POWER: 6.4W
 SYSTEM POWER: 7.9W
 OUTPUT: 490lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: (225x)M, 5mm
 HOLE SIZE: 1

RECOMMEND:

DALI/DMZ

DALI/DMZ



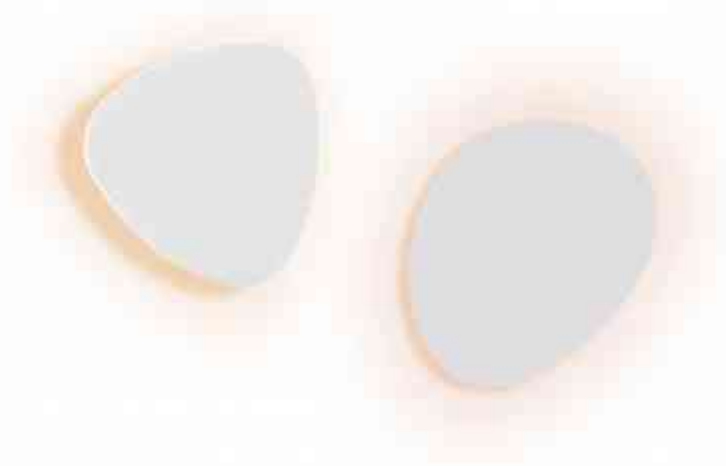


ST

SO

825

KARINA OT / SO

LED POWER: 8.4W
 SYSTEM POWER: 7.9W
 OUTPUT: 544LM/5000K
 INPUT: 230-240VAC, 50/60Hz
 CRI: 90
 DIMENSIONS: 227*225*32.5mm
 225*173*52.5mm
 HOLE SIZE: 173mm



RECOMMEND



WALL LAMP

826

LEGGO

LEGGO is a new design concept of bedside lighting.
 LEGGO is a nice example of elegance, flexibility and functionality.
 Different selection of lamp shapes is specially created to meet any possible design requirement.
 Each model has DIM function.

© CE IP20 100-240VAC TOUCH DIM

827



2

WALL LAMP



828

LEGGO 2

LED POWER 2.2W
 SYSTEM POWER 3.8W
 OUTPUT: 40lm/3000K
 INPUT: 100-240VAC, 50/60Hz
 CRI: 80
 DIMENSION: 50*48*28mm
 HOLE SIZE: 7



ANGLE

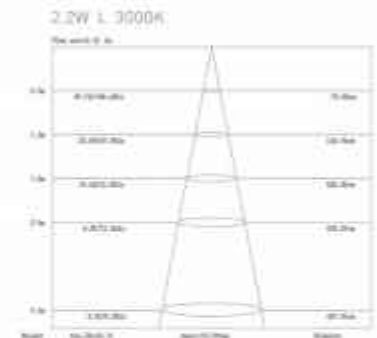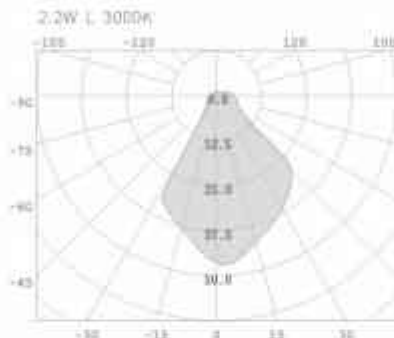

RECOMMEND:



TOUCH DIM
480°/70°

COLOR FINISHINGS:





3



829

LEGGO 3

LED POWER 3.2W
CRI: 80
SYSTEM POWER 3.7W
OUTPUT: 230LM 3000K
INPUT: 100-240VAC 50/60Hz
DIMENSION: 90*58*120mm
HOLE SIZE: 1



ANGLE 22°

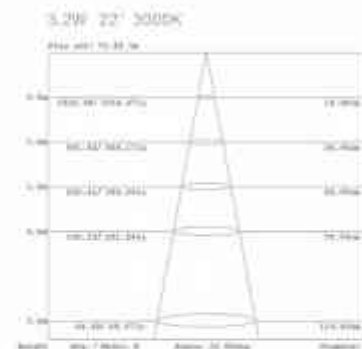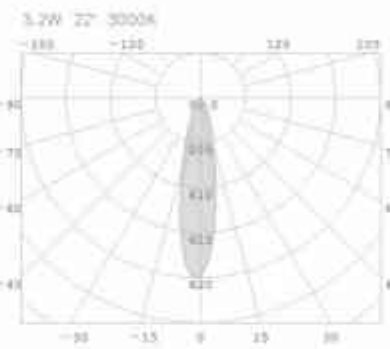

RECOMMEND



WALL LAMP

830



LUXURY

LUXURY, as its name indicates, can give additional luxurious and elegant detail to any room, be it residential or public spaces. This splendid surface mounted downlight is presented with single or double versions. To extend the collection, LUXURY ON LONG version was created.

LUXURY can be used in an elegant combination of wall mounted and ceiling mounted variants. Aesthetics and functionality are the key words to describe LUXURY collection. Various of color combinations are available for choice. In addition, the product has adjustable function.

© CE IP20 100-240VAC



WALL SINGLE

WALL DOUBLE

COLOR FINISHINGS:



RAW - WWH

RAW - WBL

RAW - WSG

RAW - WOL

RAB - WWH

RAB - WBL

RAB - WSG

RAB - WOL



LUXURY WALL SINGLE ⊕

LED POWER: 9.35W
 LED OUTPUT: 1000lm/3000K
 SYSTEM POWER: 11.4W
 SYSTEM OUTPUT: 100lm
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 113*102*85mm
 HOLE SIZE: 7



RECOMMEND:



LUXURY WALL DOUBLE ⊕

LED POWER: 2*9.35W
 LED OUTPUT: 1000lm/3000K
 SYSTEM POWER: 22.8W
 SYSTEM OUTPUT: 1040lm
 INPUT: 100-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 135.5*113*85mm
 HOLE SIZE: 7




RECOMMEND:




Angle 38°



9.35W 38° 3000K

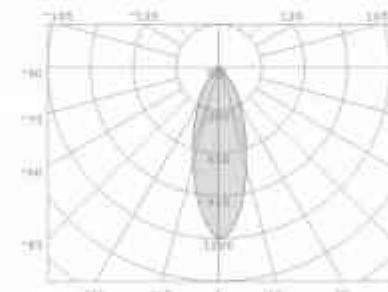

9.35W 38° 3000K



MIRO

WALL LAMP




MIRO

Wall lamp with diffused light that could be easily adjusted however needed.
 Can be used as lamp for mirror, painting or other objects on the wall.
 Available in 2 sizes 300 mm and 550 mm.

© CE IP20 220-240VAC

COLOR FINISHINGS:

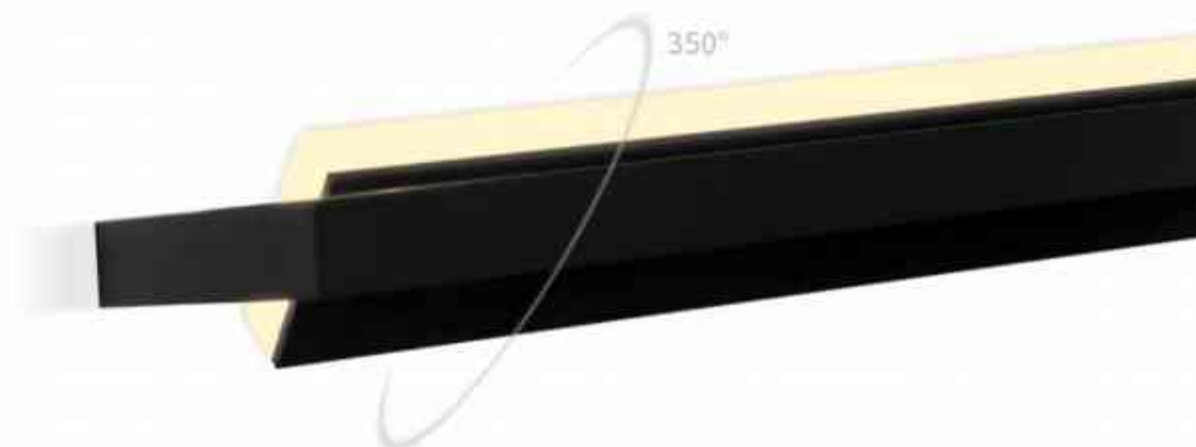

B36

COLOR FINISHINGS:





300 1.1



550 1.1

MIRO 300 1.1

LED POWER: 7.7W
SYSTEM POWER: 9.3W
SYSTEM OUTPUT: 400lm/3000K
INPUT: 230-240VAC/50-60Hz
CRI: 80
DIMENSION: 300x115x20mm
HOLE SIZE: ∅



MIRO 550 1.1

LED POWER: 14.3W
SYSTEM POWER: 17.1W
SYSTEM OUTPUT: 682lm/3000K
INPUT: 230-240VAC/50-60Hz
CRI: 80
DIMENSION: 548x115x20mm
HOLE SIZE: ∅




839



WALL LAMP

840

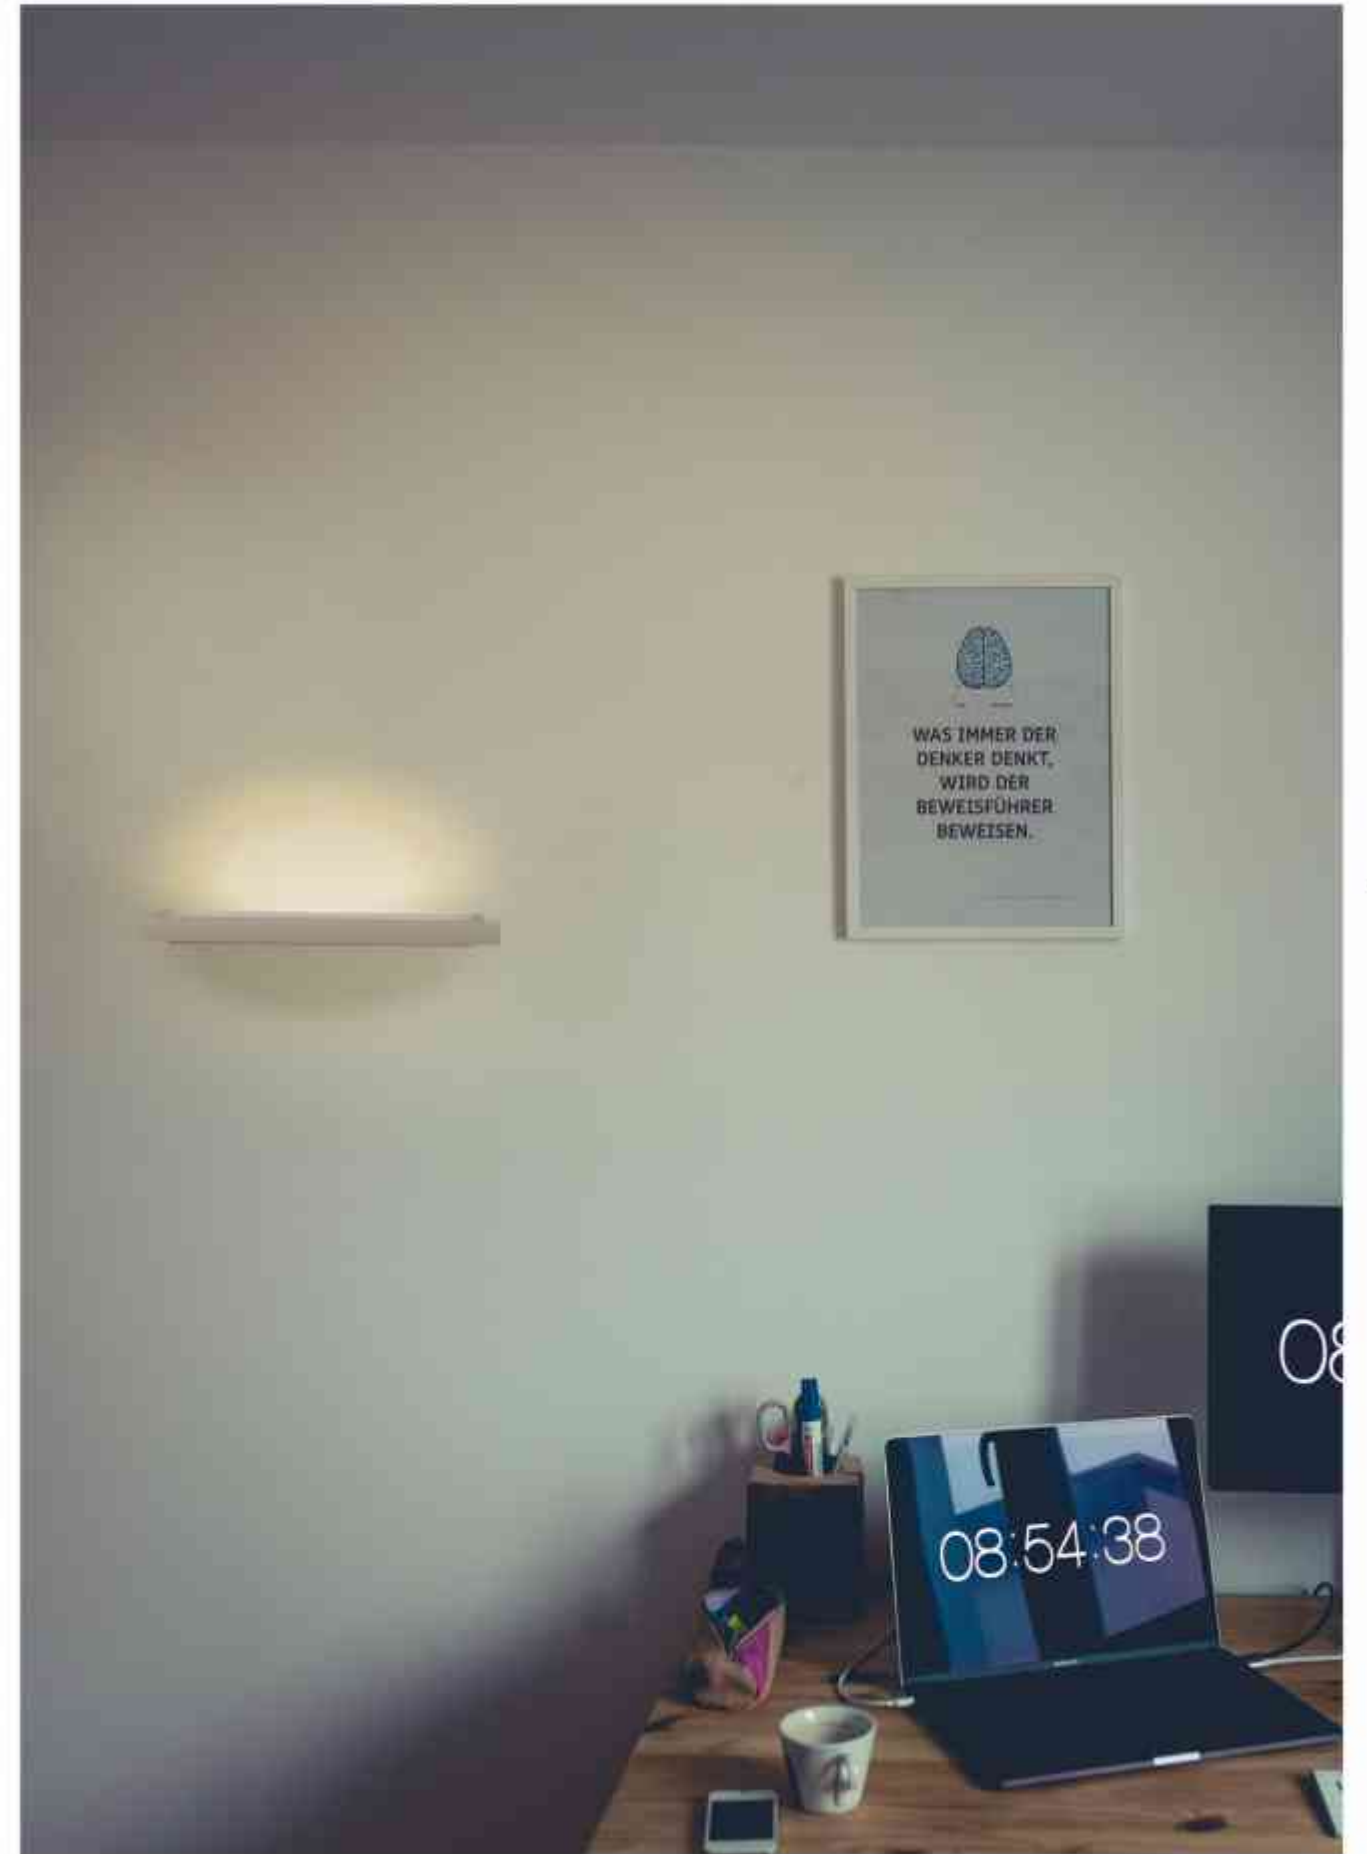



B41



WALL LAMP

B42

OTLY

Simple minimal design of recessed bedside lighting.
 OTLY is available in round and square shape.
 Square version could be equipped with switch button.




© CE IP20 100-240VAC

COLOR FINISHINGS:




OTLY IN ROUND / OTLY IN SQUARE / OTLY IO

LED POWER 2.2W
 CRI 90
 SYSTEM POWER 4.5W
 OUTPUT: 144lm/3000K
 INFL: 180-240VAC, 50/60Hz
 DIMENSION: Ø90x12mm
 21°x170mm

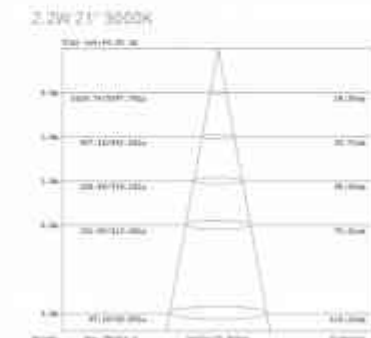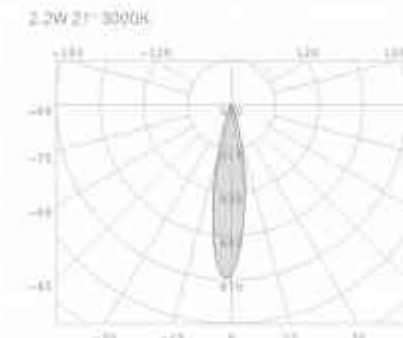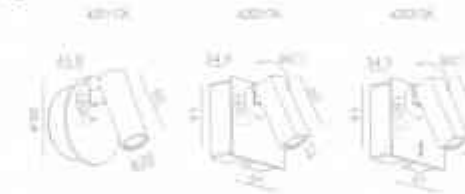



843

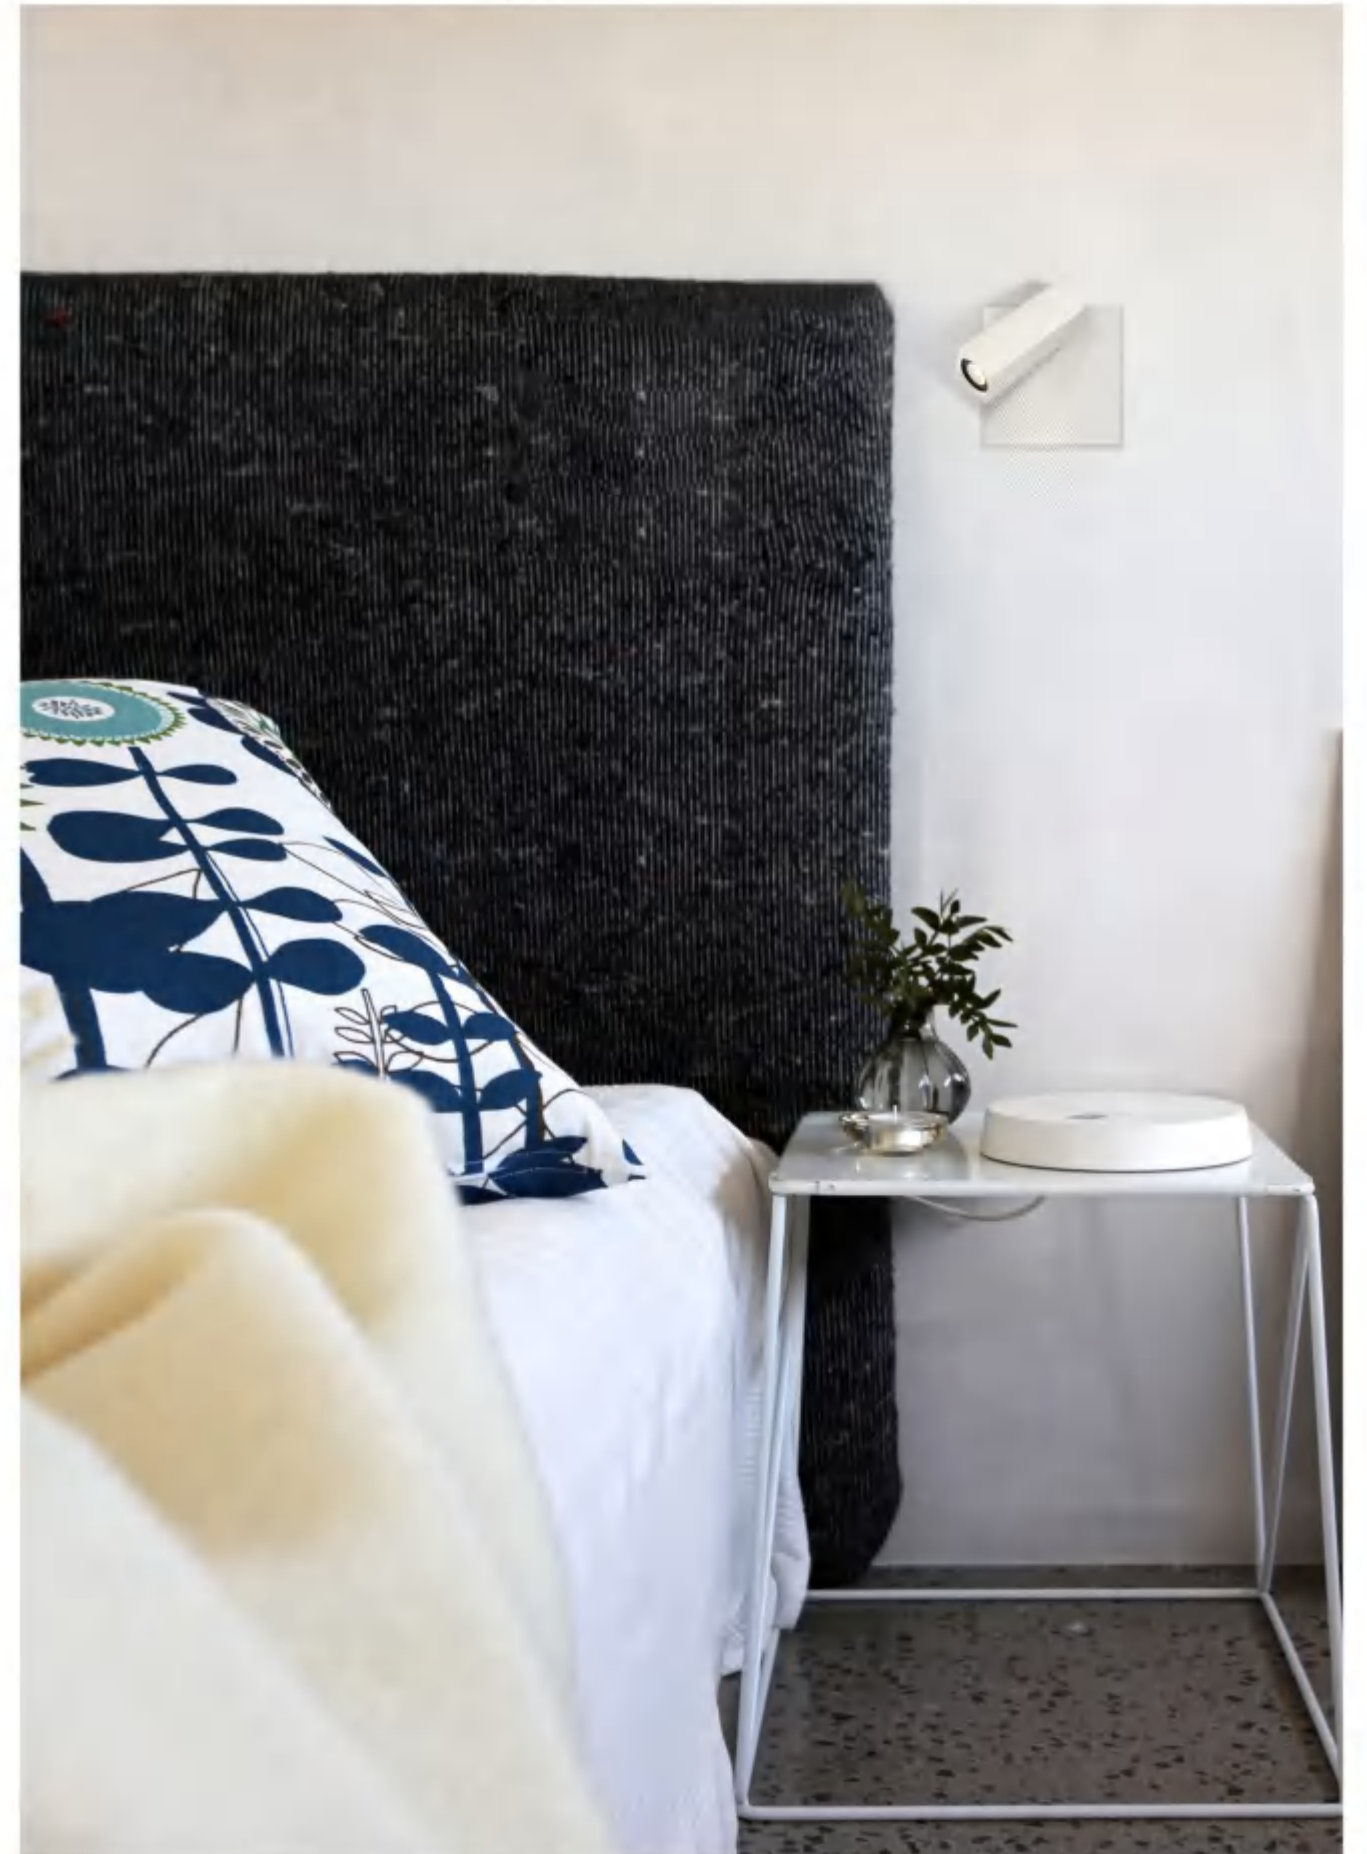

WALL LAMP

844

ROSA

ROSA is a new concept of bed side lamp
 Light fixture with high performance LED light source composed
 by a head with touch DIM and flexible arm.
 Thanks to its miniature size and elegant shape, ROSA can match
 any design concept in the room providing stylish and flexible lighting solution.
 ROSA is the best choice for both residential
 and hotel applications. Now it is
 available with both round and square base shapes.

© CE RoHS LED IP20



845



ROSA

WALL LAMP



DIM PUSH

846

ROSA IN


LED POWER 2.2W
 CRI: 90
 SYSTEM POWER 3.7W
 OUTPUT: 180lm/3000K
 INPUT: 100-240VAC, 50/60Hz




ANGLE 20°



2.2W 20° 3000K

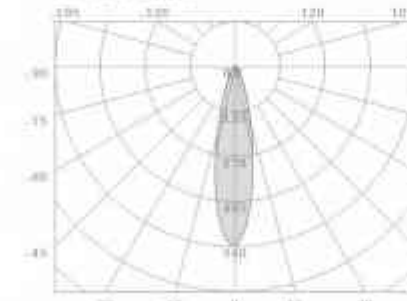

2.2W 20° 3000K

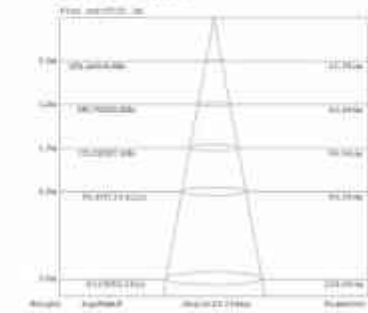

SET



Very impressive and nicely delineated parabolic light creates perfect light patterns on the wall. Thanks to newest technical achievements of LED and lens, SET produces special light effect, playing with light and shade on the wall. Single use or in combination SET always provides special beauty for any room.

© CE IP20 220-240VAC DIM TRIAC



SET

LED POWER: 7.8W AC LED
 SYSTEM POWER: 7.8W
 SYSTEM OUTPUT: 654LM/3000K
 INPUT: 220-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 100*70*40mm
 HOLE SIZE: 1

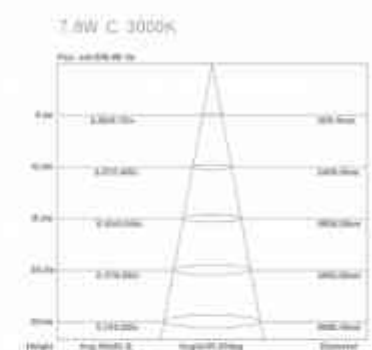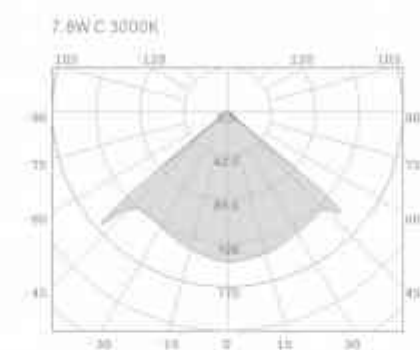

RECOMMEND



COLOR FINISHINGS:



SHELL

Extending wall light collection, FLUA has created new range SHELL. Simple and elegant design of SHELL makes this model very popular. Thanks to various color combinations SHELL can be easily integrated to any interior design concept of the room be it residential or public space. Round and square shapes are available.

© CE IP20 220-240VAC DIM TRIAC



ROUND



SQUARED

SHELL ROUND / SQUARED

LED POWER 3.9W
CRI: 90
SYSTEM POWER 3.9W
OUTPUT: 325LM/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: 180*116*33mm
HOLE SIZE: ∅



RECOMMEND





SIKA

Make the wall more decorative with FLUA new wall lamp - SIKA. With interior magnetic switch, it can be lighted up by bottom pressed. two version for options, the vertical one can realize up and down light-switching.

While round one can be rotated. It is an excellent performance in bedside. SIKA can be widely used in commercial area like meeting room, business club and housing lighting etc.

© CE IP20 100-240V


SIKA

WALL LAMP



852

COLOR FINISHINGS:

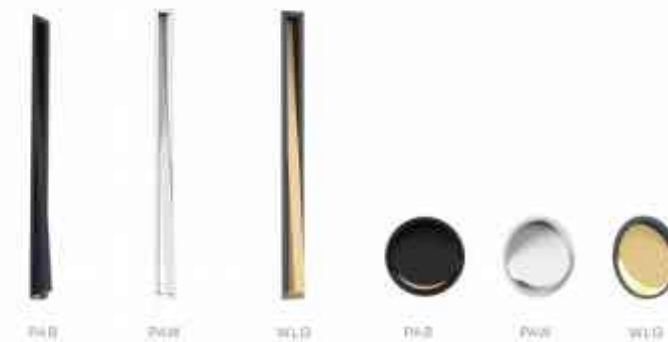



853


H

854

RO

SIKA H 

LED POWER: 2 W
 SYSTEM POWER: 3.2W
 OUTPUT: 41lm/3000K
 INPUT: 100-240V/50/60Hz
 CR: 80
 DIMENSION: 310x21x40mm
 HOLE SIZE: 119x30mm



RECOMMEND



ANGLE L



SIKA RO 

LED POWER: 2 W
 SYSTEM POWER: 3.5W
 OUTPUT: 124lm/3000K
 INPUT: 100-240V/50/60Hz
 CR: 90
 DIMENSION: Ø142x57.5mm
 HOLE SIZE: Ø140mm



RECOMMEND



ANGLE L






855



WALL LAMP

856

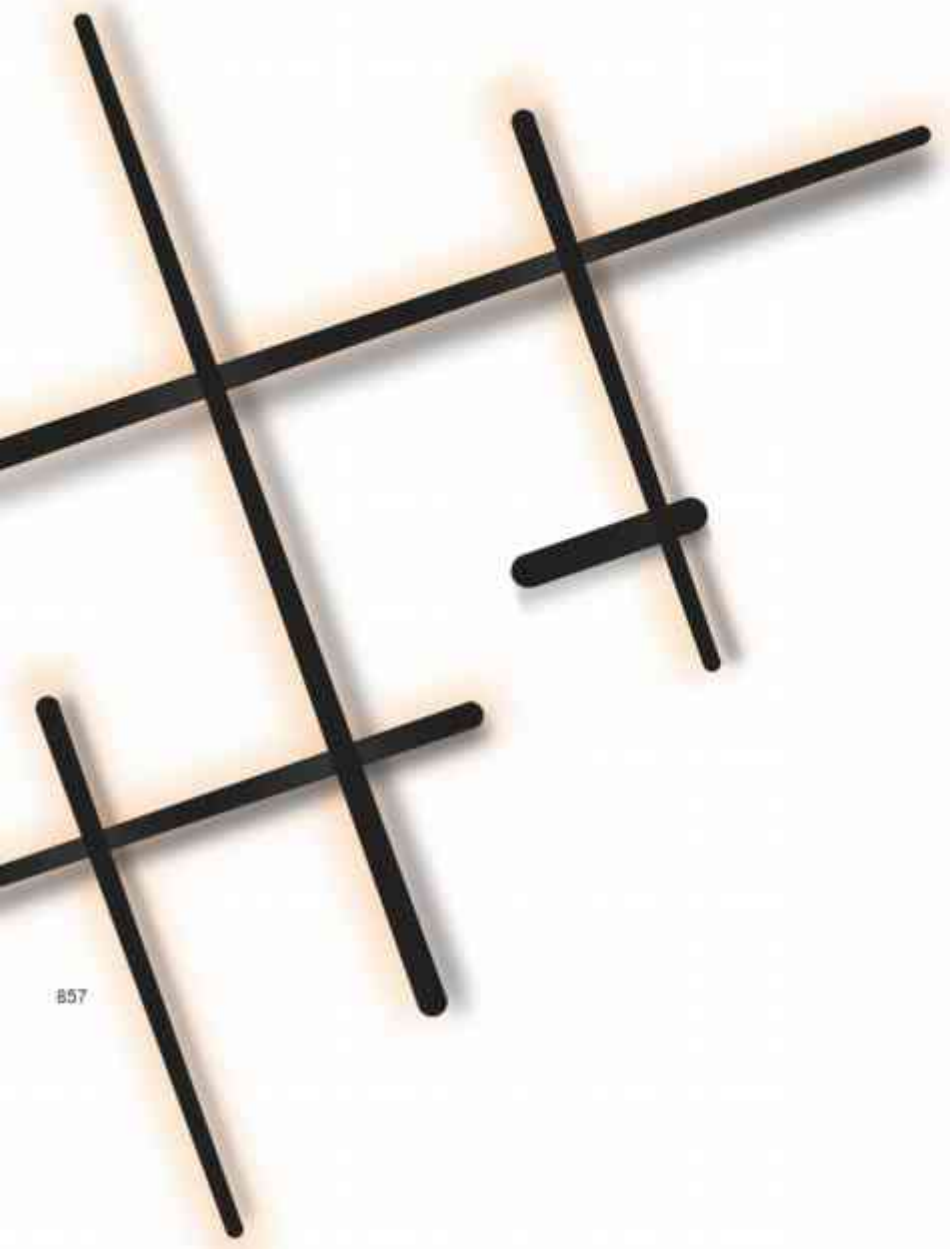

857


SONG

SONG is a new example of a deep integration of light and architectural solutions.
Light has no more limits.

SONG is available in 3 designs.

Each element of the fitting can be freely oriented and rotated in any direction whatever needed,
endlessly creating new unique ideas for inspiration.

© CE IP20 100-240VAC DIM 1-10V

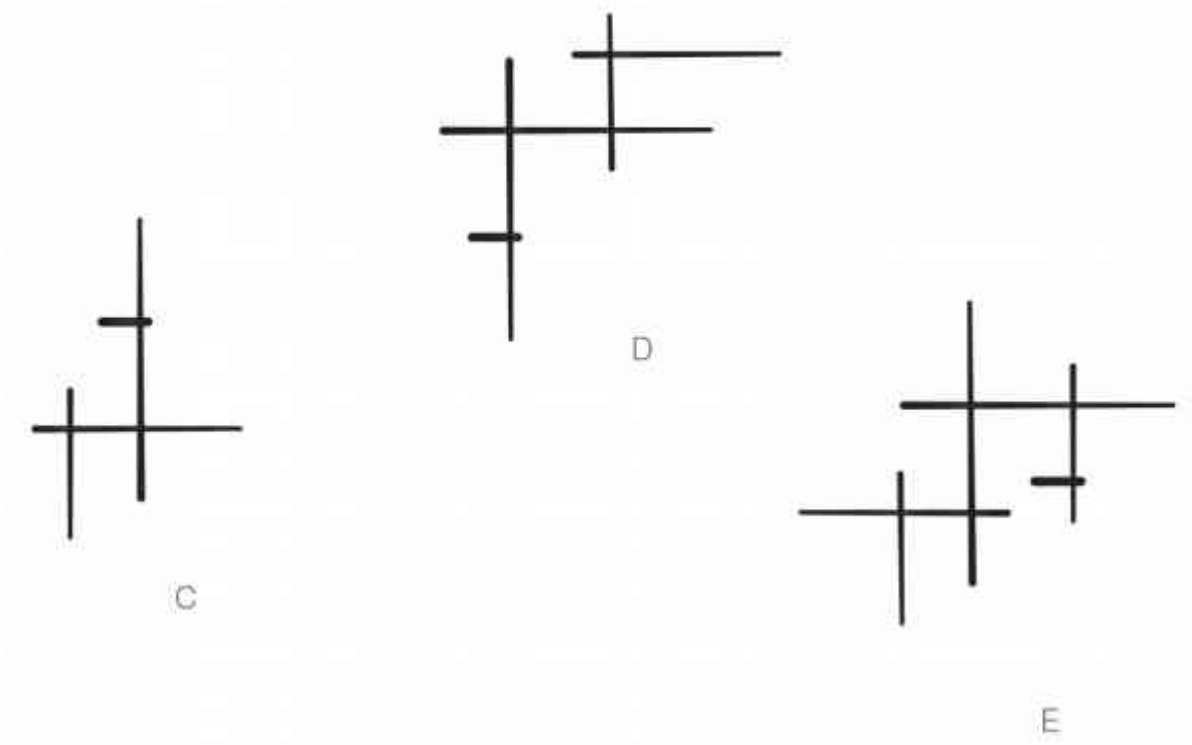

WALL LAMP

858

SONG C

CR: 90
SYSTEM POWER: 34W
INPUT: 100-240VAC 50/60HZ
DIMENSION: 185x178x160mm
HOLE SIZE: -



SONG D

CR: 90
SYSTEM POWER: 47W
INPUT: 100-240VAC 50/60HZ
DIMENSION: 185x178x160mm
HOLE SIZE: -



SONG E

CR: 90
SYSTEM POWER: 34W
INPUT: 100-240VAC 50/60HZ
DIMENSION: 185x178x160mm
HOLE SIZE: -



COLOR FINISHINGS:





TATOU

New concept of bedside lighting
 TATOU is flexible and functional friendly collection.
 Thanks to its structure, TATOU can be adjusted up to 90° and tilt up to 355°,
 making it easy to focus the light beam however needed.
 TATOU BOX version have two options for choice: with and without switch button.

© CE IP20 100-240VAC DIM TRIAC USB CHARGER

COLOR FINISHINGS:



801



TATOU

WALL LAMP




USB

TATOU USB ⊕


LED POWER: 2.2W
 CRI: 90
 SYSTEM POWER: 3W
 OUTPUT: 115 Lm/3000K
 INPUT: 100-240VAC
 DIMENSION: 102x51x202mm
 HOLE SIZE: ∅




ANGLE 15°



2.2W 15° 3000K

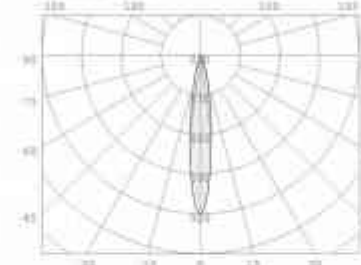

2.2W 15° 3000K



COLOR FINISHINGS:



802






TATOU BOX






TATOU BOX IO

TATOU BOX 
 LED POWER: 6W
 CRI: 90
 SYSTEM POWER: 7.5W
 OUTPUT: 413lm/3000K
 INPUT: 100-240VAC
 DIMENSION: 138*103*35.6mm
 HOLE SIZE: $\varnothing 40$

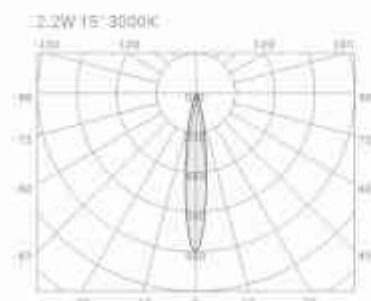

TATOU BOX IO 
 LED POWER: 6W
 CRI: 90
 SYSTEM POWER: 7.5W
 OUTPUT: 413lm/3000K
 INPUT: 100-240VAC
 DIMENSION: 103*165*35.6mm
 HOLE SIZE: $\varnothing 40$

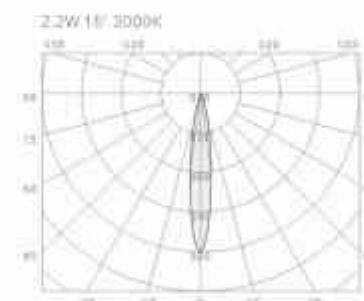

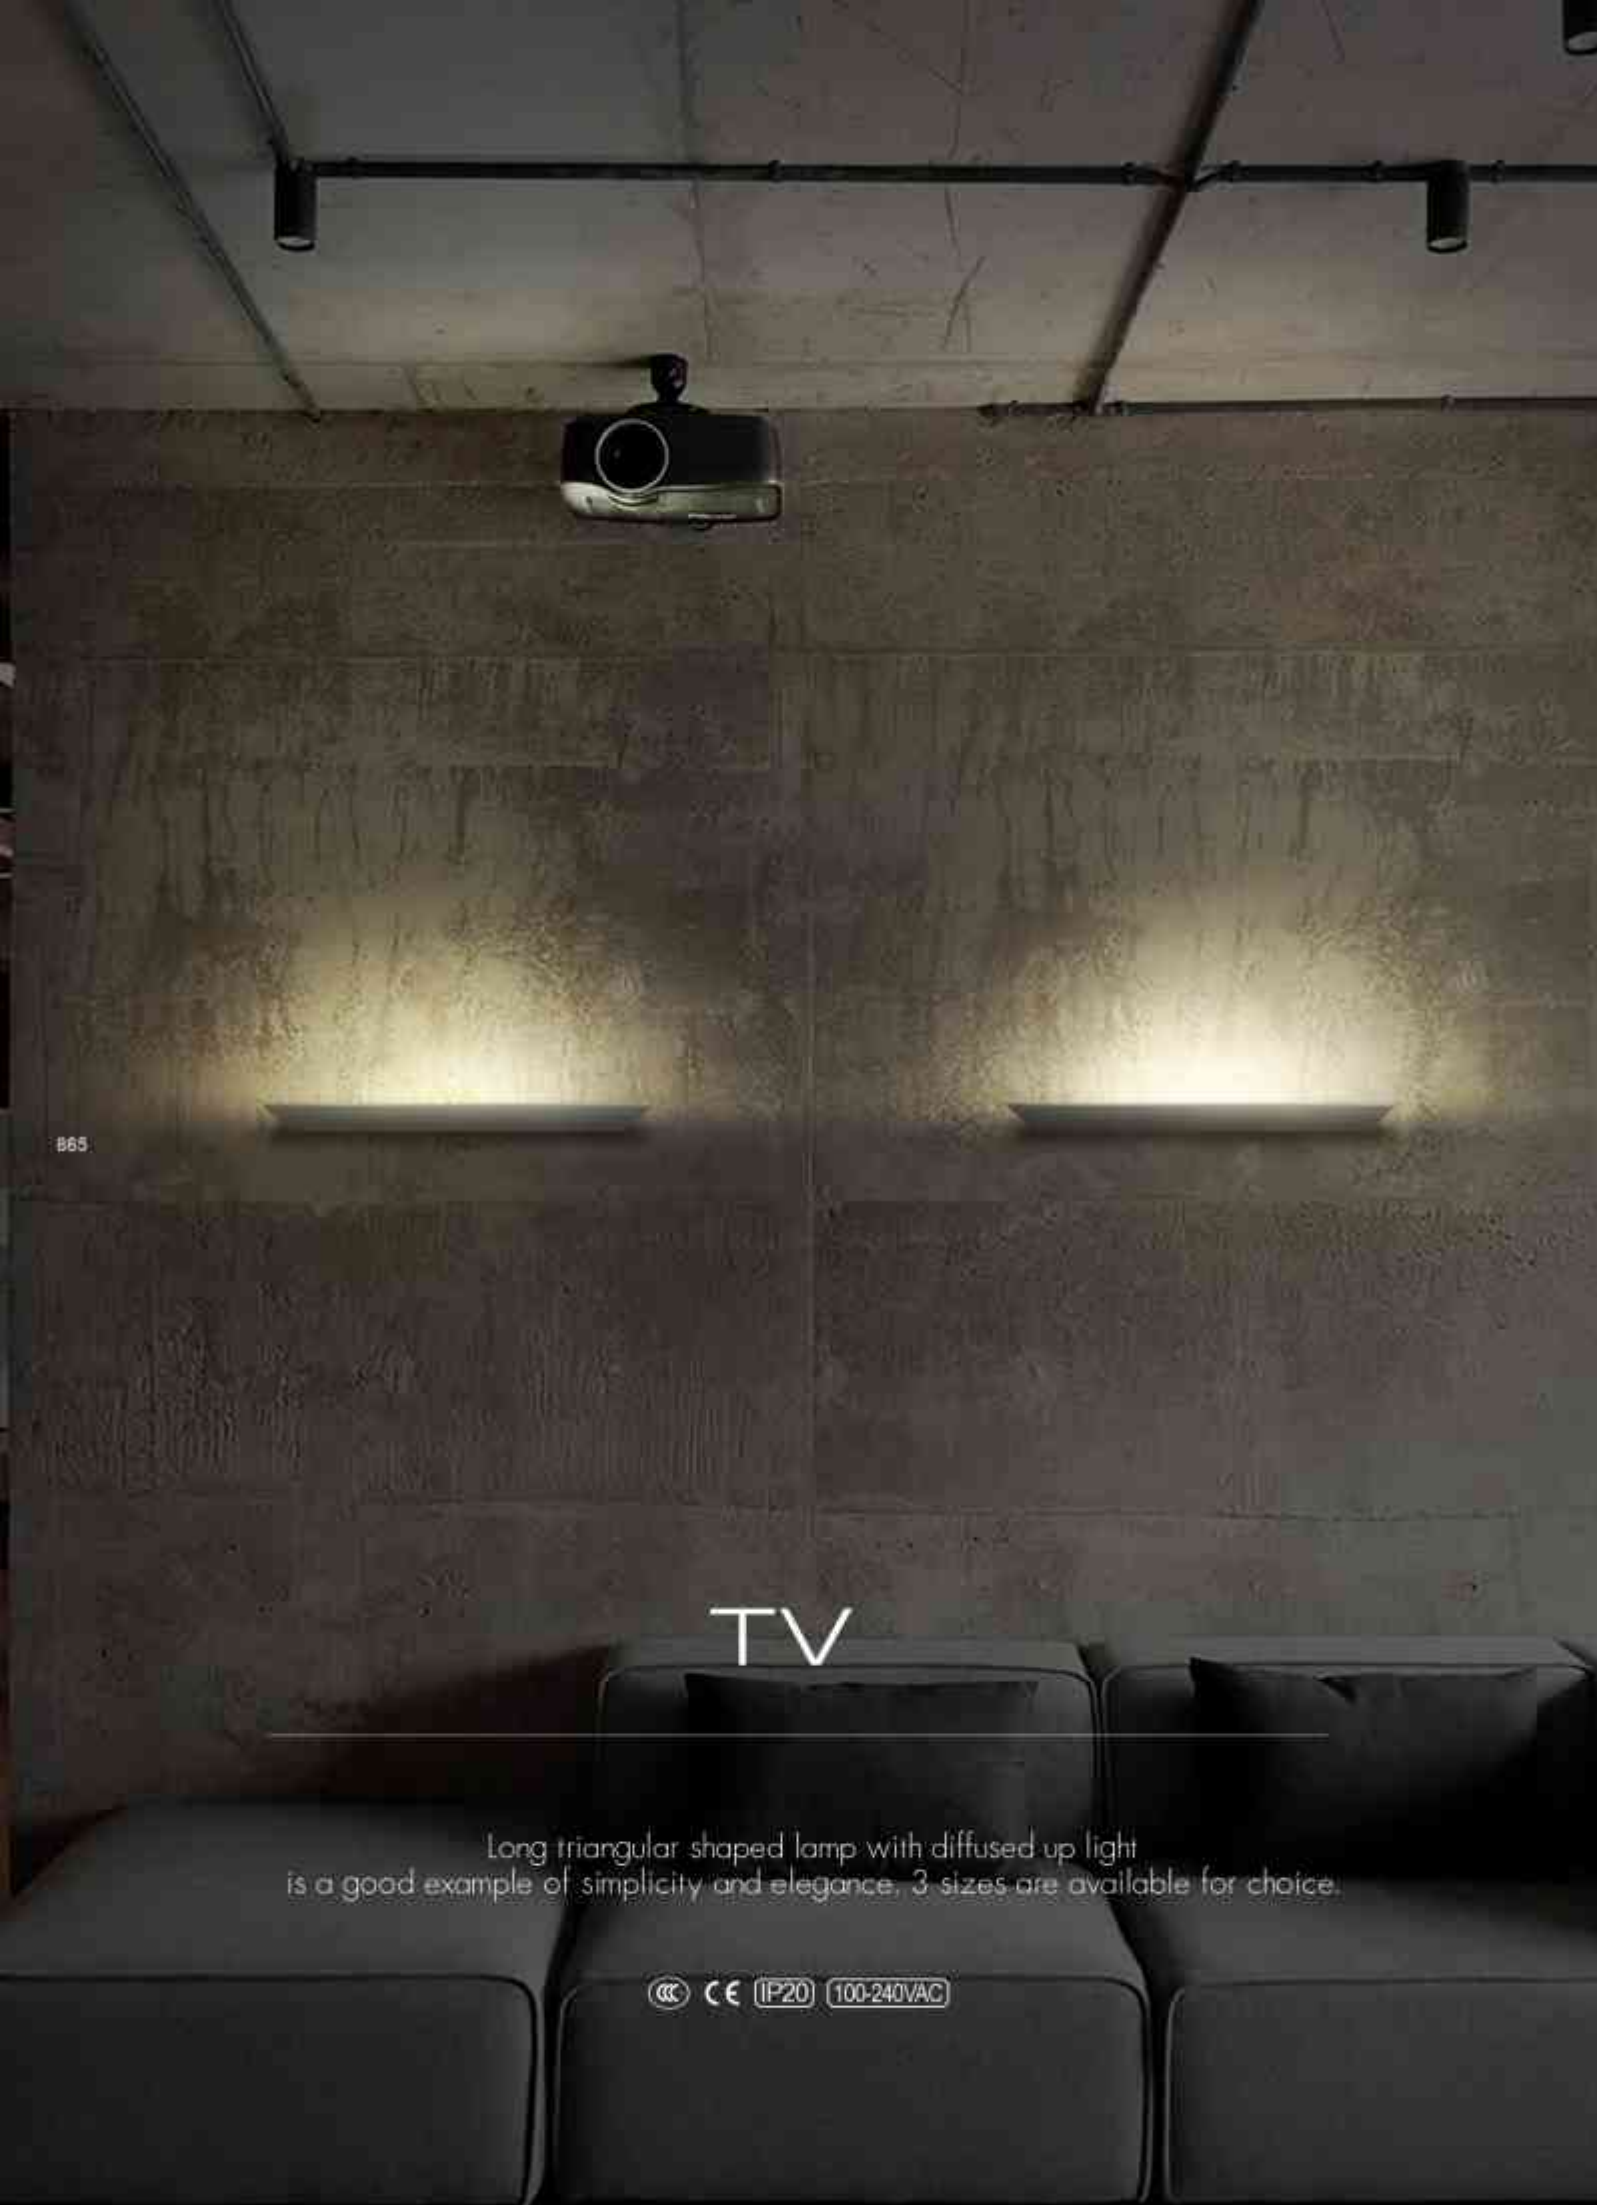

TV

Long triangular shaped lamp with diffused up light is a good example of simplicity and elegance, 3 sizes are available for choice.

CE IP20 100-240VAC



S 11 / M 11 / L 11

TV S 11

CRI: 80
SYSTEM POWER: 13.5W
OUTPUT: 1065lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 318*125*9*35mm
HOLE SIZE: 1




TV M 11

CRI: 80
SYSTEM POWER: 15.4W
OUTPUT: 1465lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 418*125*9*35mm
HOLE SIZE: 1



TV L 11

CRI: 80
SYSTEM POWER: 25.6W
OUTPUT: 2045lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 518*125*9*35mm
HOLE SIZE: 1

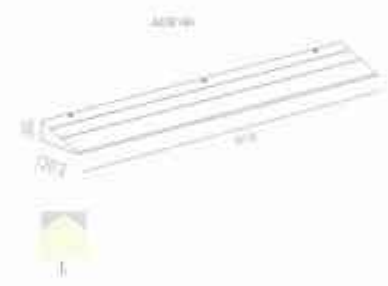

COLOR FINISHINGS:





S+ / M+ / L+

TV S+ 

LED POWER 24W
CRI 80
SYSTEM POWER 27.9W
OUTPUT: 1876lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 318*130*35mm
HOLE SIZE: \varnothing

4000K



TV M+ 

LED POWER 48W
CRI 80
SYSTEM POWER 55.8W
OUTPUT: 3637lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 618*130*35mm
HOLE SIZE: \varnothing

4000K



TV L+ 

LED POWER 72W
CRI 80
SYSTEM POWER 83.7W
OUTPUT: 5403lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 918*130*35mm
HOLE SIZE: \varnothing

4000K





VIKA

With anti-glare design,
VIKA take you into a lighting world full of gentleness.
Certified with IP54,
It's capable of most interior lighting demands.
And both round and square version are at your service.
You may also design your own square VIKA combo from bachelor to twins,
and to three "musketeers".

© CE IP54 220-240VAC DIM TRIAC

VIKA

WALL LAMP



WALL S

WALL M

870

COLOR FINISHINGS:




RAW VSP

GRAY VSP



BLACK VSP

VIKA WALL S

SYSTEM POWER 8.1W
 SYSTEM OUTPUT: 410LM/3000K
 INPUT: 200-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 82*82*71mm
 HOLE SIZE: -



ANGLE 32°

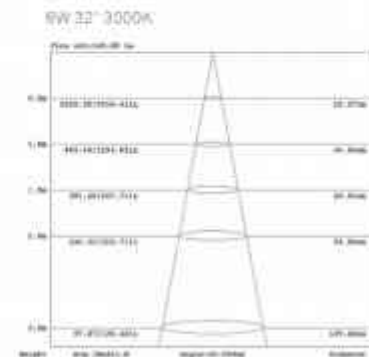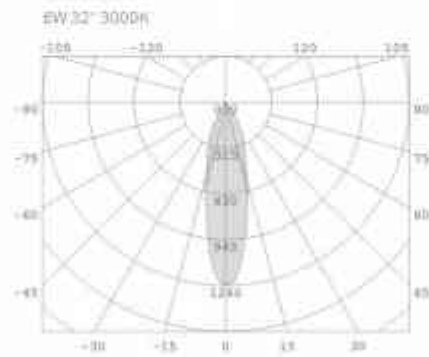


RECOMMEND





ENERGY STAR
 44410421

VIKA WALL M

SYSTEM POWER 14.4W
 SYSTEM OUTPUT: 1010LM/3000K
 INPUT: 200-240VAC, 50/60Hz
 CRI: 90
 DIMENSION: 115.5*112.5*91mm
 HOLE SIZE: -



ANGLE 28°

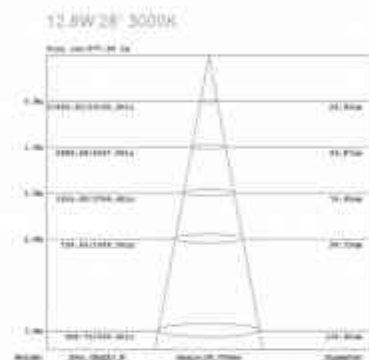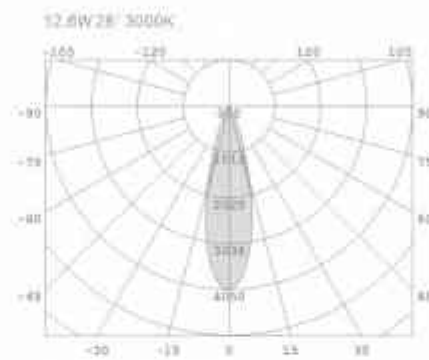

RECOMMEND



ENERGY STAR
 44410422





WING

Just like a bird's fly,
 WING could provide beautiful feeling of freedom and perfection of natural forms.
 The unique design and elegant light effect confirming
 FLUA's longstanding philosophy for timeless design.
 WING could be great choice for both residential and hospitality applications.

© CE IP20 220-240VAC



WING 
 LED POWER: 10 W
 CRI: 90
 SYSTEM POWER: 13.3W
 OUTPUT: 848lm/3000K
 INPUT: 220-240VAC, 50/60Hz
 DIMENSION: 248*90*57 mm
 HOLE SIZE: 7



RECOMMEND

 DALI



COLOR FINISHINGS:





TABLE LAMP



AGARIC
879-820



BRELLA
881-804



COLUMN T
885-832



COSMOS
893-696



FLOAT
897-000




PALLA
901-906



SEPHORA V
907-910



SEPHORA H
911-012

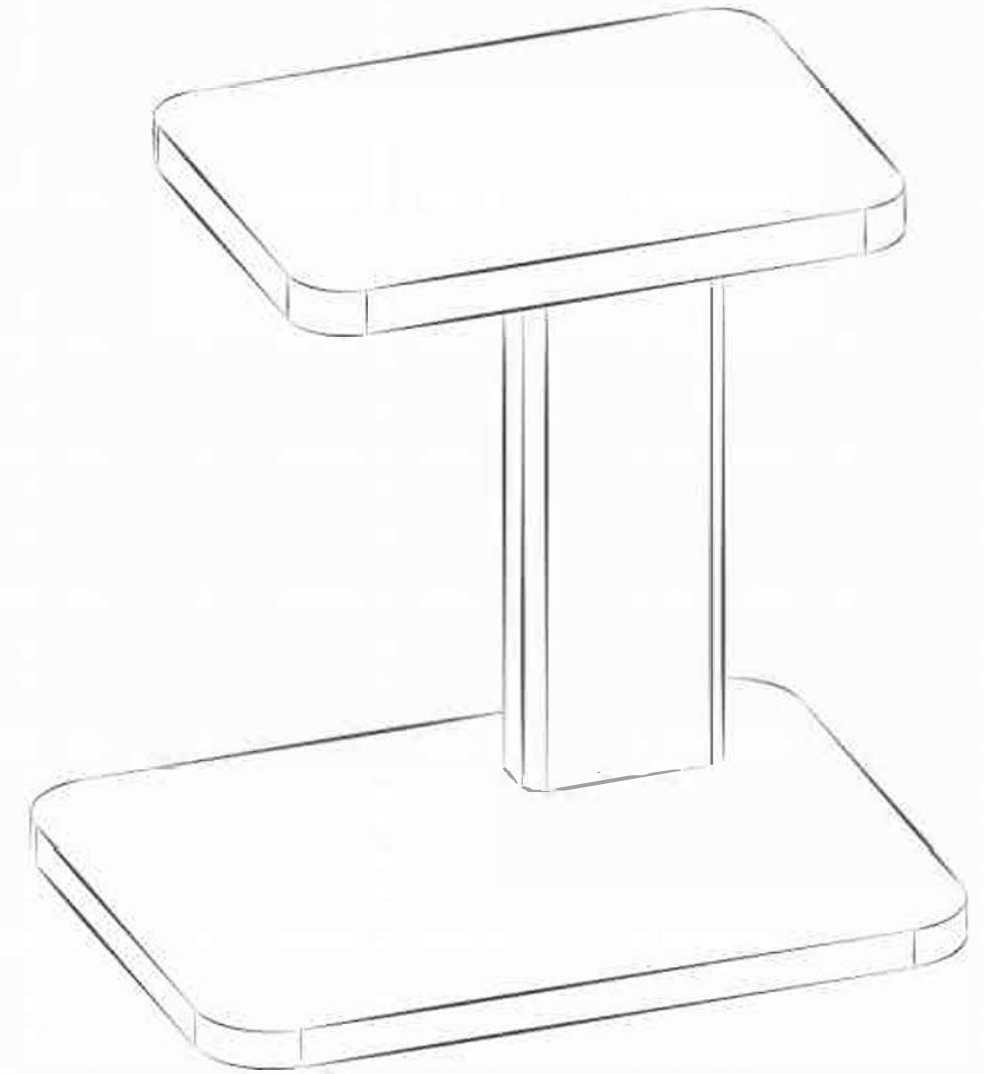



879



TABLE LAMP

880

AGARIC

AGARIC with its unique minimalist form can match any room design, be it bedroom or living room.
 The aureole light on the top gives perfect soft light effect.
 Touch DIM can easily regulate the brightness of the lamp.

© CE IP20 100-240VAC TOUCH DIM

AGARIC 
 LED POWER 8.5W
 SYSTEM POWER 18.7W
 OUTPUT 231LM/3000K
 INPUT: 100-240VAC, 50/60HZ
 CR: 90
 DIMENSION: Ø200*214mm
 HOLE SIZE: 7"




RECOMMEND:



COLOR FINISHINGS:



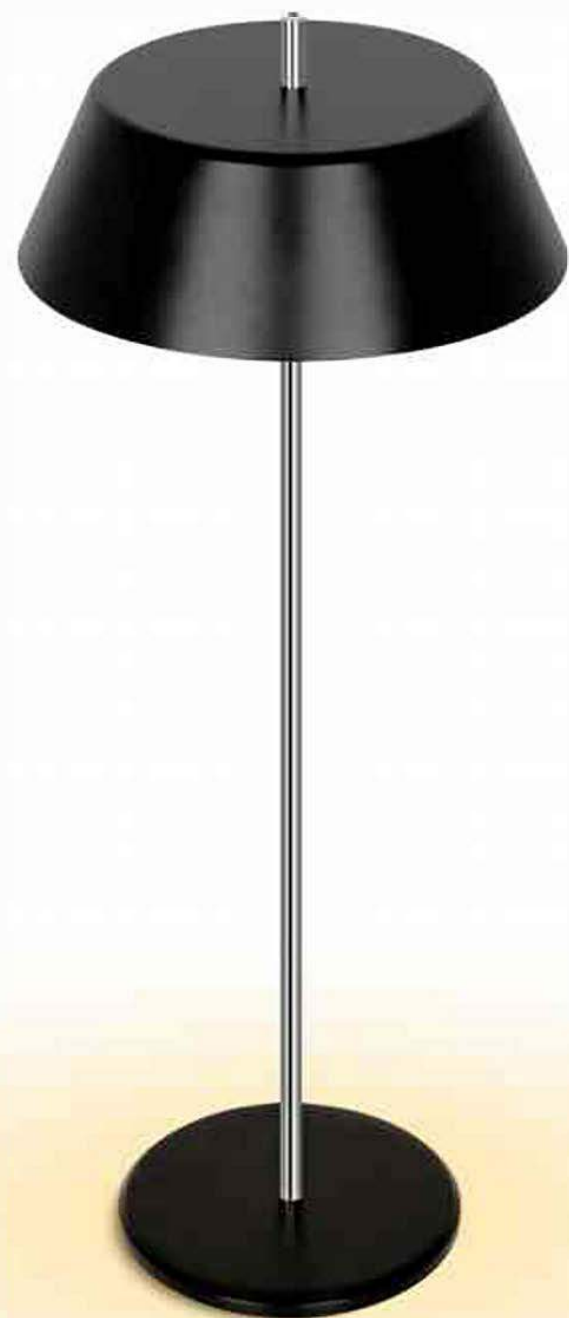

BRELLA

BRELLA - A Spontaneous Levitated Table Lamp

When spontaneous meets well planned, presents you this fine multifunctional and portable luminaire, BRELLA.

Like a transformer, effortlessly it transforms from one to another.

Top it to a pedestal, it is a table lamp; Hook it to a suspension wire, it becomes a pendant lamp;

Take all the shackles off, it is a free bird for spontaneous allocation.

IP54 rated, built-in battery lasts for 5 hours and push-dim for brightness result in a luminaire that is capable of various environments,

from living room to garden, from table to floor, to ceiling.

Whether it is grounded or levitated, BRELLA is your movable, interactive lighting unit.

CE (IP54) (5VDC) TOUCH DIM



TABLE LAMP

CEILING LIGHT



Active results by replacing professional accessories



Micro Charging Port
Built-in battery lasts 5H+ Hours
*The charger is provided with charging data and power in package

BRELLA
 CE 90
 LED POWER 3.2W
 SYSTEM POWER 1.5W
 OUTPUT LEVEL 1000LM
 ABOUT 5000
 DIMENSION (LxHxW)
 TABLE LAMP



RECOMMEND:

 TOUCH DIM
 SERVICE



SHORT PRESS
ON/OFF



LONG PRESS
Adjust brightness
15-100%

COLOR FINISHINGS:







885

COLUMN

COLUMN doesn't need much time to become a classic collection. Ultra thin pole with lighting disc on the top guarantees a very powerful light beam and splendid atmosphere in the room. Thanks to its unique design, COLUMN can be considered as additional decorative element giving perfect aesthetic detail to the whole design concept.

COLUMN collection is presented by floor and table lamps that are perfectly completing each other. Thanks to special magnetic mechanism, the lighting disc could be turned and light direction could be easily changed up or down. DIM function is included.

© CE IP20 100-240VAC TOUCH DIM

TABLE LAMP

FLOOR LAMP

886



T

COLUMN T

LED POWER: 18W
 SYSTEM POWER: 18W
 OUTPUT: 550lm/3000K
 INPUT: 100-240VAC/50/60Hz
 CH: 95
 DIMENSION: Ø100x100mm
 HOLE SIZE: /



RECOMMEND:



COLOR FINISHINGS:



PAZ



PAW

COLUMN



COLUMN F 
 LED POWER 28W
 SYSTEM POWER 28W
 OUTPUT: 1430lm/3000K
 INPUT: 100-240VAC 50/60Hz
 CR1130
 DIMETRICH - Ø200x1740mm
 HOLE SIZE: 1



RECOMMEND:

 TQLD-HDM
 30W/40W

COLOR FINISHINGS:



887

COLUMN

COLUMN T/F





TABLE LAMP

FLOOR LAMP

888





889



TABLE LAMP

FLOOR LAMP

890



891



TABLE LAMP

FLOOR LAMP

892

COSMOS

COSMOS is created in accordance with rules and tradition of minimalist style. Sharp geometrical forms and simple design bring additional elegance to any room. Unexpectedly bright colors champagne, yellow and green are available. COSMOS is the best choice for auxiliary lighting. Touch DIM and USB charger slot are included.

© CE (IP20) (100/220-240VAC) (DIM TOUCH) (USB CHARGER)

895



896

COSMOS

LED POWER 6W
 CRI: 90
 SYSTEM POWER 13.5W
 OUTPUT: 415LM/4000K
 INPUT: 100-240VAC 50/60Hz
 DIMENSION: 200*180*150MM
 HOLE SIZE: -



RECOMMEND



DIM TOUCH
400-400



COLOR FINISHINGS:



FLOAT

Innovative design brings a brand new table lamp integrated with wireless charging function.

Built for the free souls,

FLOAT is adapt to both indoors and outdoors under IP65 certified protection.

With the portable cone-shape wireless charging pad and sphere lamp,

it not only creates a soft and comfort light,

but also it is multifunctional in usability and eye-catching in home decor.

© CE IP65 100-240VAC TOUGH DIM



Cable-less Connection,
Limitless Enjoyment



899

900



*Luminaire characteristics


- 1. **TOUCH DIM**
Long press to adjust brightness.
- 2. **LOW BATTERY REMINDER**
Flashing when battery lower than 10%.
- 3. **CHARGING INDICATOR**
Indicator lights up while charging.
- 4. **FOREIGN OBJECT DETECTION**
with built-in smart detecting sensor, indicator flashes when any foreign metal objects attaches to the charging pad while working.
- 5. **CHARGE**
Support wireless charging devices such as Android and IOS.

FLOAT

LED POWER: 2.8W
CRI: 80
SYSTEM POWER: 3.2W
OUTPUT: 360lm/3000K
INPUT: 5VDC/3000mAh
DIMENSION: Ø130*227mm
HOLE SIZE: 1



RECOMMEND:



PALLA

PALLA is professional eye-comfort reading lamp with wireless charging function.

Through the minimalism industrial design, lamp body can swing in large angle range. The tactile switch delivers a very smooth touch-dim experience. Enjoy a flicker-free and blue-light-free reading time.

CCC CE IP20 100-240VAC TOUCH DIM



901

PALLA

TABLE LAMP



902

Eye Comfort / Anti Glare / Flicker Free / Bluish Light Free

905



TABLE LAMP

906

SEPHORA

SEPHORA is distinguished by its stylish appearance and unique performance. Minimal design, simple forms and maximum functionality are key words to describe SEPHORA. Frosted glass globe together with DIM function provides soft and pleasant light effect for each room.

© CE IP20 100-240VAC TOUCH DIM

COLOR FINISHINGS:



907



TABLE LAMP



V

908

SEPHORA V

LED POWER: 2.9W
CRI: 90
SYSTEM POWER: 6W
OUTPUT: 35/Lm/3000K
INPUT: 100-240VAC/50/60Hz
DIMENSION: Ø110*320mm
HOLE SIZE: /




RECOMMEND:



COLOR FINISHINGS:



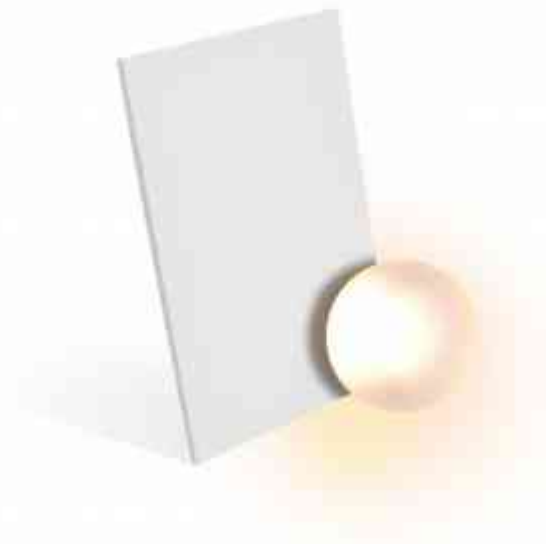

H

SEPHORA H 


LED POWER: 2 W
 CRI: 90
 SYSTEM POWER: 4W
 OUTPUT: 235LM/3000K
 INPUT: 100-240VAC/50/60Hz
 DIMENSION: 105*208*136mm
 HOLE SIZE: -



RECOMMEND:



TOUCH-CONTROL
AC/DC

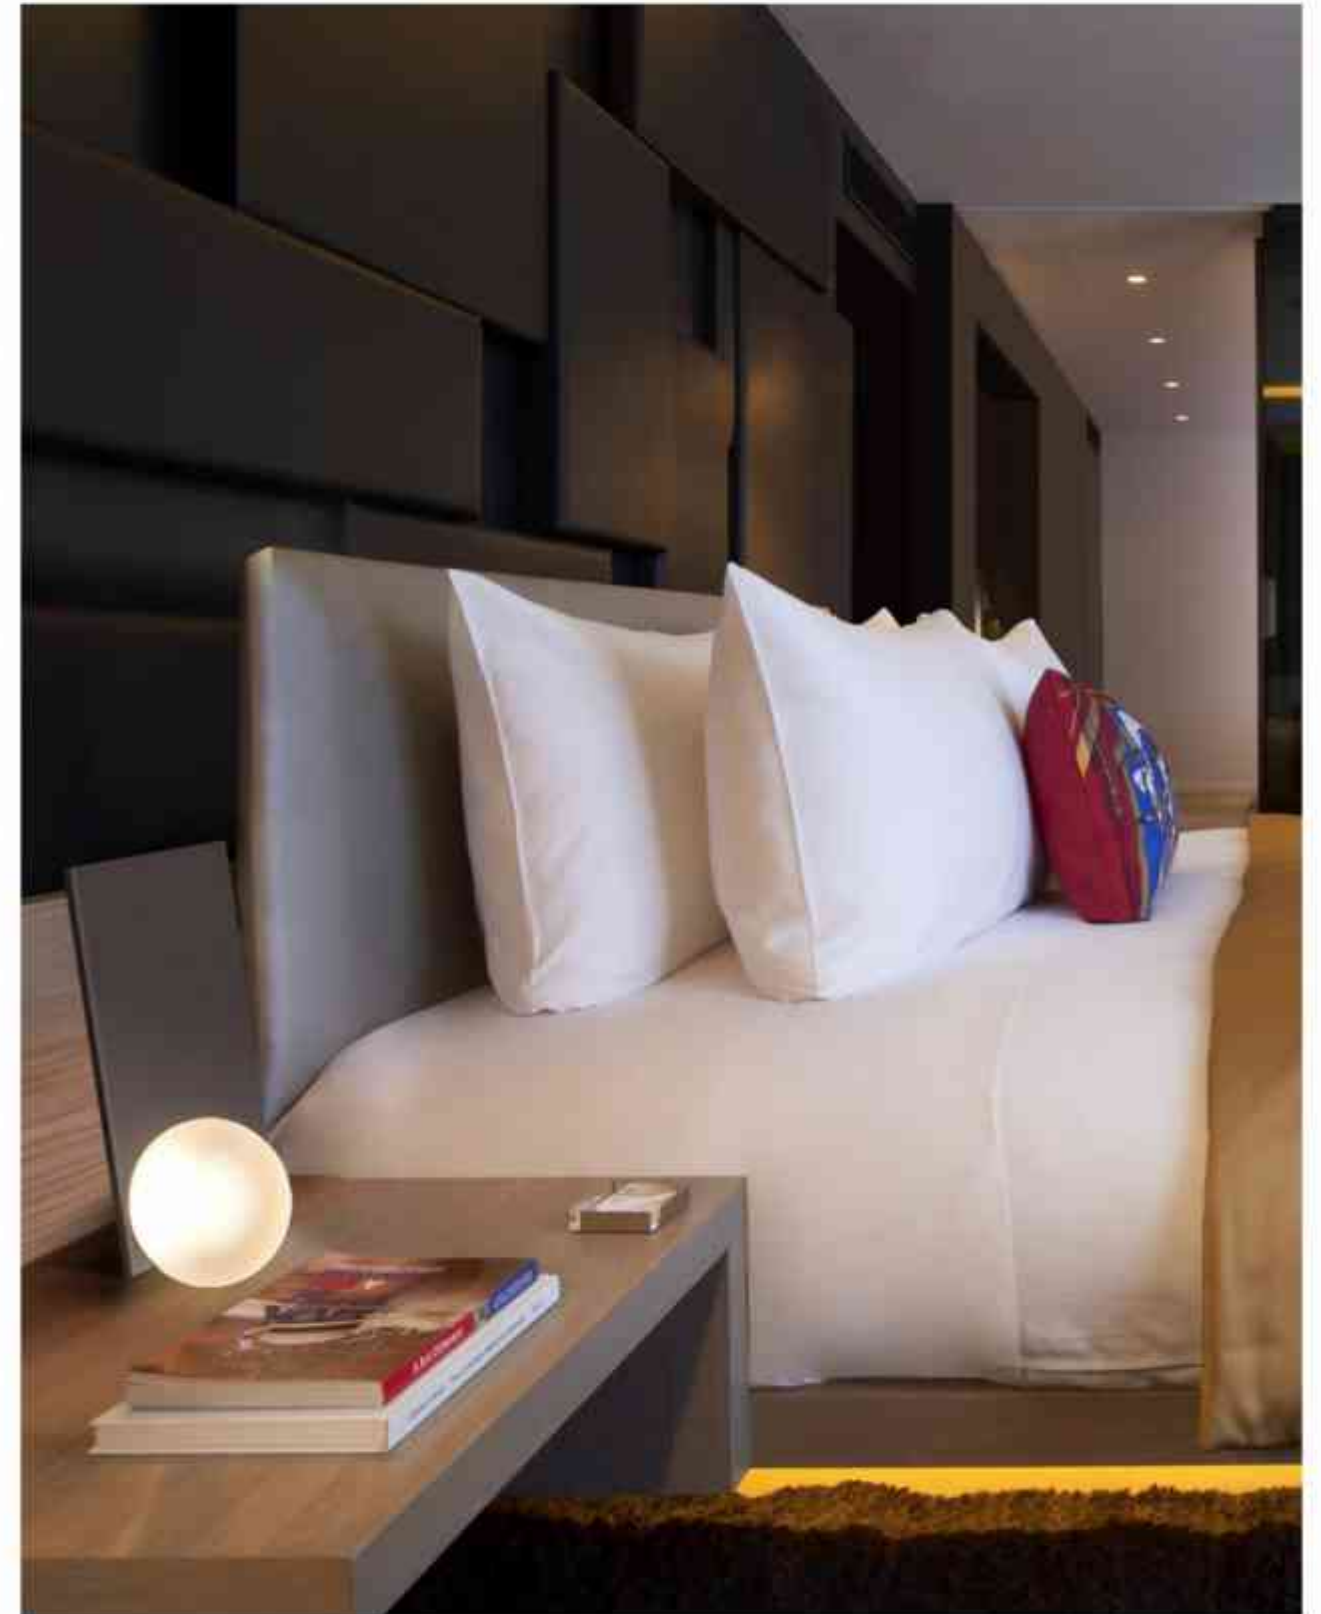

FLOOR LAMP



ATLAS
017-916



CIDA FLOOR
017-920




COLUMN F
021-022



FISHING F
023-024




HARI F
025-026



STAND
767-788

PERFORM YOUR LIGHT

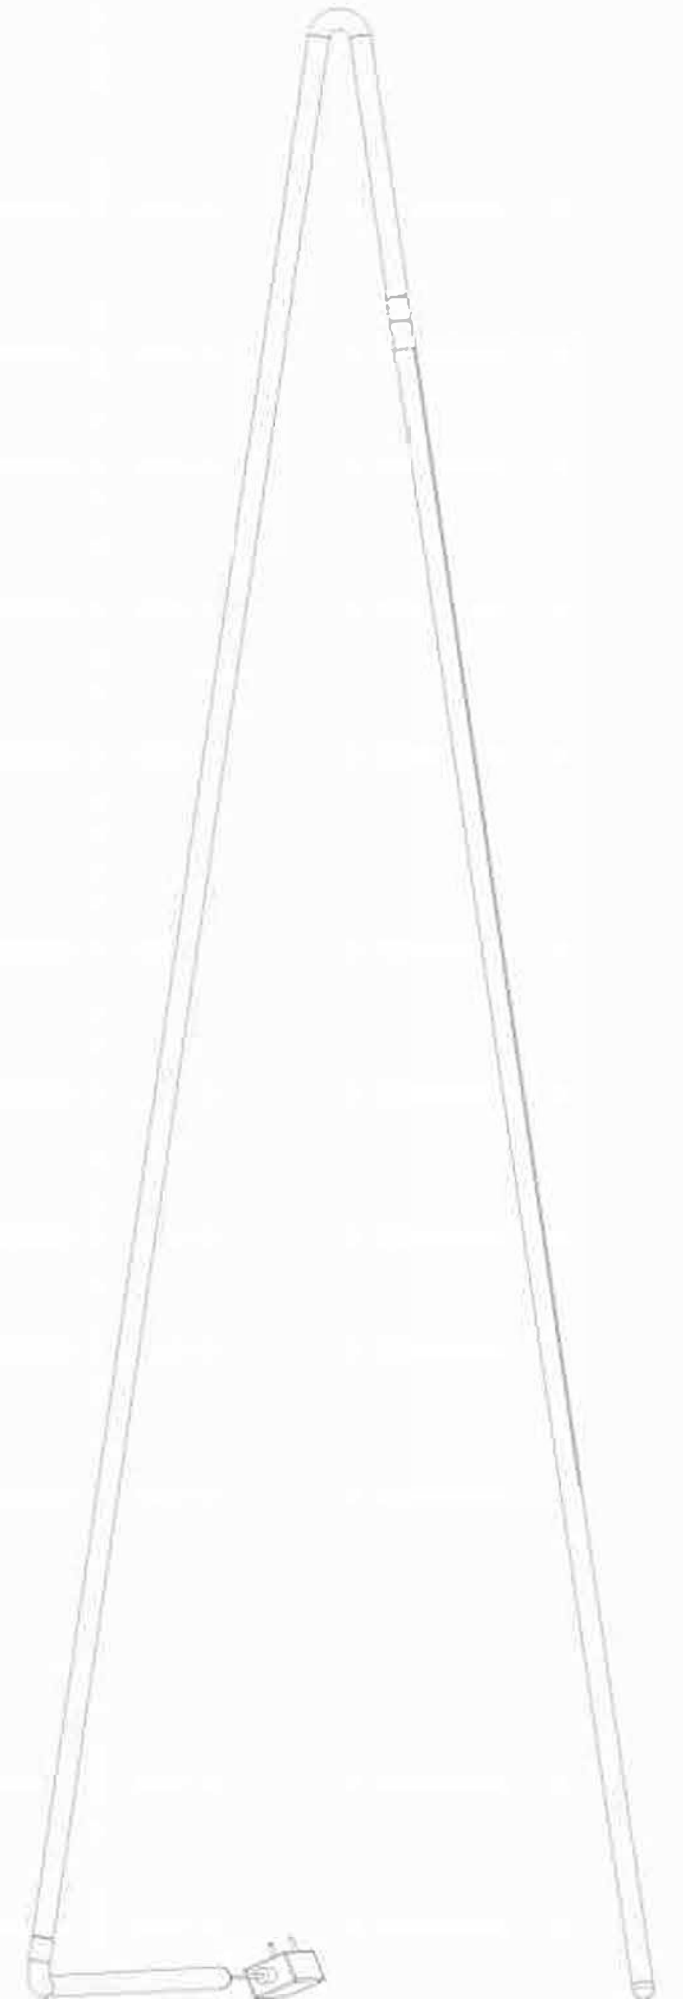

ATLAS

ATLAS is a new concept idea of floor lamp designed specially for modern office lighting.

This splendid lamp provides great lighting effect for the working area making it comfortable for working process.

ATLAS has up and down light; down light can be dimmable with the help of push button.

© CE IP20 220-240VAC TOUCH DIM



- + Bottom Lighting - Increase Brightness
- Bottom Lighting - Reduce Brightness
- ☰ Top Lighting - ON/OFF
- ☷ Bottom Lighting - ON/OFF
- Power on light



ATLAS

915

ATLAS 

LED POWER 40-9-12 16W
SYSTEM POWER 67W
OUTPUT: 3333LM/5700K
INPUT: 200-240VAC 50/60Hz
CRI: 90
DIMENSION: 913x360x1100mm
HOLE SIZE: /



RECOMMEND:



COLOR FINISHINGS:



FLOOR LAMP

916



CIDA

New minimalist design concept of floor lamp, CIDA, can perfectly match any environment. With narrow beam angle, just 14°, and DIM function, CIDA has become the best choice of lamp for reading. The fitting construction makes it easy to adjust the lamp up to 90°, so the light can be focused in the necessary direction however needed.

© CE IP20 100-240VAC DIM PUSH





FLOOR



919



FLOOR LAMP

920

COLOR FINISHINGS:



CIDA FLOOR

LED POWER 9W
 ON: 9W
 SYSTEM POWER 9.2W
 OUTPUT: 413LM/3000K
 INPUT: 100-240VAC 50-60Hz
 DIMENSION: 1520*1134*200mm
 HOLE SIZE: 1


RECOMMEND




ANGLE 14°



9W 14° 3000K



9W 14° 3000K





FISHING

The new concept of lighting is the best example of creativity. Transparent suspended globe gives additional enigmatic atmosphere to any space be it private or public area.

© CE IP20 TOUCH DIM



F

FISHING F

LED POWER 15.7W
 SYSTEM POWER 17.5W
 OUTPUT : 700LM/3000K
 INPUT : 100-240VAC, 50/60HZ
 CRI: 93
 DIMENSION Ø300*2800mm
 HOLE SIZE: 1

RECOMMEND:

TOUCH DIM:
 400176C





HARI

Sophisticated floor lamp with unique futuristic design has already won thousands of hearts of designers. Thanks to its touch DIM function, it is becoming very convenient to change the brightness of the lamp.

CC CE IP20 100-240VAC TOUCH DIM



reddot design award winner 2019




F

HARI F
LED POWER: 49.3W
SYSTEM POWER: 49.3W
OUTPUT: 2100LM/2700-5000K
RFPUT: 100-240VAC 50/60Hz
CRI: 90
DIMENSION: 2041.4*1007*230mm
HOLE SIZE: 1

RECOMMEND:
TOUCH DIM 4321470



COLOR FINISHINGS:





STAND

STAND; iconi made to order by chef designers from Italy.
 The very distinctive and innovative design is the icon of minimalism floor lamp.
 It is the impeccable fusion of classic and vogue.
 The light bar spins freely.

CE IP20 100-240VAC

STAND

FLOOR LAMP



STAND 
 LED POWER 220V
 SYSTEM POWER 20W
 OUTPUT: 1800lm/3000K
 INPUT: 100-240VAC/50-60Hz
 CR: 90
 DIMENSION: 98*503*158mm
 HOLE SIZE: /

RECOMMEND:



COLOR FINISHINGS:





EXTERIOR

UPGRADE NEW NEW

INGROUND LAMP



AGLA 935-938 **GIANO** 939-958 **GT** 959-962 **HALO** 963-964 **MAX** 965-970 **MICRO** 971-974



RAINBOW 975-987 **SURROUND** 983-986 **VEGA** 987-992 **VELA** 993-1004 **WADER** 1005-1008

LAWN LAMP



ARGO 1073-1076 **ARTE S** 1077-1080 **BEACON** 1081-1082 **ETERNITY** 1083-1086 **GRUS** 1087-1088 **JOY** 1089-1090



LANCER 1091-1094 **LIBRA** 1095-1096 **LOTOS** 1097-1102 **OTIC** 1103-1106 **WAY** 1107-1110

SPOT LAMP

929



BEAMER H 1011-1014 **CRU H** 1015-1020 **DIONS** 1021-1026 **EDEN H** 1027-1032 **ELLY H** 1033-1042 **GADDIS** 1043-1048



PICARD 1049-1054 **PICTOR** 1055-1062 **STEVE** 1063-1066 **TRACKER H** 1067-1070

WALL LAMP

930



APUS 1113-1120 **CORENA** 1121-1126 **CUBE** 1127-1130 **DISCUS** 1131-1132 **ELF** 1133-1134 **GRAY** 1135-1136



LEE O 1137-1138 **MARS** 1139-1142 **MITILO** 1143-1148 **PACE** 1149-1160 **QUIVER** 1161-1166 **SIMPHONIA** 1167-1170



SPARROW 1171-1172 **TEAR** 1173-1174 **TUBUS** 1175-1178

LINEAR WALL WASHER



OCEAN
1181-1186



RIBBON
1187-1192



WALKA
1193-1196

LINEAR LAMP













































PROFILE IP
1199-1208

LED STRIP












LED STRIP
1211-1212

INGROUND LAMP

					
AGLA S/SRGB 936	AGLA M/M RGB 937	GIANO S 941	GIANO S NB 941	GIANO S P 942	GIANO S RGB 942
					
GIANO M/M MB/ M P/M RGB 943	GIANO L 945	GIANO L NB 945	GIANO L P 946	GIANO L RGB 946	GIANO S HALF 947
					
GIANO S NB HALF 947	GIANO S P HALF 948	GIANO M HALF/ M NB HALF/ M P HALF 949	GIANO L HALF 951	GIANO L NB HALF 951	GIANO L P HALF 952
					
GT ASYMMETRIC 961	GT FROST 961	HALO 964	MAX S 966	MAX M/M 316DC 967	MAX M 316 DC 968
					
MICROROUND 972	MICRO SQUARED 973	RAINBOW S/S RGB 979	RAINBOW M/M RGB 980	RAINBOW L/L RGB 980	SURROUND AIS1316 R1 1.1 984
					
SURROUND AIS1316 R2 1.1 984	SURROUND AIS1316 R3 1.1 984	VEGA SR 2.0 989	VEGA MR 2.0 990	VEGA LR 2.0 990	WADER R RGB 1006
					
VELASS 995	VELA SS SQUARED 995	VELA SS ASYM METRIC 996	VELA S 1.1 996	VELA M 1.1 997-999	VELA M AD 1.1 997-999


933

INGROUND LAMP

					
VELA M NB 997-999	VELA ML 997-999	VELA ML SQUARED 997-999	VELA L 1000	VELA L SQUARED 1000	VELA L AD 1001
					
VELA L AD SQUARED 1001	VELA XL 1001	VELA XL SQUARED 1001			


934

PERFORM YOUR LIGHT

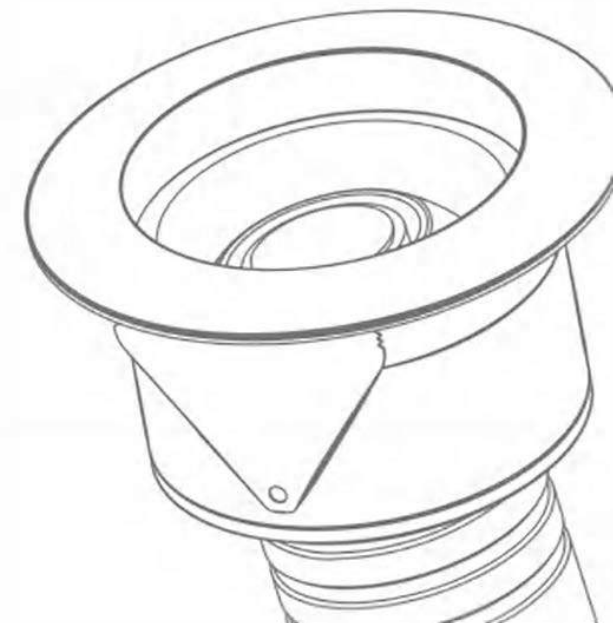

AGLA

Special Narrow border design is the main feature of the new outdoor in-ground collections AGLA. This miniature luminaire could create perfect atmosphere and special light effect to the landscapes. Thank to the stainless steel #316 and IP67, AGLA can be used near by sea side area.



935



S / S DC



S RGB

100-240VAC



LED: EDISON CRI 80
 POWER: 1.4W
 OPTIC: F
 OUTPUT: 36Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø46*63.4mm
 HOLE SIZE: Ø75mm

24VDC RGB 3IN1




LED: OSRAM RGB 3IN1
 POWER: 1.3W
 OPTIC: F
 CABLE/CLASS: H05RN-F 4*0.75mm²
 DIMENSION: Ø46*63.4mm
 HOLE SIZE: Ø75mm

24VDC



LED: EDISON CRI 80
 POWER: 1.2W
 OPTIC: F
 OUTPUT: 36Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø46*63.4mm
 HOLE SIZE: Ø75mm


COLOR FINISHINGS:

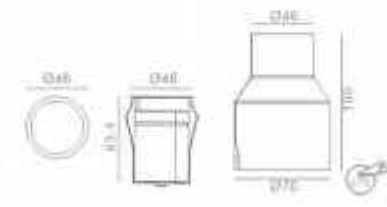

936



M / M DC



M RGB

100-240VAC



LED: EDISON CRI 90
 POWER: 4.6W
 OPTIC: F
 OUTPUT: 166Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø76*77mm
 HOLE SIZE: Ø80mm

24VDC RGB 3IN1





LED: EDISON RGB 3IN1
 POWER: 3*1.6W
 OPTIC: F
 CABLE/CLASS: H05RN-F 4*0.75mm²
 DIMENSION: Ø76*77mm
 HOLE SIZE: Ø80mm


24VDC



LED: EDISON CRI 90
 POWER: 4.4W
 OPTIC: F
 OUTPUT: 165Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø76*77mm
 HOLE SIZE: Ø80mm

COLOR FINISHINGS:

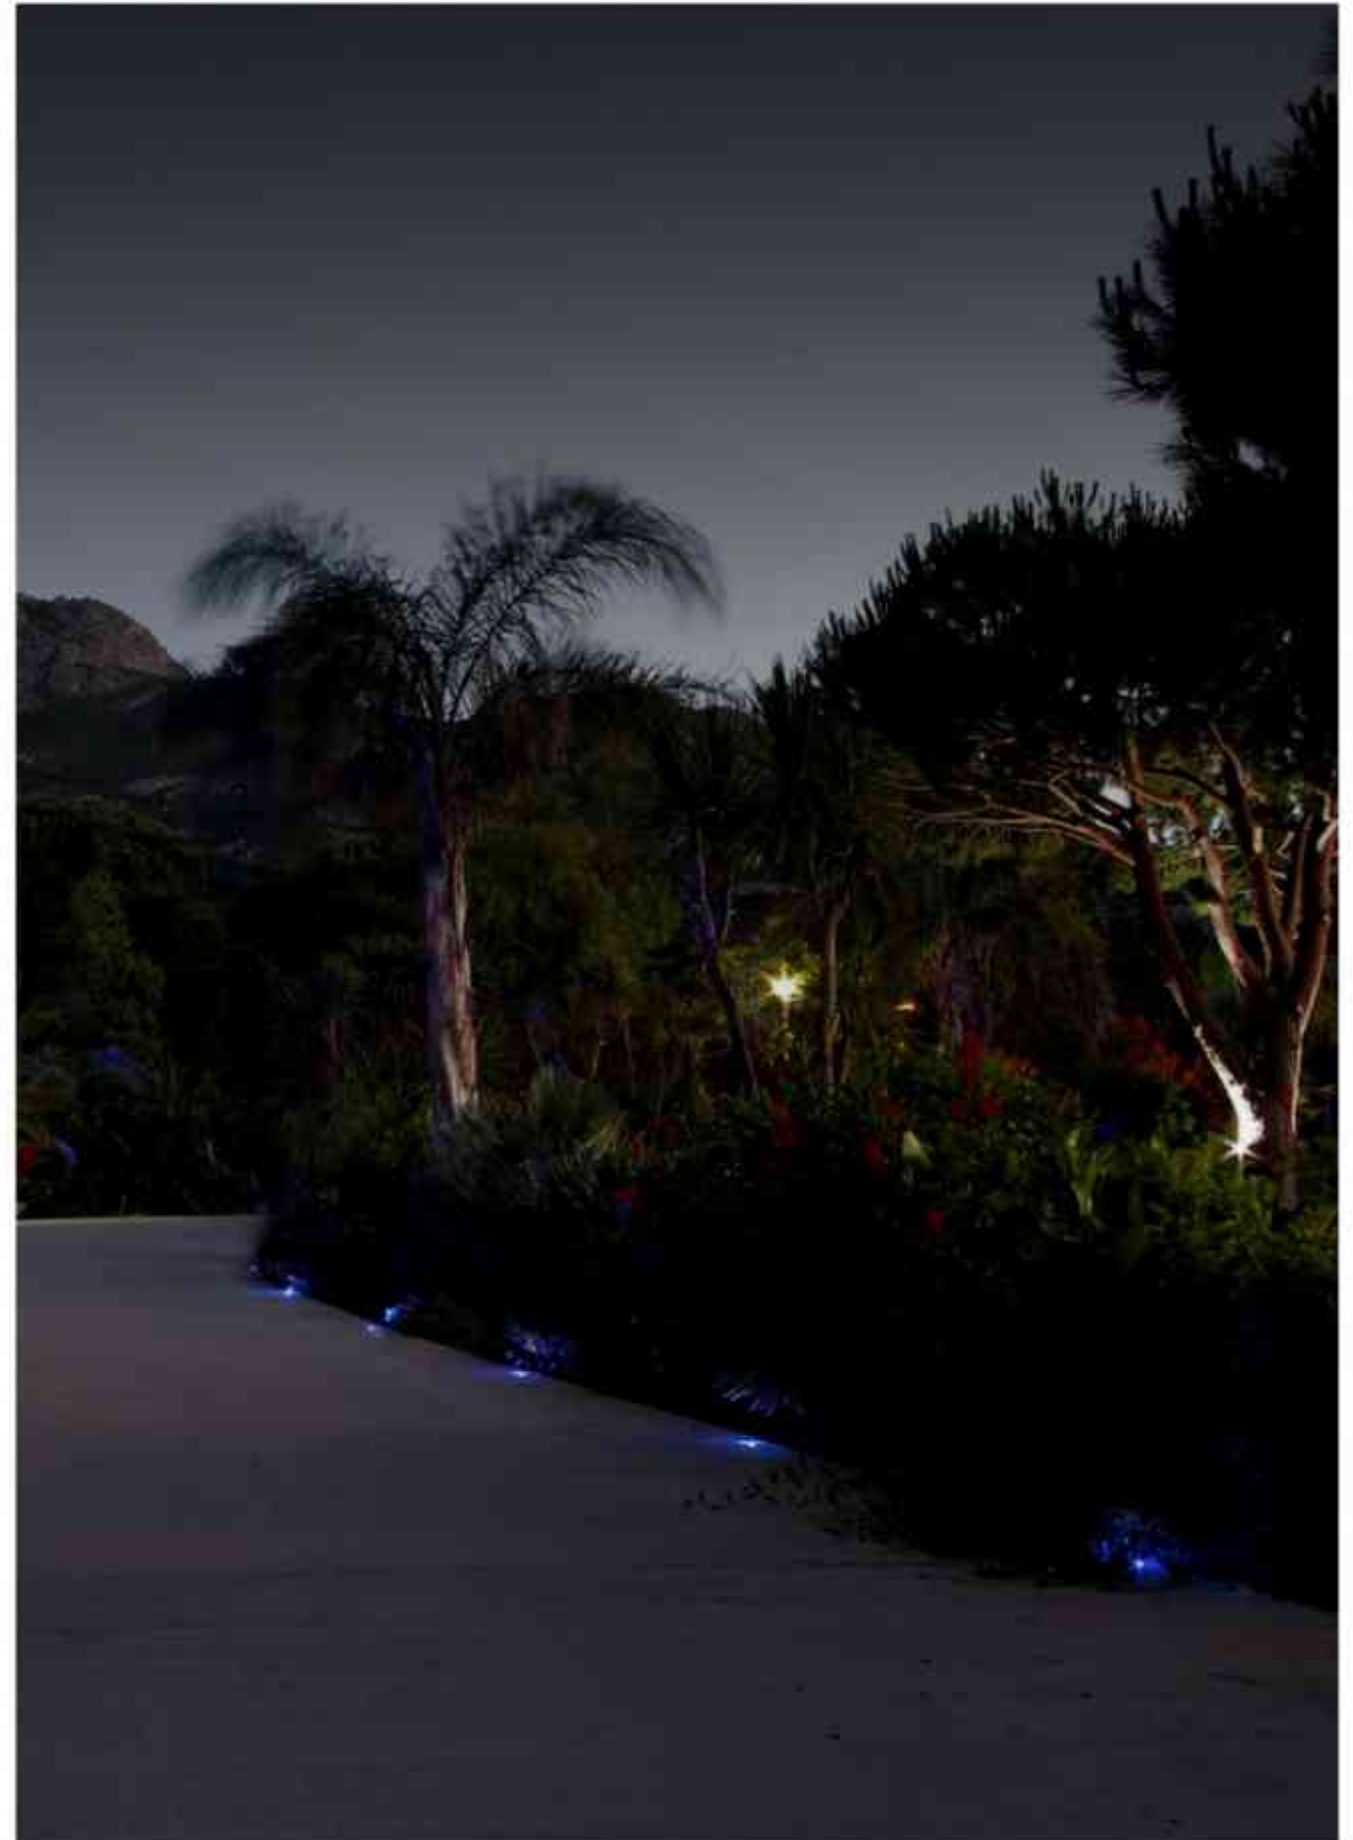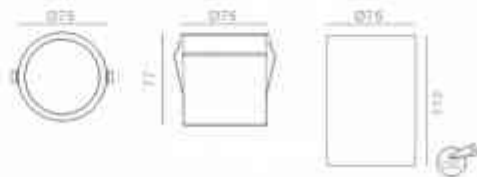



GIANO

With the stainless steel #316 and IP67, GIANO gives a new choice for outdoor underground lighting. System power 4W, with perfect polarized lighting output also help GIANO to be a nice choice for outdoor lighting product.

© CE IP67




S/S DC

100-240VAC 8833 17EA  

LED: FLUA CRI 90
 POWER: 4.1W
 OPTIC: 31°
 OUTPUT: 187Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø55*85mm
 HOLE SIZE: Ø75mm

24VDC 8837 17E  

LED: FLUA CRI 90
 POWER: 3.5W
 OPTIC: 31°
 OUTPUT: 199Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø55*85mm
 HOLE SIZE: Ø75mm

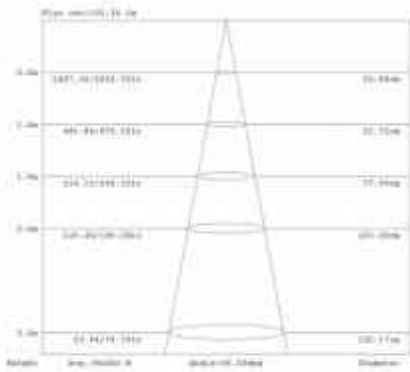


S NB/S NB DC

100-240VAC 8863 11A  

LED: OSRAM CRI 80
 POWER: 2.7W
 OPTIC: 7°
 OUTPUT: 114Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø55*85mm
 HOLE SIZE: Ø75mm

24VDC 8862 17  

LED: OSRAM CRI 80
 POWER: 2W
 OPTIC: 7°
 OUTPUT: 114Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø55*85mm
 HOLE SIZE: Ø75mm

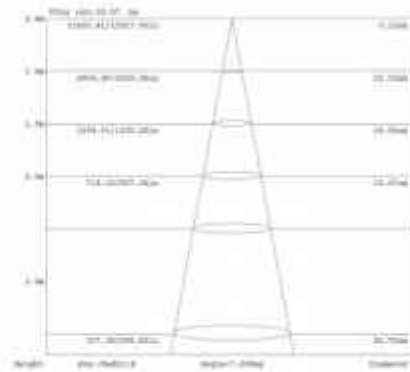


S P/S PDC

100-240VAC 8867 16EA  

LED: FLUA CRI 90
 POWER: 4.6W
 OPTIC: P(25°25°-8°)
 OUTPUT: 177Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø55*85mm
 HOLE SIZE: Ø75mm

24VDC 8868 16E  


LED: FLUA CRI 90
 POWER: 3.7W
 OPTIC: P(25°25°-8°)
 OUTPUT: 177Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø55*85mm
 HOLE SIZE: Ø75mm

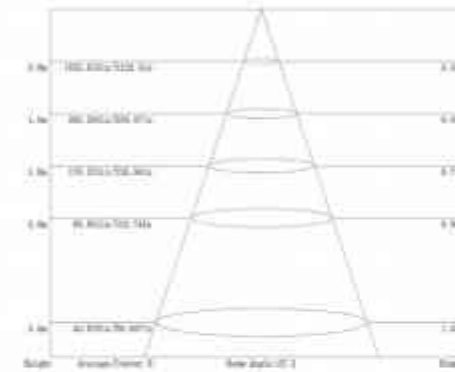

S RGB

24VDC RGB 3IN1 8838 14  

LED: EDISON RGB 3IN1
 POWER: 2.5W
 OPTIC: 22°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: Ø55*85mm
 HOLE SIZE: Ø75mm

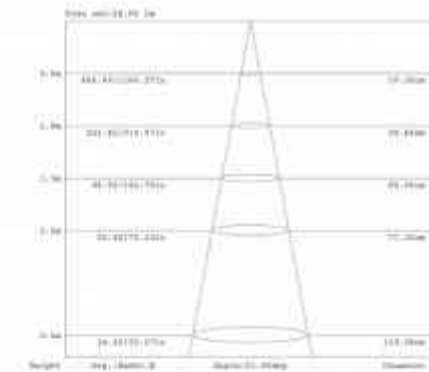

COLOR FINISHINGS:



COLOR FINISHINGS:






M/M DC

100-240VAC 665115EA  

LED: FLUA CRI 90
 POWER: 3W
 OPTIC: 25°
 OUTPUT: 326Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

24VDC 665015E  

LED: FLUA CRI 90
 POWER: 6.3W
 OPTIC: 25°
 OUTPUT: 326Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

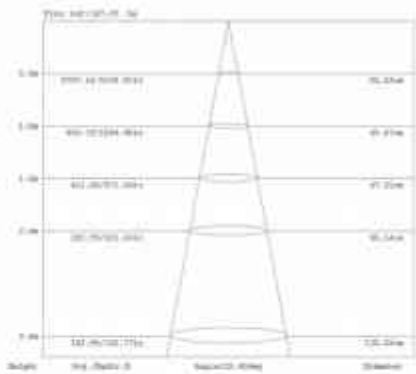

OPTIONS:



COLOR FINISHINGS:




M NB/M NB DC

100-240VAC 664611A  

LED: CREE CRI 90
 POWER: 6.3W
 OPTIC: 6°
 OUTPUT: 391Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

24VDC 664611  

LED: CREE CRI 90
 POWER: 6.3W
 OPTIC: 6°
 OUTPUT: 391Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

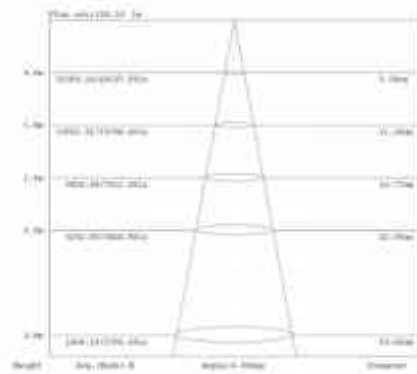


M P/M P DC

100-240VAC 665115EA  

LED: FLUA CRI 90
 POWER: 6.3W
 OPTIC: P(66°40'-7°)
 OUTPUT: 399Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

24VDC 665015E  

LED: FLUA CRI 90
 POWER: 6.3W
 OPTIC: P(66°40'-7°)
 OUTPUT: 399Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

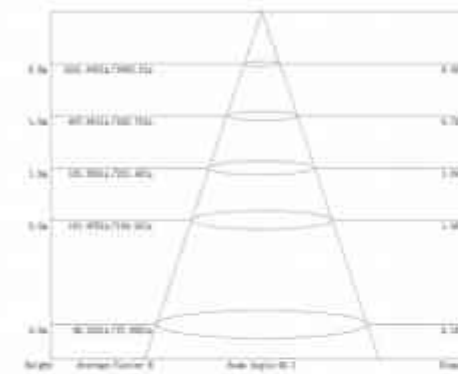


COLOR FINISHINGS:



M RGB

24VDC RGB 3IN1 667119  

LED: TYANSHINE RGB 3IN1
 POWER: 3*2W
 OPTIC: 38°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

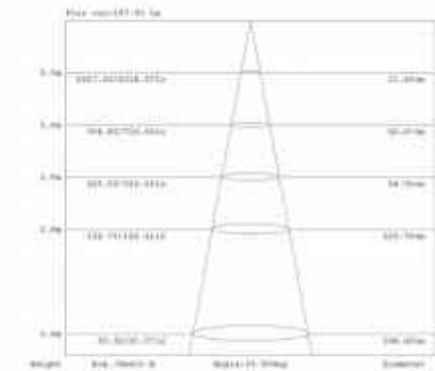




L/L DC

100-240VAC 8664 1SEA  
 LED: FLUA CRI 90
 POWER: 12.4W
 OPTIC: 22°
 OUTPUT: 750Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm


24VDC 8665 1SE  
 LED: FLUA CRI 90
 POWER: 10.5W
 OPTIC: 22°
 OUTPUT: 736Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

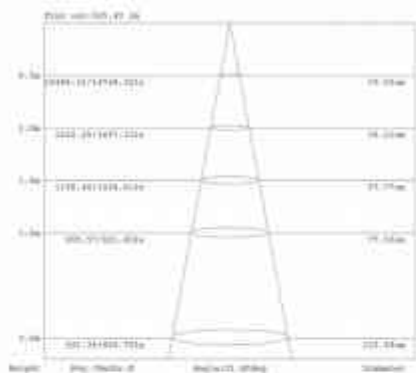

OPTIONS:




COLOR FINISHINGS:

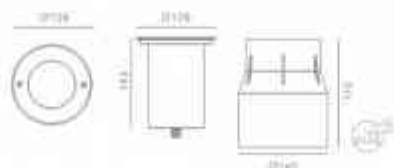

L NB/L NB DC

100-240VAC 869 111  
 LED: CREE CRI 90
 POWER: 11.6W
 OPTIC: 8°
 OUTPUT: 833Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm


24VDC 869 311  
 LED: CREE CRI 90
 POWER: 8.1W
 OPTIC: 8°
 OUTPUT: 833Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

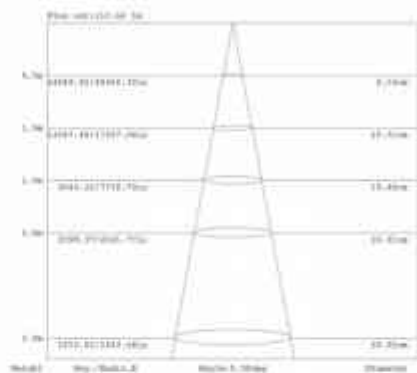


L P/L P DC

100-240VAC 8687 19E  
 LED: FLUA CRI 90
 POWER: 12.7W
 OPTIC: P(82°42'~8°)
 OUTPUT: 874Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

24VDC 8689 19E  
 LED: FLUA CRI 90
 POWER: 11.3W
 OPTIC: P(82°42'~8°)
 OUTPUT: 874Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

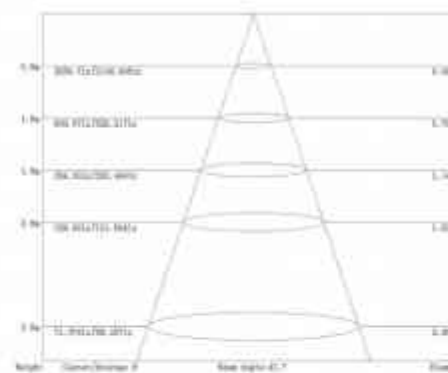


COLOR FINISHINGS:

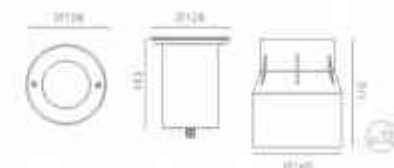


L RGB

24VDC RGB 3IN1 8663 1S  
 LED: TYANSHINE RGB 3IN1
 POWER: 3*4W
 OPTIC: 38°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

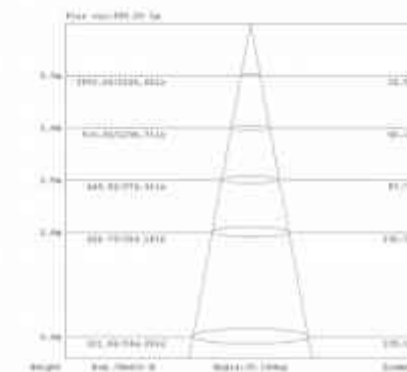




S HALF / S HALF DC

100-240VAC 6643162A  

LED: FLUA CRI 90
 POWER: 4W
 OPTIC: P(24°27°-T)
 OUTPUT: 88Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 46x26mm
 HOLE SIZE: 17.5mm

24VDC 664215E  

LED: FLUA CRI 90
 POWER: 3.9W
 OPTIC: P(24°27°-T)
 OUTPUT: 88Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 46x26mm
 HOLE SIZE: 17.5mm

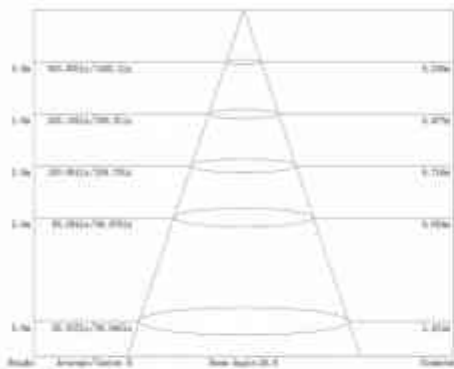


S NB HALF / S NB HALF DC

100-240VAC 665517A  

LED: OSRAM CRI 80
 POWER: 2.7W
 OPTIC: P(6°8°-T)
 OUTPUT: 82Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 46x26mm
 HOLE SIZE: 17.5mm

24VDC 665417  

LED: OSRAM CRI 80
 POWER: 2W
 OPTIC: P(6°8°-T)
 OUTPUT: 82Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 46x26mm
 HOLE SIZE: 17.5mm

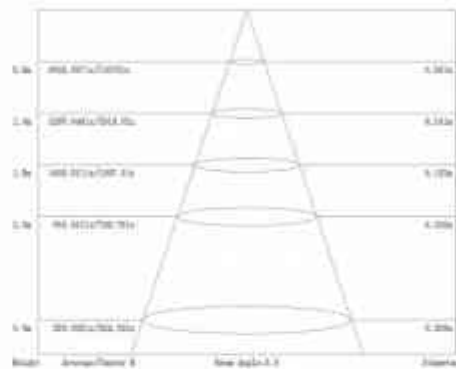


S PHALF / S PHALF DC

100-240VAC 665916E  

LED: FLUA CRI 90
 POWER: 4.6W
 OPTIC: P(25°27°-T)
 OUTPUT: 82Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 46x26mm
 HOLE SIZE: 17.5mm

24VDC 665816C  

LED: FLUA CRI 90
 POWER: 3.7W
 OPTIC: P(25°27°-T)
 OUTPUT: 82Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 46x26mm
 HOLE SIZE: 17.5mm

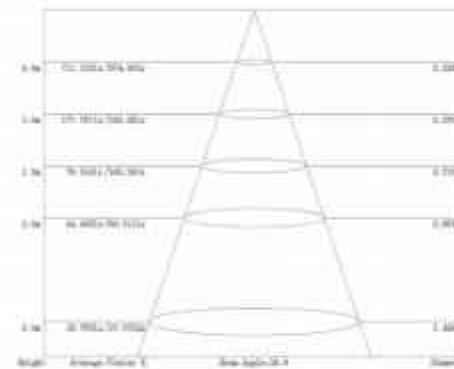

COLOR FINISHINGS:



COLOR FINISHINGS:






M HALF / M HALF DC

100-240VAC 6636 15EA

LED: FLUA CRI 90
 POWER: 7W
 OPTIC: P(24°21'-4°)
 OUTPUT: 213Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

24VDC 6635 15E

LED: FLUA CRI 90
 POWER: 6.9W
 OPTIC: P(24°21'-4°)
 OUTPUT: 213Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

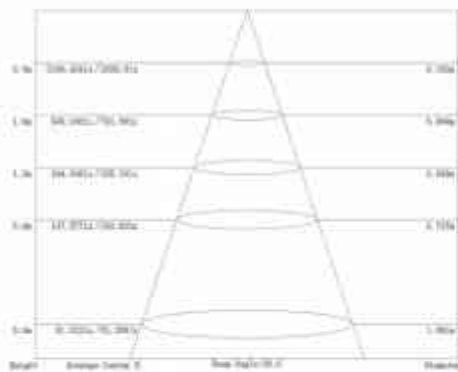

OPTIONS:

OPTICS:
 P(14°13'-0°)
 P(32°34'-0°)

COLOR FINISHINGS:




M NB HALF / M NB HALF DC

100-240VAC 6648 11A

LED: CREE CRI 90
 POWER: 6.7W
 OPTIC: P(6°8'-1°)
 OUTPUT: 178Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

24VDC 6647 11

LED: CREE CRI 90
 POWER: 6.2W
 OPTIC: P(6°8'-1°)
 OUTPUT: 217Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

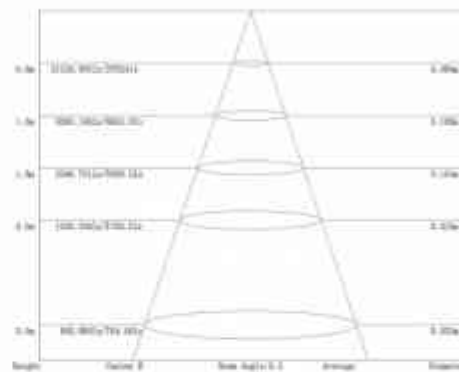


M PH HALF / M PH HALF DC

100-240VAC 6663 15EA

LED: FLUA CRI 90
 POWER: 6.3W
 OPTIC: P(52°31'-13°)
 OUTPUT: 246Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

24VDC 6662 15E

LED: FLUA CRI 90
 POWER: 6.3W
 OPTIC: P(52°31'-13°)
 OUTPUT: 246Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*126mm
 HOLE SIZE: Ø125mm

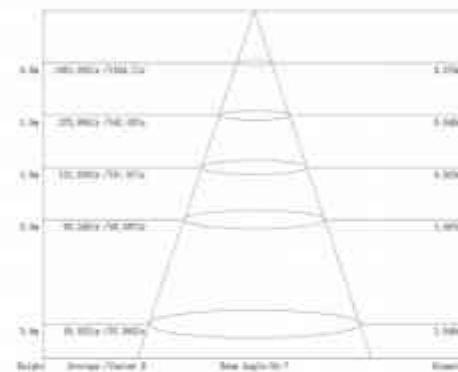

COLOR FINISHINGS:






L HALF / L HALF DC

100-240VAC 6665 15EA  

LED: FLUA CRI 90
 POWER: 12.4W
 OPTIC: P(22°18'-4°)
 OUTPUT: 380Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

24VDC 6667 15E  

LED: FLUA CRI 90
 POWER: 10.5W
 OPTIC: P(22°18'-4°)
 OUTPUT: 380Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

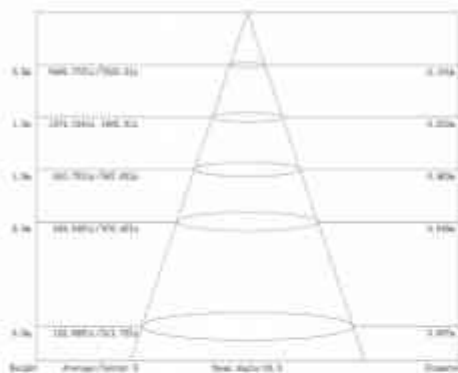


OPTIONS:

OPTICS:
 P(15°17'-2°)
 P(30°23'-9°)

COLOR FINISHINGS:

 003

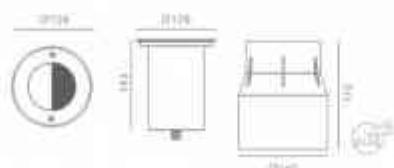


L NB HALF / L NB HALF DC

100-240VAC 6692 11  

LED: CREE CRI 90
 POWER: 11.6W
 OPTIC: P(6°6'-1°)
 OUTPUT: 289Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

24VDC 6694 11  

LED: CREE CRI 90
 POWER: 8.1W
 OPTIC: P(6°6'-1°)
 OUTPUT: 289Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

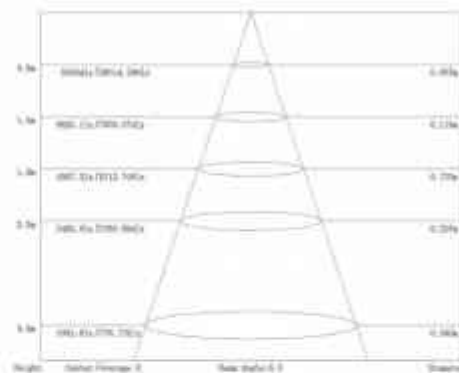


L P HALF / L P HALF DC

100-240VAC 6650 19E  

LED: FLUA CRI 90
 POWER: 12.7W
 OPTIC: P(66°29'-16°)
 OUTPUT: 413Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm


24VDC 6650 19E  

LED: FLUA CRI 90
 POWER: 11.3W
 OPTIC: P(66°29'-16°)
 OUTPUT: 413Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*143mm
 HOLE SIZE: Ø145mm

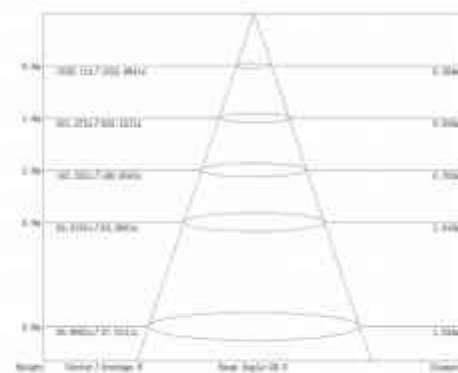

COLOR FINISHINGS:

 003

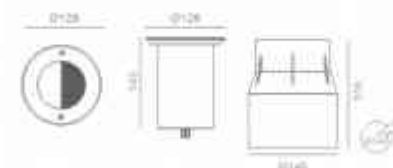

ITEM CODE	Conventional		NB		P		RGB	
	•AC	•DC	•AC	•DC	•AC	•DC	AC	•DC
 GIANO S	GIANO S		GIANO S NB		GIANO S P		GIANO S RGB	
	25°		7°		P(25*29*8°)		22°	
 GIANO M	GIANO M		GIANO M NB		GIANO M P		GIANO M RGB	
	25□ 15□ 37□		6□		P(56*40□7□)		35□	
 GIANO L	GIANO L		GIANO L NB		GIANO L P		GIANO L RGB	
	22□ 17□ 39□		6□		P(62*42□9□)		36□	
 GIANO XL	GIANO XL						GIANO XL RGB	
	28□ 21□ 40□						33□	

ITEM CODE	•AC	•DC	•AC	•DC	•AC	•DC
	 GIANO S HALF	GIANO S		GIANO S NB		GIANO S P
	P(24*27□7□)		P(6*6□3□)		P(25*27□13□)	
 GIANO M HALF	GIANO M		GIANO M NB		GIANO M P	
	P(24*21□4□) P(14*13□2□) P(32*24□3□)		P(6*6□3□)		P(52*31□13□)	
 GIANO L HALF	GIANO L		GIANO L NB		GIANO L P	
	P(22*18□4□) P(15*17□2□) P(38*25□9□)		P(6*6□3□)		P(56*29□16□)	
 GIANO XL HALF	GIANO XL					
	P(27*23□6□) P(20*20□4□) P(39*31□9□)					







GIANO S P J & S P HALF FRONTAL SHOOTING



GIANO S P HALF SIDE SHOOTING

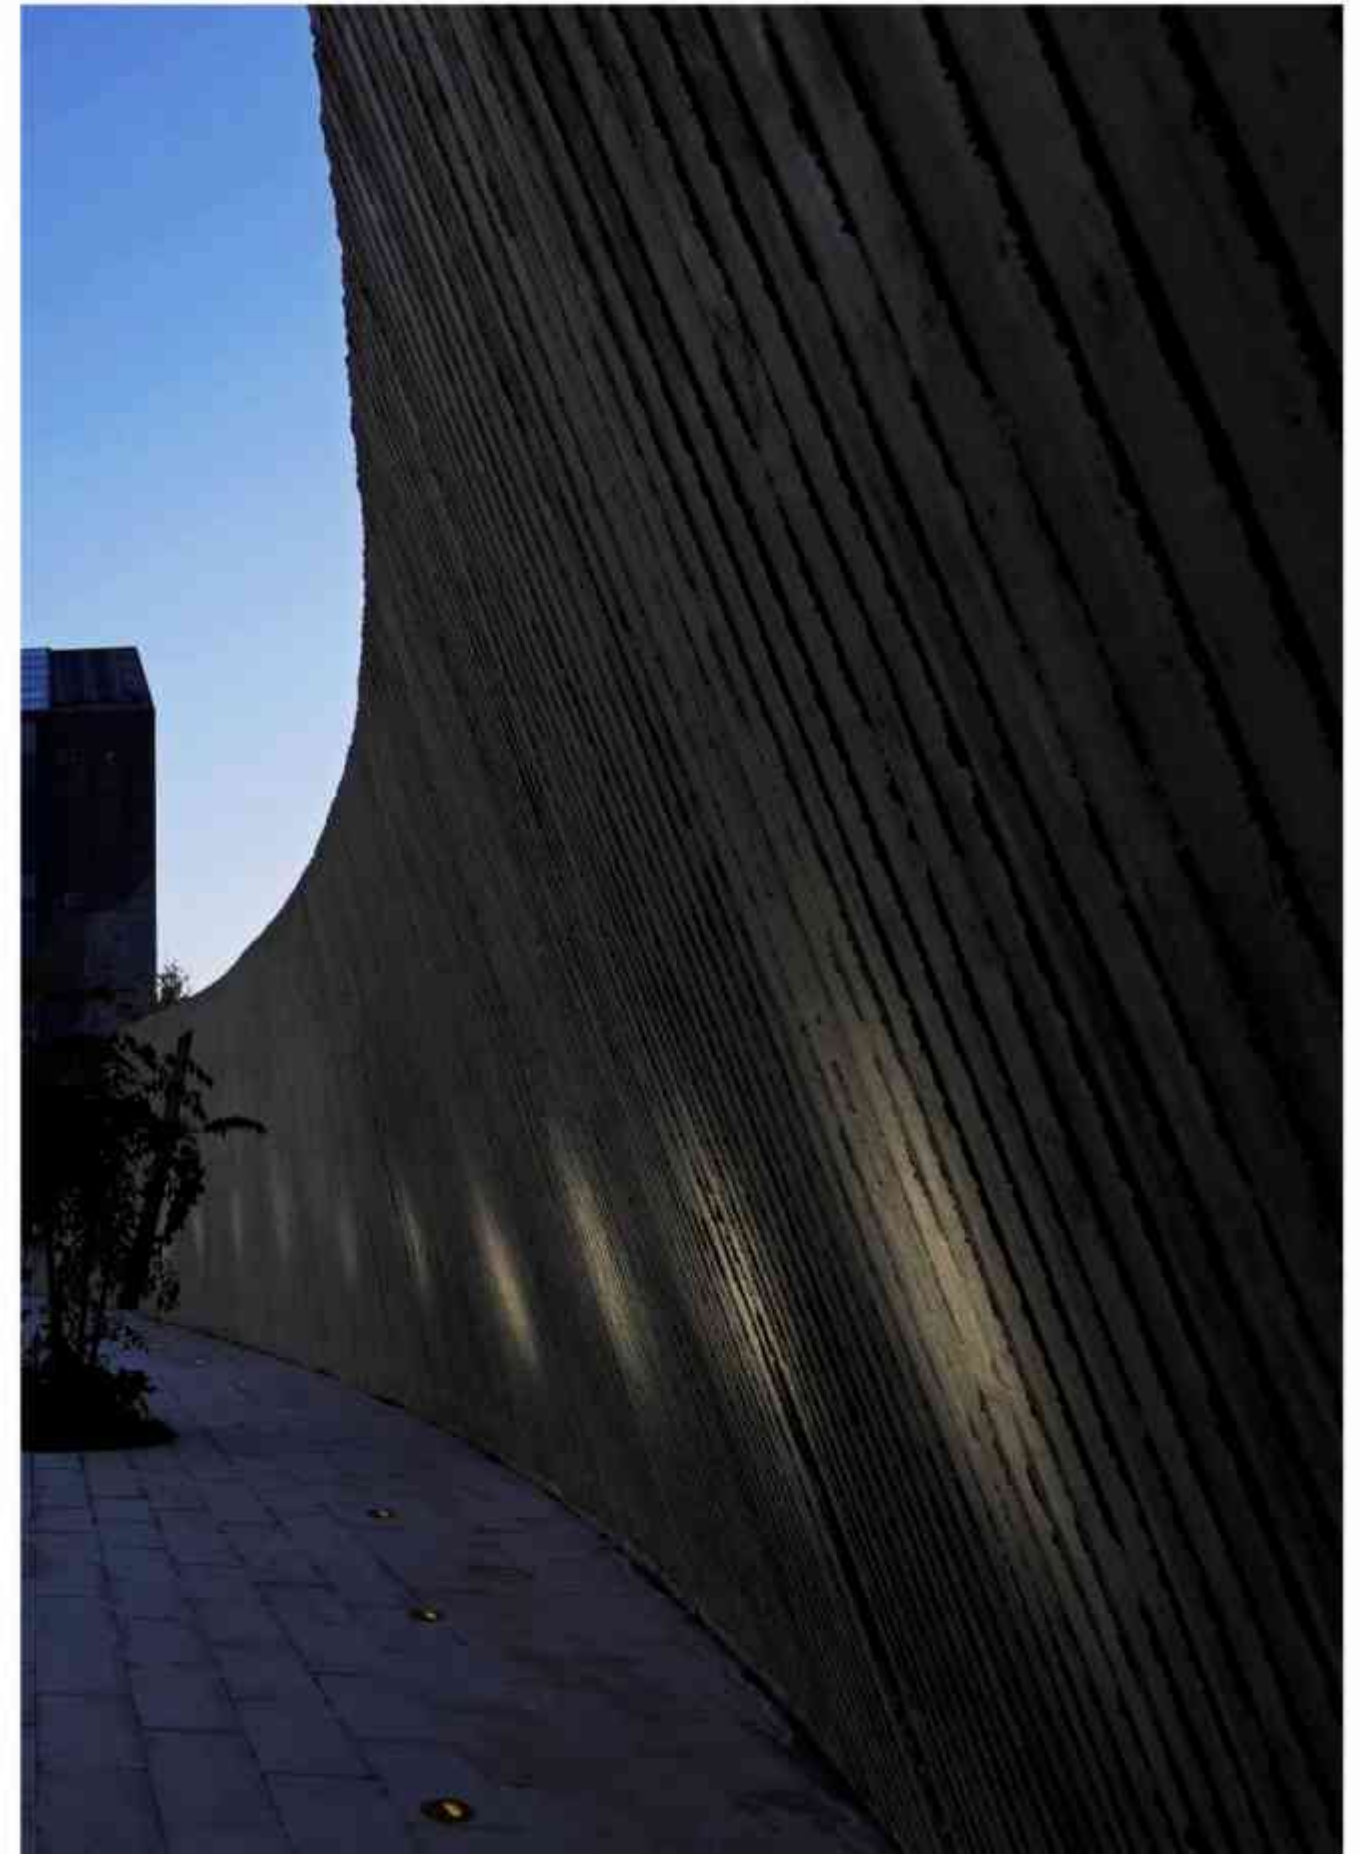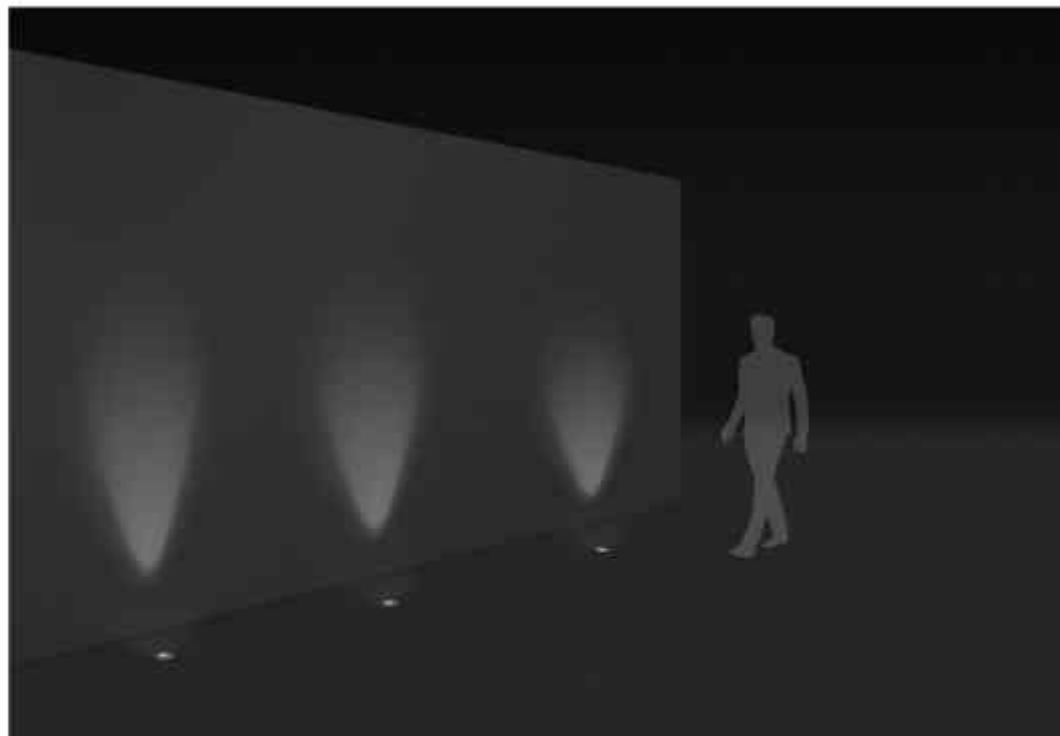



GT

This miniature in ground fitting is the best example of functionality and style. 3 different selections are available for choice: standard, asymmetric, and frosted type. Thanks to its slim body, GT can be installed in the places with limited space.

CCC CE IP67 3VDC 700mA

959



GT

INGROUND LAMP



960

GT DC



3VDC 700mA 658011 

LED: CREE CRI 80
 POWER: 2.5W
 OPTIC: 25°
 OUTPUT: 148Lm
 CABLE CLASS: VDE3209 2*24AWG
 DIMENSION: Ø65*26.5mm
 HOLE SIZE: Ø52mm


GT ASYMMETRIC DC

3VDC 700mA 657911 

LED: CREE CRI 80
 POWER: 2.5W
 OPTIC: P (18°26° 13°)
 OUTPUT: 150Lm
 CABLE CLASS: VDE3209 2*24AWG
 DIMENSION: Ø65*26.5mm
 HOLE SIZE: Ø52mm

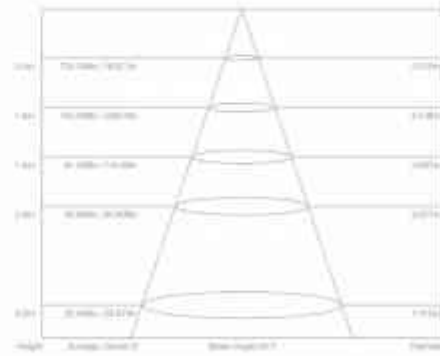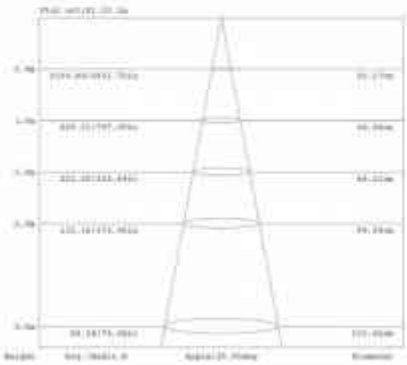


GT FROST DC

3VDC 700mA 656111 

LED: CREE CRI 80
 POWER: 2.5W
 OPTIC: F
 OUTPUT: 19Lm
 CABLE CLASS: VDE3209 2*24AWG
 DIMENSION: Ø65*26.5mm
 HOLE SIZE: Ø52mm



COLOR FINISHINGS:

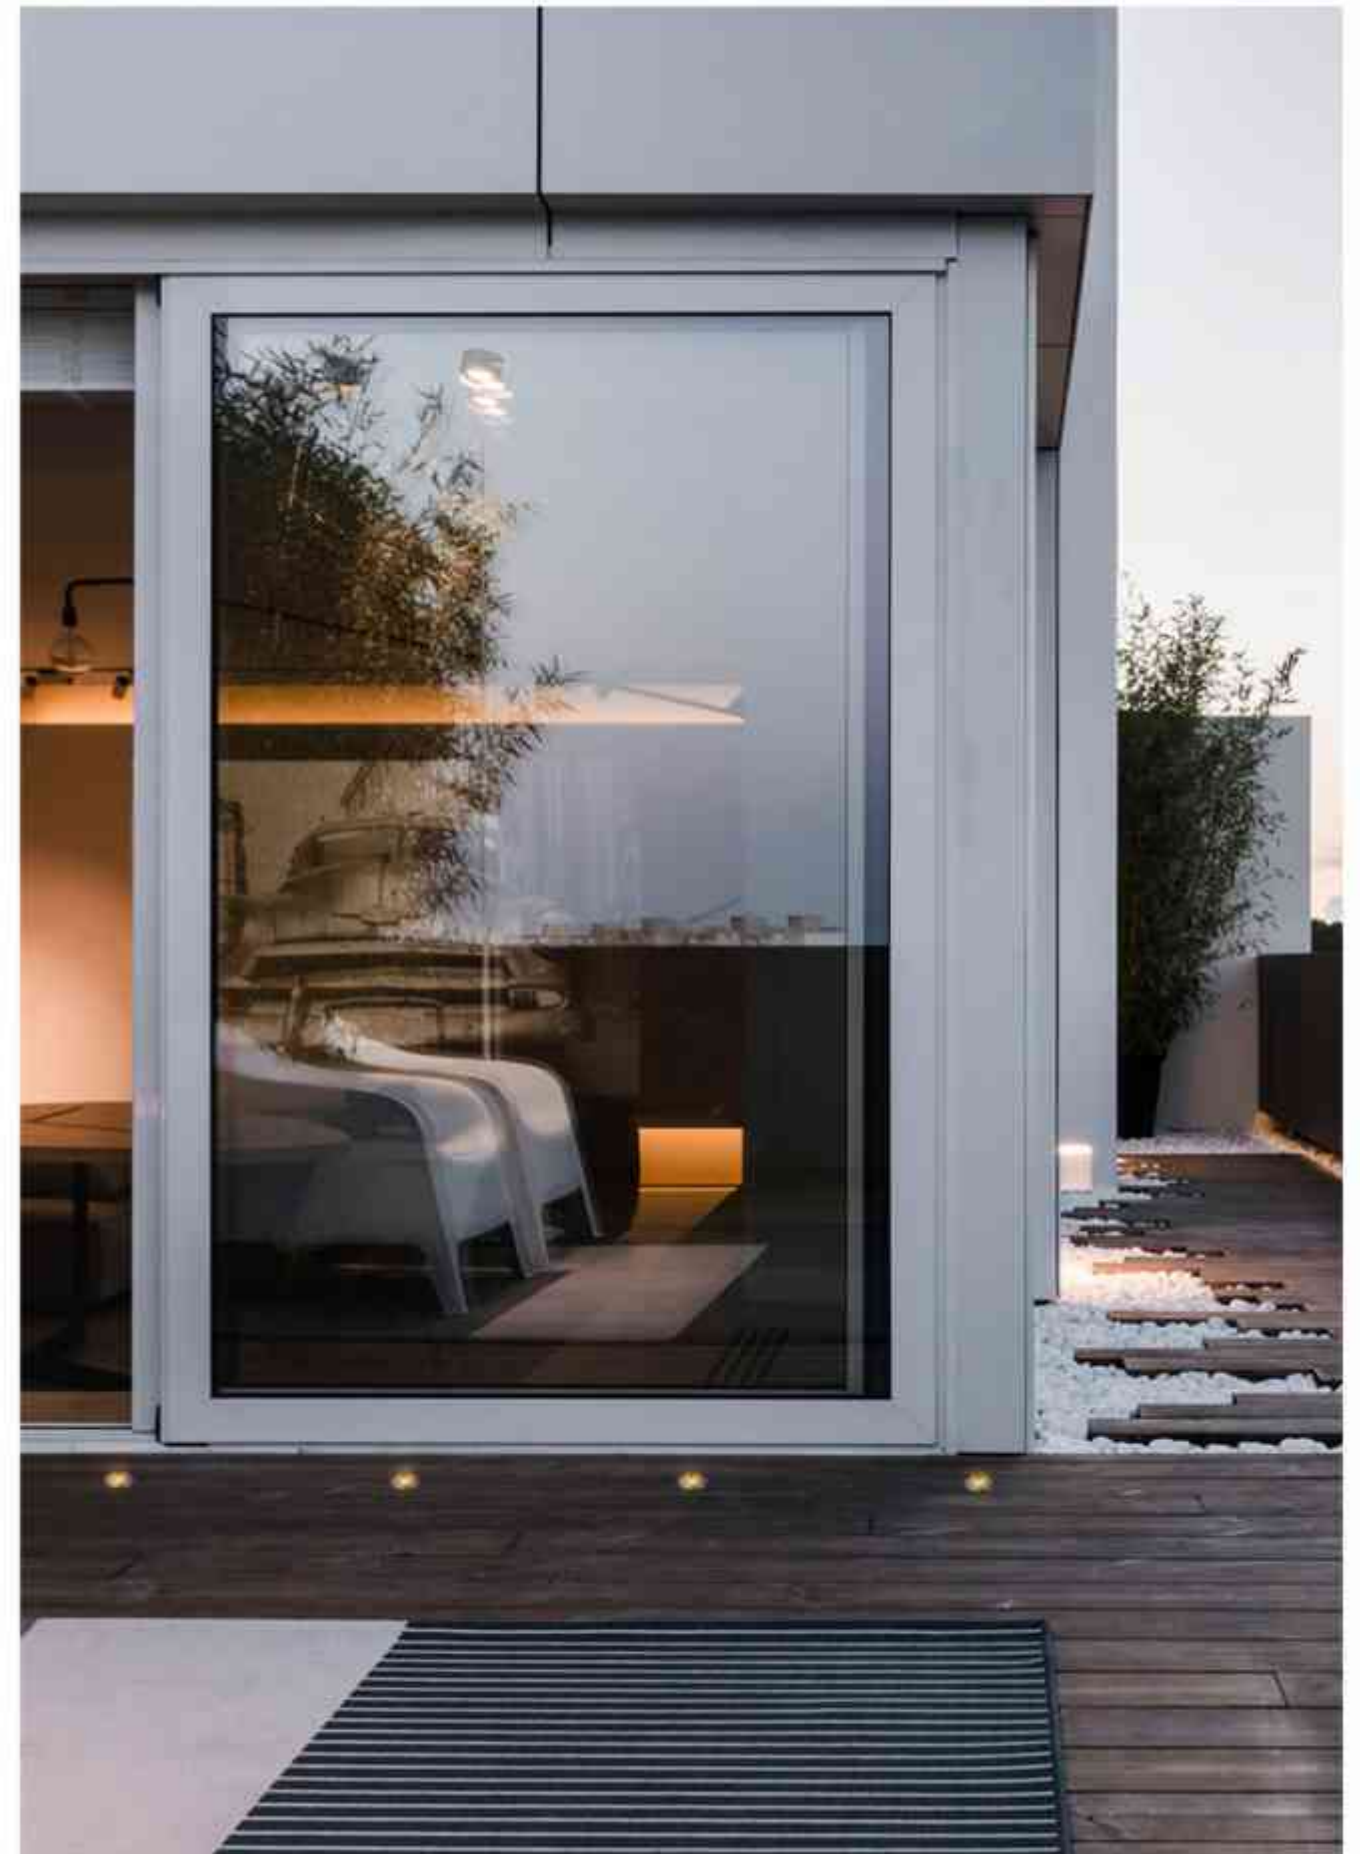



963

HALO

Thanks to its elegant and unique design, HALO delivers the intense aureole light effect, enhancing the esthetic character of the project. HALO could be installed in the wall or into the ground. This splendid fitting is the best choice for guidance lighting.

CE IP67

HALO



INGROUND LAMP



HALO / HALO DC



964

100-240VAC

647011  

LED: CREE CRI 80
 POWER: 7.8W
 OPTIC: R3
 OUTPUT: 103 Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø106*118mm
 HOLE SIZE: 7

24VDC

646911  

LED: CREE CRI 80
 POWER: 7.2W
 OPTIC: R3
 OUTPUT: 103 Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø106*118mm
 HOLE SIZE: 7




COLOR FINISHINGS:

 R01



MAX

MAX is the best example of beauty and functionality.
 MAX enhances the architectural character of any project and landscape.
 Thanks to its adjustable function and anti-glare optics that includes honeycomb cover,
 MAX indicates the right direction along the path as long as accentuates trees, sculptures or facades.
 MAX is available in 2 sizes, 2.6W and 7W.
 Bigger version is available in stainless steel option.



MAX

INGROUND LAMP



S/S DC

100-240VAC



656617

LED: OSRAM CRI 80
 POWER: 2.6W
 OPTIC: 15°
 OUTPUT: 119Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø72*75mm
 HOLE SIZE: /

24VDC

656617

LED: OSRAM CRI 80
 POWER: 2.4W
 OPTIC: 15°
 OUTPUT: 119Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø72*75mm
 HOLE SIZE: /

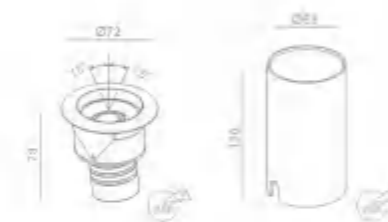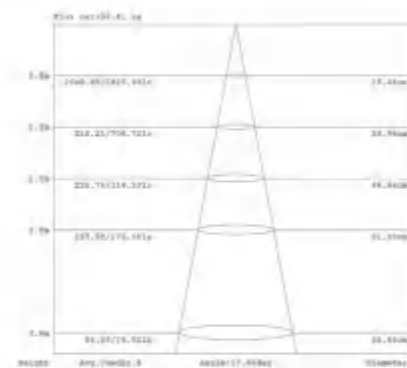

OPTICS:



COLOR FINISHINGS:



MAX



M

MAX




M 318 DC

RECESSED LAMP

967

100-240VAC 805015E

LED: FLUA CRI 90
 POWER: 3W
 OPTIC: 15°
 OUTPUT: 332lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø100*102mm
 HOLE SIZE: >

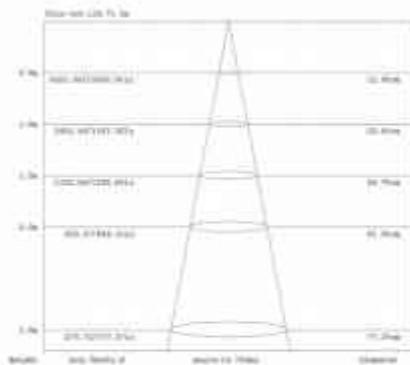


OPTICS:

 24° 36°
 COLOR FINISHINGS:

968

24VDC 805001

LED: CREE 3000K, CRI 80
 POWER: 6W
 OPTIC: 15°
 OUTPUT: 420lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø100*65mm
 HOLE SIZE: Ø76mm-Ø85mm

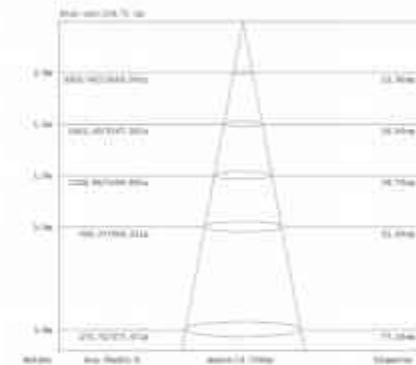


OPTICS:

 30°
 COLOR FINISHINGS:





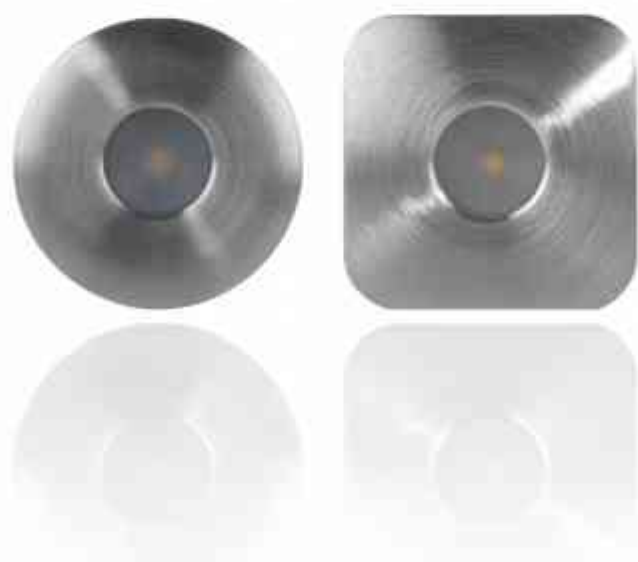

MICRO


This miniature stainless steel luminaire could make miracles, creat additional enigmatic atmosphere to any landscape. Thanks to its tiny body, MICRO is easy to be installed in the places where space is limited. Frosted glass provides additional anti-glare effect. MICRO is the best choice for footpaths as a guiding light.

CE IP67 3VDC 350mA



ROUND

3VDC 350mA 820415
 LED: OSRAM CRI 80
 POWER: 1W
 OPTIC: F
 OUTPUT: 85lm
 CABLE/CLAS: VDE7550 2*24AWG
 DIMENSION: Ø27*31mm
 HOLE SIZE: F



COLOR FINISHINGS:







SQUARED

3VDC 350mA 026515


LED: OSRAM CRI 80
 POWER: 1'6W
 OPTIC: F
 OUTPUT: 55Lm
 CABLE/CLASS: VDE7666 2'24AWG
 DIMENSION: 27'27'31mm
 HOLE SIZE: /

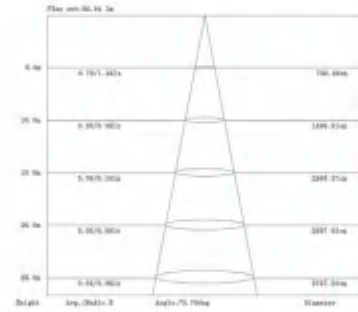

COLOR FINISHINGS:



SSS

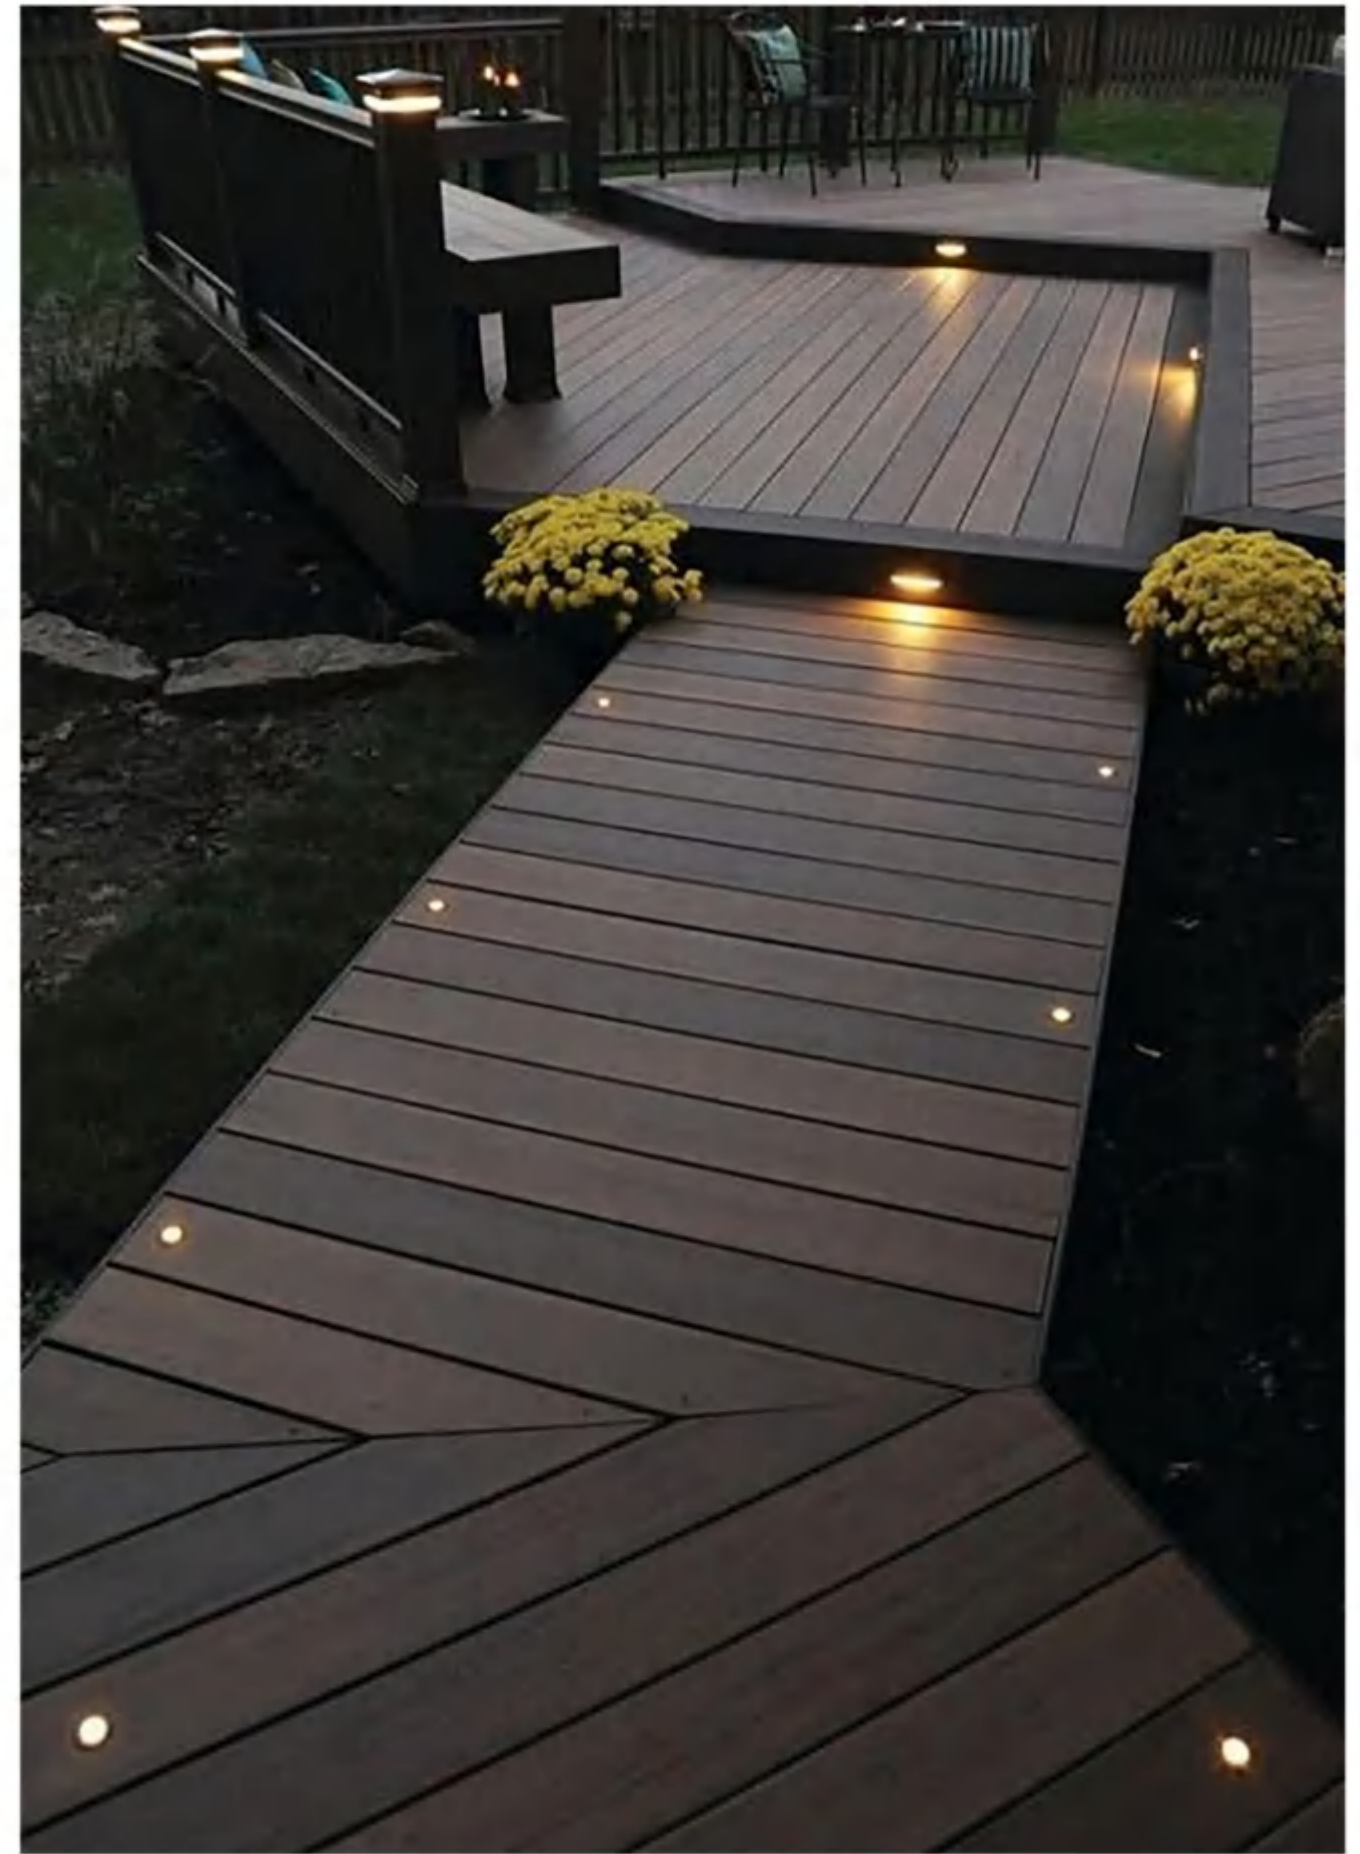

RAINBOW

Inground range RAINBOW is a great example of functionality and elegance.
Thanks to IP67 rate RAINBOW can be used outdoor.
3 sizes are available for choice. Due to RGB function, RAINBOW provides
perfect lighting patterns for any environment.

975



© CE IP67



RAINBOW

INGROUND LAMP



35.5mm




35mm

976

COLOR FINISHINGS:



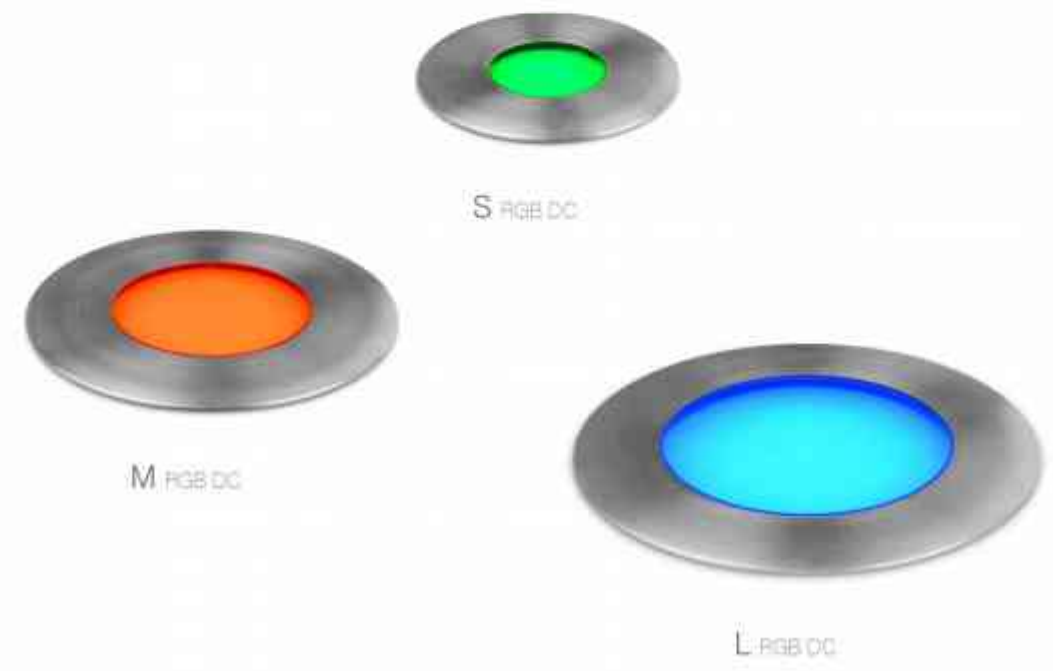




S/S DC

100-240VAC

662814A

LED: EDISON CRI 80
POWER: 3W
OPTIC: L
OUTPUT: 80Lm
CABLE CLASS: HD6RN F 2*0.75mm²
DIMENSION: Ø90*31.8mm
HOLE SIZE: Ø80mm/Ø65mm



24VDC

662714

LED: EDISON CRI 80
POWER: 3.4W
OPTIC: L
OUTPUT: 78Lm
CABLE CLASS: HD6RN F 2*0.75mm²
DIMENSION: Ø90*31.8mm
HOLE SIZE: Ø80mm/Ø65mm




S RGB DC



24VDC

662514

LED: EDISON RGB 3IN1
POWER: 2.8W
OPTIC: F
OUTPUT: 12Lm
CABLE CLASS: HD6RN F 4*0.75mm²
DIMENSION: Ø90*31.8mm
HOLE SIZE: Ø80mm/Ø65mm




M/M DC

100-240VAC

663014A

LED: EDISON CRI 80
POWER: 6W
OPTIC: L
OUTPUT: 266Lm
CABLE CLASS: HD6RN F 3*0.75mm²
DIMENSION: Ø130*31.8mm
HOLE SIZE: Ø115mm/Ø125mm

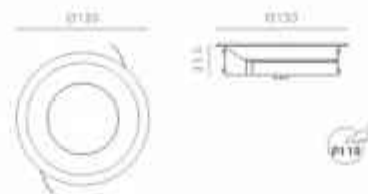

24VDC

662914

LED: EDISON CRI 80
POWER: 6.6W
OPTIC: L
OUTPUT: 249Lm
CABLE CLASS: HD6RN F 3*0.75mm²
DIMENSION: Ø130*31.8mm
HOLE SIZE: Ø115mm/Ø125mm



M RGB DC



24VDC

662614

LED: EDISON RGB 3IN1
POWER: 7.3W
OPTIC: F
OUTPUT: 34Lm
CABLE CLASS: HD6RN F 4*0.75mm²
DIMENSION: Ø130*31.8mm
HOLE SIZE: Ø115mm/Ø125mm




L/L DC

100-240VAC

663214A

LED: EDISON CRI 80
POWER: 10.9W
OPTIC: L
OUTPUT: 538Lm
CABLE CLASS: HD6RN F 3*0.75mm²
DIMENSION: Ø165*31.8mm
HOLE SIZE: Ø145mm/Ø162mm

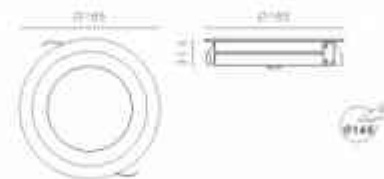

24VDC

663114

LED: EDISON CRI 80
POWER: 10.9W
OPTIC: L
OUTPUT: 487Lm
CABLE CLASS: HD6RN F 3*0.75mm²
DIMENSION: Ø165*31.8mm
HOLE SIZE: Ø145mm/Ø162mm



L RGB DC




24VDC

662414

LED: EDISON RGB 3IN1
POWER: 10.9W
OPTIC: F
OUTPUT: 122Lm
CABLE CLASS: HD6RN F 4*0.75mm²
DIMENSION: Ø165*31.8mm
HOLE SIZE: Ø145mm/Ø162mm



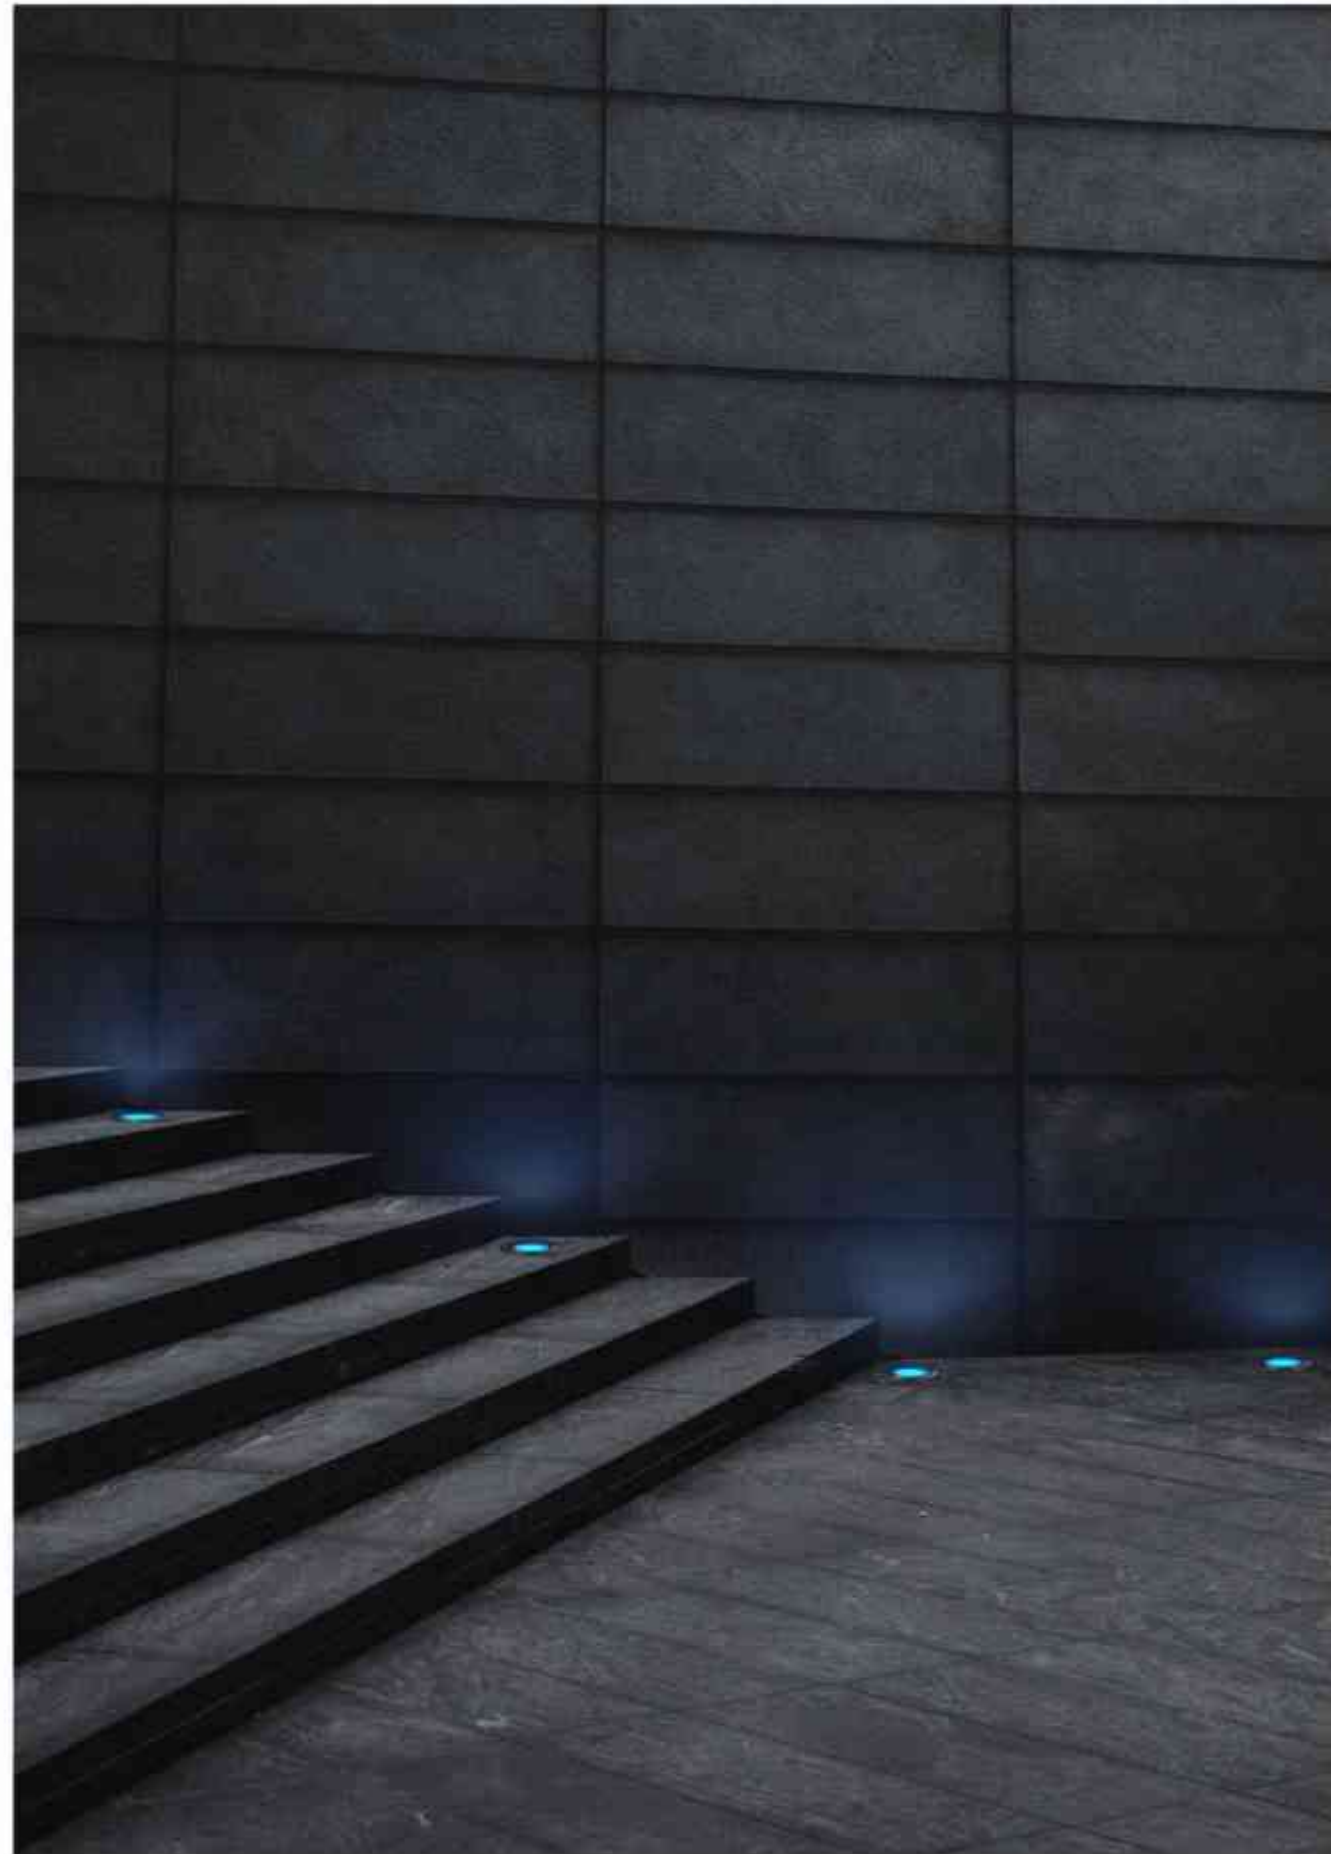



983



SURROUND

Special collection of in-ground luminaire
SURROUND is the best choice for both guiding and decorative function.
 Wide choice of outer cover with different forms
 makes it possible to create unique lighting patterns on the ground,
 be it one, two three, or more rays.
 Available in both stainless steel and anodized aluminum versions.



R1
100-240VAC 667317A

LED: OSRAM CRI 80
 POWER: 2.6W
 OUTPUT: 24 Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø65*66.8mm
 HOLE SIZE: Ø75mm

R2
100-240VAC 667517A

LED: OSRAM CRI 80
 POWER: 2.6W
 OUTPUT: 38Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø65*66.8mm
 HOLE SIZE: Ø75mm

R3
100-240VAC 667717A

LED: OSRAM CRI 80
 POWER: 2.6W
 OUTPUT: 45Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø65*66.8mm
 HOLE SIZE: Ø75mm



R2 DC/ R2 2.0



R1 DC/ R1 2.0



R3 DC/ R3 2.0

24VDC 667417

LED: OSRAM CRI 80
 POWER: 2.3W
 OUTPUT: 18 Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø65*66.8mm
 HOLE SIZE: Ø75mm


24VDC 667617

LED: OSRAM CRI 80
 POWER: 2.3W
 OUTPUT: 22Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø65*66.8mm
 HOLE SIZE: Ø75mm

24VDC 667817

LED: OSRAM CRI 80
 POWER: 2.3W
 OUTPUT: 29Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø65*66.8mm
 HOLE SIZE: Ø75mm

COLOR FINISHINGS:

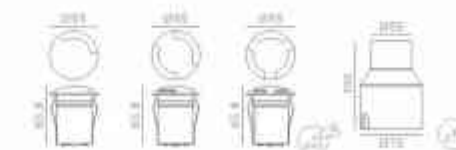


984





VEGA

In-ground luminaires with brand new structure design to have independent integrated driver on the bottom of fitting body.
 You can replace the driver easily by yourself.
 Thermal management is much lower with this new structure design,
 which lengthen the lifespan of the luminaires as well.



SR_{2.0} / SR_{DC2.0}



PAGE 947

MR_{2.0} / MR_{DC2.0}



PAGE 948

LR_{2.0} / LR_{DC2.0}



PAGE 949





SR20 / SR DC20





MR20 / MR DC20

100-240VAC 661115EA   

LED: FLUA CRI 90
 POWER: 13.5W
 OPTIC: 20°
 OUTPUT: 1425lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø170*116mm
 HOLE SIZE: Ø160mm




24VDC 661215E   

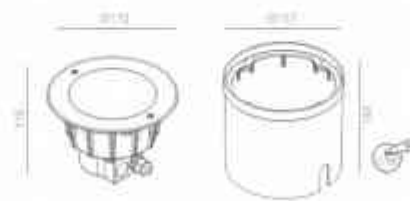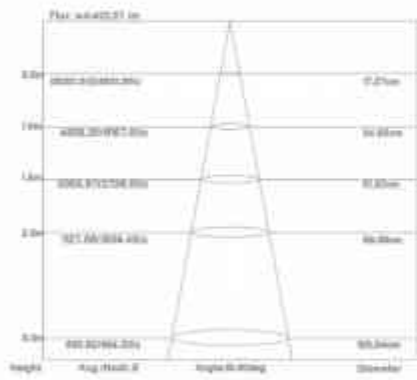LED: FLUA CRI 90
 POWER: 12.5W
 OPTIC: 20°
 OUTPUT: 1425lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø170*116mm
 HOLE SIZE: Ø160mm



COLOR FINISHINGS:



100-240VAC 660815EA   

LED: FLUA CRI 90
 POWER: 24.5W
 OPTIC: 22°
 OUTPUT: 2577lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø200*159mm
 HOLE SIZE: Ø187mm

24VDC 661015E   

LED: FLUA CRI 90
 POWER: 21.3W
 OPTIC: 22°
 OUTPUT: 2577lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø200*159mm
 HOLE SIZE: Ø187mm



COLOR FINISHINGS:







VELA

VELA stands for a complete range of water and shock resistant lighting fixtures.



Thanks to the use of powerful led arrays, these floor recessed fixtures deliver an intense light effect.

Various of sizes and functionalities has made VELA one of most popular range of FLUA outdoor collection. VELA can answer almost all projects' requirements.

From tiniest member which is just 2.4W up to 23.9W, all versions have round and square outer frame for choice, VELA M and VELA L are available with adjustable function.

To complete the range, smaller series could be chosen with asymmetric lens or RGB / RGBW.




SS				PAGE 955	
S 1.1				PAGE 956	
M 1.1/M AD 1.1				PAGE 957	
M NB				PAGE 958	
ML				PAGE 959	
L/L AD					PAGE 960
XL				PAGE 961	



SS/SS DC

100-240VAC 654217  
 LED: OSRAM CRI 80
 POWER: 2.6W
 OPTIC: 12°
 OUTPUT: 159Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø58*70mm
 HOLE SIZE: Ø78mm

24VDC 654117  
 LED: OSRAM CRI 80
 POWER: 2.4W
 OPTIC: 12°
 OUTPUT: 160Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø58*70mm
 HOLE SIZE: Ø78mm

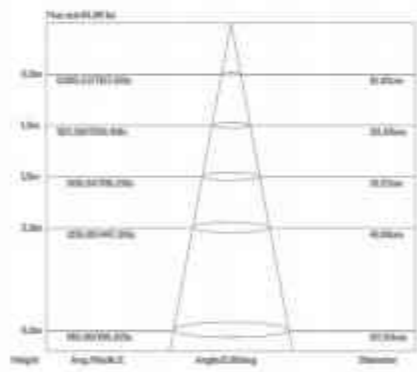

OPTIONS:




COLOR FINISHINGS:



SS SQUARED/SS SQUARED DC

100-240VAC 654417  
 LED: OSRAM CRI 80
 POWER: 2.6W
 OPTIC: 12°
 OUTPUT: 125Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø58*58*70mm
 HOLE SIZE: Ø78mm

24VDC 654317  
 LED: OSRAM CRI 80
 POWER: 2.4W
 OPTIC: 12°
 OUTPUT: 125Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø58*58*70mm
 HOLE SIZE: Ø78mm

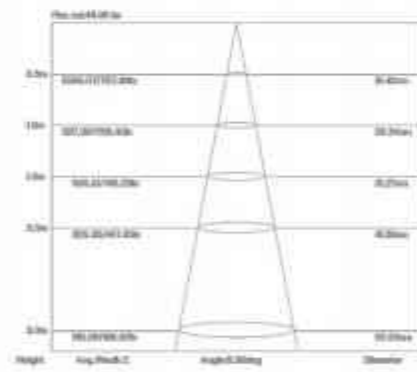

OPTIONS:




COLOR FINISHINGS:



SS ASYMMETRIC/SS ASYMMETRIC DC

100-240VAC 654817  
 LED: OSRAM CRI 80
 POWER: 2.6W
 OPTIC: P(18°/23°-13°)
 OUTPUT: 110Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø58*70mm
 HOLE SIZE: Ø78mm

24VDC 654517  
 LED: OSRAM CRI 80
 POWER: 2.4W
 OPTIC: P(18°/23°-13°)
 OUTPUT: 110Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø58*70mm
 HOLE SIZE: Ø78mm

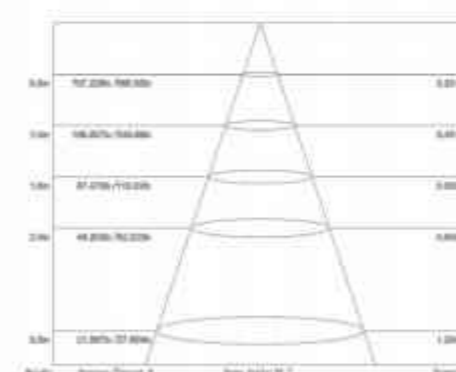



M Mini




ML / ML DC

100-240VAC 657411

LED: CREE CRI 80
 POWER: 7W
 OPTIC: 58°
 OUTPUT: 459Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø68*123mm
 HOLE SIZE: Ø100mm



ANGLE 5°

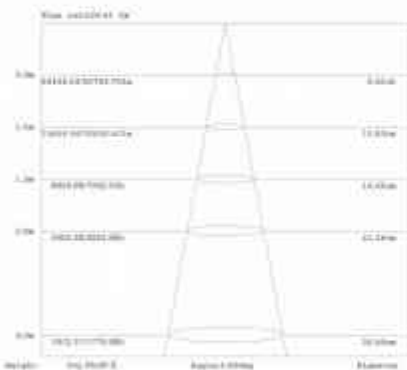


COLOR FINISHINGS:



100-240VAC 631612EB

LED: FLUA CRI 90
 POWER: 10.7W
 OPTIC: 38°
 OUTPUT: 734Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø106*145mm
 HOLE SIZE: Ø125mm

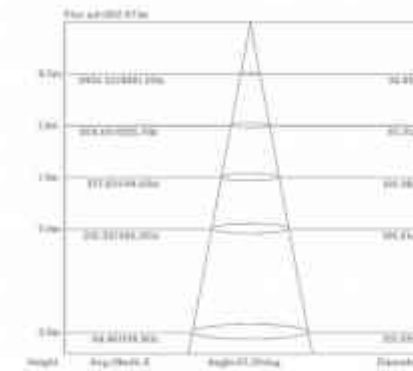

OPTIONS:

OPTICS:



COLOR FINISHINGS:





ML / ML DC



ML SQUARED / ML SQUARED DC



L / L DC



L SQUARED / L SQUARED DC



L AD / L AD DC



L AD SQUARED / L AD SQUARED DC

INGROUND LAMP

24VDC

631512EB

LED: FLUA CRI 90
 POWER: 10W
 OPTIC: 38°
 OUTPUT: 734Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø100*145mm
 HOLE SIZE: Ø125mm

24VDC

631712EB

LED: FLUA CRI 90
 POWER: 10W
 OPTIC: 38°
 OUTPUT: 734Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø100*145mm
 HOLE SIZE: Ø125mm

100-240VAC

632112BE / 632312BE

LED: FLUA CRI 90
 POWER: 16.8W
 OPTIC: 24°
 OUTPUT: 1024Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø126*164mm
 HOLE SIZE: Ø145mm

24VDC

632012BE / 632212BE

LED: FLUA CRI 90
 POWER: 15.5W
 OPTIC: 24°
 OUTPUT: 1024Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*164mm
 HOLE SIZE: Ø145mm

100-240VAC




634612BE / 634812BE

LED: FLUA CRI 90
 POWER: 16.8W
 OPTIC: 24°
 OUTPUT: 1024Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø126*210mm
 HOLE SIZE: Ø205mm

24VDC

634512BE / 634712BE


LED: FLUA CRI 90
 POWER: 15.5W
 OPTIC: 24°
 OUTPUT: 1024Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø126*210mm
 HOLE SIZE: Ø205mm

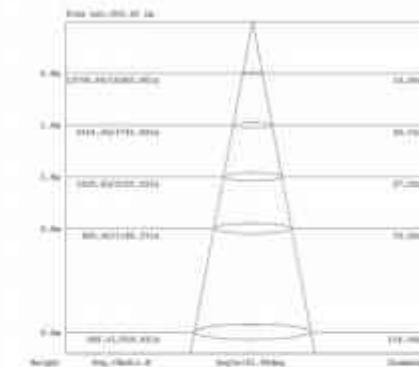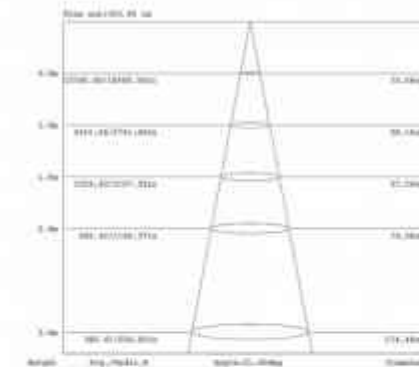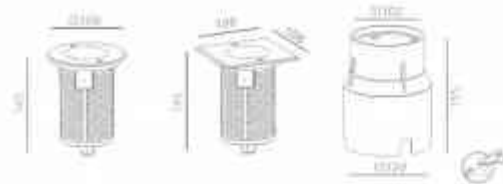

OPTIONS:



OPTIONS:



COLOR FINISHINGS:





XL / XL DC



XL SQUARED / XL SQUARED DC



100-240VAC 632612BE / 632812BE 

LED: FLUA CRI 90
 POWER: 23.9W
 OPTIC: 24°
 OUTPUT: 2188Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø175*210mm
 175*175*210mm
 HOLE SIZE: Ø205mm

24VDC 632512BE / 632712BE 

LED: FLUA CRI 90
 POWER: 22.8W
 OPTIC: 24°
 OUTPUT: 2188Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø175*210mm
 175*175*210mm
 HOLE SIZE: Ø205mm

1001

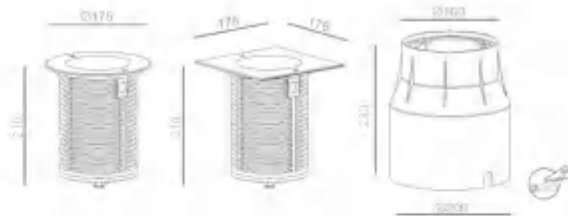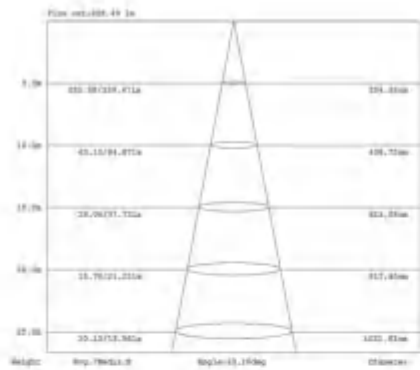

OPTIONS:

OPTICS:



COLOR FINISHINGS:



1002



1003



INGROUND LAMP

1004



WADER

WADER is a kind of bordered underground lights, its waterproof rating is IP67 with stainless steel lamp body and 10mm thick ultra-white tempered glass. It will be beautiful and comfortable for the surface is flush with the ground after being installed. There are monochrome and RGB to choose from, the input voltage is 24V and the luminous is soft. It can be brightening or indicating lighting which is used for a variety of squares and roadsides.











R.DC

24VDC  

LED: EDISON 3000K CRI 80
 POWER: 3W
 OPTIC: F
 OUTPUT: 220Lm
 DIMENSION: Ø66*54mm
 HOLE SIZE: Ø59*100mm

HOLDING FINISHING:





R 3 IN 1




1007

24VDC RGB 3IN1

856414

LED EDISON RGB 3IN1
POWER: 4W
OPTIC: F
DIMENSION: Ø86*80mm
HOLE SIZE: Ø80*100mm

HOLDING FINISHES:

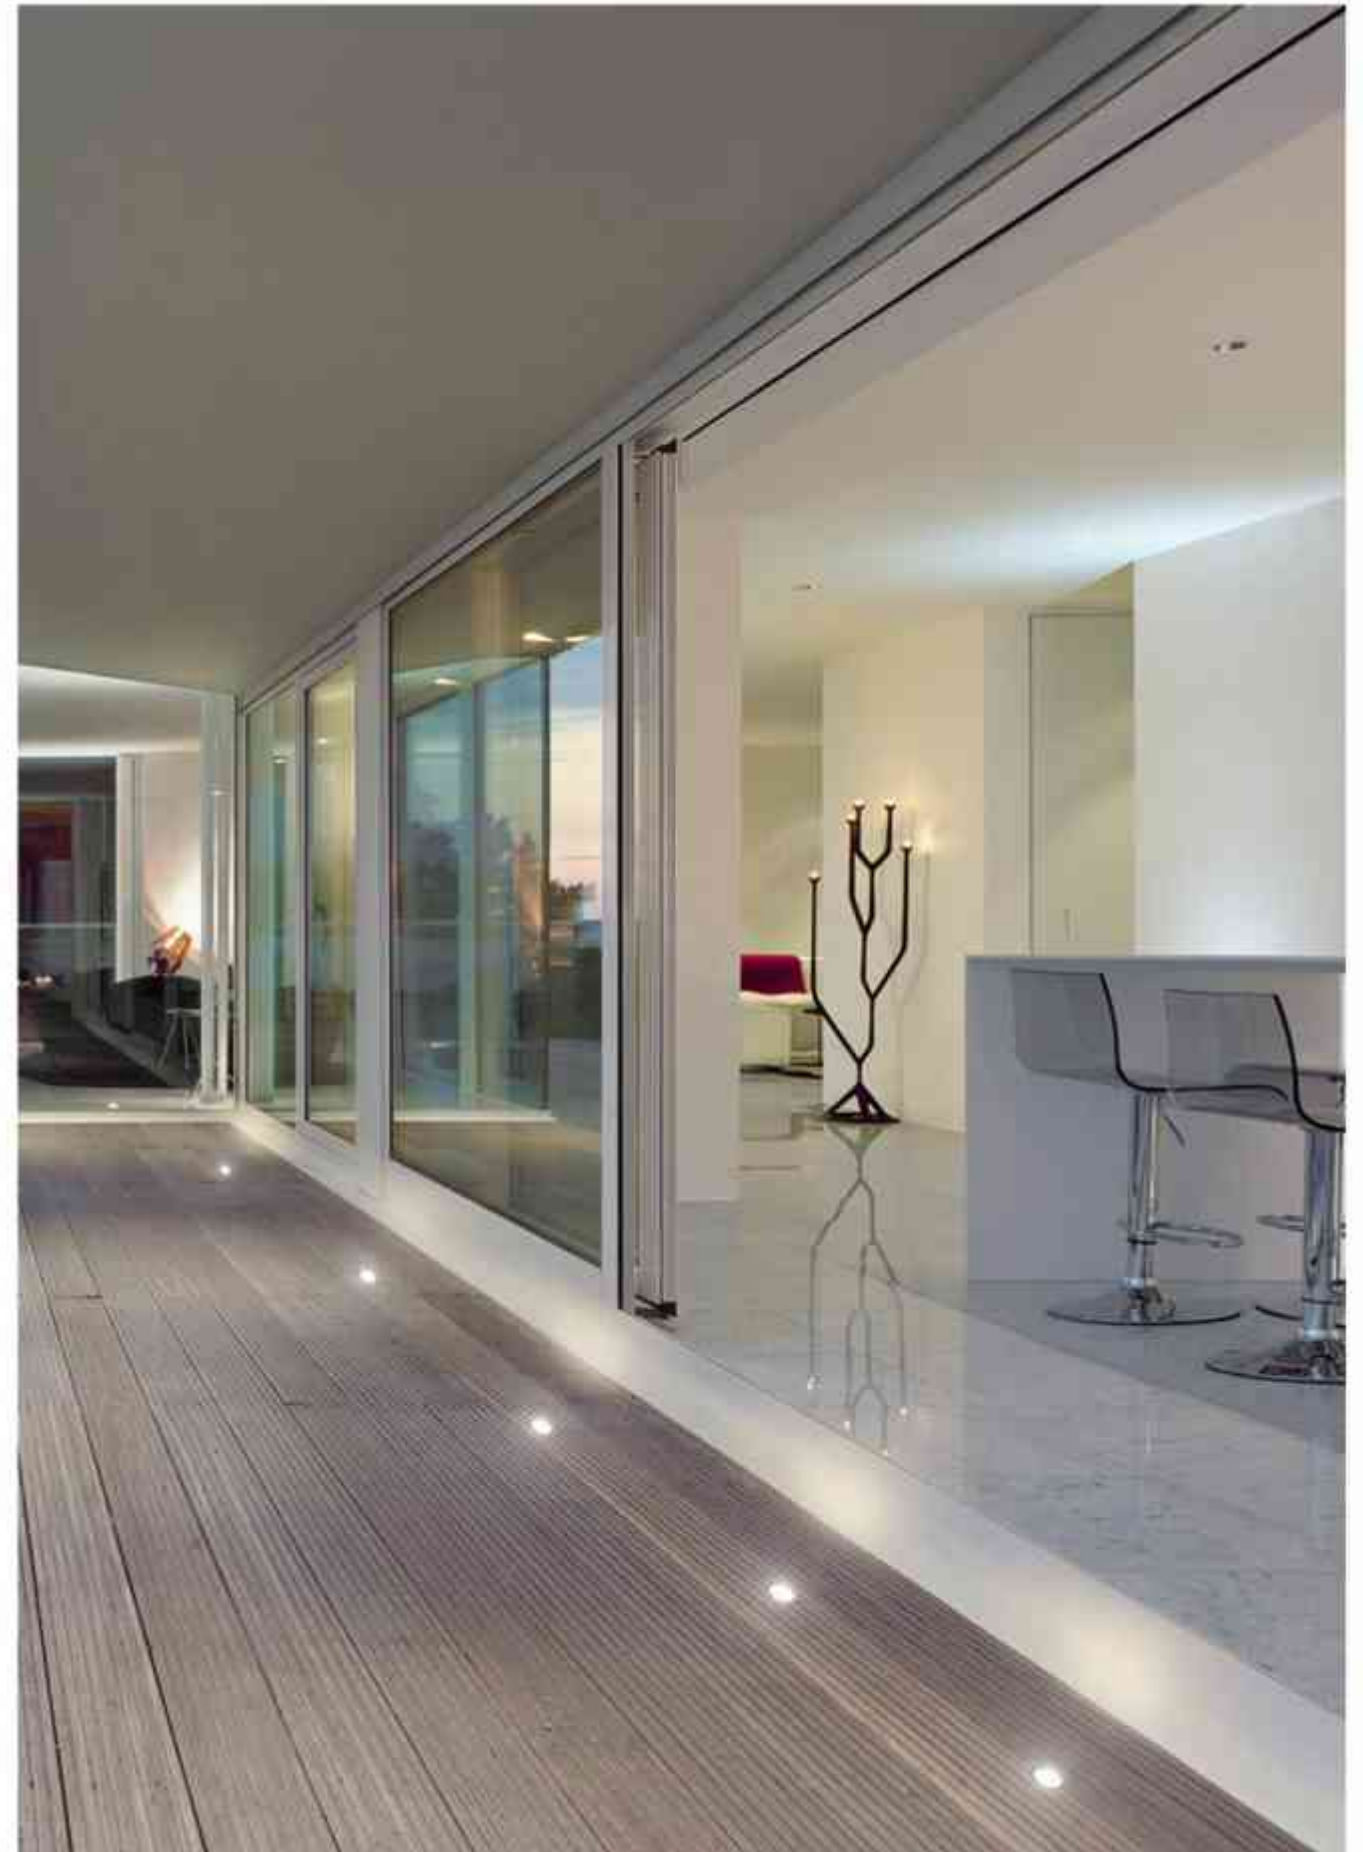

1008

RECESSED LAMP


SPOT LAMP

BEAMER 1013	BEAMER H 1012	CRU 1016	CRU RGB 1016	CRU H SINGLE 1017	CRU H DOUBLE 1018
DIONS FLAT 1022	DIONS SPOT 1023	EDEN S 2.0 1030	EDEN M 2.0 1031	EDEN L 2.0 1032	EDEN S 1030
EDEN M 1029	EDEN L 1032	EDEN H S 2.0 1030	EDEN H M 2.0 1031	EDEN H L 2.0 1032	ELLY S BASE 1035
ELLY M BASE 1037	ELLY L BASE 1041	ELLY S SPIKE 1035	ELLY M SPIKE 1037	ELLY L SPIKE 1041	ELLY S H 1035
ELLY M H 1037	ELLY L H 1041	GADDIS M/ M+ 1045	GADDIS H M/ HM+ 1045	PICARD S 1051	PICARD M 1052
PICARD L 1053	PICARD M RGB 1052	PICARD L RGB 1053	PICTOR SS 1.1 1057	PICTOR S 1.1 1058	PICTOR M 1.1 1059

1009

SPOT LAMP

PICTOR L 1.1 1058	STEVE 3.0 1064	TRACKER NB 1068	TRACKER H NB 1069

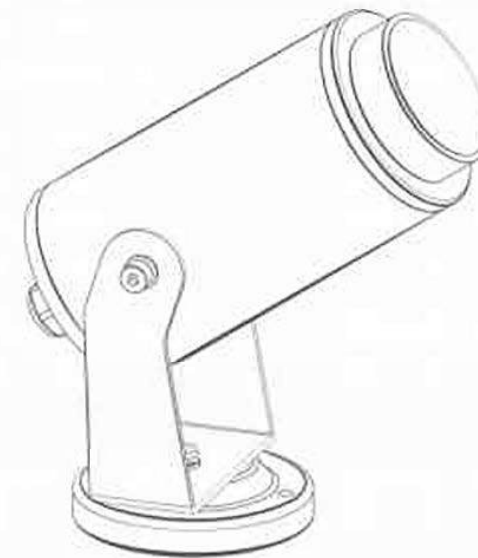

1010

PERFORM YOUR LIGHT



Adjustable Angle by Stretching Lens 15°-32°

BEAMER

BEAMER

This splendid tiny spot is the best choice for garden light. Thanks to its adjustable function, the beam angle can change from 15° up to 32° degrees, making it more flexible and face all possible lighting design requirement. BEAMER can be installed on the pole or in-ground by mounting base or spike.

© CE IP65 100-240VAC

100-240VAC 730715EA

LED: FLUA CRI 90
 POWER: 7.7W
 OPTIC: 15°-32°
 OUTPUT: 284lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø66*141*588mm
 HOLE SIZE: 10mm



COLOR FINISHINGS:



PGY




BEAMER

1013

100-240VAC 730815EA


LED: FLUA CR1 90
 POWER: 7.7W
 OPTIC: 15°-32°
 OUTPUT: 284Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 266*141*70mm
 HOLE SIZE: /

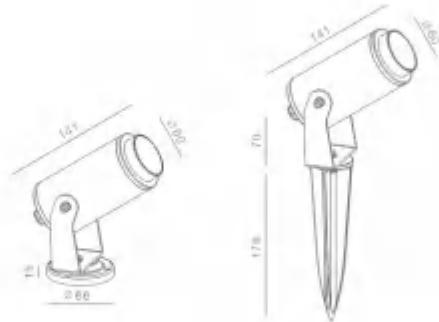

COLOR FINISHINGS:



PGV

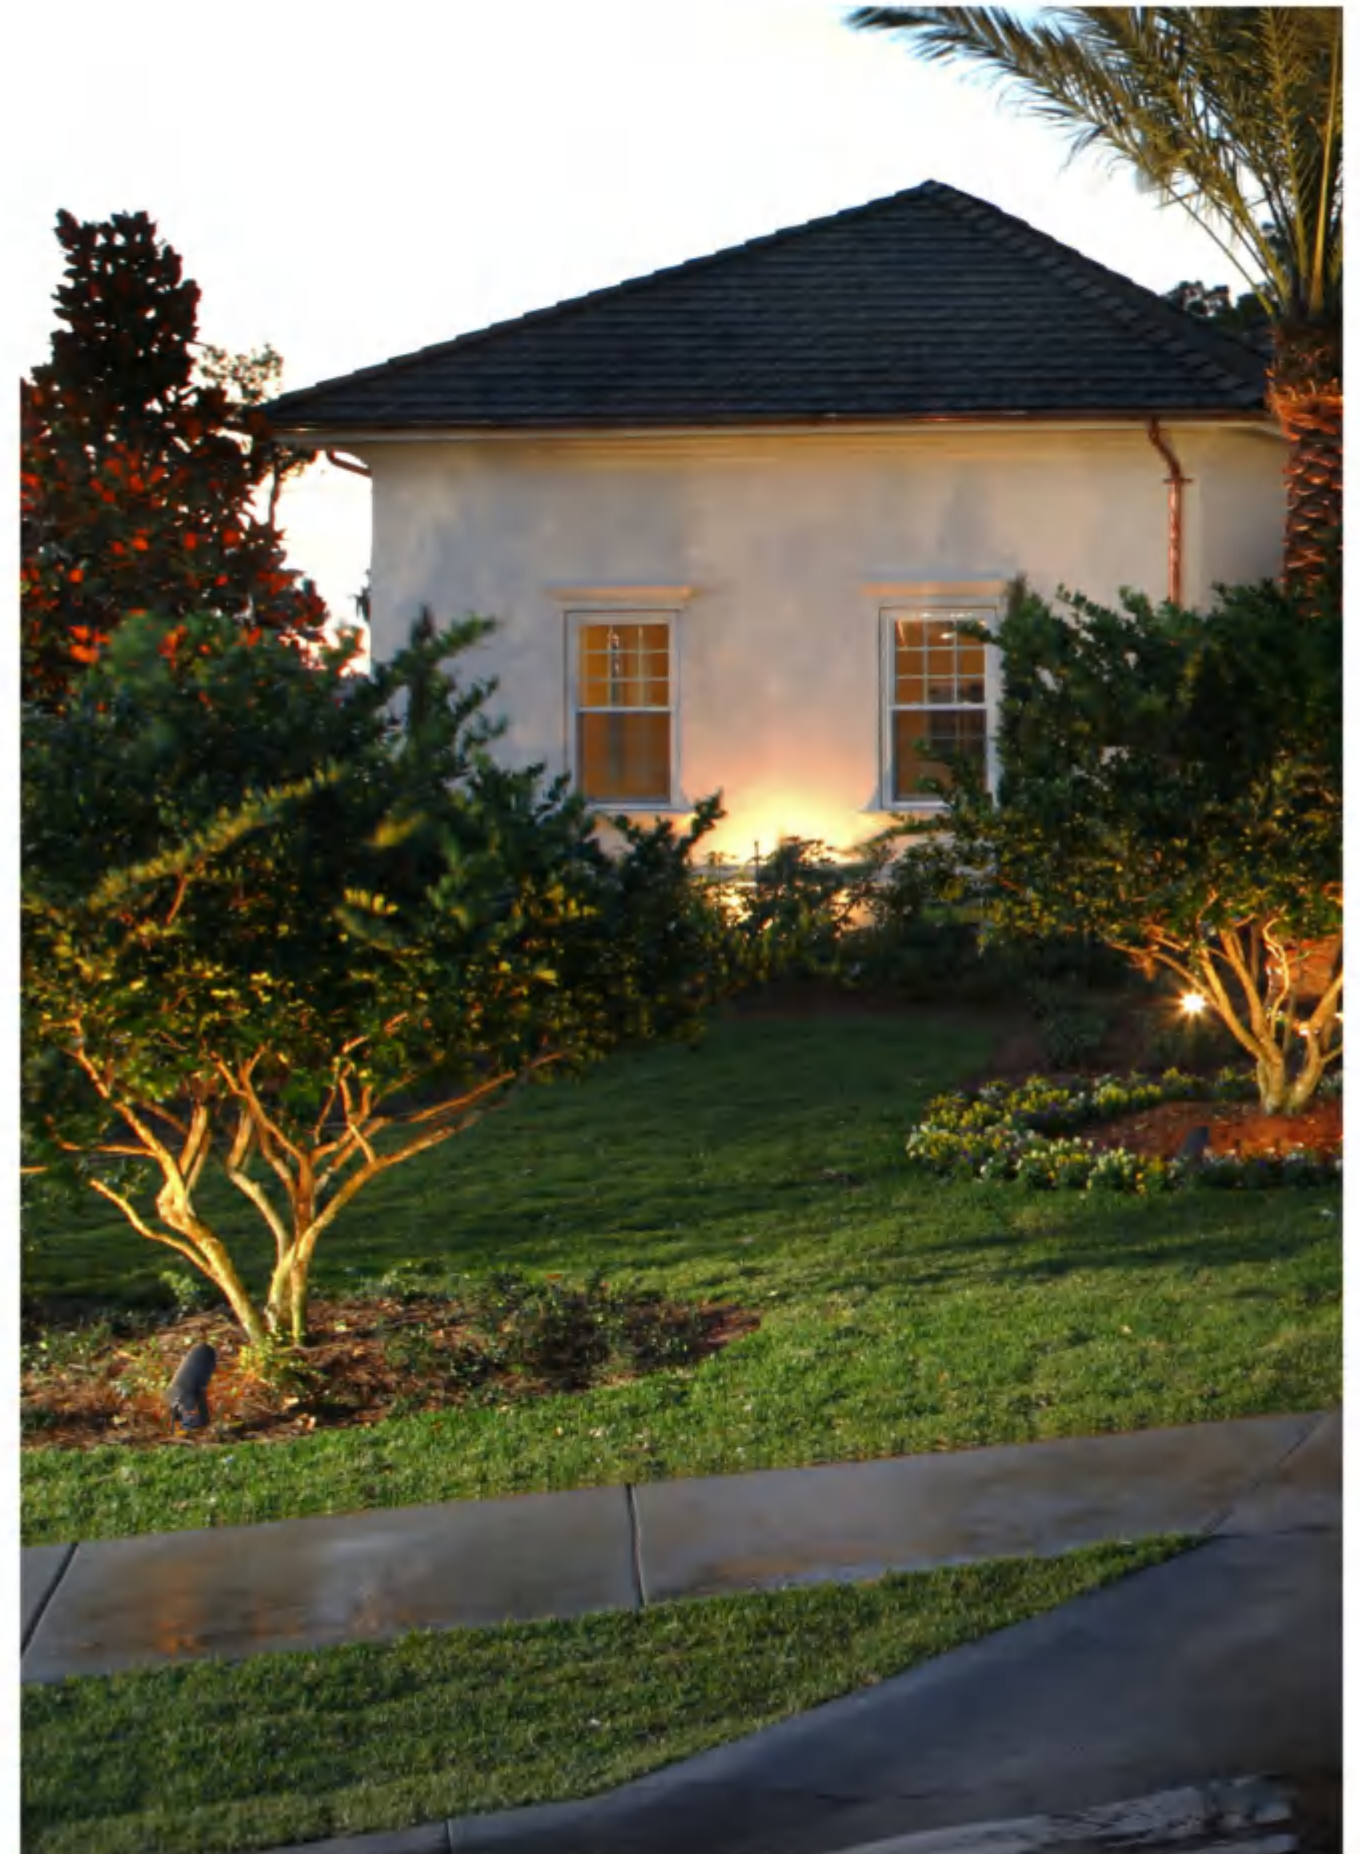

SPOT LAMP

1014



1015

CRU

Mini spot in 3W power output, appearance by sandblasting anodized treatment offers superior weatherproof effect outdoor.
 Either with base plate or spike,
 it's extremely suitable for illuminating grass and plants in low position.
 Free adjustment of projecting angle makes it also suitable for installation on wall to active a plain wall by the beautiful light.

CE IP65



CRU / CRU_{DC} / CRU_{RGB}



100-240VAC 701011A

LED: OSRAM CRI 90
 POWER: 2.6W
 OPTIC: 12°
 OUTPUT: 127Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø42*92*45mm
 HOLE SIZE: ∅


24VDC 700711A

LED: OSRAM CRI 90
 POWER: 2.4W
 OPTIC: 12°
 OUTPUT: 127Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø42*92*45mm
 HOLE SIZE: ∅

24VDC RGB 3IN1 70081A

LED: EDISON RGB 3IN1
 POWER: 4.1W
 OPTIC: 28°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: Ø42*92*45mm
 HOLE SIZE: ∅

1016

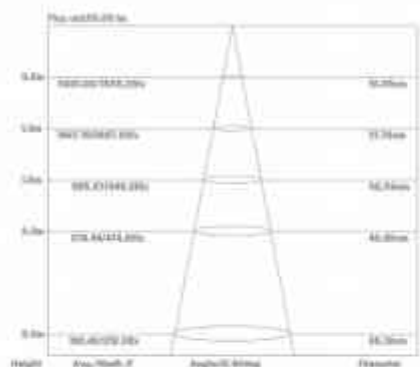

OPTIONS:

OPTICS:



COLOR FINISHINGS:





H SINGLE / H SINGLE DC




H DOUBLE / H DOUBLE DC

1017

100-240VAC 717811A 

LED: OSRAM CRI 80
 POWER: 2.6W
 OPTIC: 12°
 OUTPUT: 127Lm
 CABLE CLASS: HD6RN F 2'0,75mm²
 DIMENSION: Ø42'90'565mm
 HOLE SIZE: 7

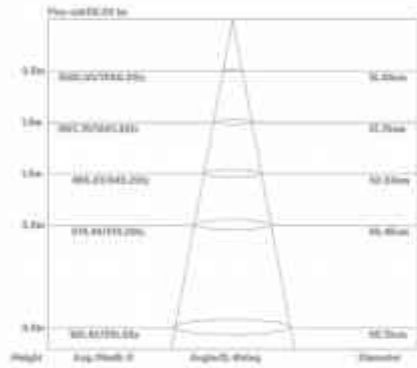

OPTIONS:

OPTICS:



COLOR FINISHINGS:



24VDC 717413A 


LED: OSRAM CRI 80
 POWER: 2.4W
 OPTIC: 12°
 OUTPUT: 127Lm
 CABLE CLASS: HD6RN F 2'0,75mm²
 DIMENSION: Ø42'90'565mm
 HOLE SIZE: 7



1018

100-240VAC 717911A 

LED: OSRAM CRI 80
 POWER: 2*2.6W
 OPTIC: 12°
 OUTPUT: 254Lm
 CABLE CLASS: HD6RN F 2'0,75mm²
 DIMENSION: Ø66'536mm
 HOLE SIZE: 7

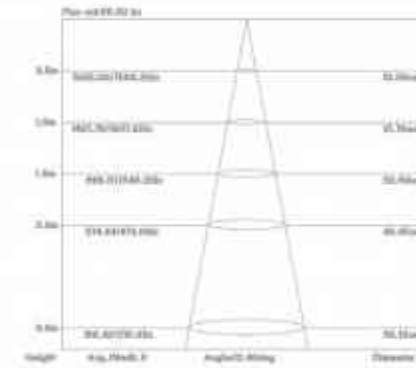

OPTIONS:

OPTICS:



COLOR FINISHINGS:



24VDC 717711A 

LED: OSRAM CRI 80
 POWER: 2*2.4W
 OPTIC: 12°
 OUTPUT: 254Lm
 CABLE CLASS: HD6RN F 2'0,75mm²
 DIMENSION: Ø66'536mm
 HOLE SIZE: 7





1019



1020

DIONS

DIONS is a new design for outdoor garden light.
 Thank to the adjustable lamp,
 DIONS could be adjusted to wherever you want without any problem.
 DIONS could give us a perfect light output and
 also fit to everywhere in outdoor lighting sences.

© CE IP65 100-240VAC




DIONS FLAT




100-240VAC 733316A

LED: LUMINUS CRI 90
 POWER: 7,6W
 OPTIC: 18°
 OUTPUT: 618lm
 CABLE CLASS: H05RN-F 3*0,75mm²
 DIMENSION: 180*120*1275mm
 HOLE SIZE: 1"

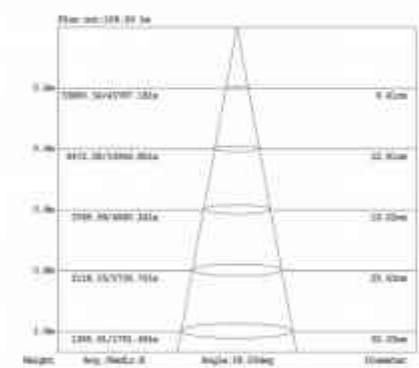

COLOR FINISHINGS:



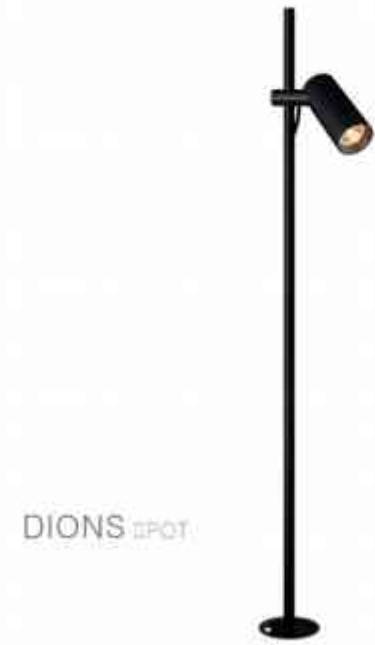


DIONS SPOT


1023

100-240VAC 733819A


LED: LUMINUS CRI 90
 POWER: 7.6W
 OPTIC: 26°
 OUTPUT: 864lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø62*538*1276mm
 HOLE SIZE: 1

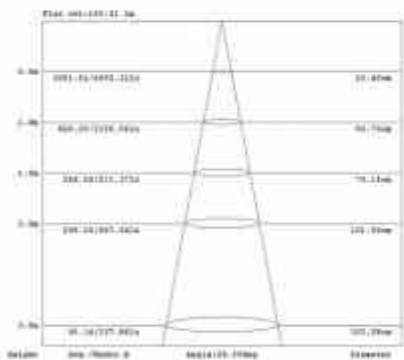


COLOR FINISHINGS:

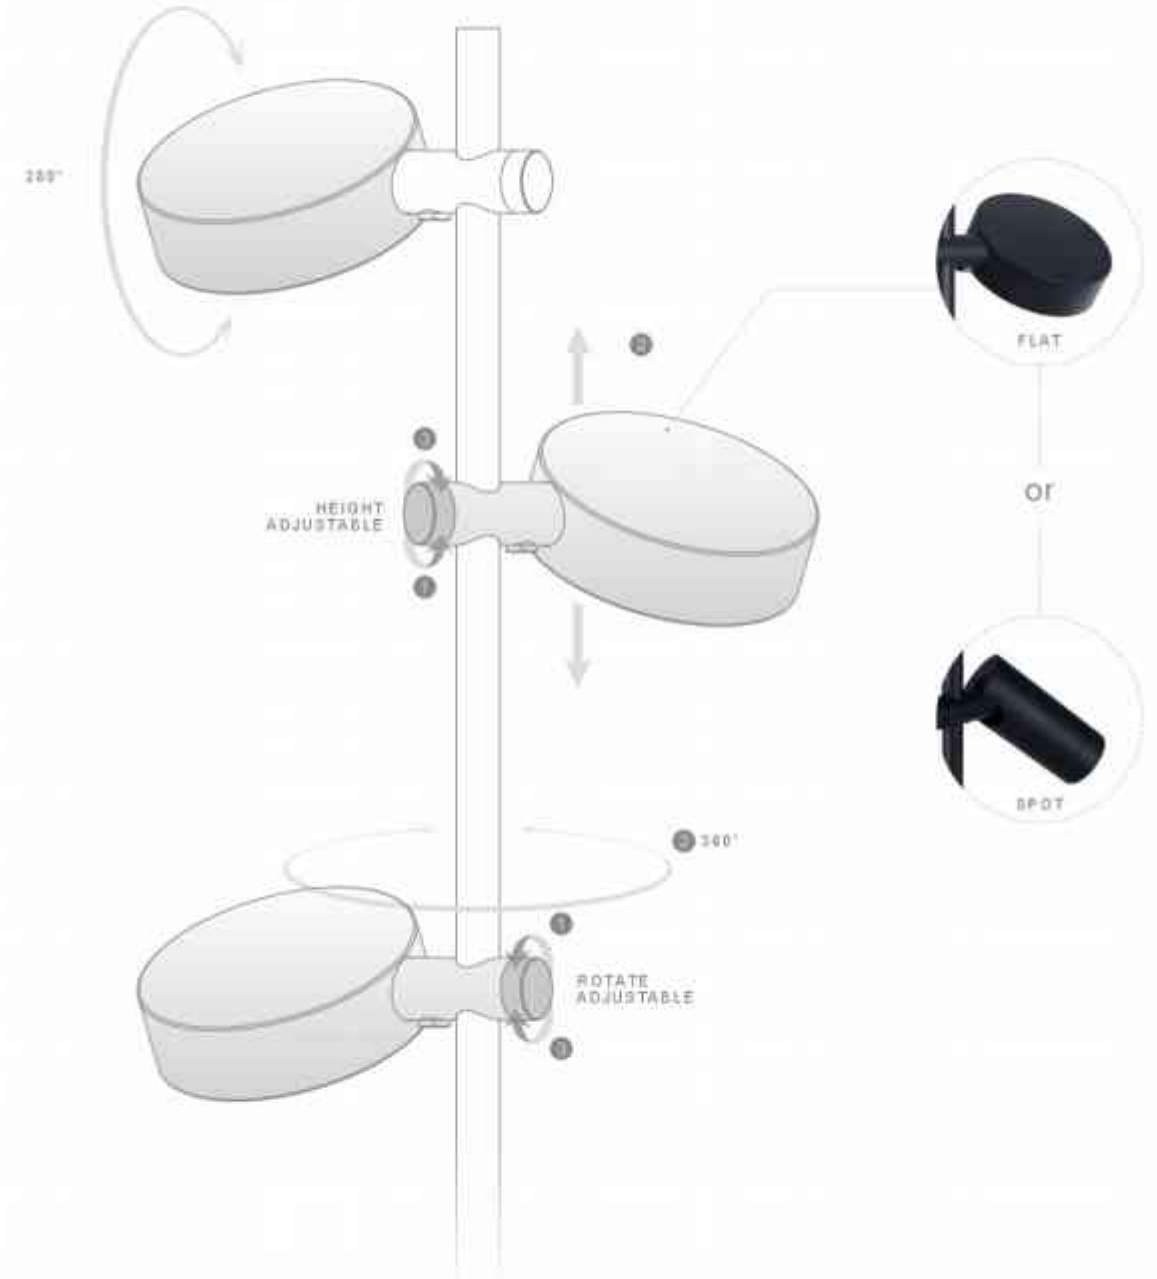

1024

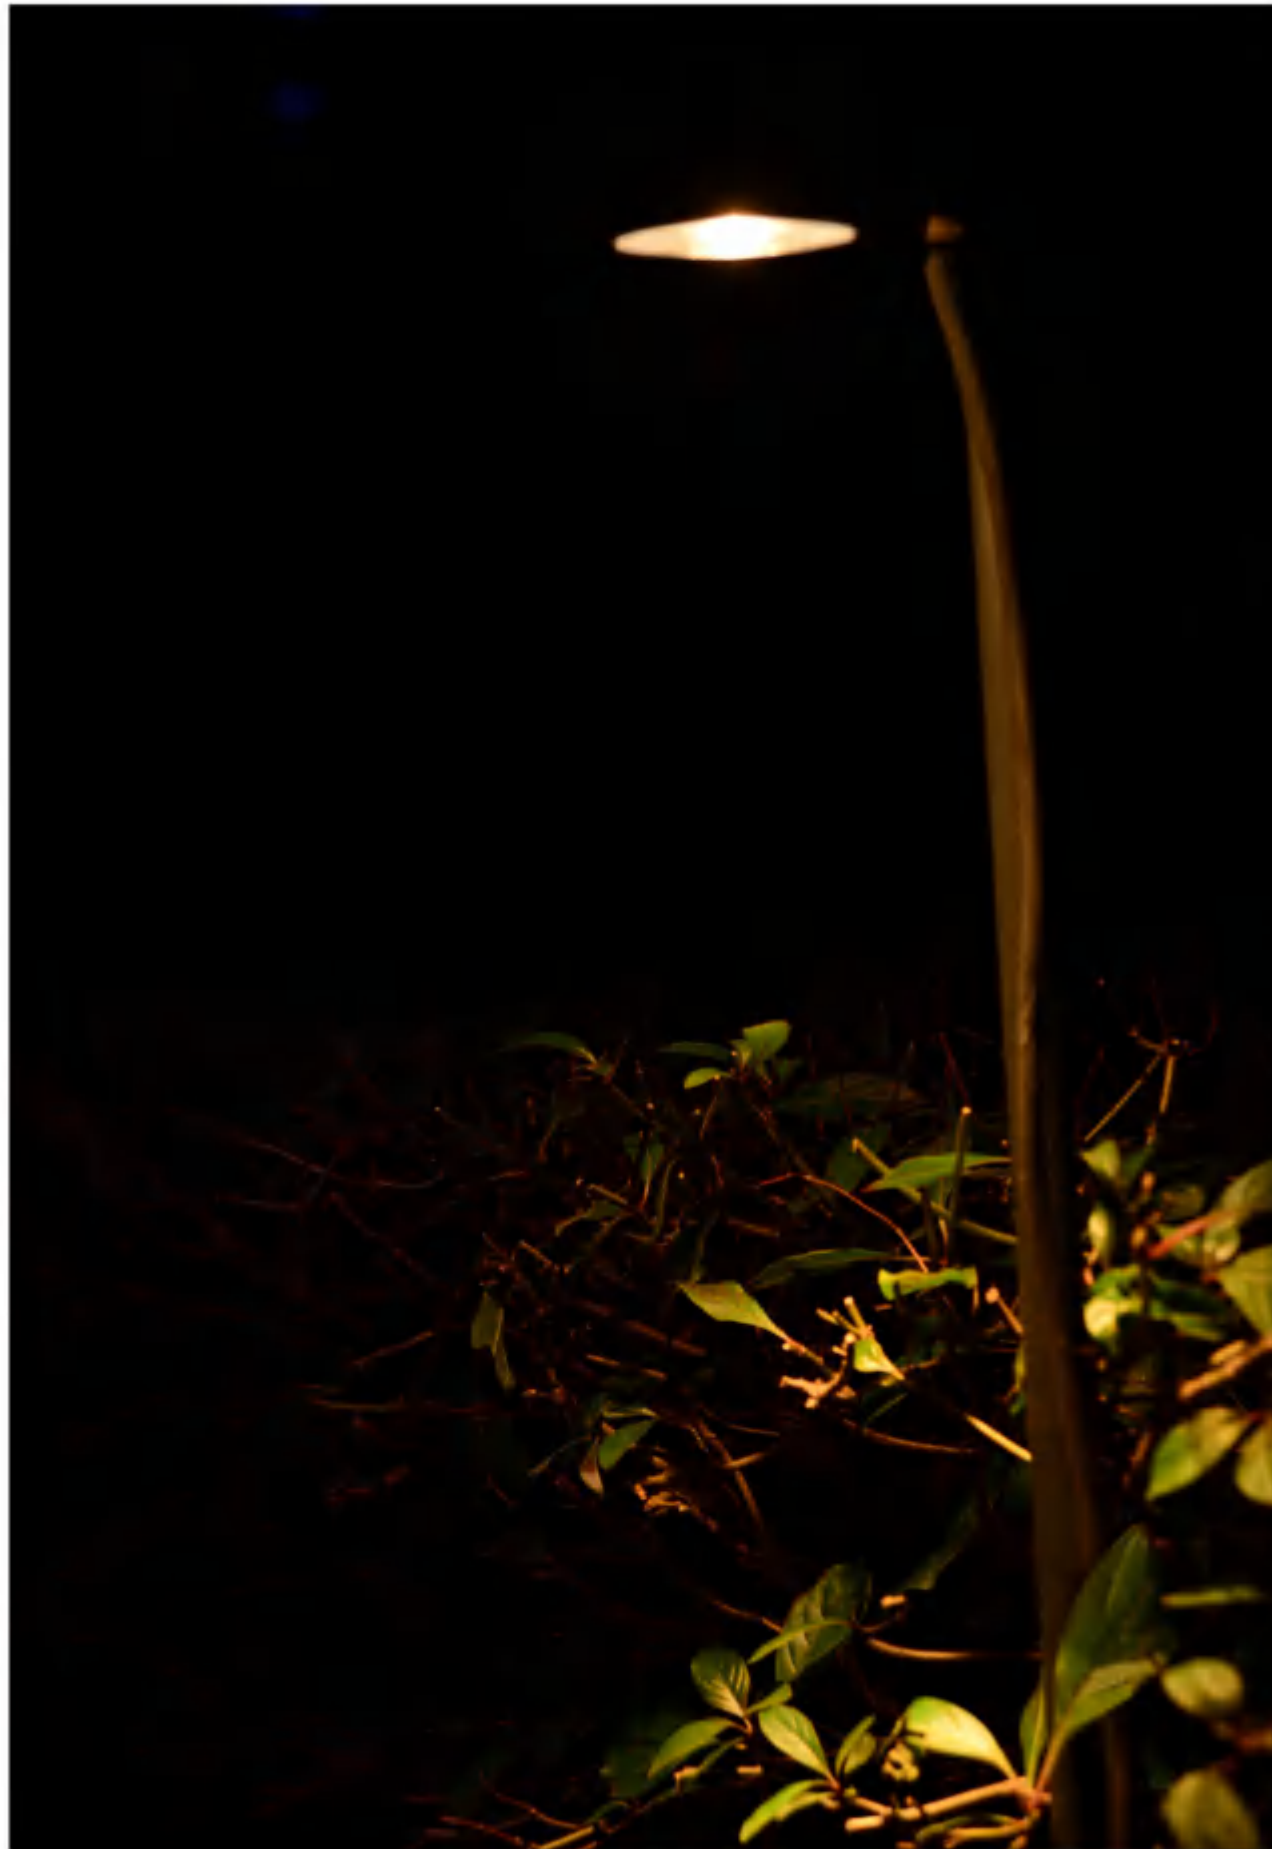

1025

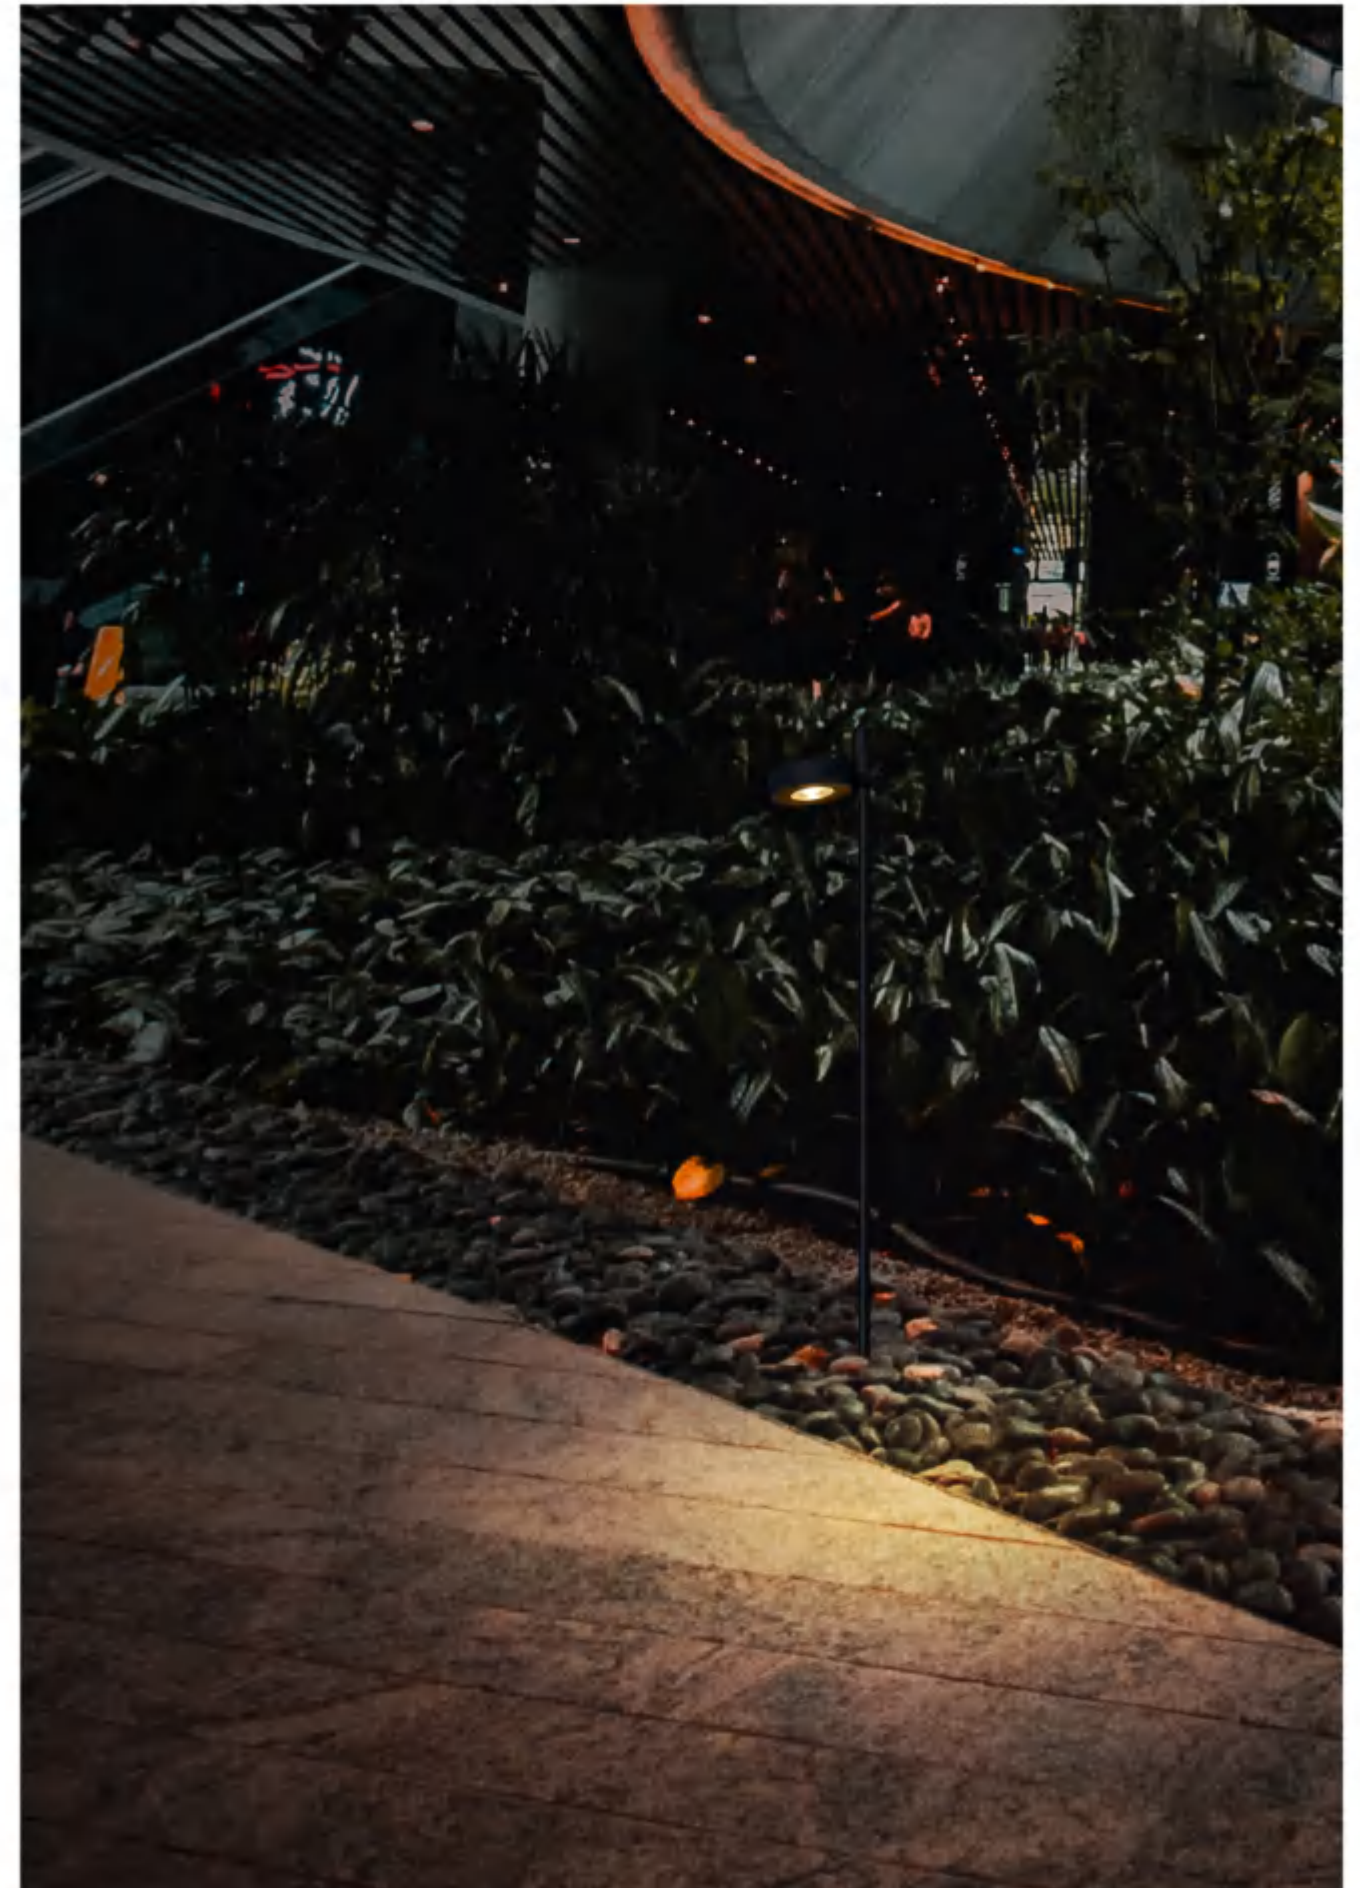

1026

SPOT LAMP

EDEN

This tiny spot is a great solution for landscape illumination. It is perfectly emphasizing the objects such as bushes or sculptures where necessary. Thanks to stainless steel 316# material EDEN can be used nearby sea side areas.

© CE IP65 100-240VAC

1027

EDEN

SPOT LAMP

EDEN M




1028

EDEN HGE 6



COLOR FINISHINGS



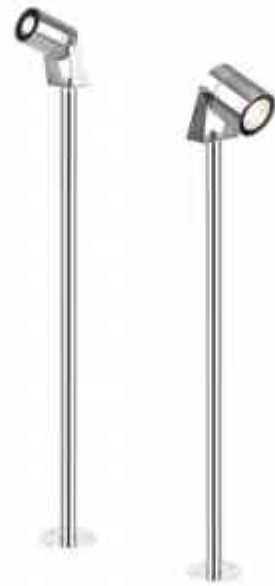

EDEN _S EDEN _M




EDEN _{G2.0} EDEN _{H G2.0}

1029

1030


100-240VAC 731317A

LED: OSRAM CRI 90
 POWER: 2.5W
 OPTIC: 40°
 OUTPUT: 143Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø42*63*800mm
 HOLE SIZE: ∅

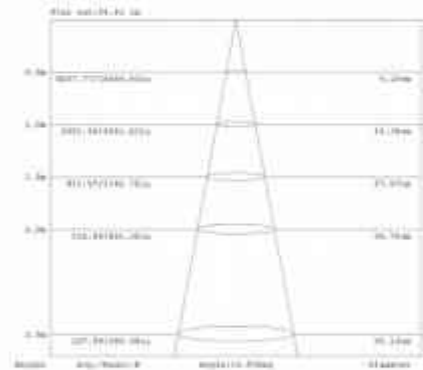


100-240VAC 731416EA

LED: FLUA CRI 90
 POWER: 5.0W
 OPTIC: 15°
 OUTPUT: 442Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø67*77*810mm
 HOLE SIZE: ∅

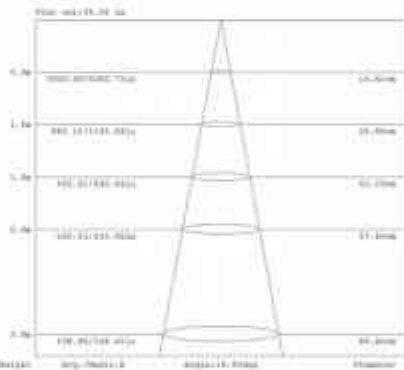


100-240VAC 732416A

LED: LUMILEDS CRI 90
 POWER: 4.2W
 OPTIC: 15°
 OUTPUT: 356Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø44.5*106*850mm
 HOLE SIZE: ∅

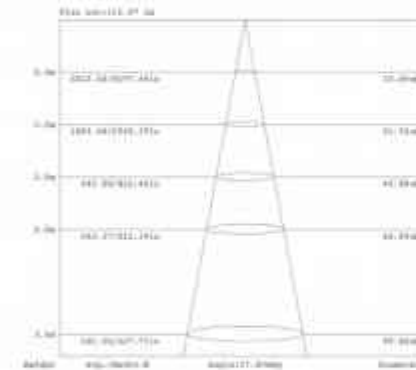

100-240VAC 733716A

LED: LUMILEDS CRI 90
 POWER: 4.2W
 OPTIC: 16°
 OUTPUT: 356Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø44.5*106*865mm
 HOLE SIZE: ∅

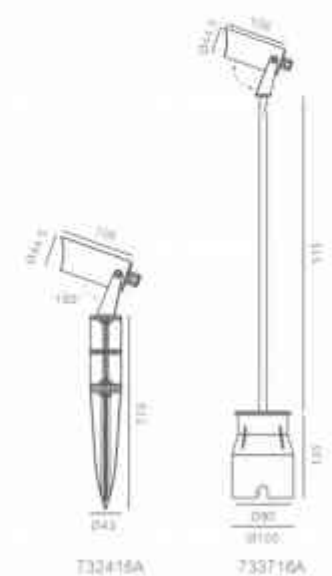

732416A 733716A



EDEN M2.0



EDEN HM2.0




EDEN L2.0



EDEN HL2.0


100-240VAC 734119EA

LED: FLUA - CRI 90
 POWER: 7.4W
 OPTIC: 14°
 OUTPUT: 460Lm
 CABLECLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø88.5*160*240mm
 HOLE SIZE: 1

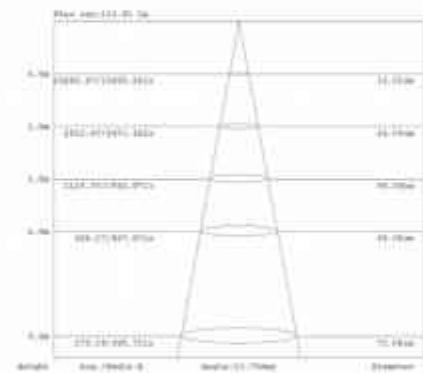

100-240VAC 734219EA

LED: FLUA - CRI 90
 POWER: 7.4W
 OPTIC: 14°
 OUTPUT: 460Lm
 CABLECLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø88.5*160*264mm
 HOLE SIZE: 1

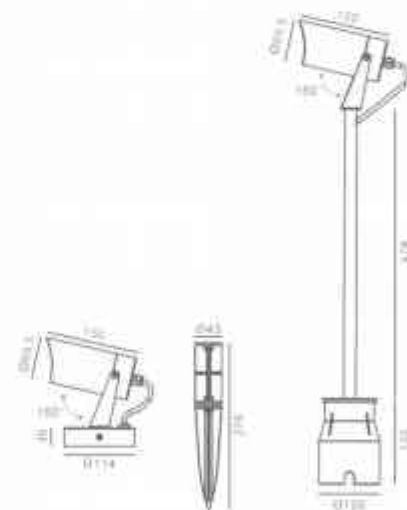


734119EA

734219EA


220-240VAC 734319EDT

LED: FLUA - CRI 90
 POWER: 13.7W
 OPTIC: 13°
 OUTPUT: 1050Lm
 CABLECLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø88.5*196*280mm
 HOLE SIZE: 1

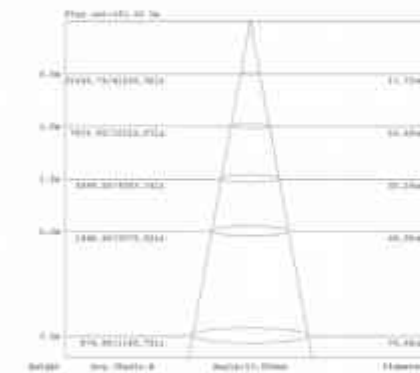

220-240VAC 734419EDT

LED: FLUA - CRI 90
 POWER: 13.7W
 OPTIC: 13°
 OUTPUT: 1050Lm
 CABLECLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø88.5*196*311mm
 HOLE SIZE: 1

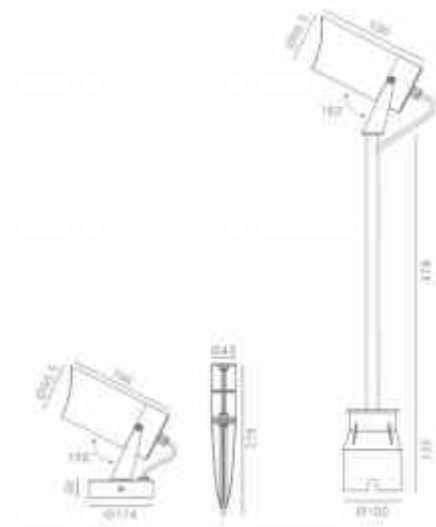

734319EDT

734419EDT



1033

ELLY

ELLY, eliminates bloated design techniques, uses a minimalist yet elegant appearance, combined dual anti-glare design, to perfectly present the light effect. Ground plug-in type / Base fixed type / Bollard type, three installation meet the application requirements of different outdoor environments. Home/villa/hotel and other basic lighting or accent lighting, ELLY can bring you an unparalleled dream of light.

© CE IP65

ELLY

SPOT LAMP

1034



INSTALLATION TYPE



Base fixed



Bollard



Ground plug-in



S_{BASE} / S_{BASE} DC



S_{SPIKE} / S_{SPIKE} DC




S_H / S_H DC

100-240VAC 734819E

LED: FLUA CRI 90
 POWER: 7.0W
 OPTIC: 18°
 OUTPUT: 300lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø62*110*125.5mm
 HOLE SIZE: 1

24VDC 736219E

LED: FLUA CRI 90
 POWER: 6.7W
 OPTIC: 18°
 OUTPUT: 300lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø62*110*125.5mm
 HOLE SIZE: 1




100-240VAC 735019E

LED: FLUA CRI 90
 POWER: 7.0W
 OPTIC: 18°
 OUTPUT: 300lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø62*110*270mm
 HOLE SIZE: 1

24VDC 736319E

LED: FLUA CRI 90
 POWER: 6.7W
 OPTIC: 18°
 OUTPUT: 300lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø62*110*270mm
 HOLE SIZE: 1





100-240VAC 735119E

LED: FLUA CRI 90
 POWER: 7.0W
 OPTIC: 18°
 OUTPUT: 300lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø62*110*705mm
 HOLE SIZE: Ø110*140mm

24VDC 736419E

LED: FLUA CRI 90
 POWER: 6.7W
 OPTIC: 18°
 OUTPUT: 300lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø62*110*705mm
 HOLE SIZE: Ø110*140mm

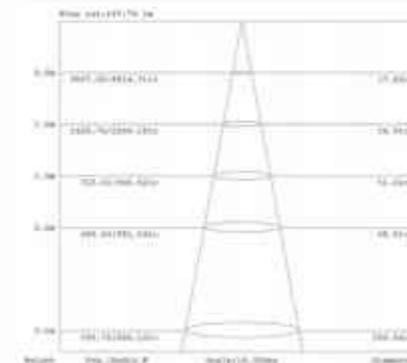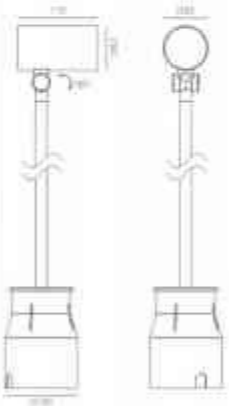

OPTIONS:



COLOR FINISHINGS:






M BASE / M BASE DC

100-240VAC 735519E
 LED: FLUA CRI 90
 POWER: 14.9W
 OPTIC: 18°
 OUTPUT: 950lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø85*145*167mm
 HOLE SIZE: 7


24VDC 735519E
 LED: FLUA CRI 90
 POWER: 12.8W
 OPTIC: 18°
 OUTPUT: 950lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø85*145*167mm
 HOLE SIZE: 7



M SPIKE / M SPIKE DC

100-240VAC 735519E
 LED: FLUA CRI 90
 POWER: 14.9W
 OPTIC: 18°
 OUTPUT: 950lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø85*145*407mm
 HOLE SIZE: 7



24VDC 735519E
 LED: FLUA CRI 90
 POWER: 12.8W
 OPTIC: 18°
 OUTPUT: 950lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø85*145*407mm
 HOLE SIZE: 7



M H / M H DC

100-240VAC 735719E
 LED: FLUA CRI 90
 POWER: 14.9W
 OPTIC: 18°
 OUTPUT: 950lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø85*145*895mm
 HOLE SIZE: Ø110*140mm

24VDC 735719E
 LED: FLUA CRI 90
 POWER: 12.8W
 OPTIC: 18°
 OUTPUT: 950lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø85*145*895mm
 HOLE SIZE: Ø110*140mm

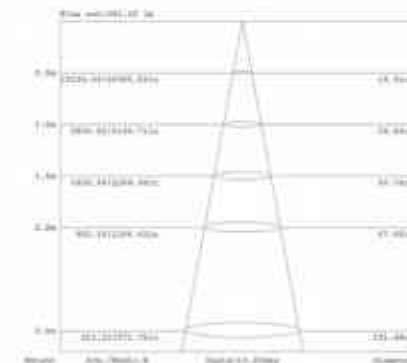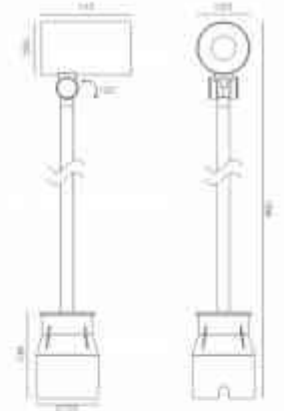

OPTIONS:



COLOR FINISHINGS:







L BASE / L BASE DC



L SPIKE / L SPIKE DC



L H / L H DC

100-240VAC 736110E

LED: FLUA CRI 90
 POWER: 24.4W
 OPTIC: 18°
 OUTPUT: 1395lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø108*172*190.5mm
 HOLE SIZE: 7

100-240VAC 736210E

LED: FLUA CRI 90
 POWER: 24.4W
 OPTIC: 18°
 OUTPUT: 1395lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø108*172*430.5mm
 HOLE SIZE: 7

100-240VAC 736510E

LED: FLUA CRI 90
 POWER: 24.4W
 OPTIC: 18°
 OUTPUT: 1395lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø108*172*385mm
 HOLE SIZE: 7

24VDC 736410E





LED: FLUA CRI 90
 POWER: 22.8W
 OPTIC: 18°
 OUTPUT: 1395lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*172*190.5mm
 HOLE SIZE: 7

24VDC 736610E

LED: FLUA CRI 90
 POWER: 22.8W
 OPTIC: 18°
 OUTPUT: 1395lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*172*430.5mm
 HOLE SIZE: 7

24VDC 736810E

LED: FLUA CRI 90
 POWER: 22.8W
 OPTIC: 18°
 OUTPUT: 1395lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø108*172*385mm
 HOLE SIZE: 7

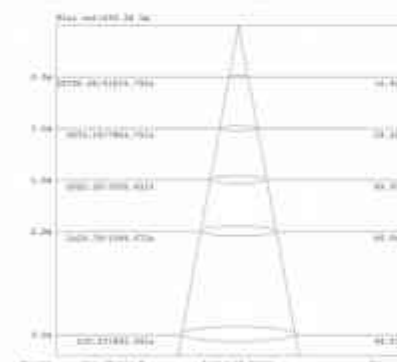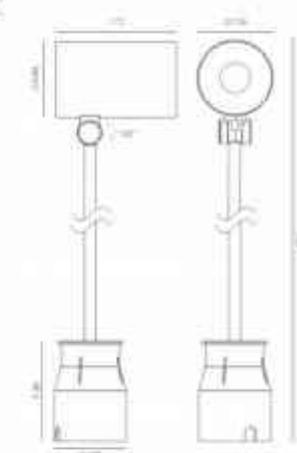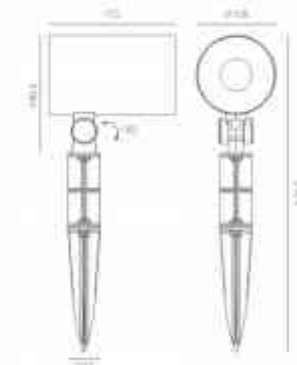

OPTIONS:



COLOR FINISHINGS:






GADDIS

Flexibility, elegance and usability are main key words to describe GADDIS collection.
 GADDIS is ideal to illuminate trees, sculptures or facades.
 GADDIS comes into two versions: 7W and 15W.
 In addition, antiglare accessory is available.

CE (IP65)

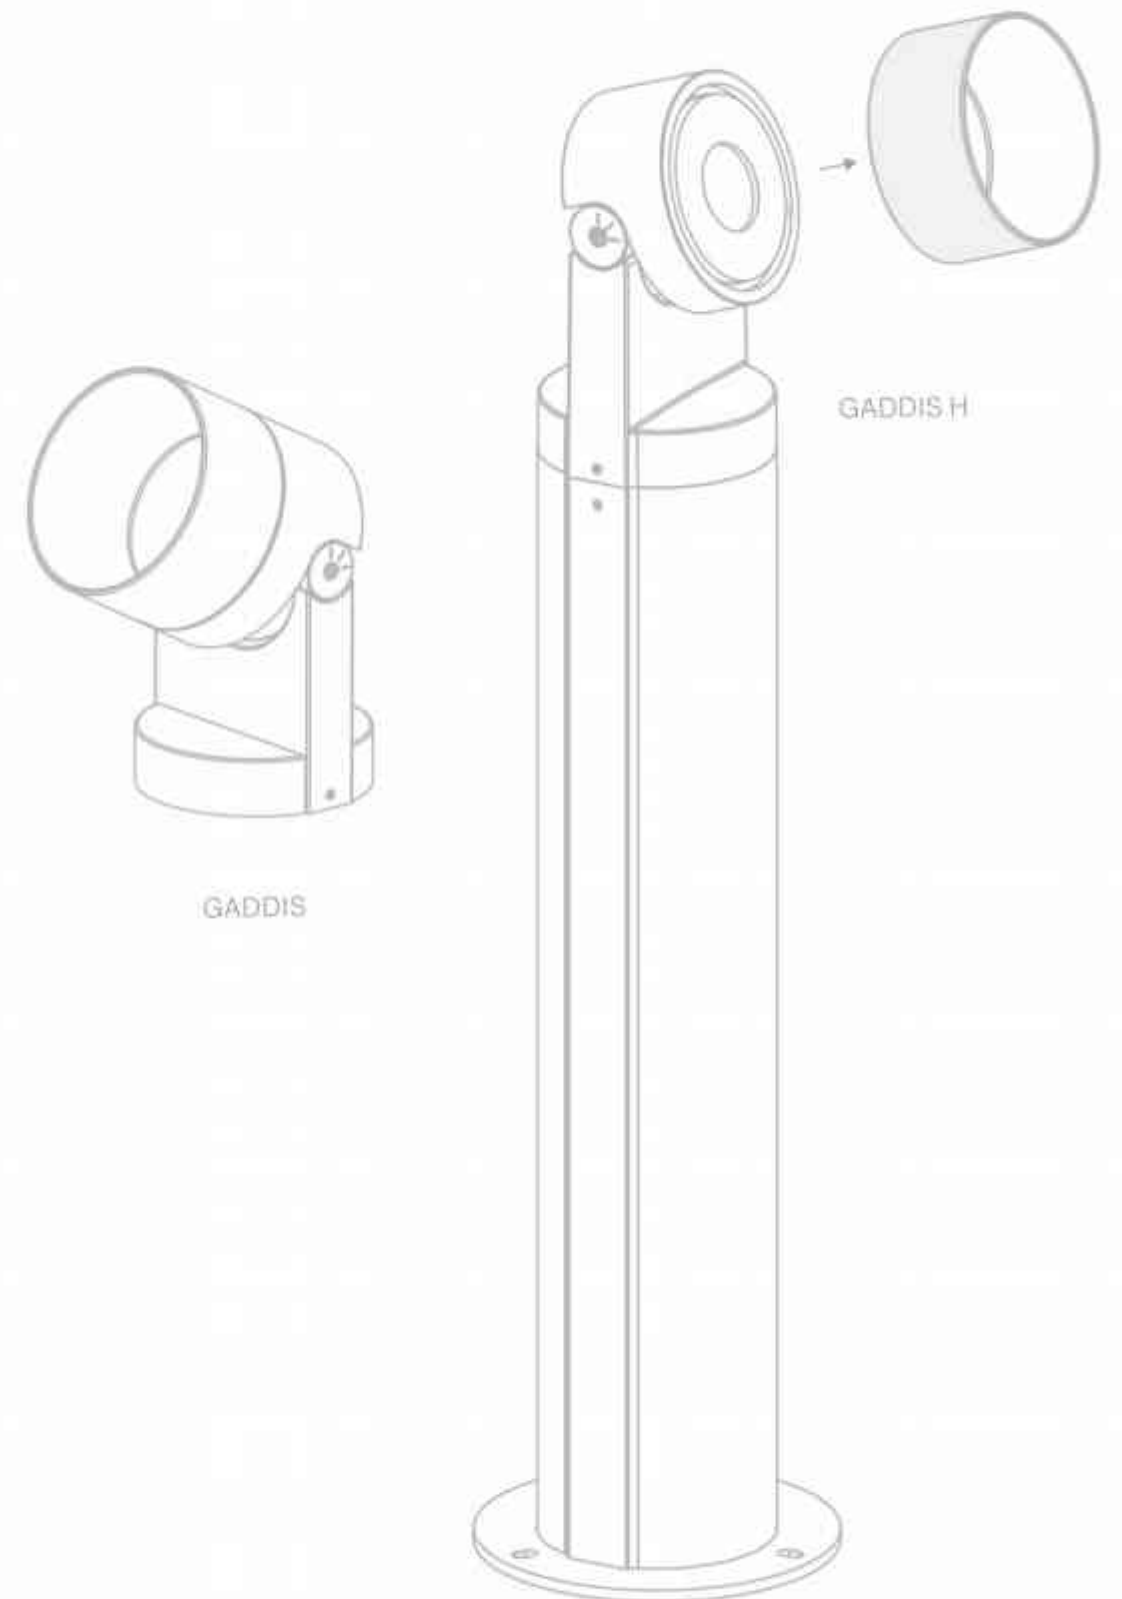

GADDIS

GADDIS H



M / M DC / M+ / M+ DC




HM / HM DC / HM+ / HM+ DC

M
100-240VAC 727016

LED: CREE CRI 80
POWER: 7.7W
OPTIC: 18°
OUTPUT: 479Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: Ø100*105mm
HOLE SIZE: -

M DC
24VDC 727716

LED: CREE CRI 80
POWER: 7.3W
OPTIC: 18°
OUTPUT: 476Lm
CABLE CLASS: H05RN-F 2*0.75mm²
DIMENSION: Ø100*105mm
HOLE SIZE: -

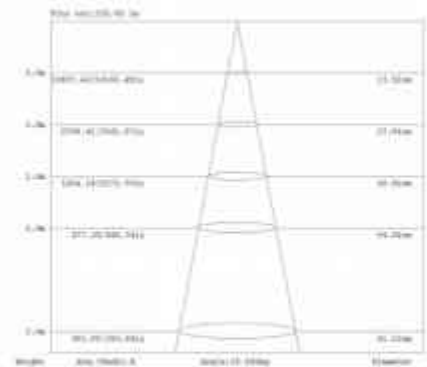

COLOR FINISHINGS:




M+
100-240VAC 725716

LED: LUMINUS CRI 90
POWER: 16.6W
OPTIC: 18°
OUTPUT: 997Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: Ø100*105mm
HOLE SIZE: -

M+ DC
24VDC 727616

LED: LUMINUS CRI 90
POWER: 14.6W
OPTIC: 18°
OUTPUT: 997Lm
CABLE CLASS: H05RN-F 2*0.75mm²
DIMENSION: Ø100*105mm
HOLE SIZE: -

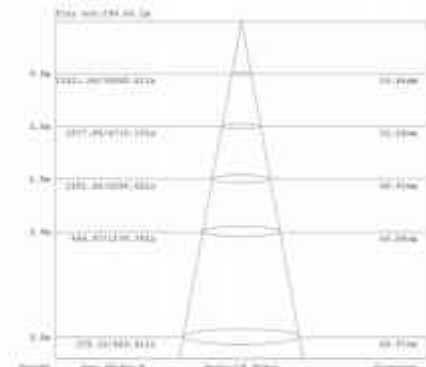


HM
220-240VAC 731916

LED: CREE CRI 80
POWER: 7.7W
OPTIC: 18°
OUTPUT: 479Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: Ø100*600mm
HOLE SIZE: -

HM DC
24VDC 731816

LED: CREE CRI 80
POWER: 7.3W
OPTIC: 18°
OUTPUT: 476Lm
CABLE CLASS: H05RN-F 2*0.75mm²
DIMENSION: Ø100*600mm
HOLE SIZE: -

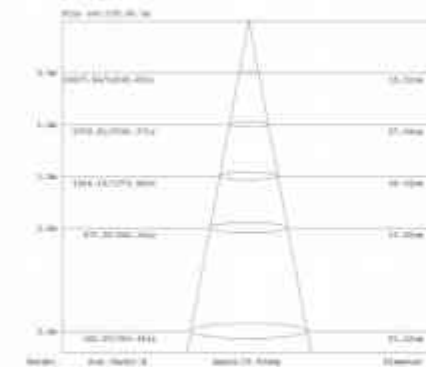

COLOR FINISHINGS:





HM+
220-240VAC 731016

LED: LUMINUS CRI 90
POWER: 16.6W
OPTIC: 18°
OUTPUT: 997Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: Ø100*600mm
HOLE SIZE: -

HM+ DC
24VDC 731716

LED: LUMINUS CRI 90
POWER: 14.6W
OPTIC: 18°
OUTPUT: 997Lm
CABLE CLASS: H05RN-F 2*0.75mm²
DIMENSION: Ø100*600mm
HOLE SIZE: -

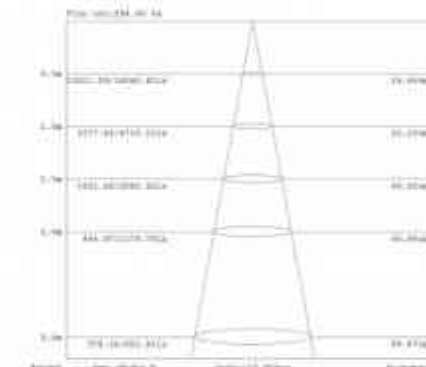

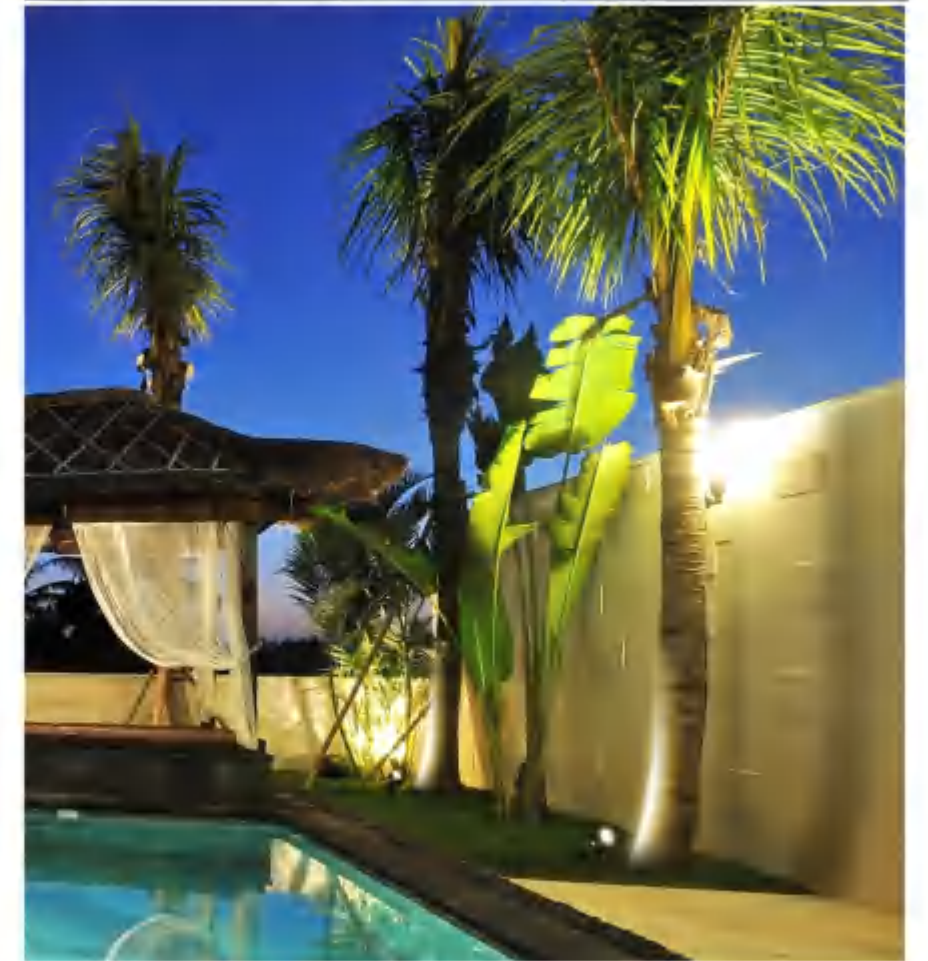



PICARD

This square shaped flood light is perfect for illuminating trees, sculptures, facades and other objects of the landscape.

RGB 3in 1 is available for choice.

Could be installed on the ground or on the wall.

Spike and mounting base are both available.

© CE IP65 24VDC

PICARD
S DC



PAGE 770

PICARD
M DC / M RGB



PAGE 780

PICARD
L DC / L RGB



PAGE 781



S DC




M DC / M RGB

1051

24VDC 812811A

LED: OSRAM CRI 80
 POWER: 3W
 OPTIC: 12°
 OUTPUT: 256lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 134*58*58mm
 HOLE SIZE: -

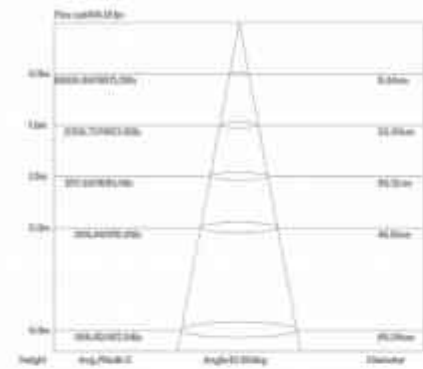

OPTIONS:

OPTICS:
 12°


COLOR FINISHINGS:

PGV

1052

24VDC 813211A

LED: OSRAM CRI 80
 POWER: 6W
 OPTIC: 12°
 OUTPUT: 553lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 134*87*58mm
 HOLE SIZE: -

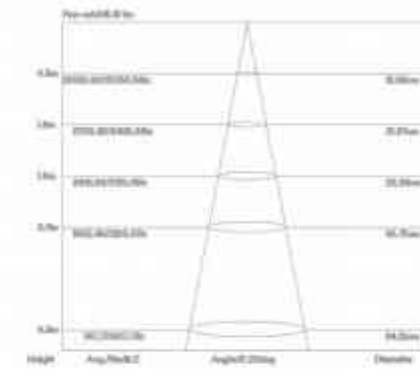

OPTIONS:

OPTICS:
 12°

COLOR FINISHINGS:

PGV

24VDC RGB 3IN1 813311A

LED: EDISON RGB 3IN1
 POWER: 18.5W
 OPTIC: 26°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: 134*87*56mm
 HOLE SIZE: -

OPTIONS:

OPTICS:
 26°





L DC / L RGB

24VDC

813611A

LED: OSRAM CRI 80
 POWER: 12W
 OPTIC: 12°
 OUTPUT: 1000lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 134*143*50mm
 HOLE SIZE: 1


24VDC RGB 3IN1

813714

LED: EDISON RGB 3IN1
 POWER: 33.6W
 OPTIC: 25°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: 134*143*50mm
 HOLE SIZE: 1

OPTIONS:

OPTICS:

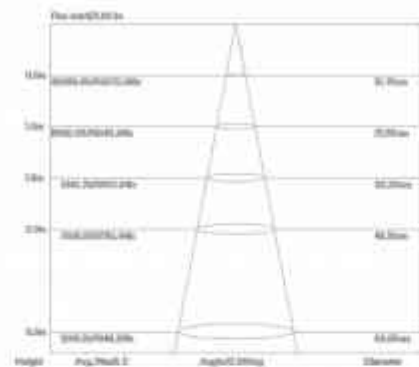


OPTIONS:

OPTICS:



COLOR FINISHINGS:

■ Grey



1053

1054



SPOT LAMP

PICTOR

Flexibility, elegance and usability are key words to describe classic luminaire PICTOR. This splendid wide-range collection has been already specified in many outdoor projects worldwide.

Flexible to use due to its adjustable head, PICTOR was specially designed to provide perfect light effect for any landscape.

Best choice for walkways, trees, sculptures or other landscape applications.

Available in 5 different dimensions, each model could be installed with spike or installation plate.

1055

SS 11 / SS 00 T11



PAGE 785

1056

S 11 / S 00 T11



PAGE 786

M 11 / M 00 T11



PAGE 787

L 11 / L 00 T11



PAGE 788





SS11 / SSDC11

100-240VAC 733118A

LED: LUMILEDS CRI 80
 POWER: 4.2W
 OPTIC: 28°
 OUTPUT: 312lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø48*115mm
 HOLE SIZE: ∅

24VDC 733216

LED: LUMILEDS CRI 80
 POWER: 3.4W
 OPTIC: 28°
 OUTPUT: 312lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø48*105mm
 HOLE SIZE: ∅

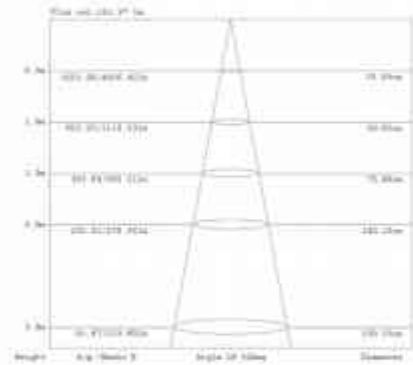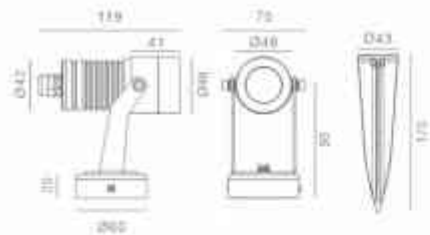

OPTIONS:

OPTICS:



COLOR FINISHINGS:





S11 / SDC11

100-240VAC 733118EA

LED: FLUA CRI 80
 POWER: 7.8W
 OPTIC: 40°
 OUTPUT: 845lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø62*133mm
 HOLE SIZE: ∅

24VDC 733015E

LED: FLUA CRI 80
 POWER: 6.8W
 OPTIC: 40°
 OUTPUT: 845lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø62*117mm
 HOLE SIZE: ∅

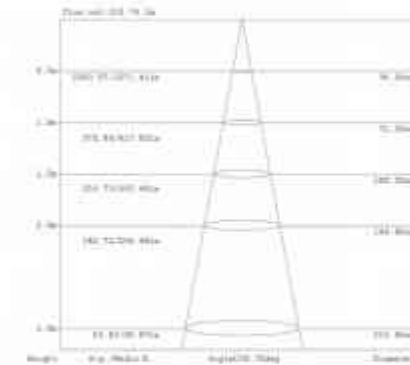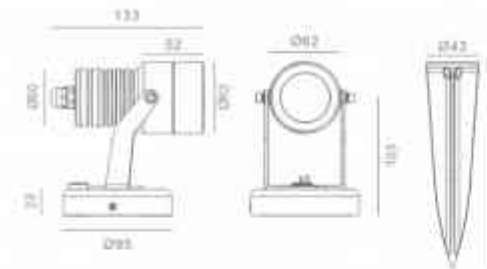

OPTIONS:

OPTICS:



COLOR FINISHINGS:





M 1.1 / M 0.1 E



L 1.1 / L 0.1 E



1059

220-240VAC 732515EDT 

LED: FLUA CRI 90
 POWER: 14W
 OPTIC: 34°
 OUTPUT: 982lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø78*143mm
 HOLE SIZE: 1

24VDC 732515E 

LED: FLUA CRI 90
 POWER: 12.7W
 OPTIC: 34°
 OUTPUT: 982lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø78*143mm
 HOLE SIZE: 1

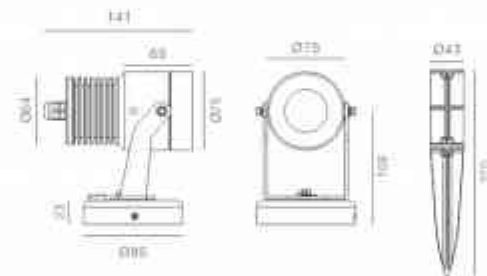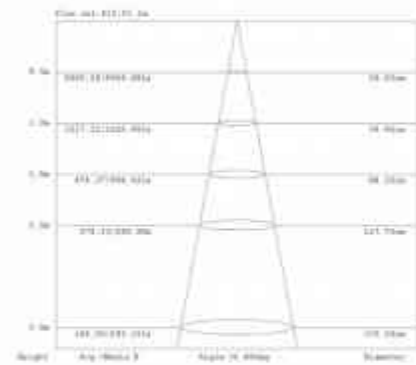

COLOR FINISHINGS:



PGT



1060

100-240VAC 732715EA 

LED: FLUA CRI 90
 POWER: 28W
 OPTIC: 36°
 OUTPUT: 1870lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø102*147mm
 HOLE SIZE: 1

24VDC 732715E 

LED: FLUA CRI 90
 POWER: 23.8W
 OPTIC: 36°
 OUTPUT: 2024lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø102*147mm
 HOLE SIZE: 1

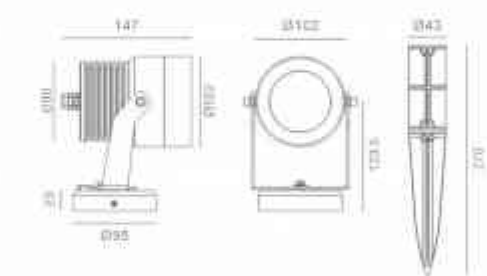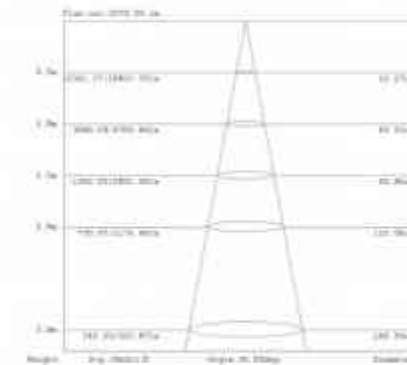

COLOR FINISHINGS:



PGT




1061



1062



SPOT LAMP

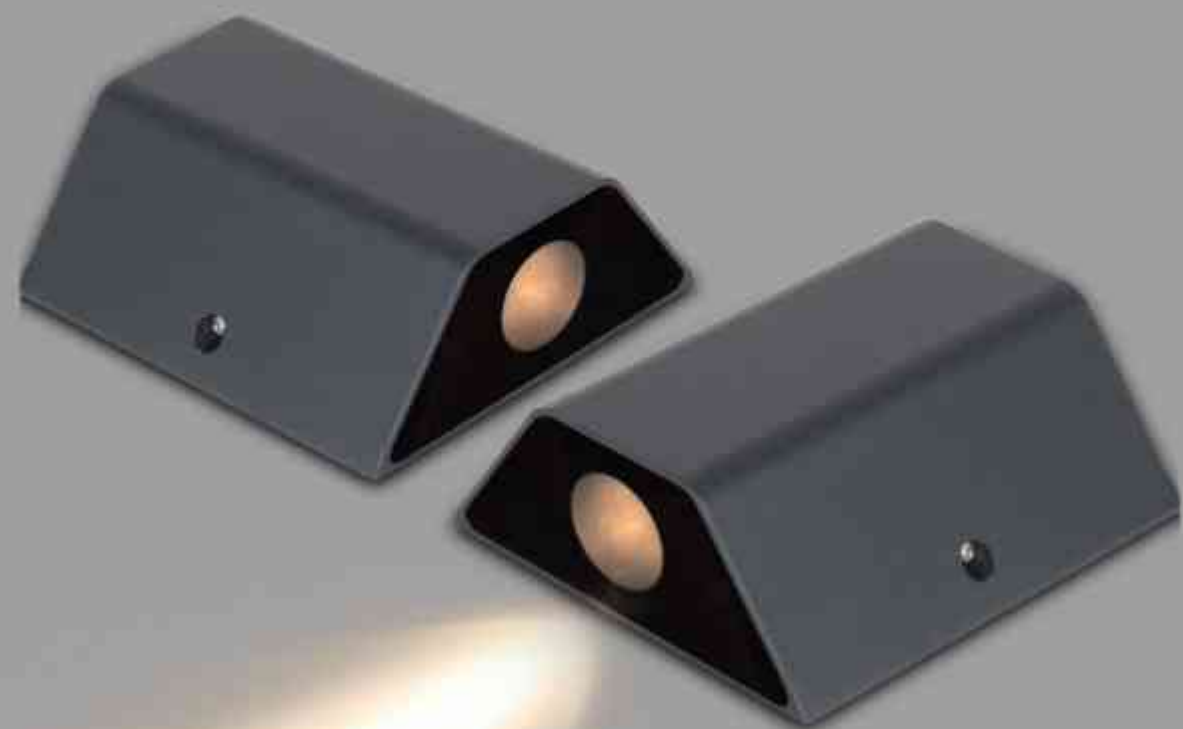

STEVE


STEVE is a perfect solution to deliver a subtle light for driveway, path or garden trail without disturbing the silence and beauty of the night, nature and surrounding architectures. Rather small in size and shape in trapezoid makes it such an exquisite and artsy piece. Combined with a 6° LENS and 3.2 W power, results in a super long and narrow beam with very soft lighting effect.



STEVE ac/ STEVE DC30

100-240VAC 734517

LED: OSRAM 3000K CRI 80
 POWER: 3.2W
 OPTIC: 6°
 OUTPUT: 103Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 110*110*40mm
 HOLE SIZE: 7

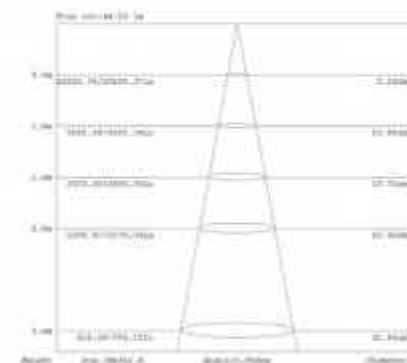

COLOR FINISHINGS:



100-240VAC 734517

LED: OSRAM 3000K CRI 80
 POWER: 3.2W
 OPTIC: 6°
 OUTPUT: 103Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 110*110*40mm
 HOLE SIZE: 7





1065



SPOT LAMP

1066



1067

TRACKER

This splendid floodlight is a great choice for garden light solution. Thanks to narrow beam angle (only 7 degree), TRACKER can create amazing lighting patterns for the landscape, playing with light and shade, perfectly emphasizing the objects in the space.

© CE IP65 220-240VAC

TRACKER

SPOT LAMP





TRACKER NE

1068

220-240VAC 731111A

LED: CREE CRI 90
 POWER: 7.3W
 OPTIC: 7°
 OUTPUT: 378lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø64*130*120mm
 HOLE SIZE: 1

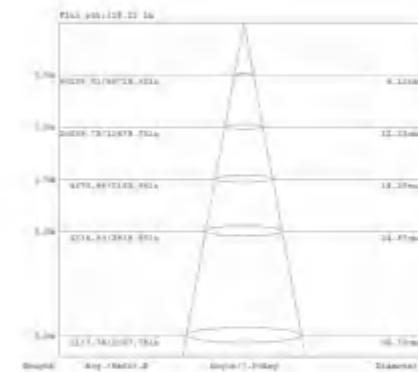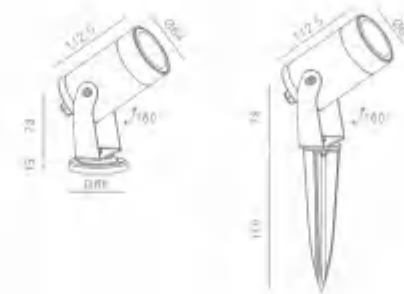

COLOR FINISHINGS:






TRACKER H.NE

1069

220-240VAC 731011A


LED: CREE CRI 90
 POWER: 7.3W
 DIM: 7°
 OUTPUT: 376lm
 CABLE CLASS: HB5RN F 3'0.75mm²
 DIMENSION: Ø64*130*520mm
 HOLE SIZE: 1

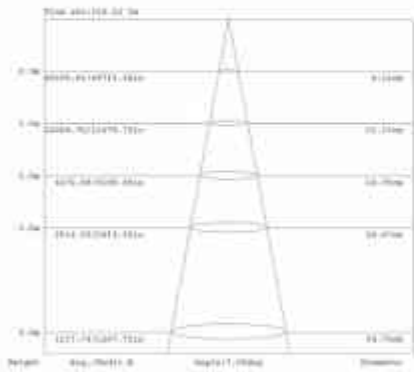

COLOR FINISHINGS:





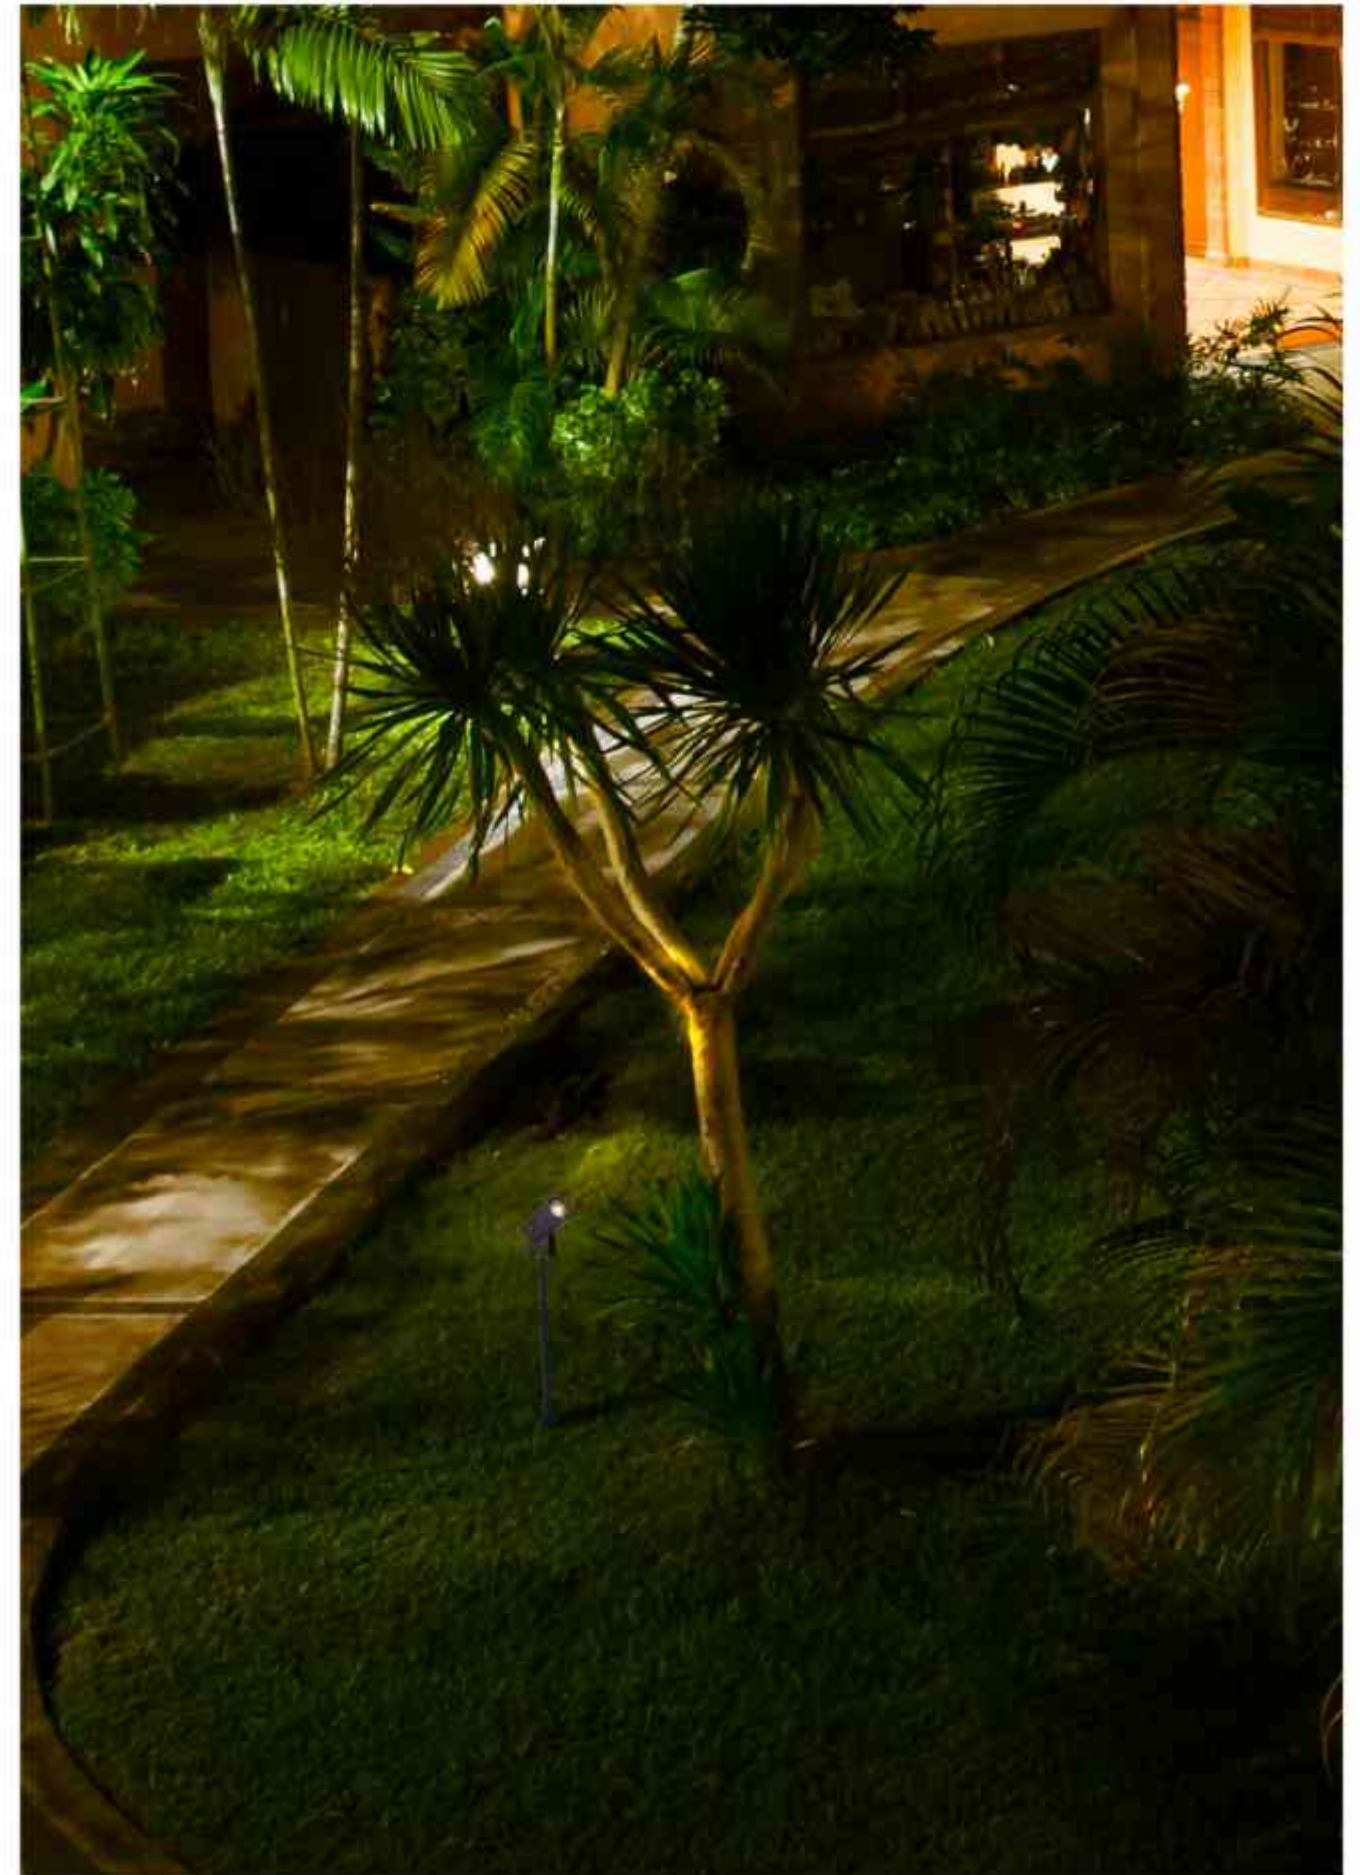

R07



SPOT LAMP

1070

LAWN LAMP

					
ARGO 2.0 1075	ARTE S 600 1076	ARTE S 900 1078	ARTE S 1200 1076	BEACON 1082	ETERNITY 200 1084
					
ETERNITY 600 1084	ETERNITY D200 1085	ETERNITY D600 1086	JOY 300 1090	JOY 600 1090	JOY 900 1090
					
LANCER 300 1092	LANCER 600 1094	LIBRA 300 2.0 1094	LIBRA 600 2.0 1096	LIBRA 900 2.0 1096	LOTOS S 1098
					
LOTOS M 1099	LOTOS L 1100	OTIC 1105	WAY 300 1108	WAY 600 1108	WAY 900 1108



PERFORM YOUR LIGHT


ARGO

New philosophy of landscape lighting ARGO has already become one of the best solutions for the garden luminaires.

Thanks to its special asymmetric optics, ARGO creates special triangle-shaped light effect. In addition, spike helps to make installation process much easier.

© CE IP65

1073

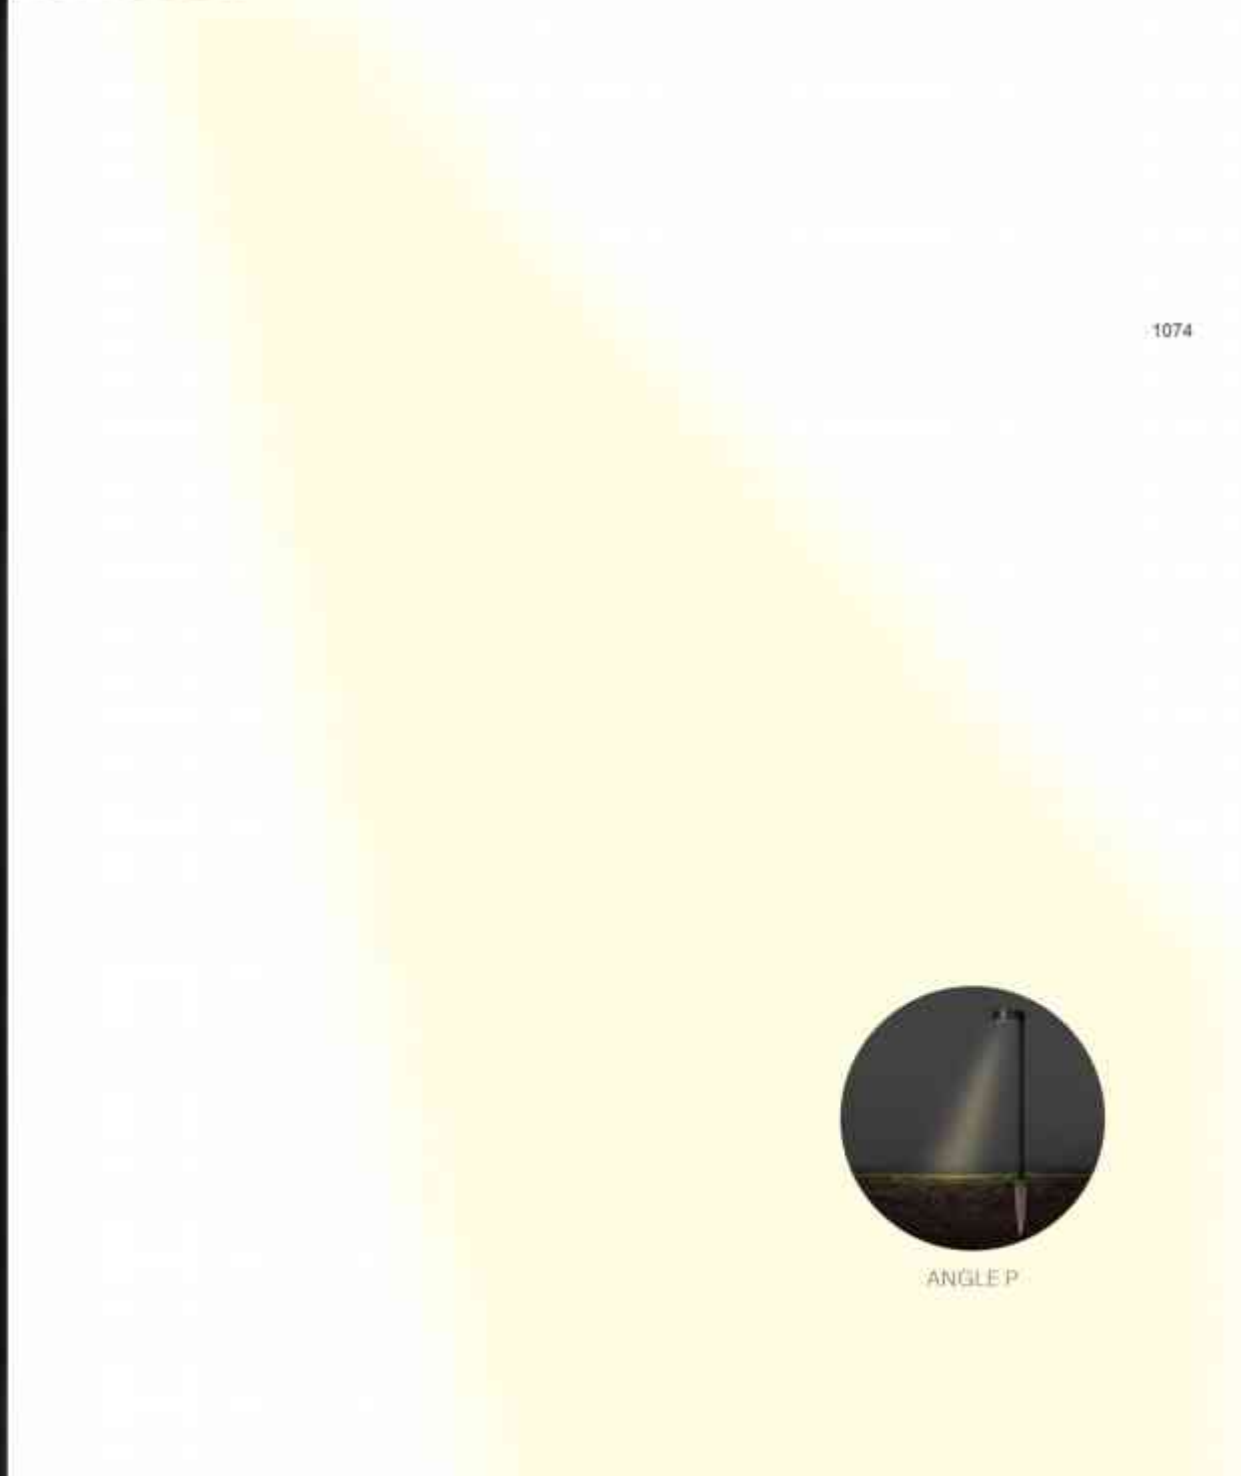

LAWN LAMP

1074



ANGLE P



600 / 600 DC 2.0

1075

220-240VAC


733815EA  

LED: FLUA CRI 90
 POWER: 18W
 OPTIC: P(60°x1°-7°)
 OUTPUT: 990lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø114*875mm
 HOLE SIZE: 1

24VDC


734016E  

LED: FLUA CRI 90
 POWER: 14W
 OPTIC: P(60°x1°-7°)
 OUTPUT: 920lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø114*875mm
 HOLE SIZE: 1

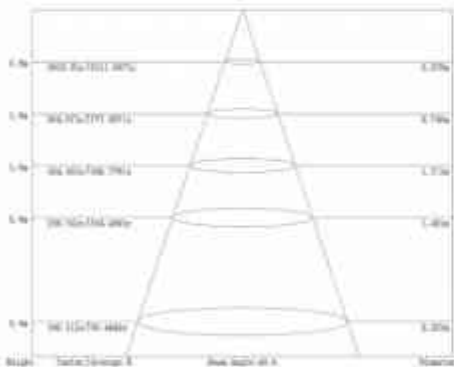

COLOR FINISHINGS:

 POY

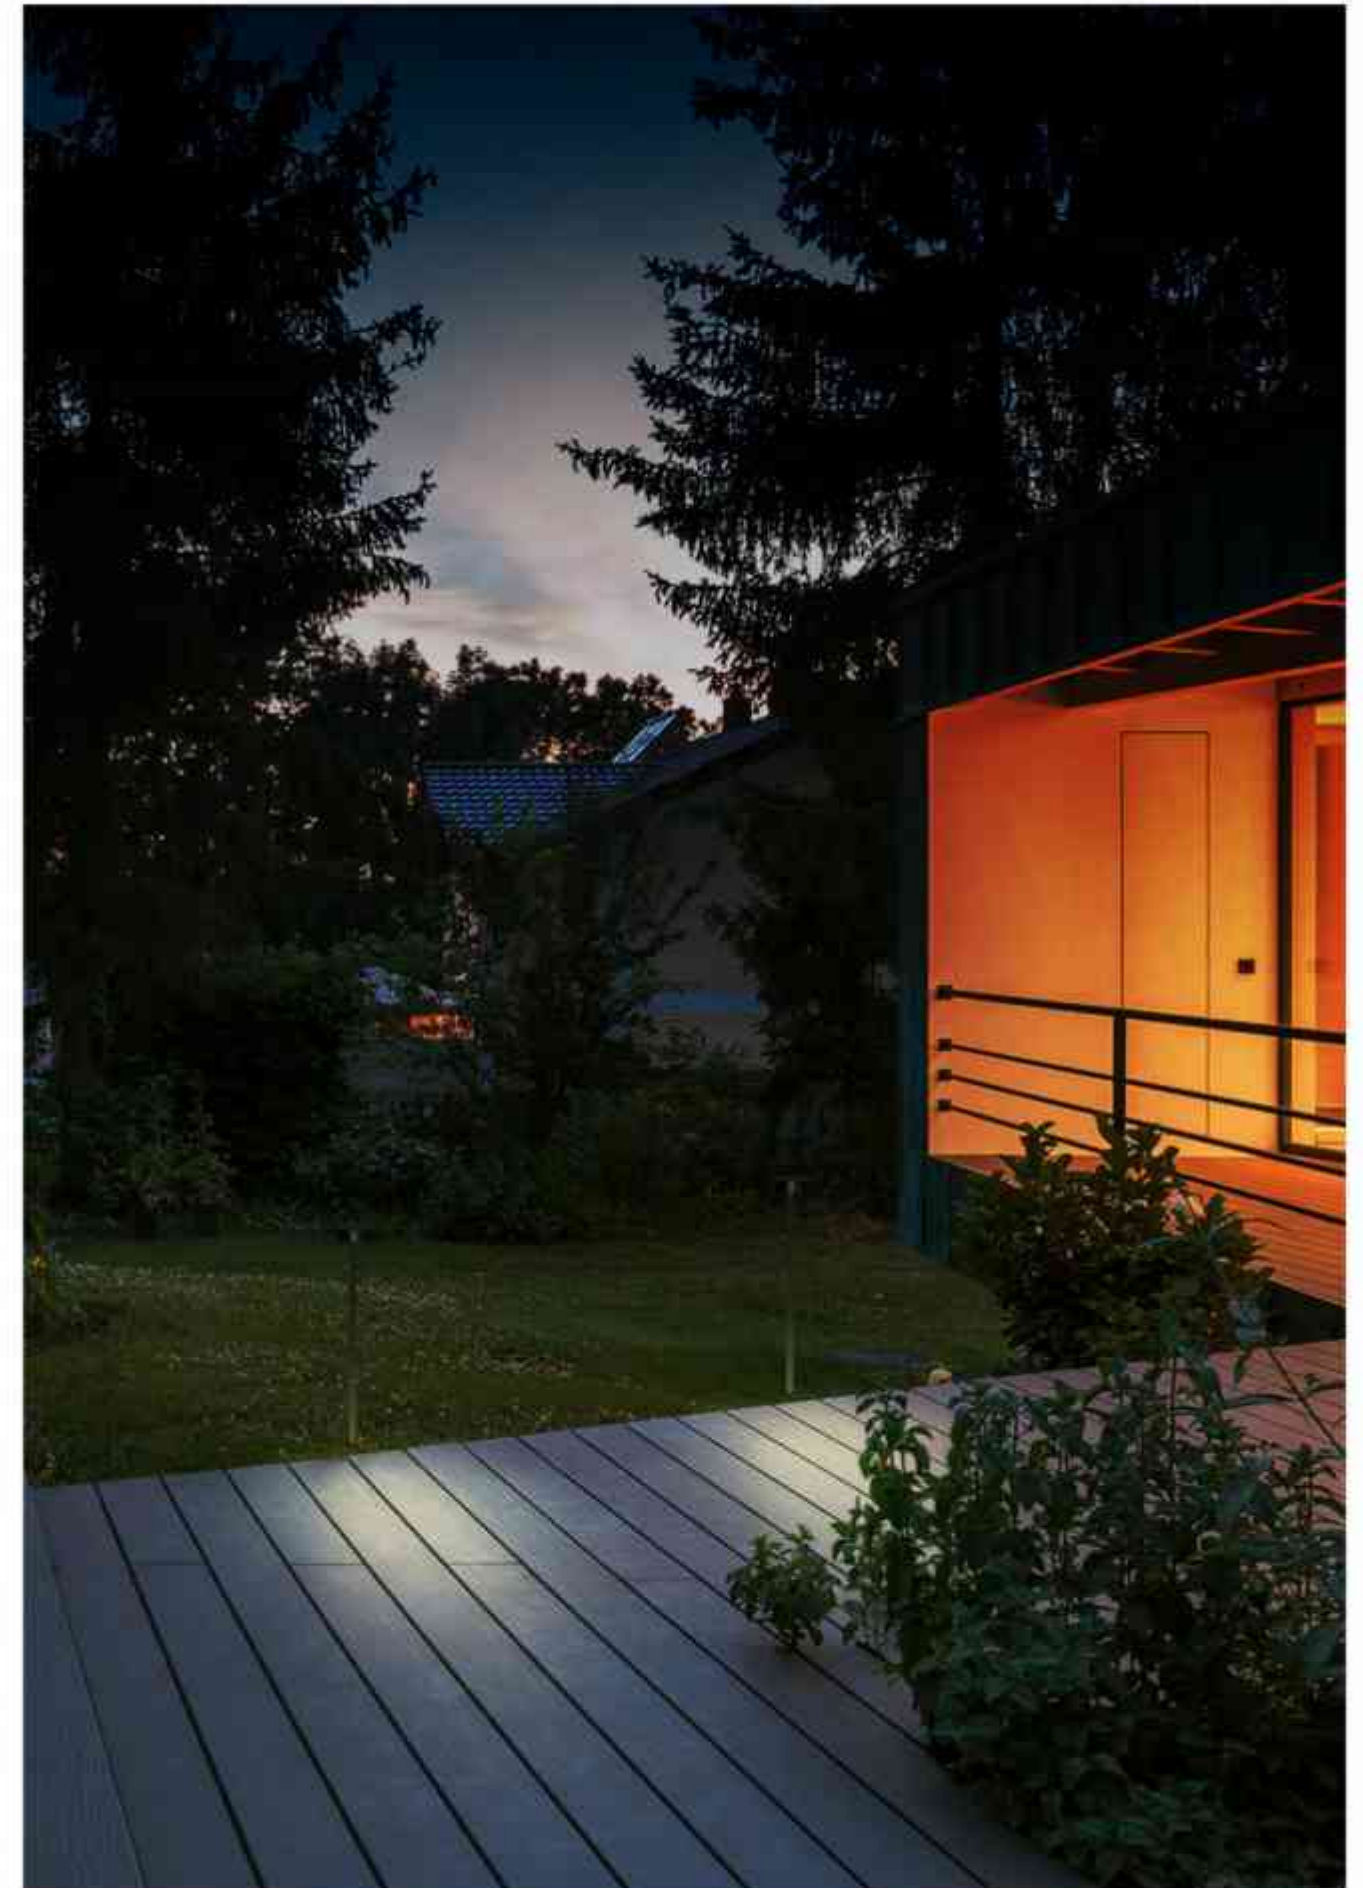

LAWN LAMP

1076

ARTE S

The frame outside the frame, the space within the space.

The ARTE, is a lamp, also an infinite extension of the XYZ axis.

ARTE can be used as a space of number axis, through the connection of the interfaces.

It can move on the XYZ axis. When a designer accepts a new project,

the first task is to divide the layout of the space,

and the application of ARTE can almost adapt to all types of spaces.

Such as hotel lobbies with high ceilings, long meeting rooms, and elegant French restaurants, private offices, can even be used as atmosphere decorations in indoor and outdoor spaces:

© CE 24VAC IP65

1077

ARTE

LAWN LAMP




ARTE SS 600/S 900/S 1200

1078

ARTE S S 600/S 900/S 1200

LED POWER: 4.0W
 LED OUTPUT: 2700K/3000K
 SYSTEM POWER: 4.0W
 SYSTEM OUTPUT: 170Lm
 INPUT: 24VDC
 CRI: 90
 DIMENSION: 21x58mm
 21x79mm
 21x120mm

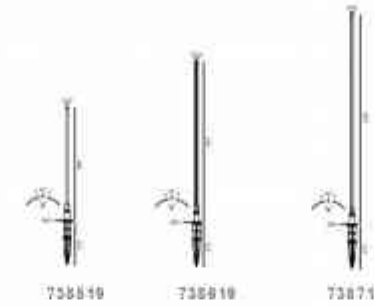

COLOR FINISHINGS:

WBL PWL WLS

ANGLE C





1079



1080

LAWN LAMP



BEACON

BEACON is perfect choice for creating warm and elegant atmosphere for the landscape. Slim elegant tube with 58.5 mm height can match any outside environment. Soft oblique asymmetric light perfectly illuminates the way without any glare.

© CE IP65

1081

BEACON

LAWN LAMP



BEACON / BEACON DC

1082

100-240VAC


728317

LED: OSRAM CRI 90
 POWER: 2.6W
 OPTIC: F
 OUTPUT: 142lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø100*585mm
 HOLE SIZE: 1

24VDC

728217

LED: OSRAM CRI 90
 POWER: 2.4W
 OPTIC: F
 OUTPUT: 142lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø100*585mm
 HOLE SIZE: 1

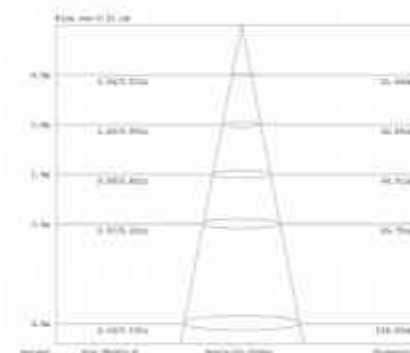

COLOR FINISHINGS:

■ R01



1083



200/600

1084


100-240VAC 728814

LED: HONGLI CRI 80
 POWER: 11W
 OPTIC: F
 OUTPUT: 330Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 200*66*200mm
 HOLE SIZE: 1




100-240VAC 728814

LED: HONGLI CRI 80
 POWER: 11W
 OPTIC: F
 OUTPUT: 330Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 200*66*600mm
 HOLE SIZE: 1



ETERNITY

ETERNITY series are your perfect companions when it comes to creating a warm and cosy atmosphere outside. This splendid collection is available 2 different heights, making them useful in many applications.



COLOR FINISHINGS:
 ■ Gray



1085

LAWN LAMP



D 200/D 600

1086


220-240VAC 729124

LED: HONGLI CRI 80
 POWER: 2*9.6W
 OPTIC: F
 OUTPUT: 631lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 200*99*200mm
 HOLE SIZE: ∅



220-240VAC 729224

LED: HONGLI CRI 80
 POWER: 2*9.6W
 OPTIC: F
 OUTPUT: 631lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 200*99*580mm
 HOLE SIZE: ∅




COLOR FINISHINGS:



PGY

JOY

New splendid luminaire JOY is characterized by circular shaped pole and aluminum ultra-thin disk. Available in 3 sizes for choice: 300 mm, 600 mm and 900 mm. JOY with its soft indirect light can provide the best light effect for any outdoor environment.



900 / 900 DC



300 / 300 DC



600 / 600 DC

1087



LAWN LAMP

1088

220-240VAC 725614 725214 725414

LED: EDISON CRI 80
 POWER: 17W
 OPTIC: F
 OUTPUT: 600Lm
 CABLE/CLASS: H05RN-F 3*0,75mm²
 DIMENSION: ∅210*300mm
 ∅210*600mm
 ∅210*900mm

HOLE SIZE: /

24VDC 725614 725114 725314


LED: EDISON CRI 80
 POWER: 16.3W
 OPTIC: F
 OUTPUT: 600Lm
 CABLE/CLASS: H05RN-F 2*0,75mm²
 DIMENSION: ∅210*300mm
 ∅210*600mm
 ∅210*900mm

HOLE SIZE: /

COLOR FINISHINGS:



PGY

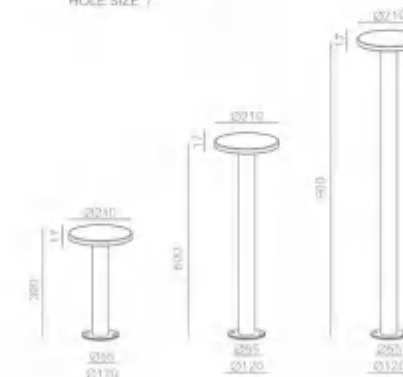




1089




1090

LAWN LAMP

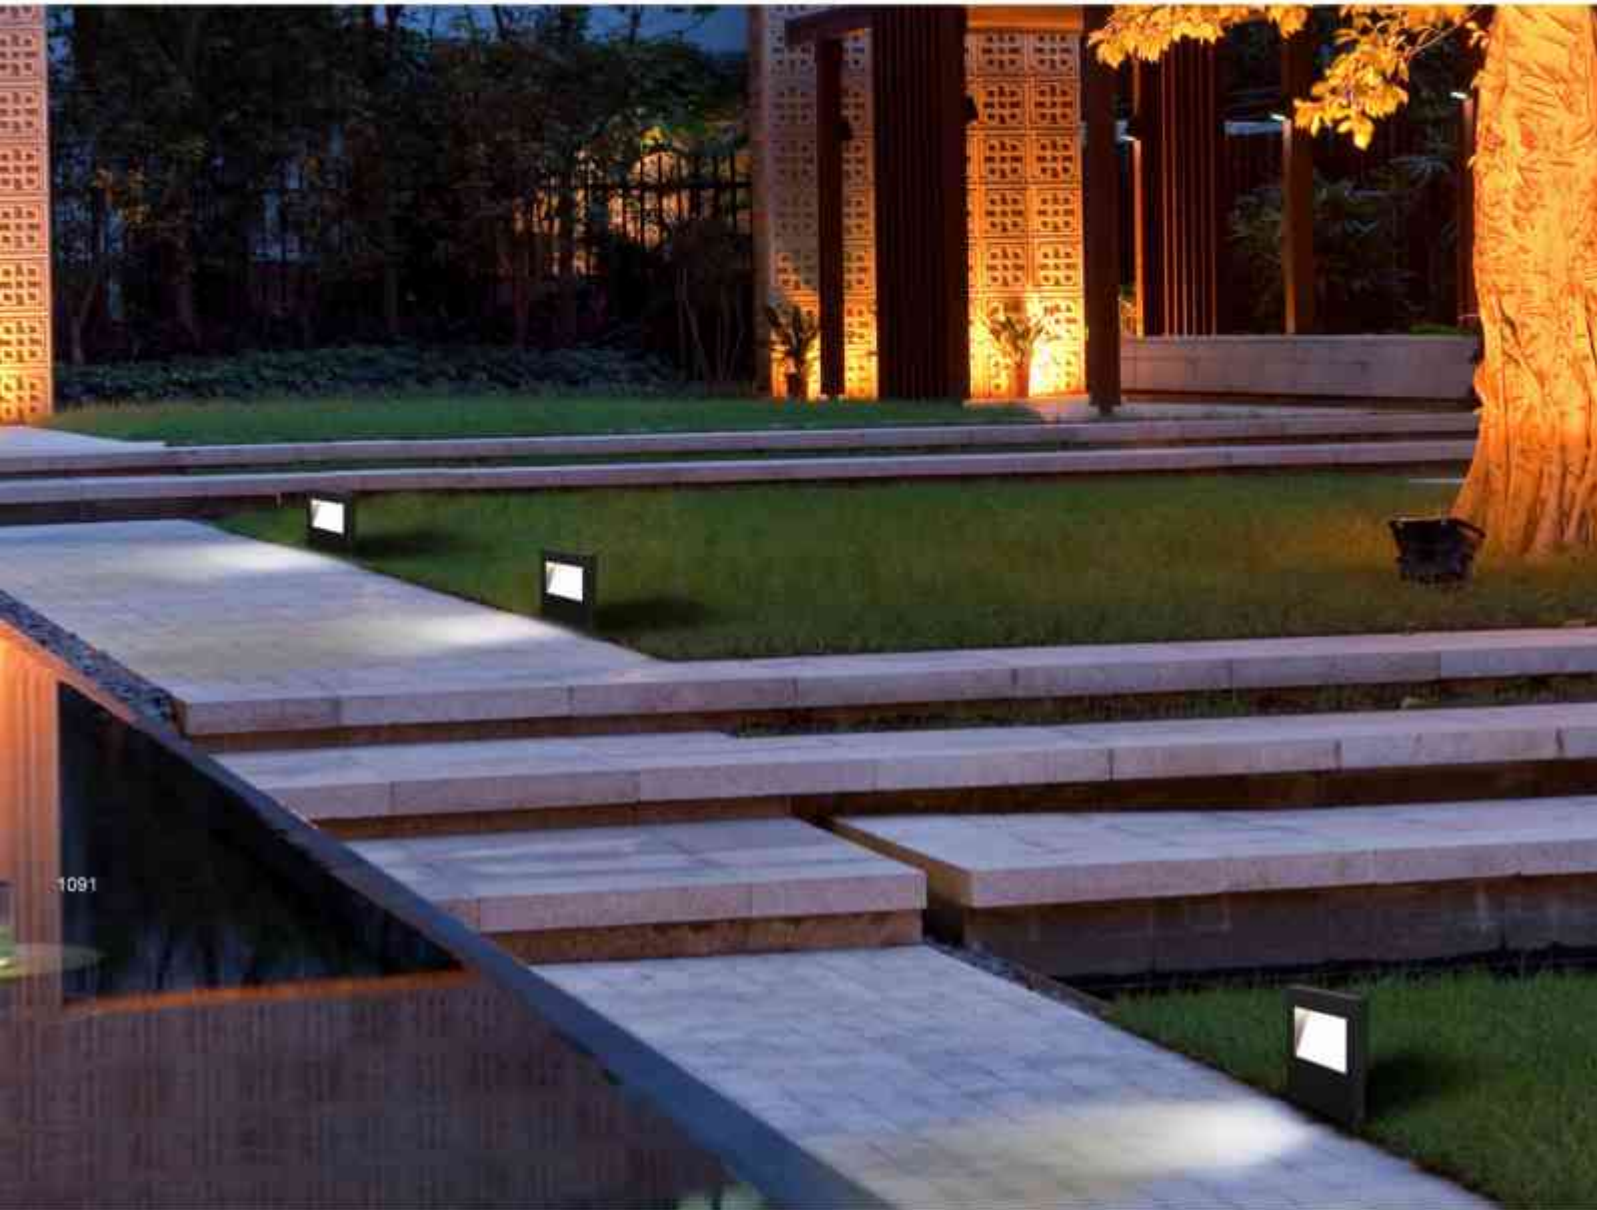

LANCER

Super slim shape of LANCER can be used perfectly for guidance light on the path.
Sandblast anodized reflector produces perfect soft indirect light.
Available in 2 versions: 300 mm and 600 mm.



300/300 DC

100-240VAC



LED: HONGLI CRI 80
POWER: 9W
OPTIC: F
OUTPUT: 268Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 200*80*300mm
HOLE SIZE: 1

24VDC



LED: HONGLI CRI 80
POWER: 8.4W
OPTIC: F
OUTPUT: 268Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 200*80*300mm
HOLE SIZE: 1

COLOR FINISHINGS:





1093



LAWN LAMP

1094

600/600 DC

100-240VAC

728414

LED: HONGLI CRI 80
 POWER: 6W
 OPTIC: F
 OUTPUT: 266Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 200*60*600mm
 HOLE SIZE: 1

24VDC

728314

LED: HONGLI CRI 80
 POWER: 6.4W
 OPTIC: F
 OUTPUT: 266Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 200*60*600mm
 HOLE SIZE: 1

COLOR FINISHINGS:

■ 001



LIBRA

New concept design of bollard

LIBRA is a new range of bollard series. The best choice for path illumination. Thanks to its semicircle shape, LIBRA gives perfect light effect in the garden. Available in 3 lengths: 300 mm, 600 mm, 900 mm.

© CE IP65 220-240VAC


1095

1096

300 20 / 600 20 / 900 20

220-240VAC T33416EDT / T33516EDT / T33616EDT

LED: FLUA CRI 90
 POWER: 15.2W
 OPTIC: F
 OUTPUT: 648lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 104*80*300mm
 104*80*600mm
 104*80*900mm
 HOLE SIZE: 7

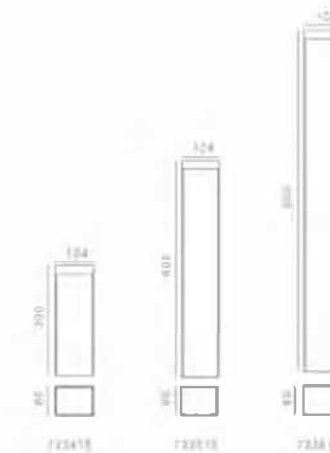

COLOR FINISHINGS:



LOTOS

FAST (S - 7.4W / M - 10.7W) are the latest designs under architectural lighting portfolio. Square design brings you a very sharp lighting experience while round design leads you to a romantic scene. Certified with IP54, it's capable of most interior lighting demands.

© CE IP20 220-240VAC 2700K-6000K APP



LOTOS 0 / 0 DC

SYSTEM POWER: 4.8W/3.4W
 SYSTEM OUTPUT: 270lm/2700K
 PRFUT: 100 DALI/0.5A/DC
 CRI: 90
 DIMENSION: 2100*80mm
 HOLE SIZE: 210mm


737618




ANGLE 11°



3.4W 17° 2700K

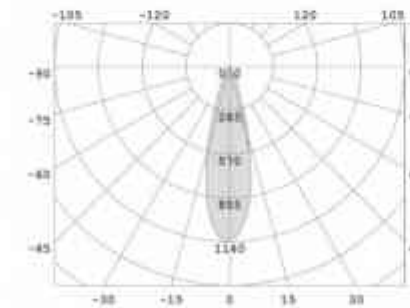

3.4W 17° 2700K








1099

LOTOS M/MDC 
 SYSTEM POWER: 11W/3.0W
 SYSTEM OUTPUT: 843lm/2700K
 INPUT: 100-240V/50/60V/AC
 CRI: 90
 DIMENSION: Ø100*1332mm
 HOLE SIZE: Ø110mm



ANGLE 17

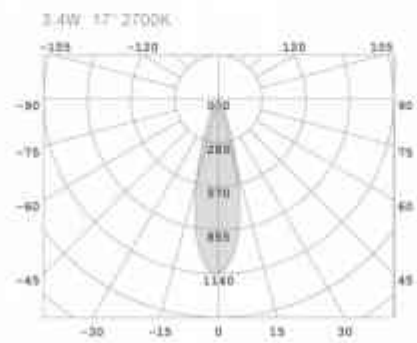


LAWN LAMP



1100

LOTOS L/L DC 
 SYSTEM POWER: 21.7W/3.3W
 SYSTEM OUTPUT: 1390lm/2700K
 INPUT: 100-240V/50/60V/AC
 CRI: 90
 DIMENSION: Ø100*1310mm
 HOLE SIZE: Ø110mm

737266




ANGLE 29

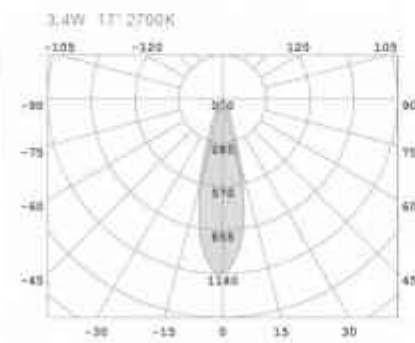



1101

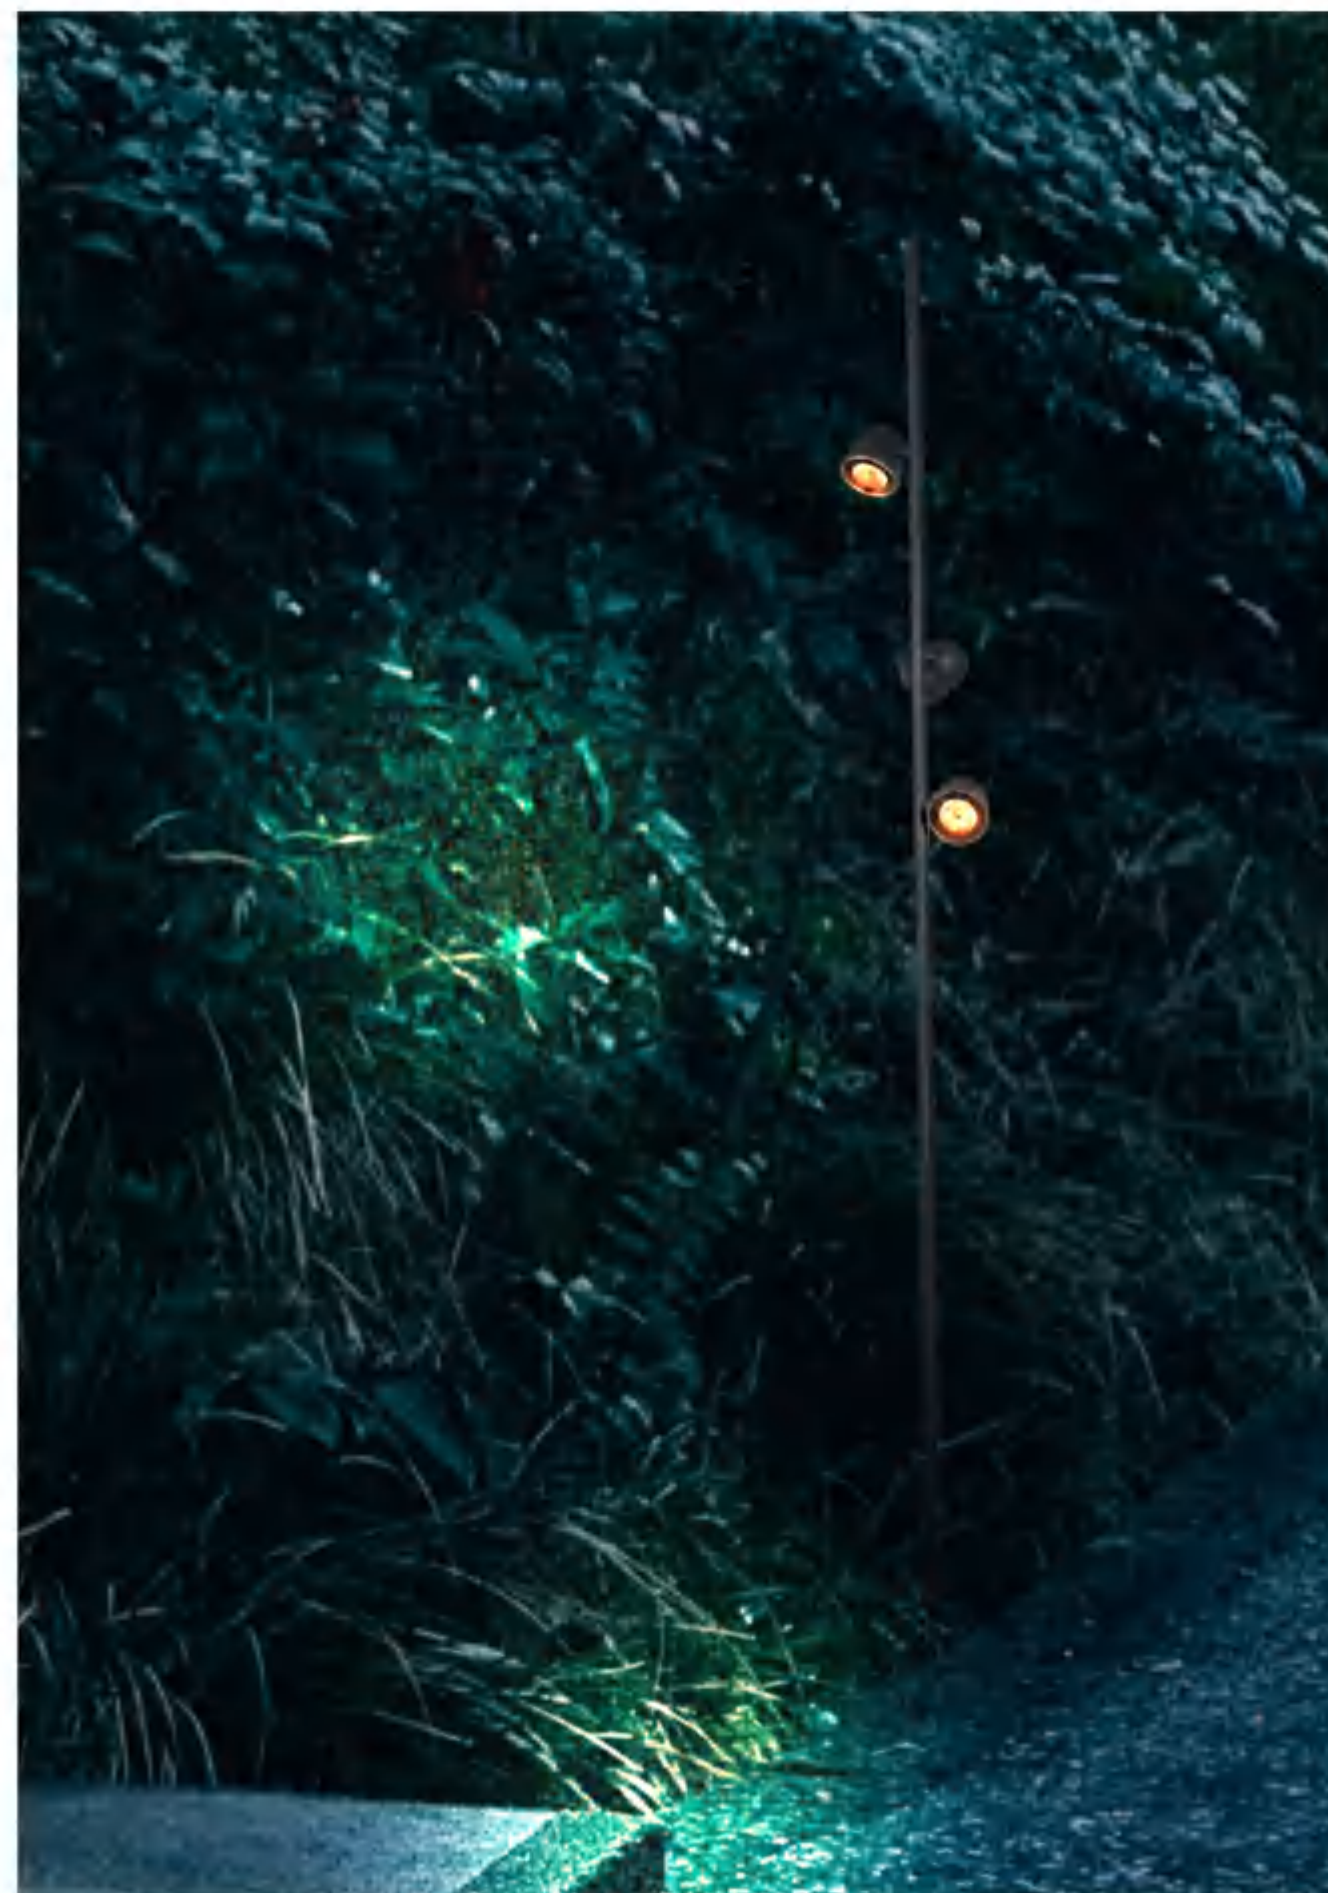

1102

LAWN LAMP

OTIC

OTIC, a brand new innovative bollard lamp is the perfect piece for exterior lighting session with its rotatable lamp head and supreme anti-glare lighting effect.

The eyeball-shape lamp heads make OTIC the most loyal and humble guardian for your outdoor properties. Ideal for both commercial and residential exterior spaces, whether to light up the lawn, garden, corridor, driveway, path and landscapes etc..

© CE IP65 100-240VAC 24VDC

1103



OTIC

LAWN LAMP



1104




OTIC / OTIC DC

1105

100-240VAC

736726

LED: LUMILEDS CRI 80
 POWER: 11.7W
 OPTIC: 21°
 OUTPUT: 517Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 75*600mm
 HOLE SIZE: 1

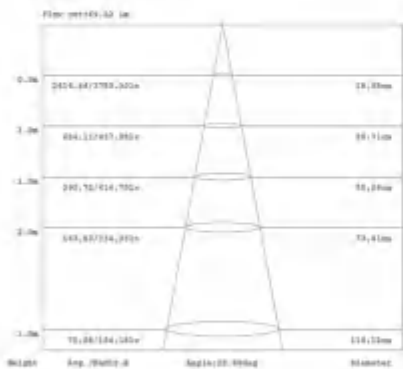

24VDC

736826

LED: LUMILEDS CRI 80
 POWER: 10W
 OPTIC: 21°
 OUTPUT: 517Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 75*600mm
 HOLE SIZE: 1



LAWN LAMP

1106



R900 / R900 DC



R300 / R300 DC



R600 / R600 DC

WAY

WAY is a simple, and at the same time, elegant concept of bollard lamp. Its conical reflector provides perfect diffused light effect 360 degrees around. Available in 3 heights: 300 mm, 600 mm, 900 mm. Could be used in many different applications.



100-240VAC 724414 722814 724614

LED: HONGLI CRI 80
 POWER: 7.7W
 OPTIC: F
 OUTPUT: 291Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: ∅105*300mm
 ∅105*600mm
 ∅105*900mm

HOLE SIZE: ∅

24VDC 724314 722714 724514

LED: HONGLI CRI 80
 POWER: 7.3W
 OPTIC: F
 OUTPUT: 291Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: ∅105*300mm
 ∅105*600mm
 ∅105*900mm

HOLE SIZE: ∅

COLOR FINISHINGS:





1109











































LAWN LAMP


1110



WALL LAMP

					
APUS WR1 2.0 1115	APUS WR2 2.0 1110	APUS WS1 2.0 1117	APUS WS2 2.0 1118	CORENA SINGLE 1123	CORENA DOUBLE 1125
					
CUBE SINGLE 1128	CUBE DOUBLE 1129	DISCUS W 1132	EL.F W IP 1139	GRAY 1136	LEEO SINGLE 1138
					
LEEO DOUBLE 1135	MARS SINGLE 1140	MARS DOUBLE 1141	MITILO 1144	PACE ROUND 1 1151	PACE ROUND 2 1152
					
PACE SQUARED 1153	PACE LONG 1 1154	PACE LONG 2 1155	PACE LONG 3 1150	PACE LONG 4 1157	QUIVER 1162
					
QUIVER S 1162	QUIVER M 1163	QUIVER L 1164	QUIVER L 1164	SIMPHONIA I 1169	SIMPHONIA O 1169
					
SIMPHONIA DI 1169	SIMPHONIA DO 1169	SIMPHONIA FI 1169	SIMPHONIA FO 1169	SIMPHONIA IO 1169	SIMPHONIA DIO 1169
					
SPARROW 1172	TEAR 1173	TUBUS SINGLE 1.1 1177	TUBUS DOUBLE 1.1 1178		

1111

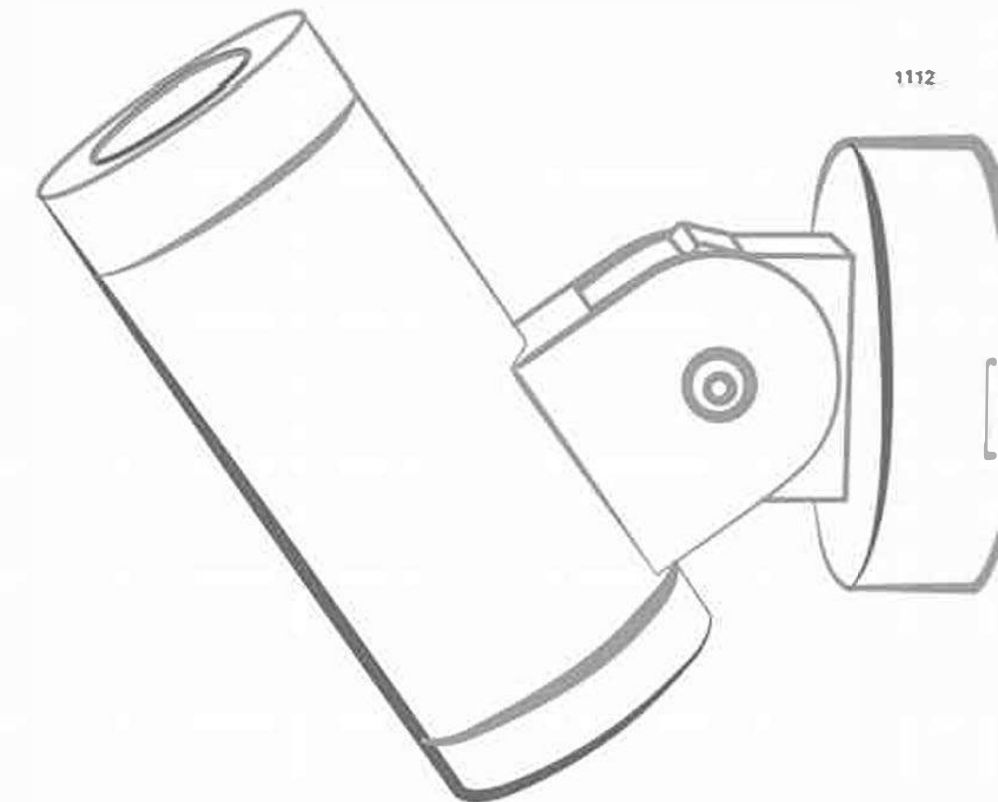

1112

PERFORM YOUR LIGHT

APUS

APUS is a well-known member of the outdoor range.
Be it elegant tube version or square shaped series,
both could provide perfect esthetic effect.
APUS is available with up or up/down versions.



WR1 20 / WR1 0020



PAGE 831

WR2 20 / WR2 0020



PAGE 832

WS1 20 / WS1 0020



PAGE 833

WS2 20 / WS2 0020



PAGE 834



WS1 20/WS1DC20




WS2 20/WS2DC20

1117

1118

100-240VAC 435715EA

LED: FLUA CRI 90
 POWER: 8.4W
 OPTIC: 55°
 OUTPUT: 218Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 70*70*106mm
 HOLE SIZE: Ø75mm

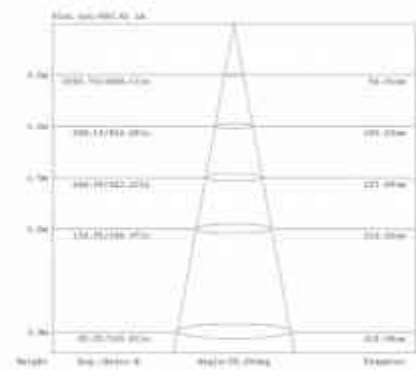

24VDC 435815E

LED: FLUA CRI 90
 POWER: 7.0W
 OPTIC: 55°
 OUTPUT: 265Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 70*70*106mm
 HOLE SIZE: Ø75mm




COLOR FINISHINGS:




100-240VAC 435915EA

LED: FLUA CRI 90
 POWER: 14.2W
 OPTIC: 55°
 OUTPUT: 1448Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 70*70*159mm
 HOLE SIZE: Ø75mm

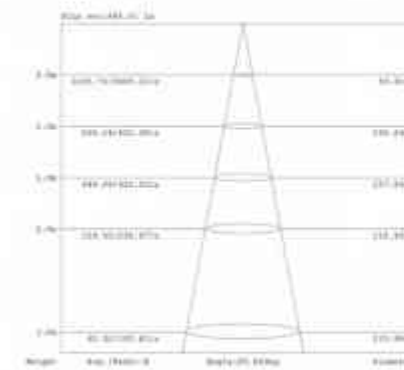

24VDC 436015E

LED: FLUA CRI 90
 POWER: 15.0W
 OPTIC: 55°
 OUTPUT: 1690Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 70*70*106mm
 HOLE SIZE: Ø75mm

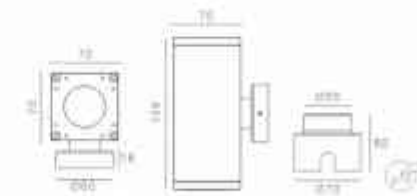


COLOR FINISHINGS:





1119

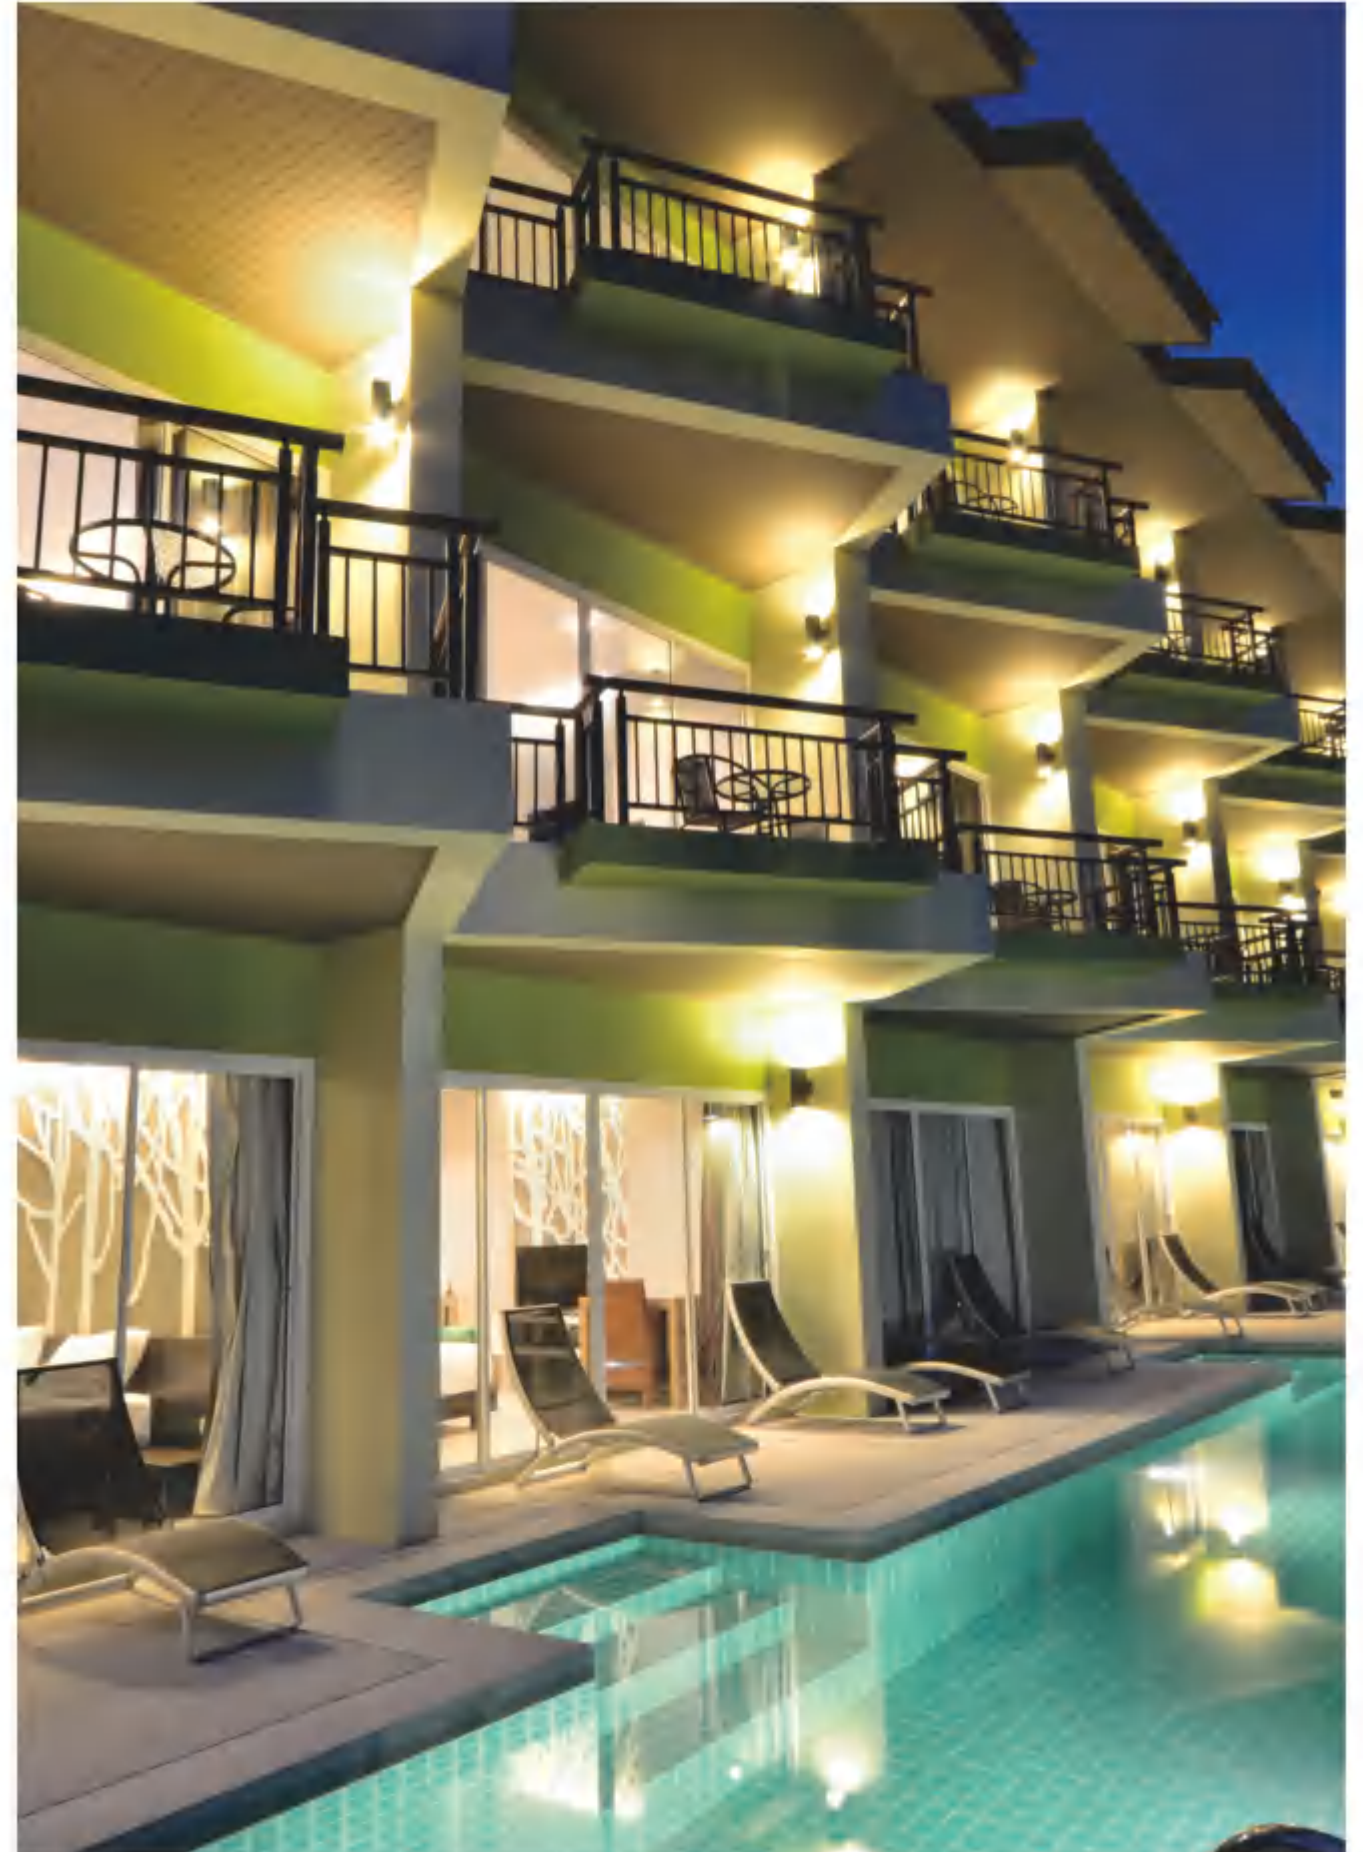

1120



1121

1122

CORENA

New philosophy of outdoor wall lamp CORENA has already become very popular lamp thanks to its special design.

Smooth lines of the form create great aesthetic effect.

2 options are available for choice: one-sided lamp and double sided lamp.

© CE IP65



SINGLE / SINGLE DC


1123

100-240VAC 436115EA

LED: FLUA CRI 90
 POWER: 20.9W
 OPTIC: 33°
 OUTPUT: 1831lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 155*87.5*180mm
 HOLE SIZE: 1"


24VDC 43621RE

LED: FLUA CRI 90
 POWER: 18.3W
 OPTIC: 33°
 OUTPUT: 1461lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 155*87.5*180mm
 HOLE SIZE: 1"

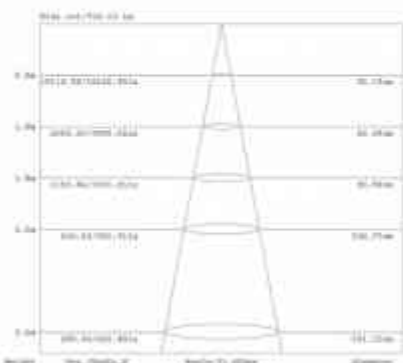

COLOR FINISHINGS:

■ 1027



WALL LAMP

1124




DOUBLE / DOUBLE DC

1125

100-240VAC 436315EA

LED: FLUA CRI 90
 POWER: 34.3W
 OPTIC: 33°
 OUTPUT: 2669Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 155*87.6*300mm
 HOLE SIZE: 1"

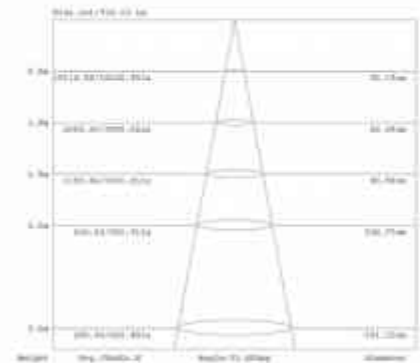


24VDC 436415E

LED: FLUA CRI 90
 POWER: 35.4W
 OPTIC: 33°
 OUTPUT: 2834Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 155*87.6*300mm
 HOLE SIZE: 1"




COLOR FINISHINGS:

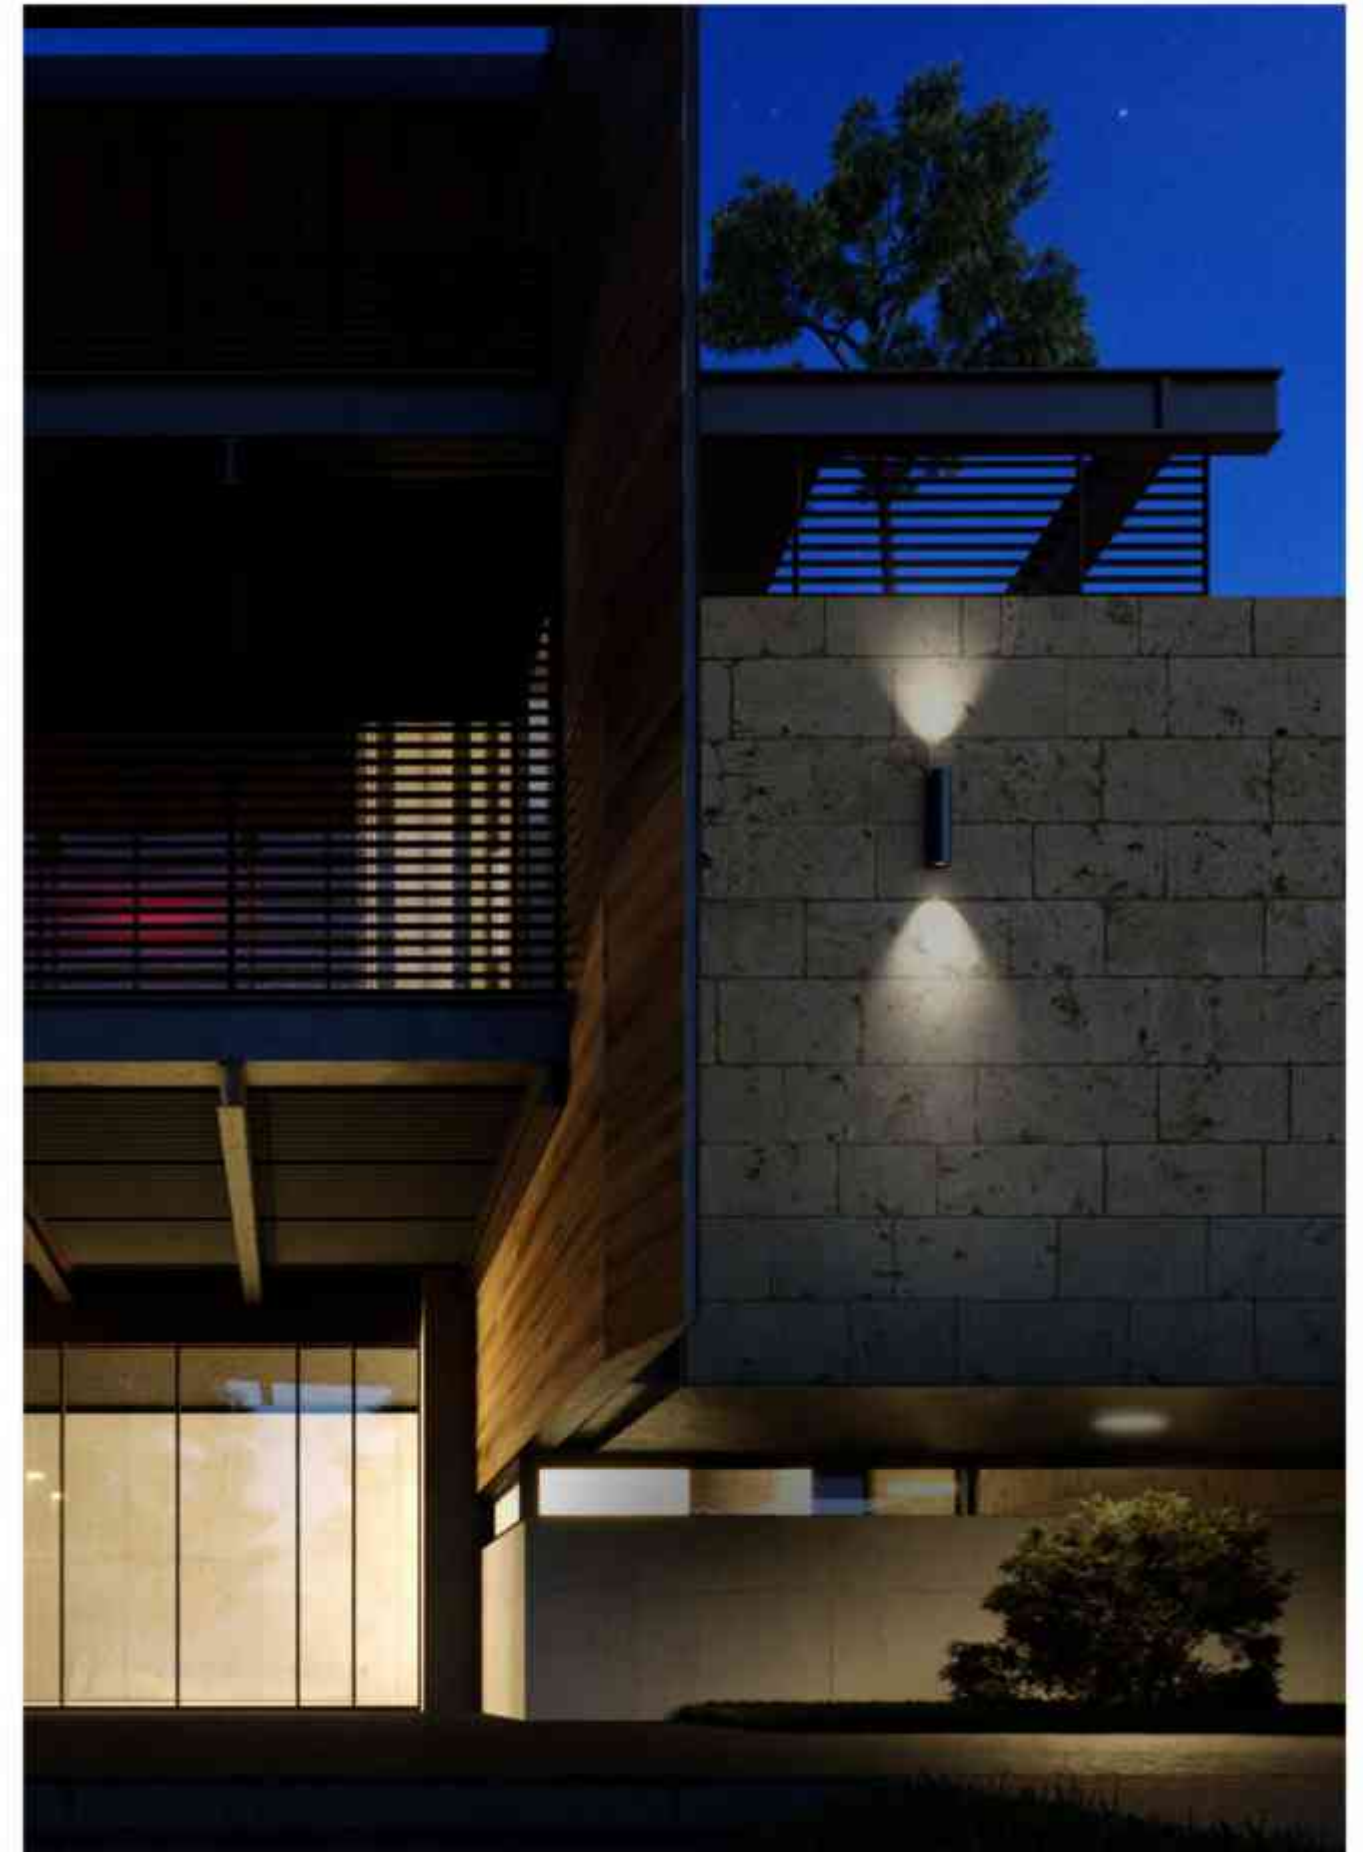

WALL LAMP

1126

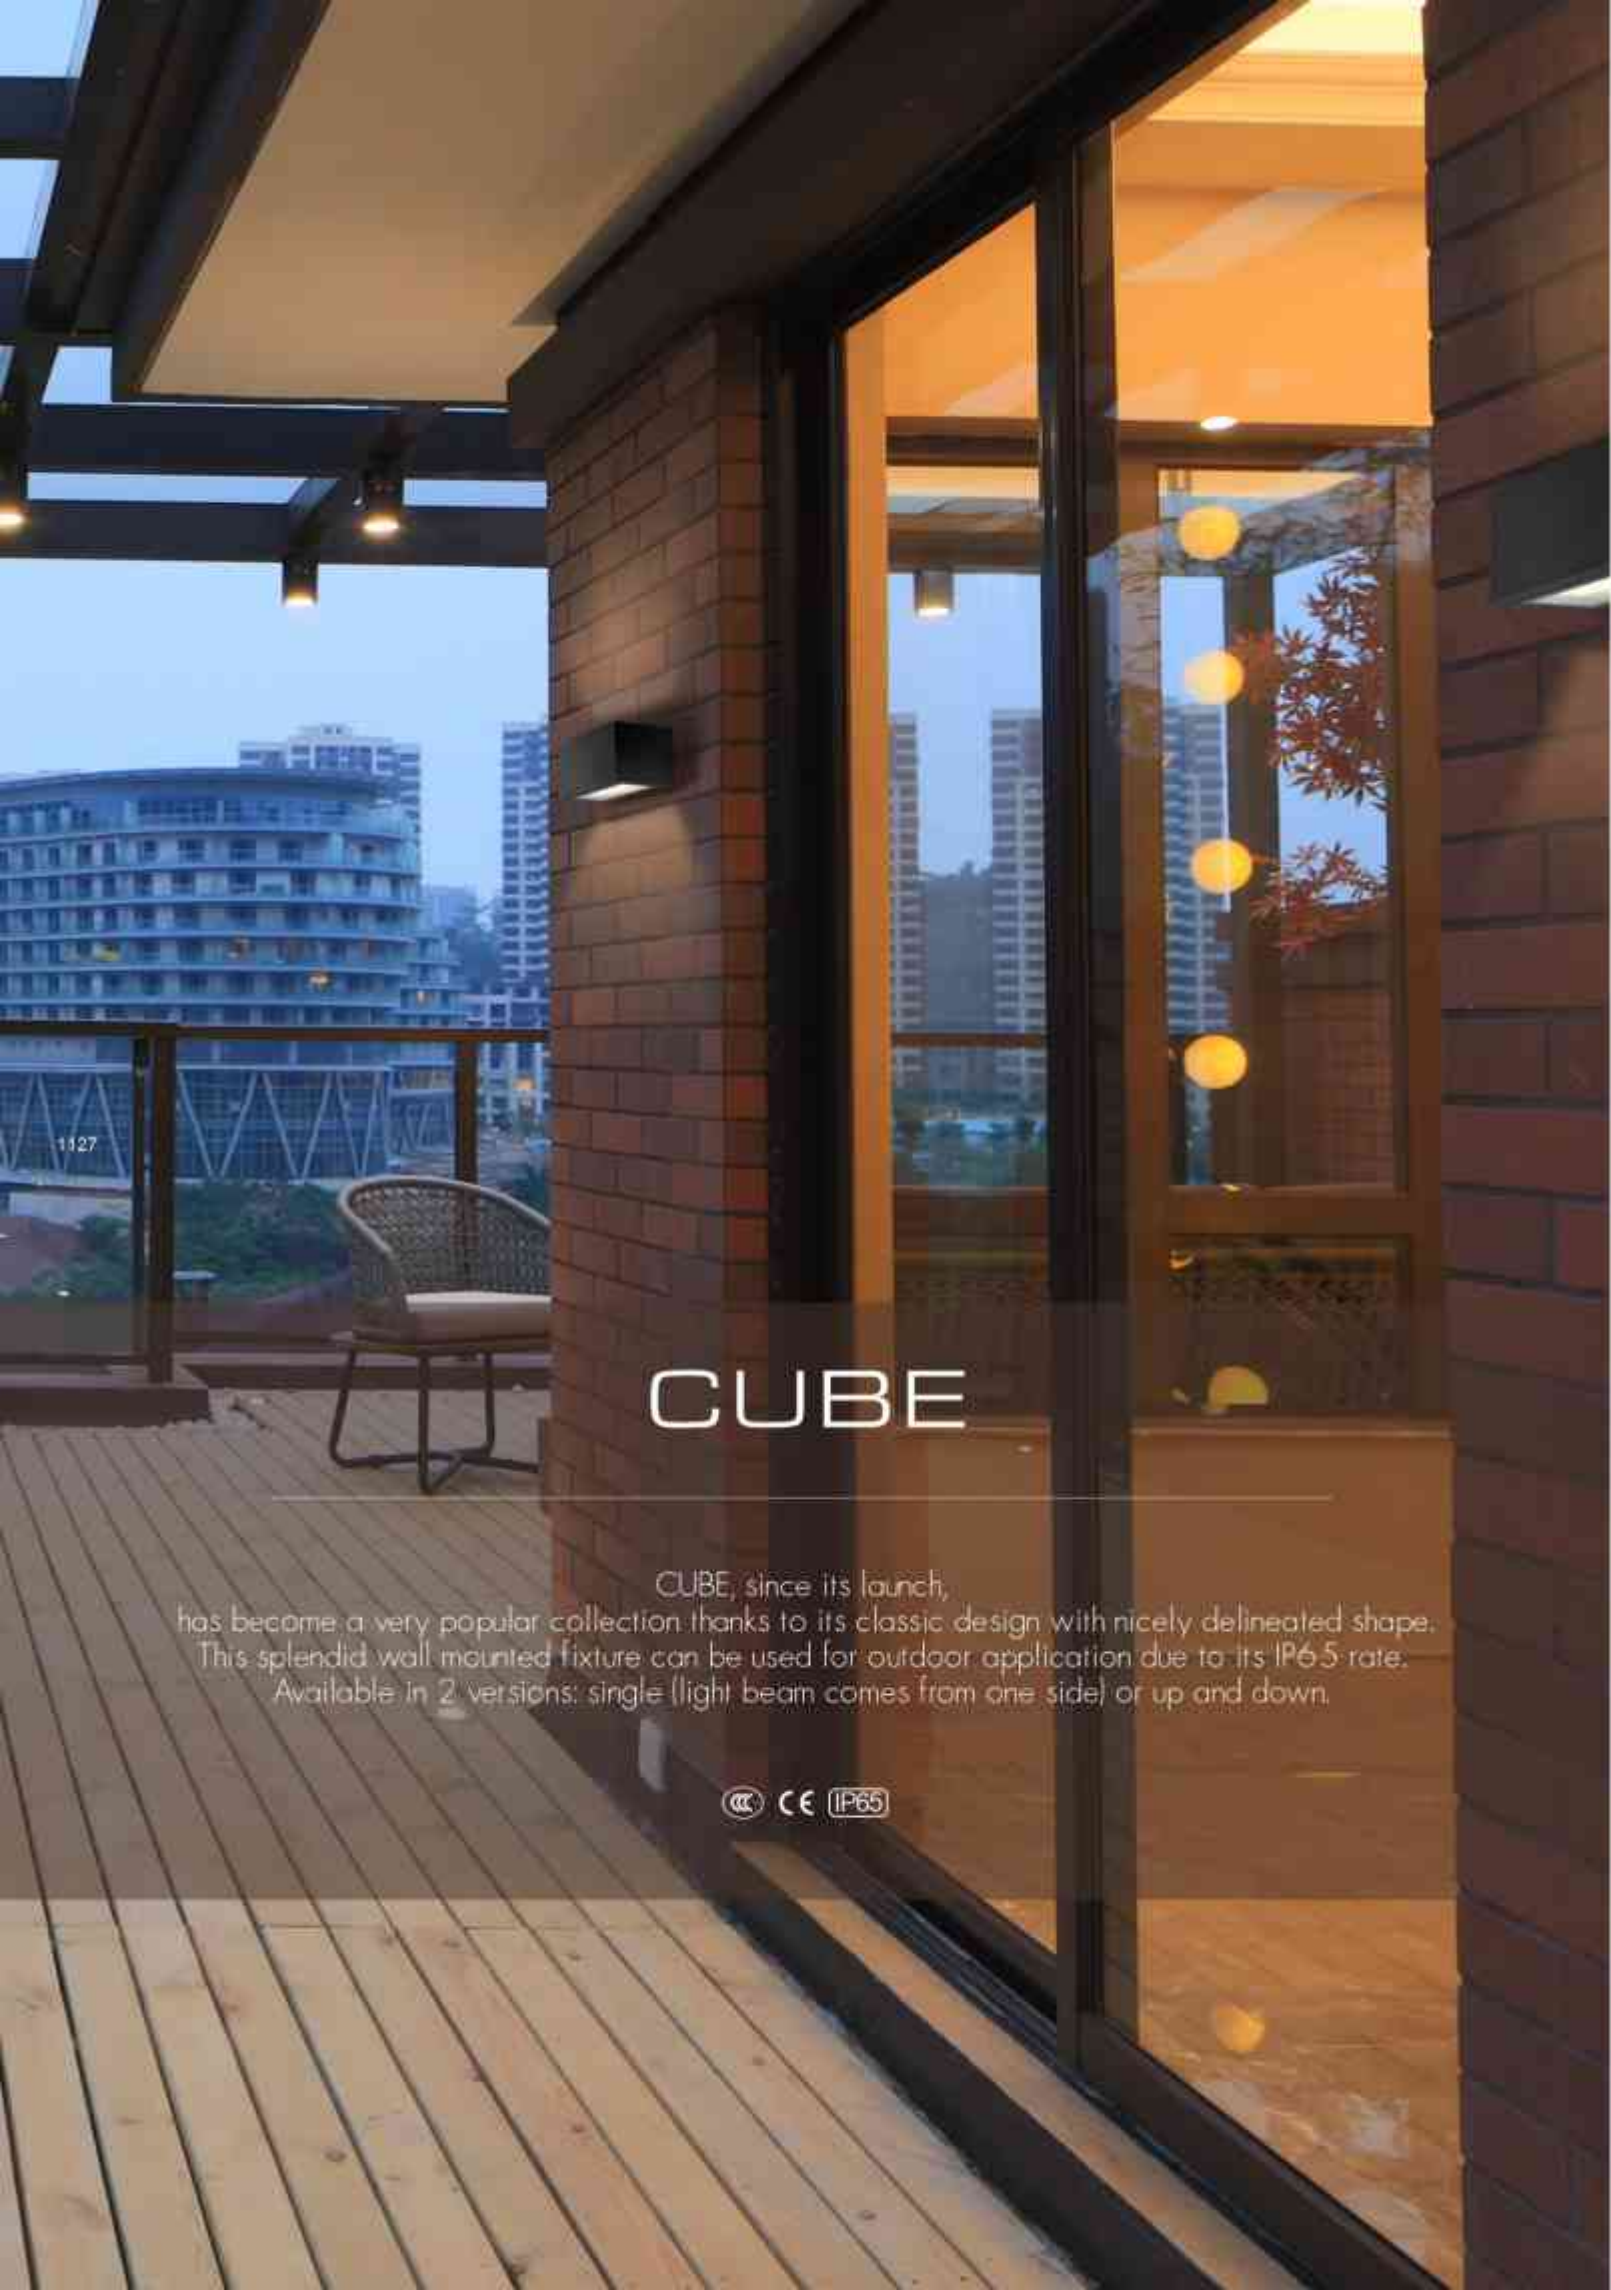

CUBE

CUBE, since its launch, has become a very popular collection thanks to its classic design with nicely delineated shape. This splendid wall mounted fixture can be used for outdoor application due to its IP65 rate. Available in 2 versions: single (light beam comes from one side) or up and down.

© CE IP65



SINGLE / SINGLE DC

220-240VAC

422214

LED: HONGLI CRI 80
 POWER: 8W
 OPTIC: F
 OUTPUT: 617Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 220*115*100mm
 HOLE SIZE: ∅

24VDC

422114

LED: HONGLI CRI 80
 POWER: 8W
 OPTIC: F
 OUTPUT: 617Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 220*115*100mm
 HOLE SIZE: ∅

COLOR FINISHINGS:

■ R01





DOUBLE / DOUBLE 00

1129



220-240VAC 422424

LED: HOMOL1 CRJ 80
POWER: 21W
OPTIC: F
OUTPUT: 1034Lm
CABLE/CLASS: H05RN-F 2*0,75mm²
DIMENSION: 220*115*100mm
HOLE SIZE: -

24VDC 422524

LED: HOMOL1 CRJ 80
POWER: 21W
OPTIC: F
OUTPUT: 1034Lm
CABLE/CLASS: H05RN-F 2*0,75mm²
DIMENSION: 220*115*100mm
HOLE SIZE: -

COLOR FINISHINGS:

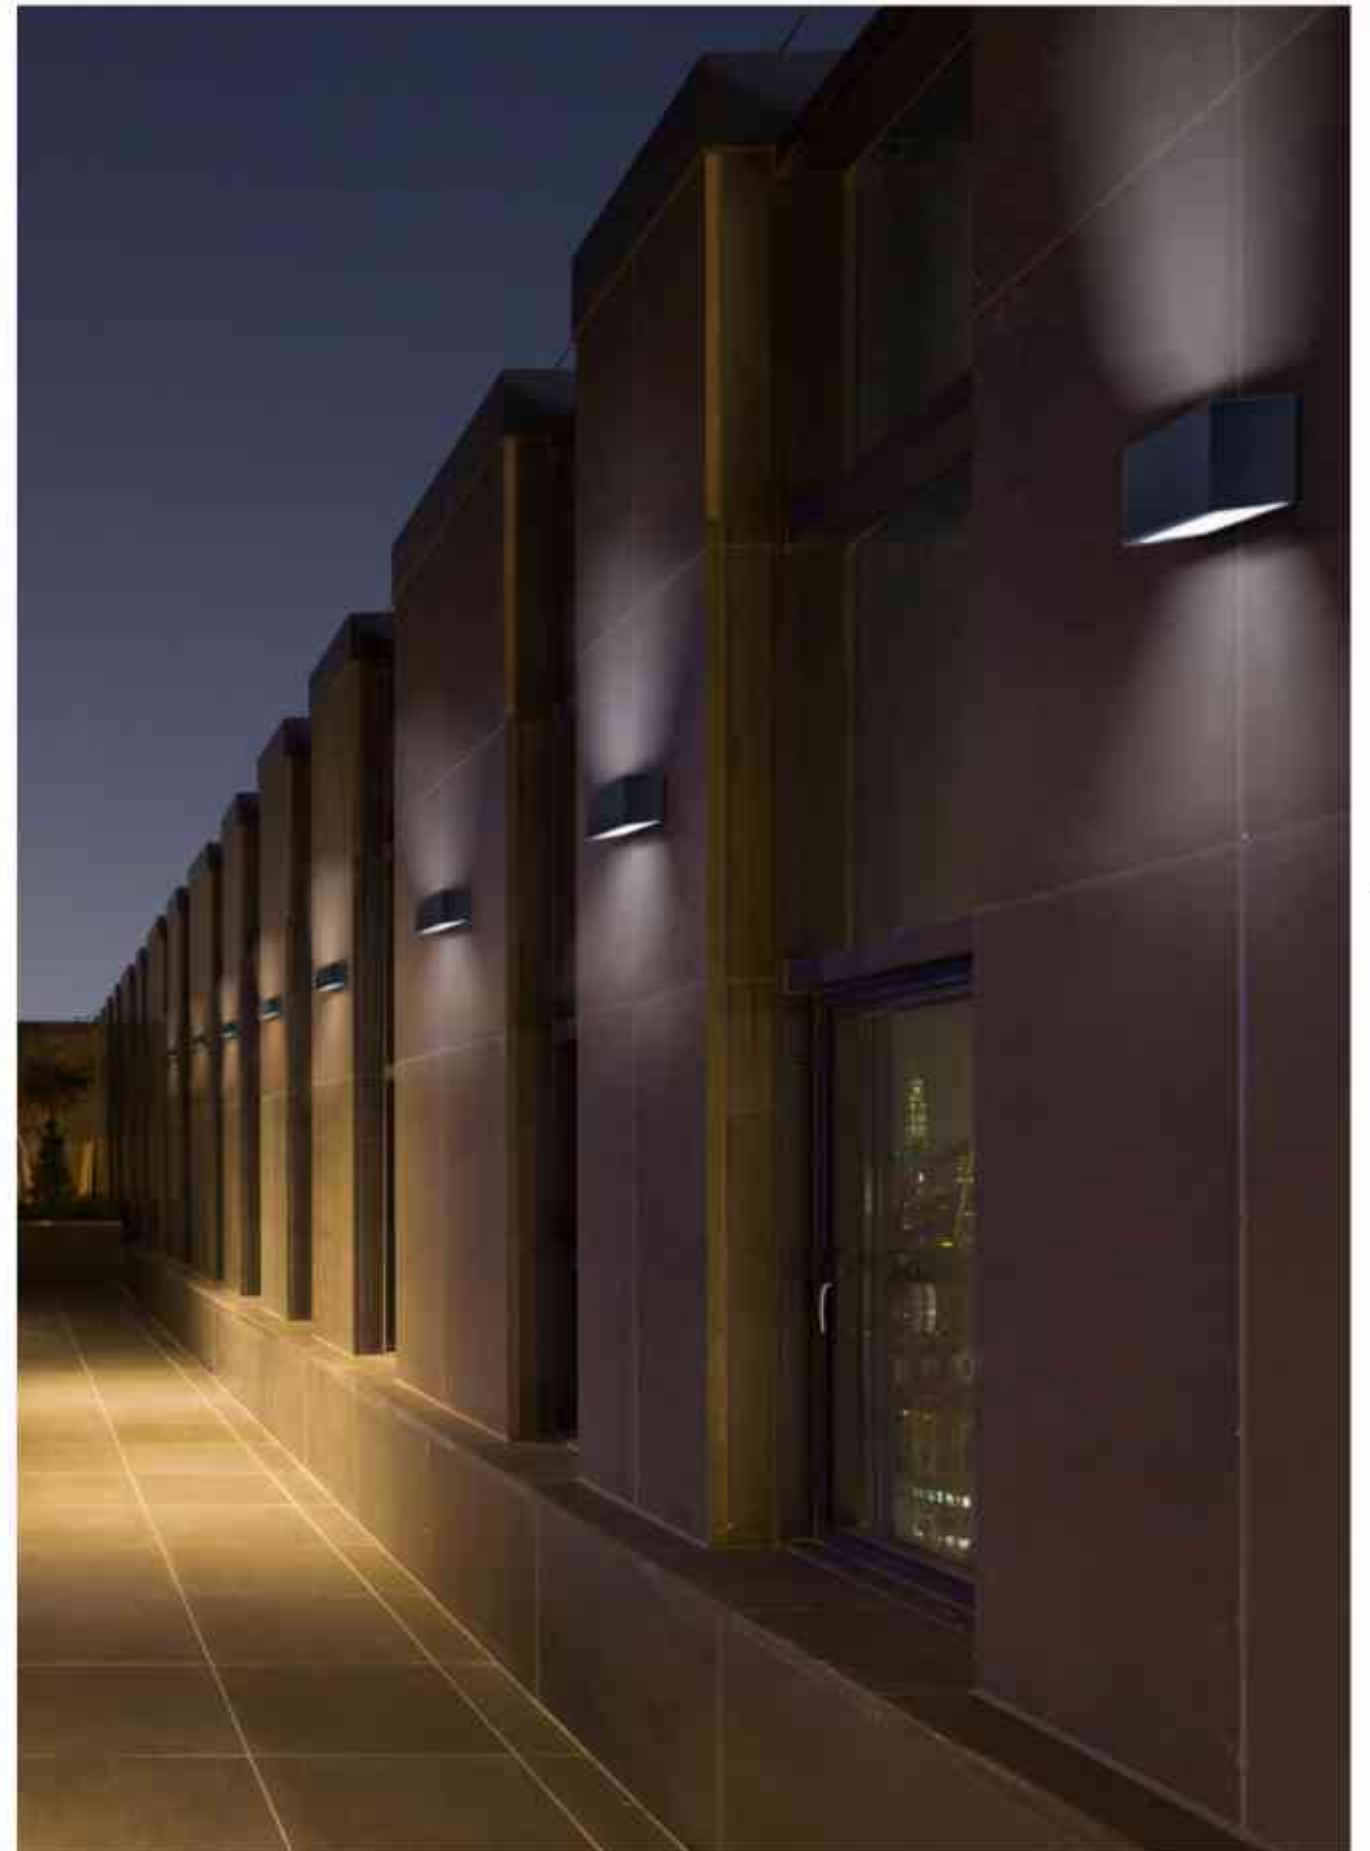

WALL LAMP

1130



1131

DISCUS

New concept design of bollard lamp.
 Unique design with rotatable lamp head makes it possible
 to fix the light beam with 330 degree.
 Recommended for garden and pathway lighting.

© CE IP65 220-240VAC

DISCUS

WALL LAMP





W

1132

220-240VAC 4340 15EA

LED: PLUA CRI 90
 POWER: 15.7W
 OPTIC: 20°
 OUTPUT: 1033lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 88*110*52mm
 HOLE SIZE: 47mm

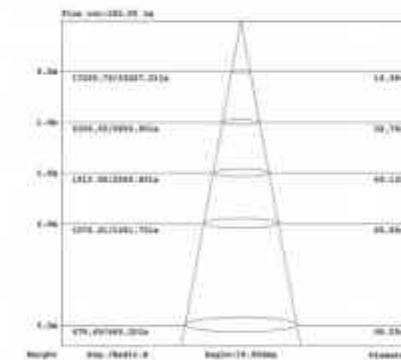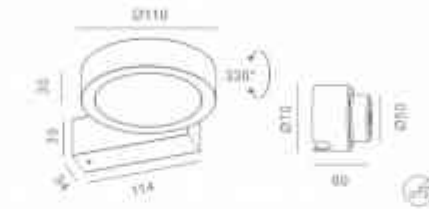

COLOR FINISHINGS:



POY



ELF

WALL LAMP



W IP

1134

ELF

Best decorative effect is coming from pure simple forms and materials.
 Pure transparent glass globe fixed on elegantly bended aluminium arm.
 The light inside the glass creates unique lighting patterns in the room.
 Be it residential or public spaces,
 ELF is a great choice for wall lighting solution.
 Thanks to IP65 rate, ELF can be used for both indoor and outdoor application.

CE IP65 220-240VAC

220-240VAC 432216A

LED: LUMILEDS CRI 90
 POWER: 5.3W
 OPTIC: F
 OUTPUT: 240Lm
 CABLE/CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø150*210*229mm
 HOLE SIZE: /



COLOR FINISHINGS:



POY



GRAY

Ultra thin body provides perfect decorative effect for the wall.
Thanks to IP65 rate, GRAY is possible to be used both indoor and outdoor.
GRAY is the best solution for auxiliary outdoor lighting.

CCC CE IP65 220-240VAC

GRAY

WALL LAMP



220-240VAC 431515A

LED: SUNPU CRI 80
POWER: 6.6W
OPTIC: F
OUTPUT: 146Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: 145*110*30mm
HOLE SIZE: 1



COLOR FINISHINGS:




LEEO

The LEEO was specially designed with the new enigmatic spirit .
Recommended for landscape illumination .

This splendid collection with single and double-sided lighting can
be installed on the wall .Bollard version with 600mm length is the best solution for
pathway illumination .

Thanks to its Ip65 rate LEEO can be used for outdoor applications



SINGLE



DOUBLE

SINGLE
100-240VAC



LED: EDISON CRI 80
POWER: 11.3W
OPTIC: L
OUTPUT: 442Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 200*160*28mm
HOLE SIZE: /



COLOR FINISHINGS:



DOUBLE
220-240VAC



LED: EDISON CRI 80
POWER: 22.2W
OPTIC: L
OUTPUT: 1016Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 200*160*46mm
HOLE SIZE: /



COLOR FINISHINGS:





MARS

MARS, a new wall lamp design for outdoor inspiration lighting. Made by stainless steel #316 and IP65, MARS can be used near by the sea side area. Single and double head design.





SINGLE / SINGLE DC

220-240VAC 43881SED1

LED: FLUA CRI 90
 SYSTEM POWER: 3.2W
 OPTIC: 40°
 LUMINAIRE LUMEN: 368lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø64.5*100mm
 HOLE SIZE: Ø75mm

24VDC 43881SE

LED: FLUA CRI 90
 SYSTEM POWER: 3.5W
 OPTIC: 40°
 LUMINAIRE LUMEN: 388lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø64.5*100mm
 HOLE SIZE: Ø75mm

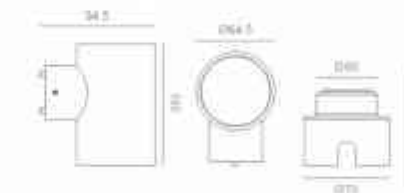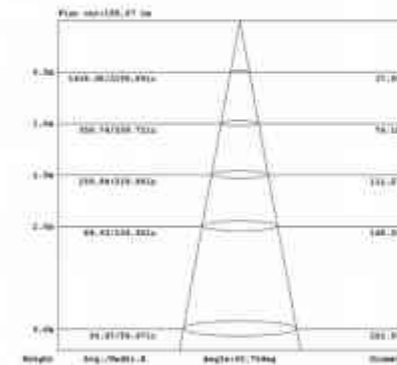

COLOR FINISHINGS:





DOUBLE / DOUBLE DC


1141

220-240VAC 437015EDT

LED: FLUA, CRI 90
 POWER: 5W
 OPTIC: 40°
 OUTPUT: 768lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø64.8*100mm
 HOLE SIZE: Ø75mm

24VDC 437115E

LED: FLUA, CRI 90
 POWER: 7.8W
 OPTIC: 40°
 OUTPUT: 877lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: Ø64.8*100mm
 HOLE SIZE: Ø75mm

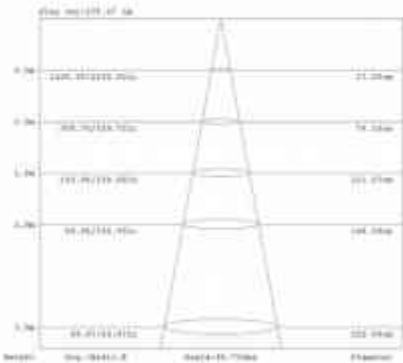

COLOR FINISHINGS:



WALL LAMP

1142



MITILO

MITILO - Breaking the Tradition and Rule! It's not a traditional lamp that only function is to illuminate the space. It's something you can play with, an ideal tool that inspires architects and designers on playing with the light and shadow to the max. This rare thing creates geometrical and three-dimensional textures in space, redefines the relationship between lighting and building through a very precise and sharp line of light, which expands over a radius of 180°.

With MITILO you can manipulate light effects to turn the architect surfaces into vast canvasses. Ideal for lighting purposes on window frame, door frame, hallways, etc..

© CE IP65 24VDC/100-240VAC



MITILO / MITILO DC

MITILO / MITILO DC

LED POWER: 6.1W
 LED OUTPUT: 300LM/2700K
 SYSTEM POWER: 7W/6.8W
 SYSTEM OUTPUT: 810LM
 INPUT: 24VDC / 100-240VAC
 CRI: 90
 DIMENSION: 212x185x44mm




COLOR FINISHING:




MITILO / MITILO DC


ANGLE 180°




7W/6.8W 180° 2700K



7W/6.8W 180° 2700K

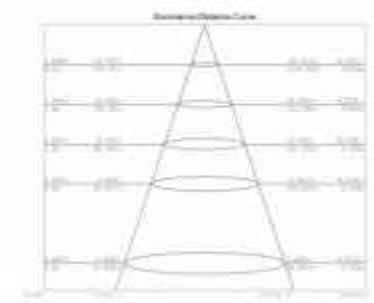


1145

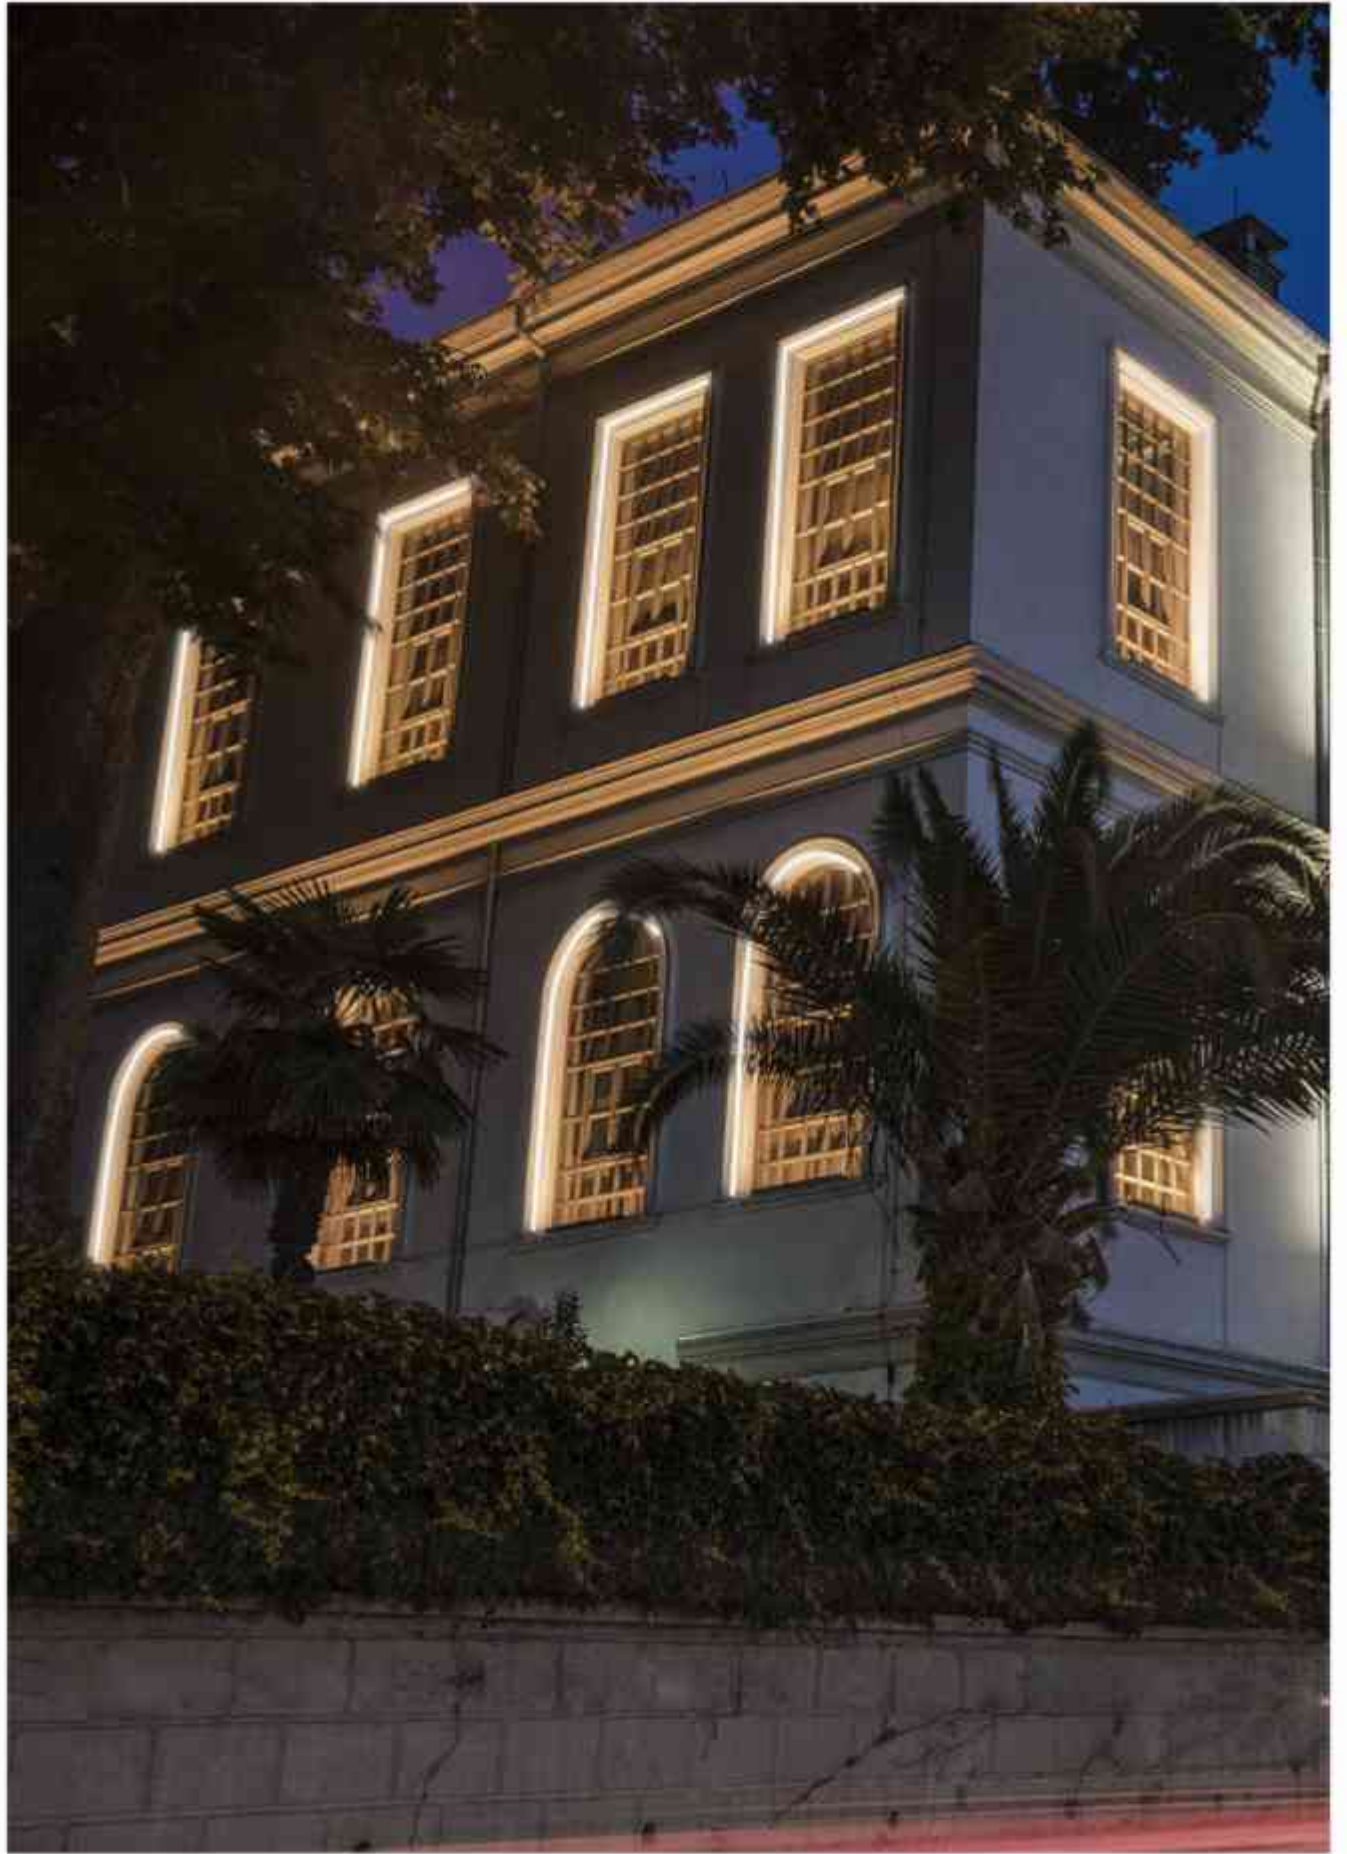


WALL LAMP

1146

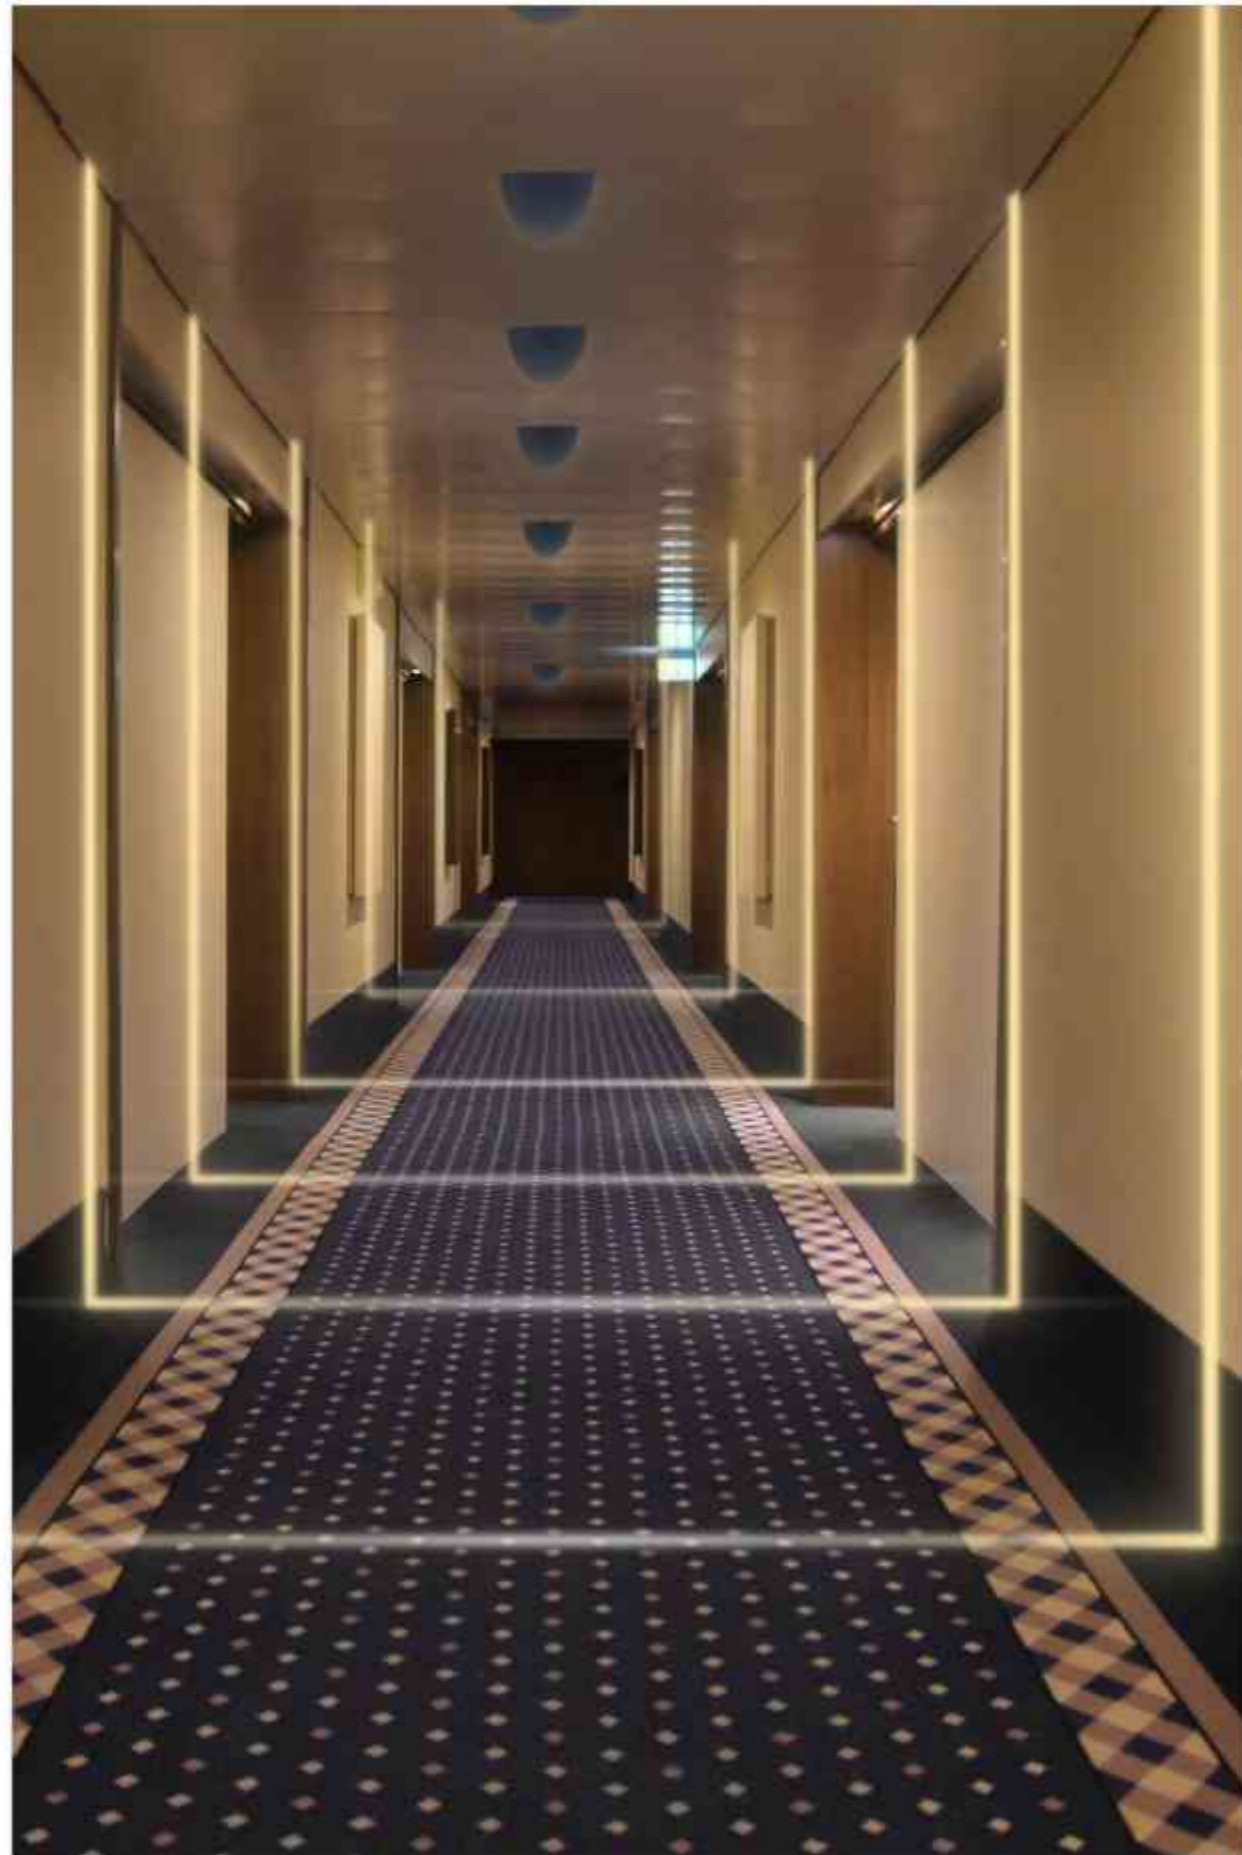


1147

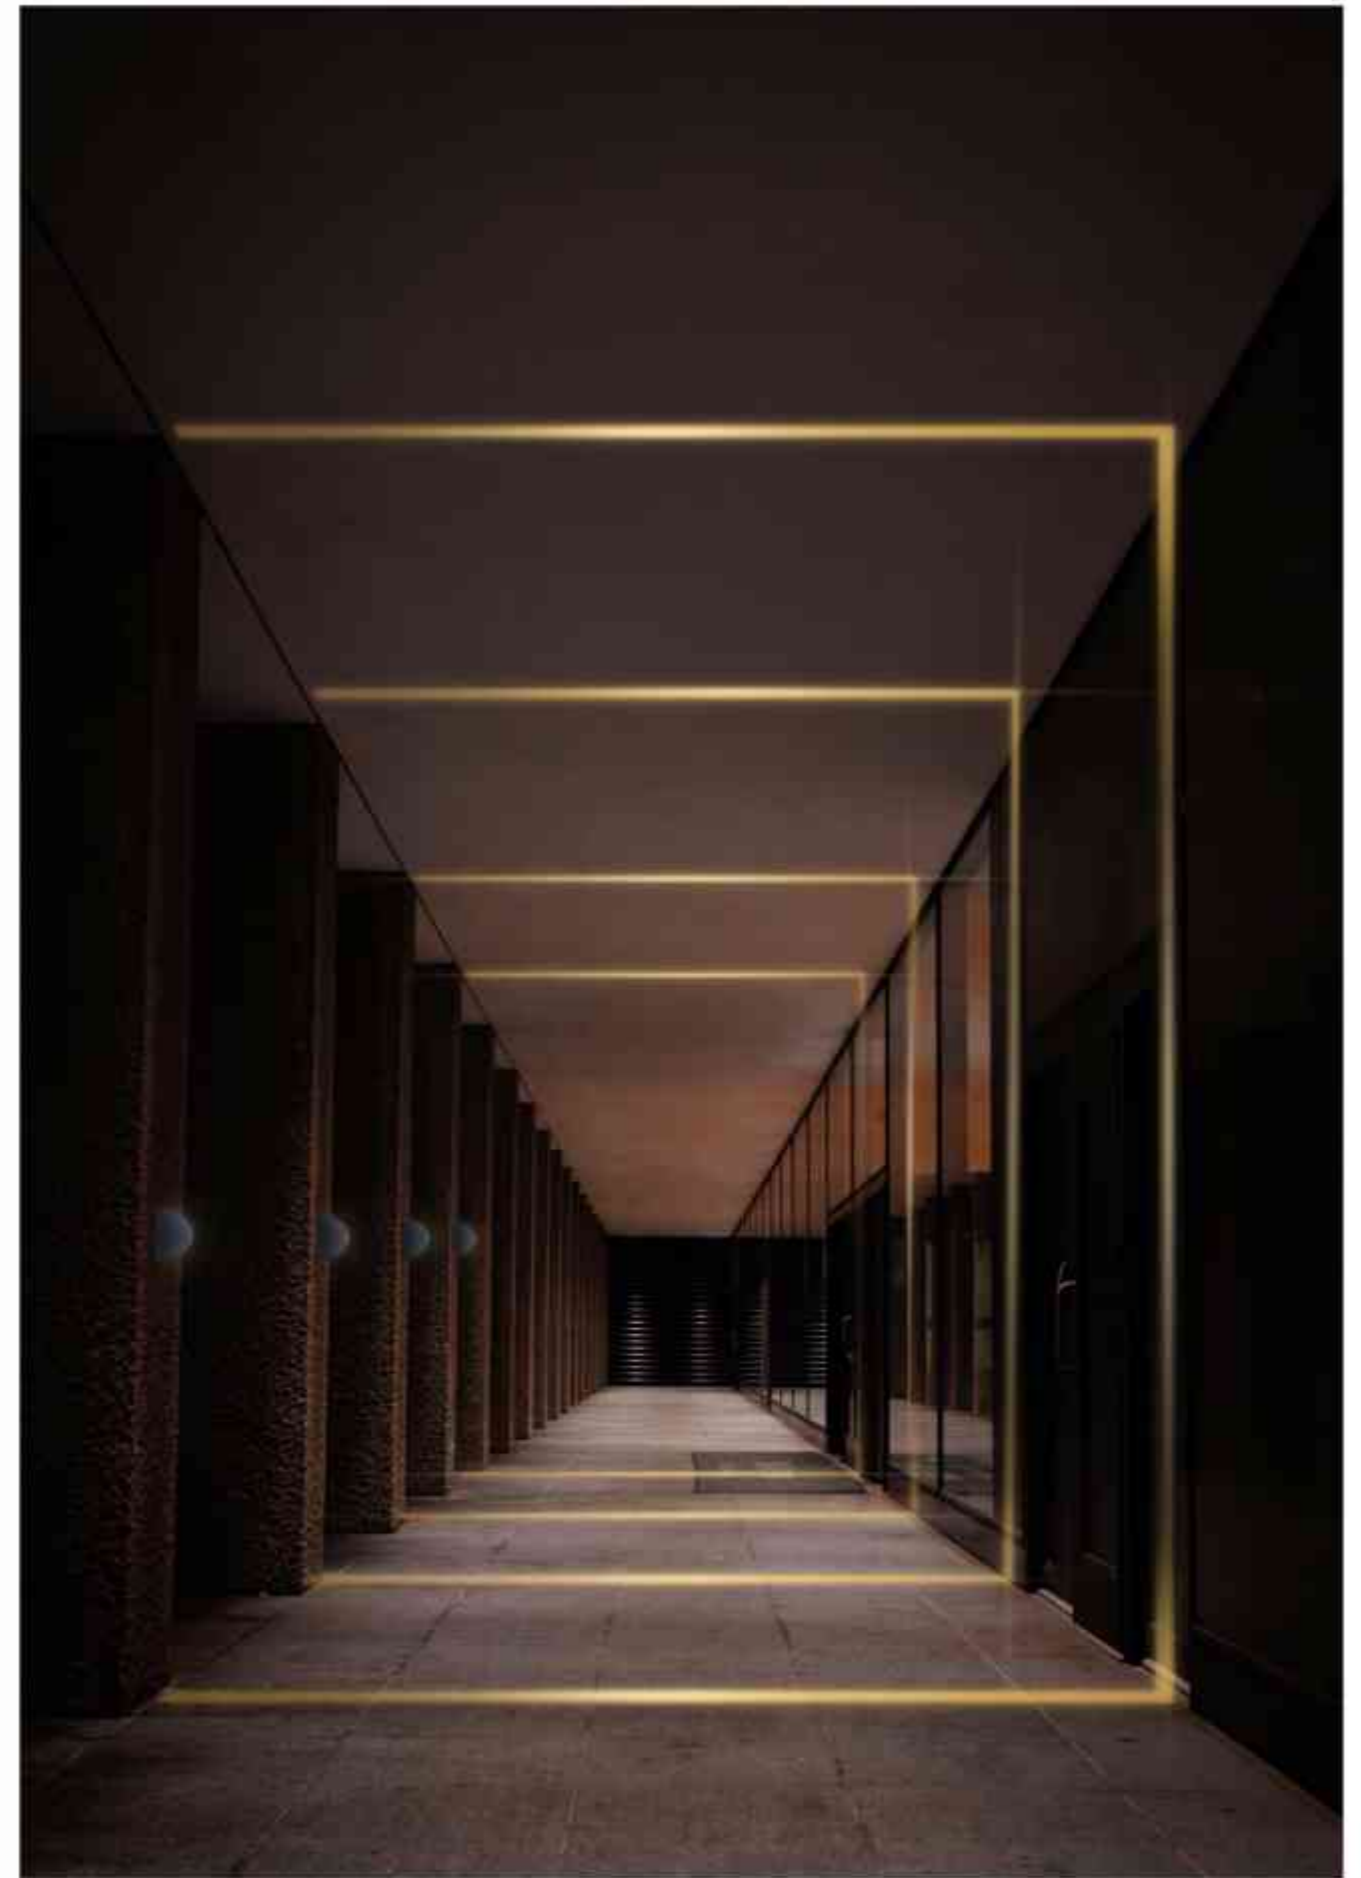

1148

WALL LAMP

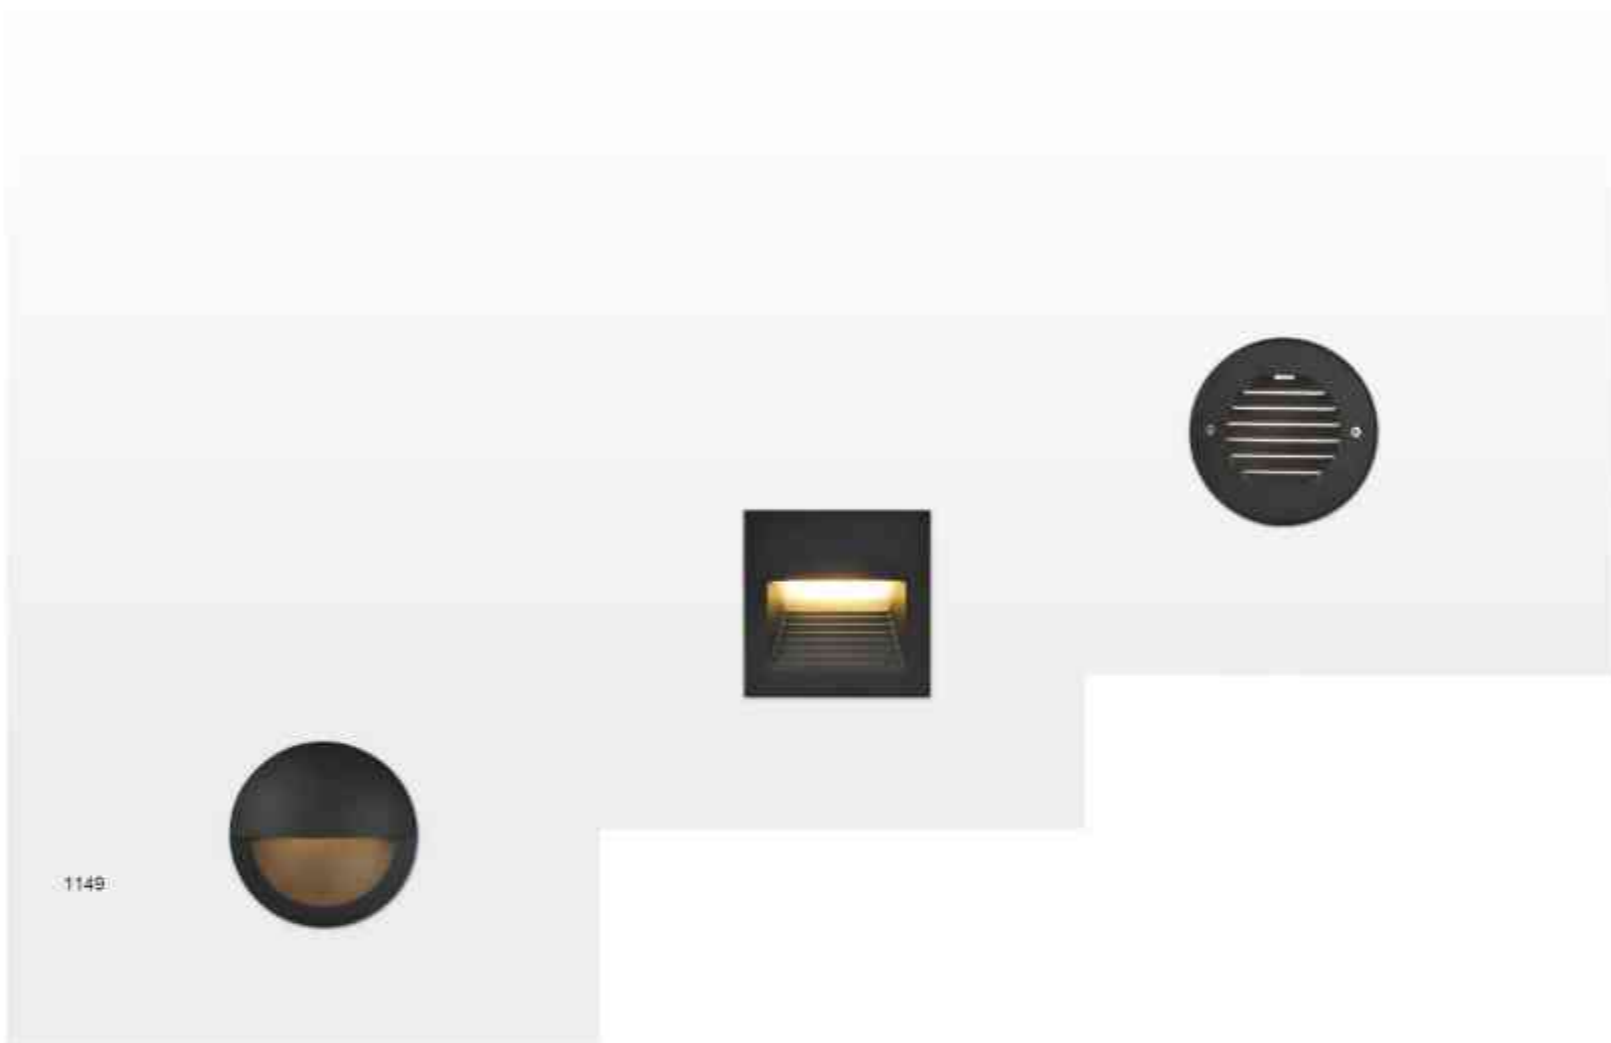

PACE

PACE is a small recessed luminaire,
 it is perfect as guidance light. Be it in a corridor or stairs,
 PACE provides perfect light effect, guiding your way.
 Available in both round, square and rectangular forms. Rectangular version,
 PACE LONG, is available with stainless steel outer frame as an option.

© CE IP65 100-240VAC

ROUND 1



PAGE 857

ROUND 2



PAGE 858

SQUARED



PAGE 859

LONG 1



PAGE 860

LONG 2



PAGE 861

LONG 3



PAGE 862

LONG 4



PAGE 863




ROUND 1



ROUND 2

100-240VAC 410014

LED: EDISON CRI 80
 POWER: 2.05W
 OPTIC: F
 OUTPUT: 60Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø130*13mm
 HOLE SIZE: Ø125mm



COLOR FINISHINGS:

■ P01

100-240VAC 410014

LED: EDISON CRI 80
 POWER: 5.9W
 OPTIC: F
 OUTPUT: 60Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: Ø130*11mm
 HOLE SIZE: Ø121mm



COLOR FINISHINGS:

■ P01




SQUARED



LONG 1

100-240VAC 417014

LED: EDISON CRI 80
POWER: 2.25W
OPTIC: F
OUTPUT: 110Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: 130*130*60mm
HOLE SIZE: 121*121mm




COLOR FINISHINGS:



100-240VAC 417114

LED: EDISON CRI 80
POWER: 2.25W
OPTIC: F
OUTPUT: 85Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: 220*80*48mm
HOLE SIZE: 210*50mm




COLOR FINISHINGS:





LONG 2



LONG 3

1155

1156

100-240VAC 417214

LED: EDISON CRI 90
POWER: 4W
OPTIC: F
OUTPUT: 30lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: 225*80*48mm
HOLE SIZE: 215*50mm



COLOR FINISHINGS:



100-240VAC 417314

LED: EDISON CRI 90
POWER: 2.6W
OPTIC: F
OUTPUT: 60lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: 225*80*48mm
HOLE SIZE: 215*50mm



COLOR FINISHINGS:






LONG 4

1157

100-240VAC

430914

LED: HONGLI CRI 90
POWER: 5W
OPTIC: P
OUTPUT: 137lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: 220*52*55mm
HOLE SIZE: /



COLOR FINISHINGS:



WALL LAMP

1158

1159



WALL LAMP

1160




QUIVER

QUIVER with IP65 is a new product in FLUA outdoor wall lights family. Thanks to its simple, and at the same time, elegant appearance QUIVER, with only 52mm in diameter, will be the great choice for hotels, residential spaces and other projects.

7° narrow beam angle gives special lighting performance with up and down light directions.

© CE IP65 100-240VAC

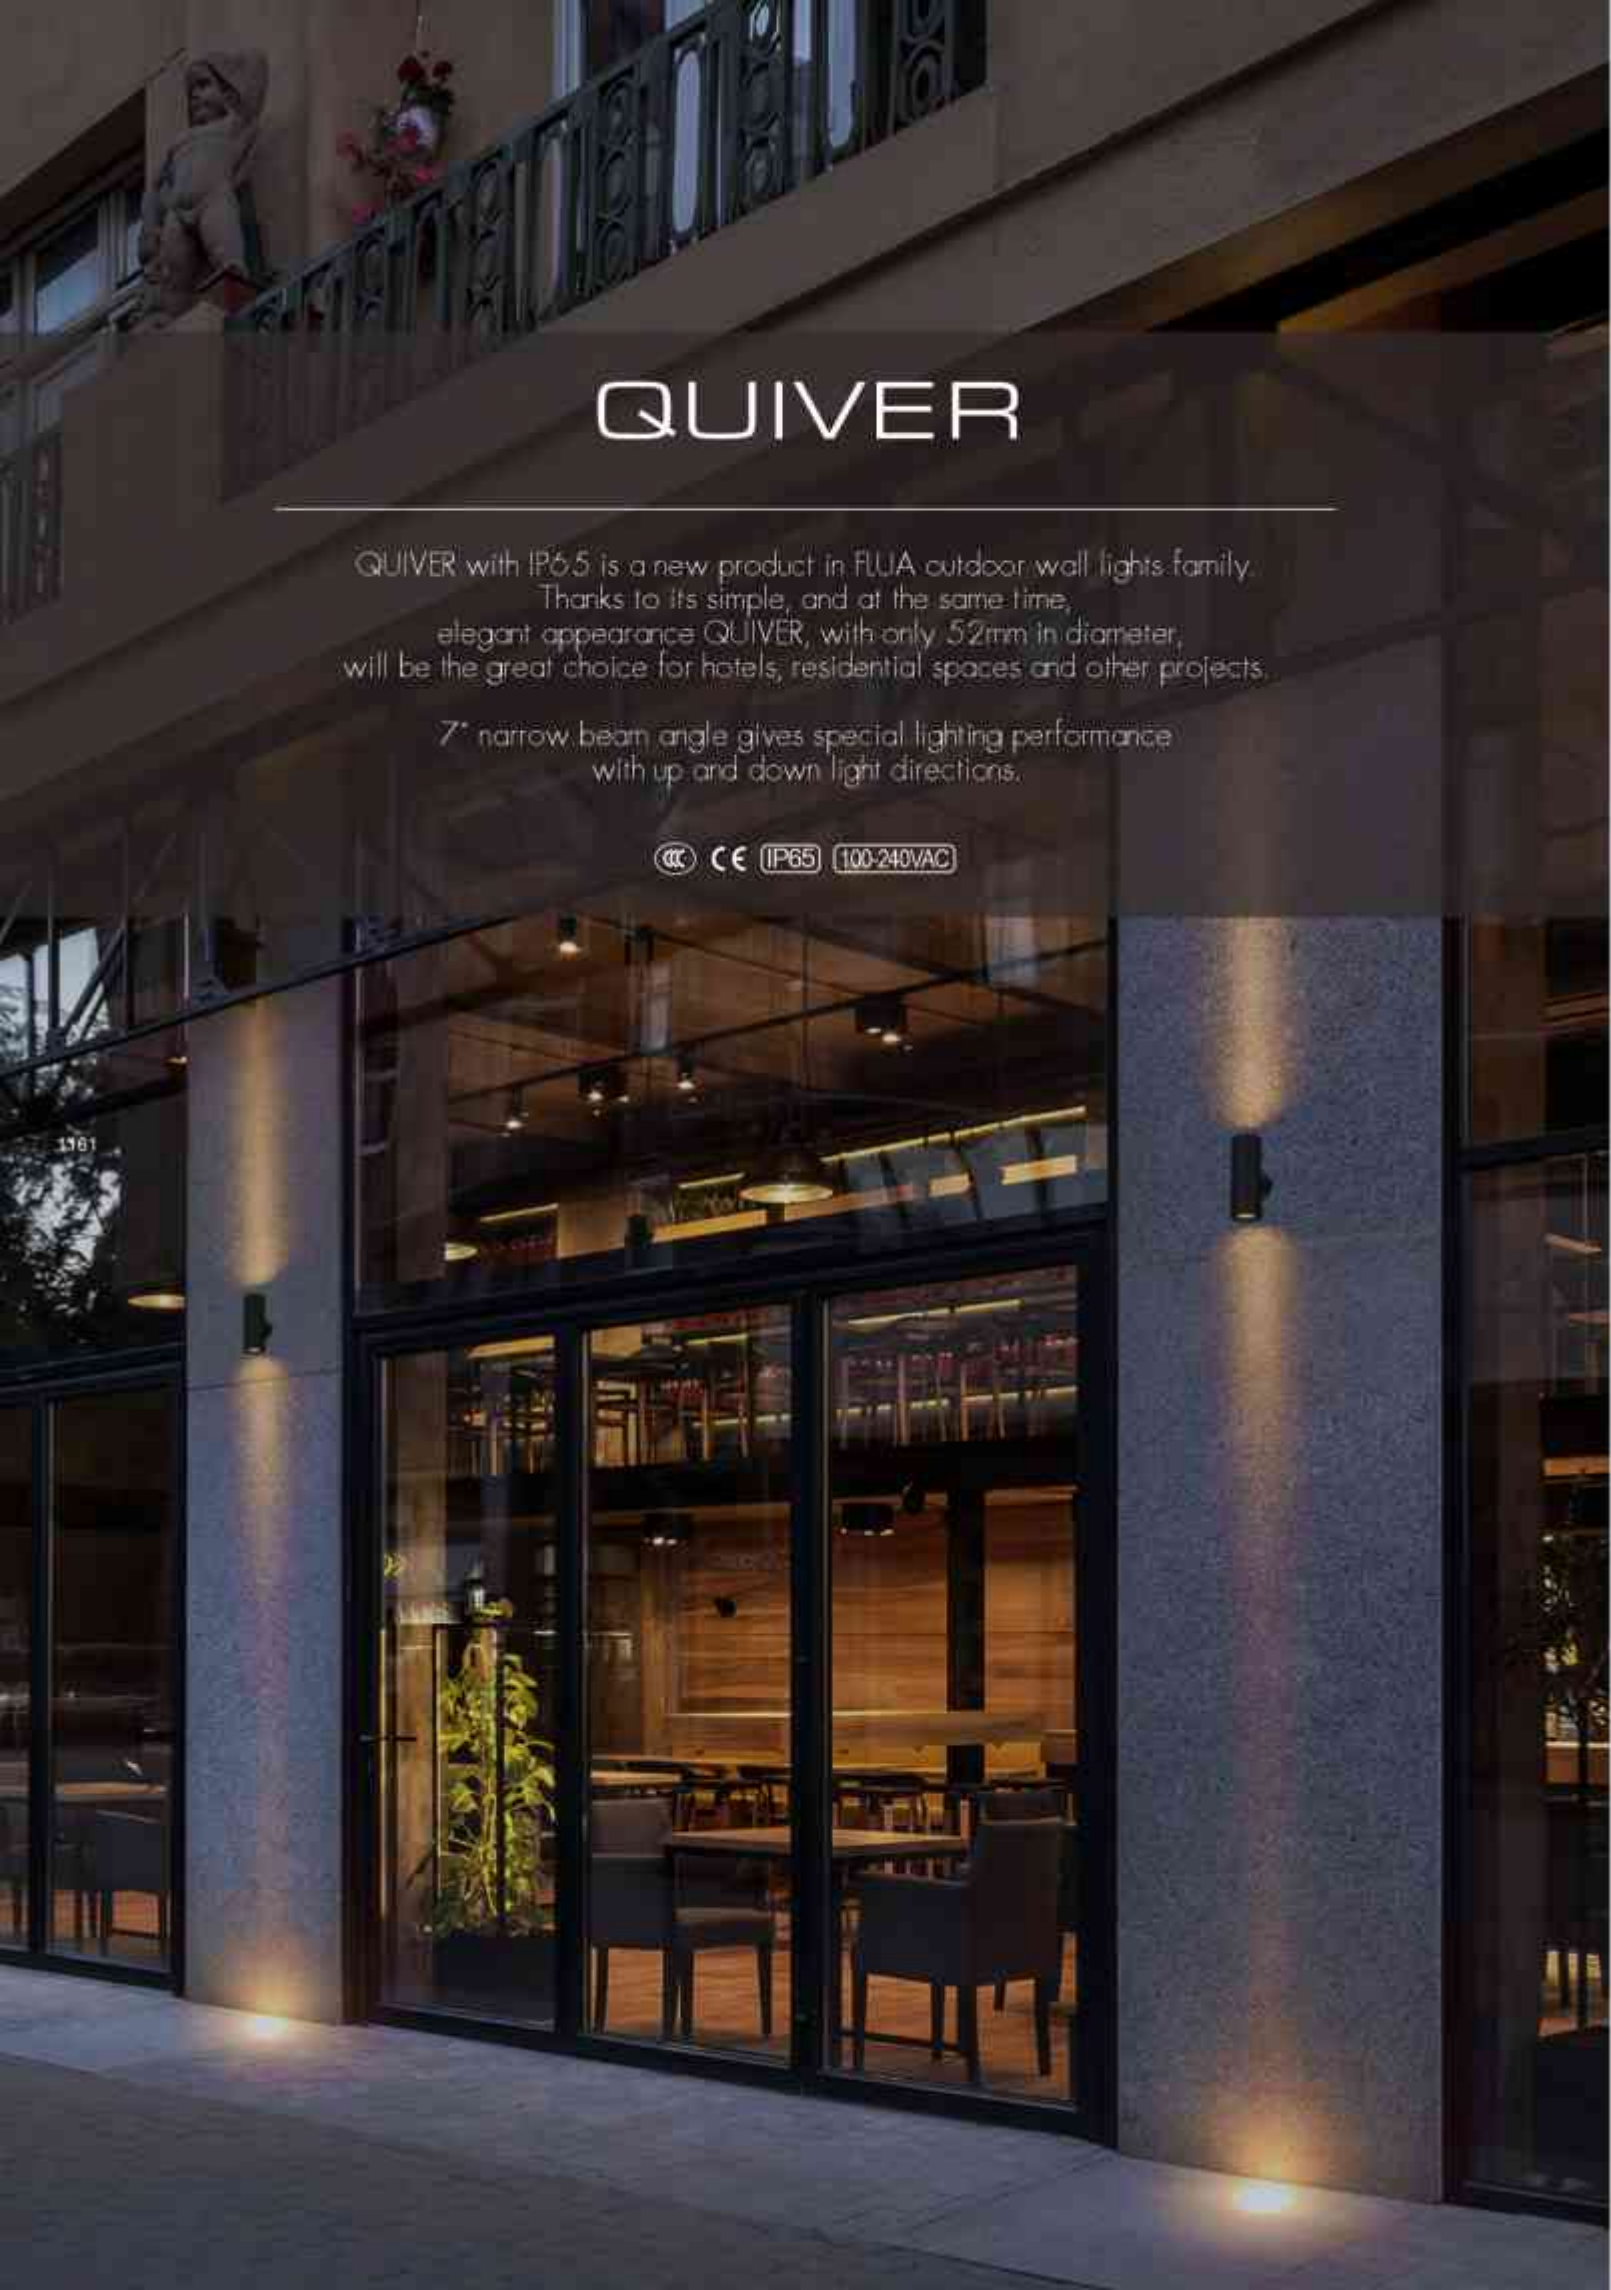

QUIVER



WALL LAMP



S

100-240VAC 430317A

LED: OSRAM CRI 80
 POWER: 5.7W
 OPTIC: 8°
 OUTPUT: 372lm
 CABLE CLASS: HD5RN-F 3*0.75mm²
 DIMENSION: Ø55x150mm
 HOLE SIZE: 1

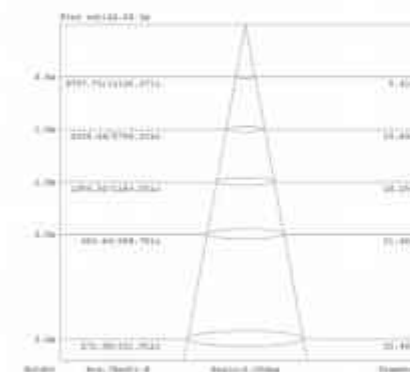

COLOR FINISHINGS:



POW

1162



M/M DC



L/L DC


1163

100-240VAC 439129E

LED: FLUA CRI 90
 POWER: 22W
 OPTIC: 25°
 OUTPUT: 1272lm
 CABLE/CLASS: H05RN-F 3'0.75mm²
 DIMENSION: 85*90,5*200mm
 HOLE SIZE: 7

24VDC 439229E

LED: FLUA CRI 90
 POWER: 20W
 OPTIC: 26°
 OUTPUT: 1272lm
 CABLE/CLASS: H05RN-F 2'0.75mm²
 DIMENSION: 85*90,5*200mm
 HOLE SIZE: 7

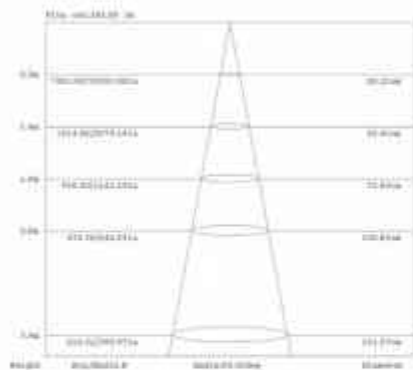

OPTIONS:

OPTICE:



COLOR FINISHINGS:




1164

100-240VAC 440029E

LED: FLUA CRI 90
 POWER: 36.0W
 OPTIC: 25°
 OUTPUT: 2385lm
 CABLE/CLASS: H05RN-F 3'0.75mm²
 DIMENSION: 85*112,5*200mm
 HOLE SIZE: 7

24VDC 440129E

LED: FLUA CRI 90
 POWER: 30W
 OPTIC: 25°
 OUTPUT: 2385lm
 CABLE/CLASS: H05RN-F 2'0.75mm²
 DIMENSION: 85*112,5*200mm
 HOLE SIZE: 7

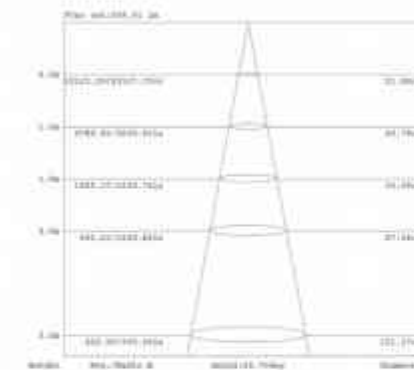


OPTIONS:

OPTICE:



COLOR FINISHINGS:



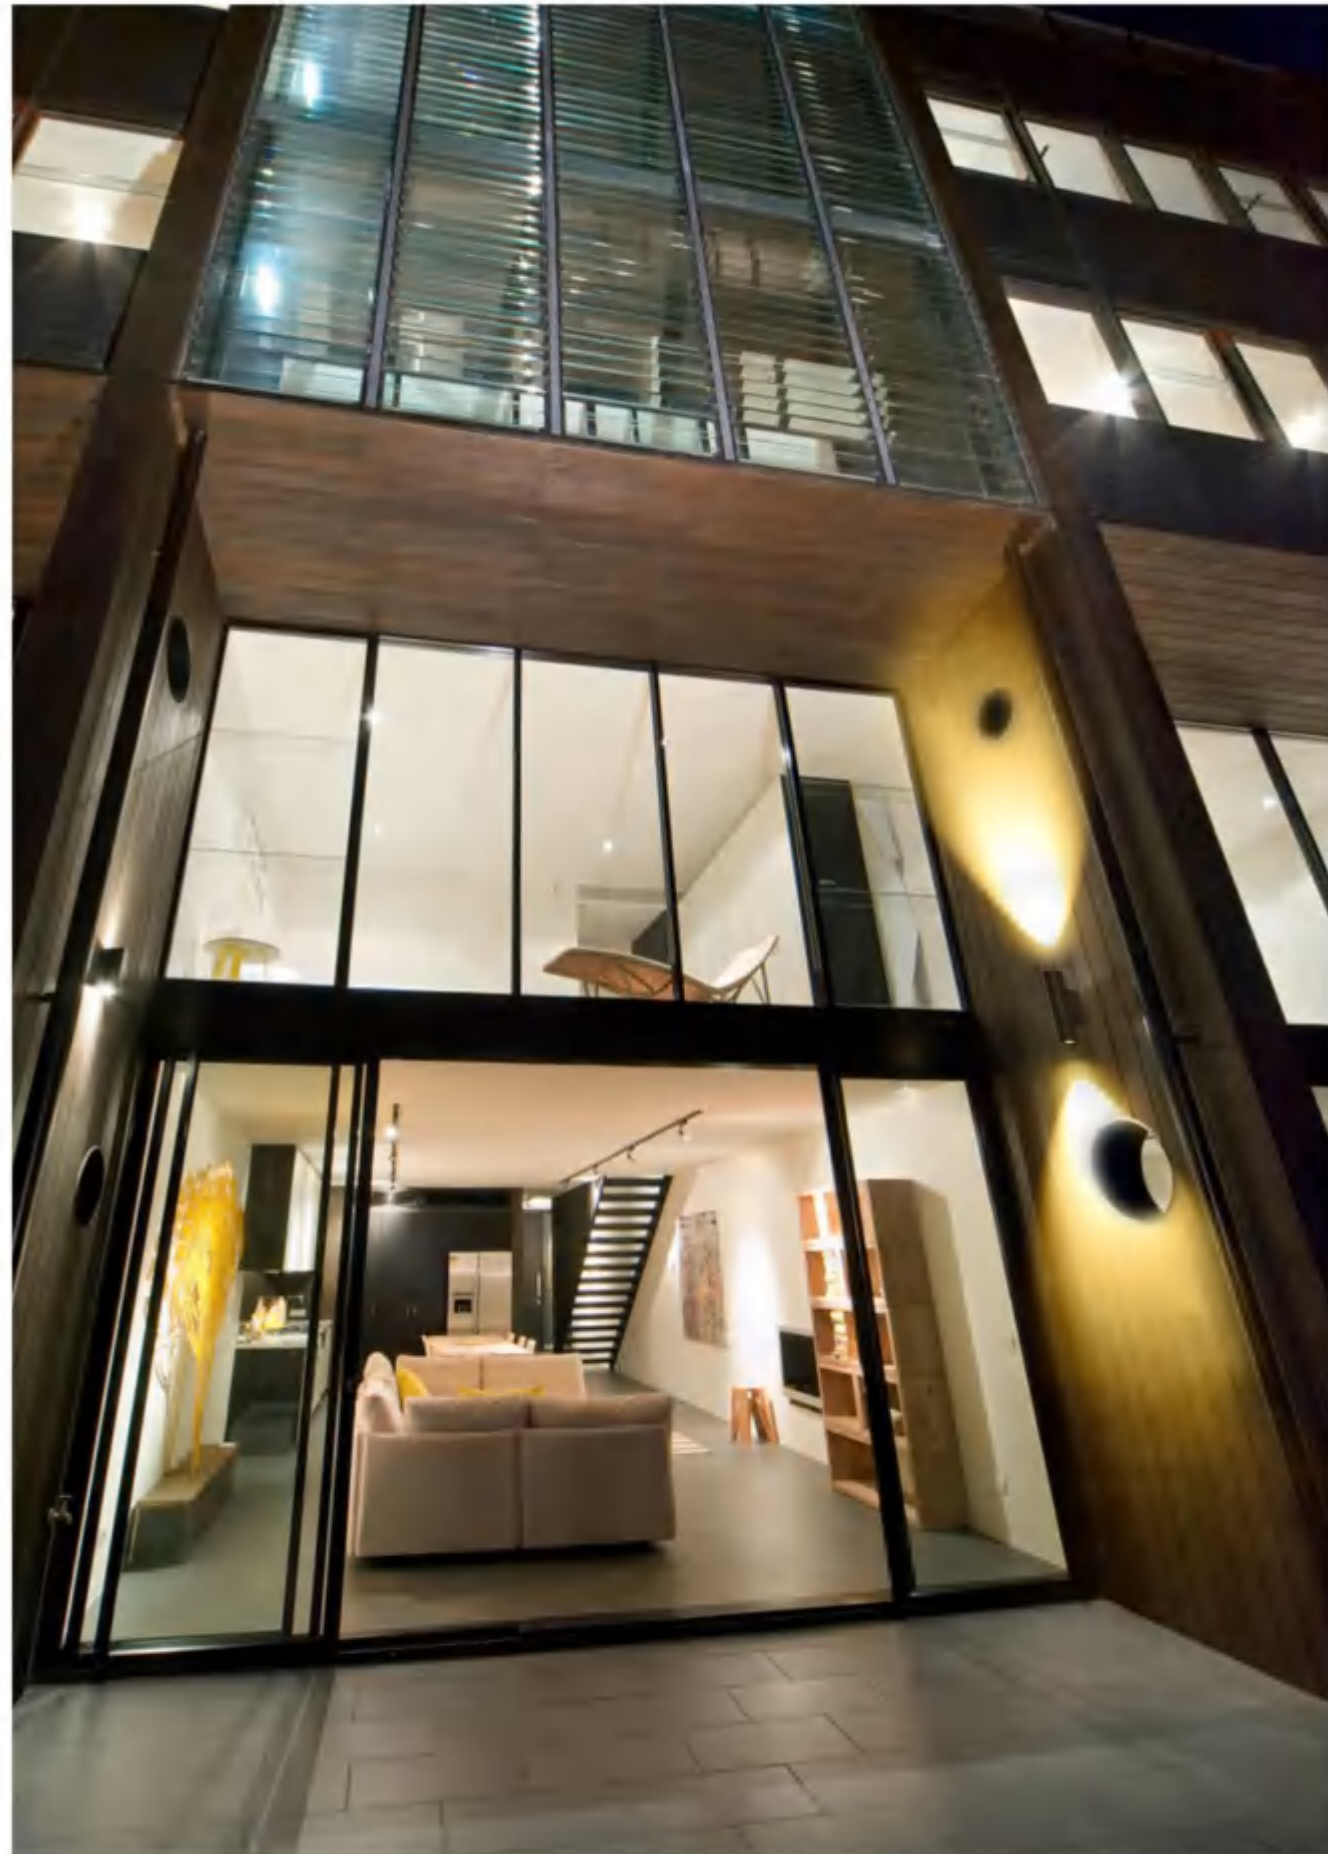


1165



WALL LAMP

1166



ANTI DAZZLING

SIMPHONIA

SIMPHONIA is a new concept design range of products. This splendid luminaire creates beautiful lighting patterns on the wall. Can match any kind of design requirement. Thanks to IP 65, SIMPHONIA can be used for outdoor usage. Thanks to special lens, the rays are becoming extremely paralleled.

© CE IP65 100-240VAC

SIMPHONIA



WALL LAMP

I / O / DI / IO / DO / FI / DIO / FO




1169



SIMPHONIA I
100-240VAC

432517A

LED: OSRAM CRI 80
POWER: 3W
OPTIC: R
OUTPUT: 20Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



SIMPHONIA O
100-240VAC

432617A

LED: OSRAM CRI 80
POWER: 3W
OPTIC: R
OUTPUT: 68Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



SIMPHONIA DI
100-240VAC

432717A


LED: OSRAM CRI 80
POWER: 5.7W
OPTIC: R
OUTPUT: 41Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



SIMPHONIA DO
100-240VAC

432817A

LED: OSRAM CRI 80
POWER: 5.7W
OPTIC: R
OUTPUT: 159Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



SIMPHONIA FI
100-240VAC

433017A


LED: OSRAM CRI 80
POWER: 10W
OPTIC: R
OUTPUT: 99Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



SIMPHONIA FO
100-240VAC

433217A

LED: OSRAM CRI 80
POWER: 10W
OPTIC: R
OUTPUT: 301Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



SIMPHONIA IO
100-240VAC

432817A

LED: OSRAM CRI 80
POWER: 5.7W
OPTIC: R
OUTPUT: 106Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



SIMPHONIA DIO
100-240VAC

433117A

LED: OSRAM CRI 80
POWER: 10W
OPTIC: R
OUTPUT: 112Lm
CABLE/CLASS: H05RN-F 3*0.75mm²
DIMENSION: 100*100*85mm
HOLE SIZE: /



COLOR FINISHINGS:



1170

SPARROW



This tiny spot lighting for outdoor usage is the best choice for bush or tree enlighten.
Can be installed on the ground or on the tree stem.

© CE IP65 100-240VAC




100-240VAC 432317A

LED: OSRAM CRI 80
POWER: 3W
OPTIC: 25°
OUTPUT: 168Lm
CABLE/GLASS: H05RN-F 3*0.75mm²
DIMENSION: Ø42*98*60mm
HOLE SIZE: ∅

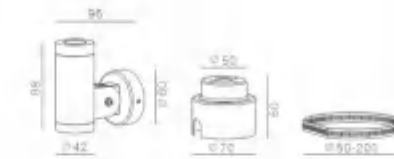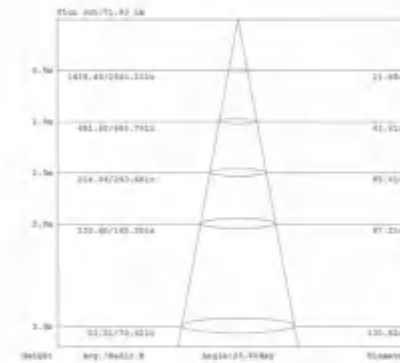

Installation:

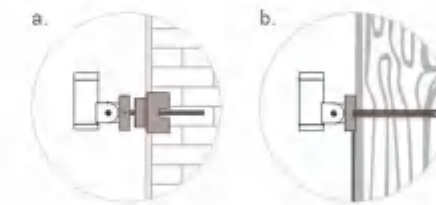

COLOR FINISHINGS:



TEAR


TEAR with its triangular shaped light creates incredible effect on the floor.
This is the newest concept of guidance light for hallways and staircases.

© CE IP65 100-240VAC



100-240VAC 430717


LED: OSRAM CRI 88
POWER: 2.8W
OPTIC: R(60° x 39°)
OUTPUT: 10Lm
CABLE CLASS: H05RN-F 3*0.75mm²
DIMENSION: 220*62*55mm
HOLE SIZE: 215*50mm



COLOR FINISHINGS:



RQT

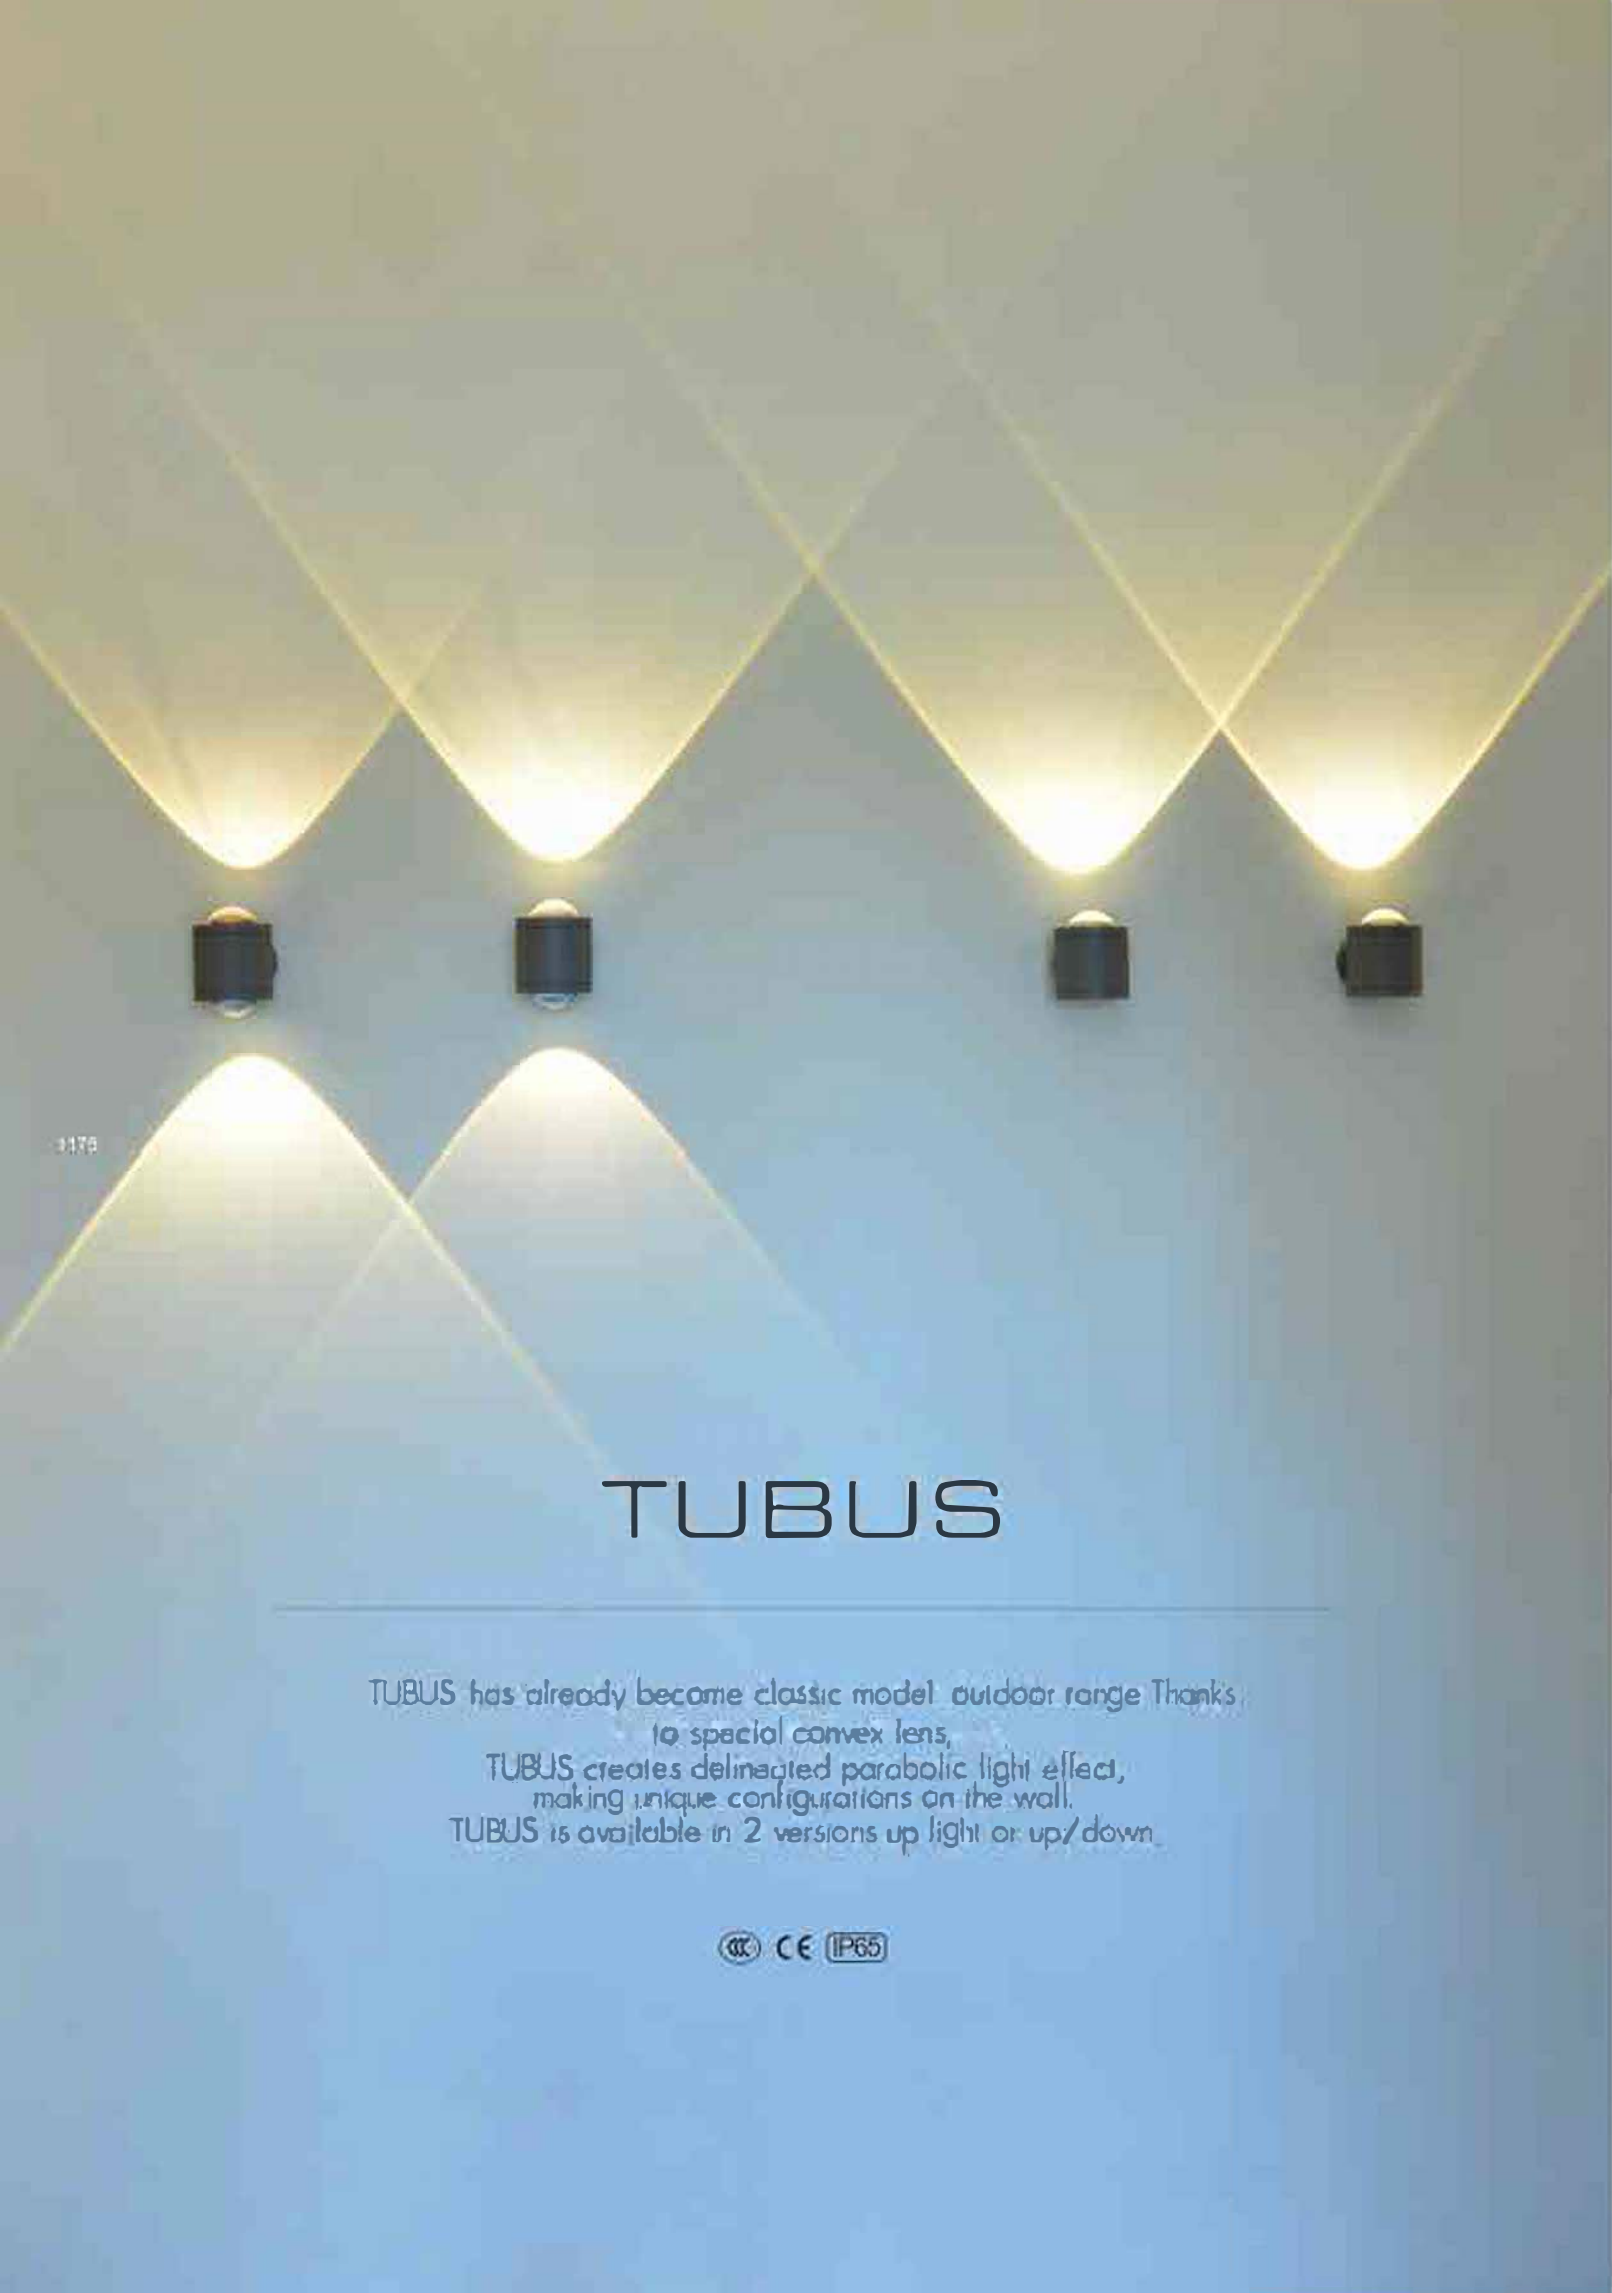

TUBUS

TUBUS has already become classic model outdoor range Thanks
 to special convex lens,
 TUBUS creates delineated parabolic light effect,
 making unique configurations on the wall.
 TUBUS is available in 2 versions up light or up/down.



SINGLE 1,1 / SINGLE 50 1,1



PAGE 881

DOUBLE 1,5 / DOUBLE 50 1,5



PAGE 882



SINGLE 11 / SINGLE 00 11


DOUBLE 11 / DOUBLE 00 11

100-240VAC 441817A

LED: OSRAM CRI 80
 POWER: 2.6W
 OPTIC: C
 OUTPUT: 180Lm
 DIMENSION: Ø78*93mm
 HOLE SIZE: Ø76mm

24VDC 441717A

LED: OSRAM CRI 80
 POWER: 2.4W
 OPTIC: C
 OUTPUT: 180Lm
 DIMENSION: Ø78*93mm
 HOLE SIZE: Ø76mm

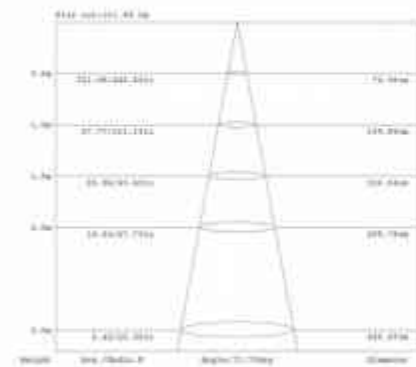

HOUSING COLOR:
 RGV




100-240VAC 441827A


LED: OSRAM CRI 80
 POWER: 2*2.6W
 OPTIC: C
 OUTPUT: 360Lm
 DIMENSION: Ø78*112mm
 HOLE SIZE: Ø76mm

24VDC 441827A

LED: OSRAM CRI 80
 POWER: 2*2.4W
 OPTIC: C
 OUTPUT: 360Lm
 DIMENSION: Ø78*112mm
 HOLE SIZE: Ø76mm

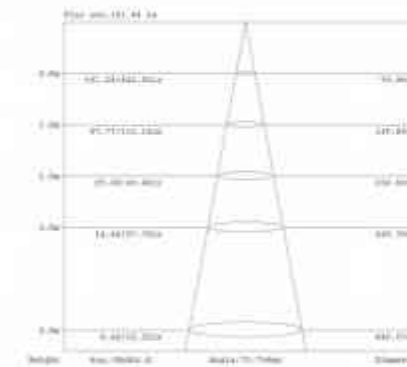

HOUSING COLOR:
 RGV



ILINE LAMP



OCEAN S 1.1
1187



OCEAN M 1.1
1183



OCEAN L 1.1
1184



RIBBON S RGB 2.0
1188



RIBBON M RGB 2.0
1189



RIBBON L RGB 2.0
1190




WALKA ON S
1194



WALKA ON M
1194



WALKA ON L
1194

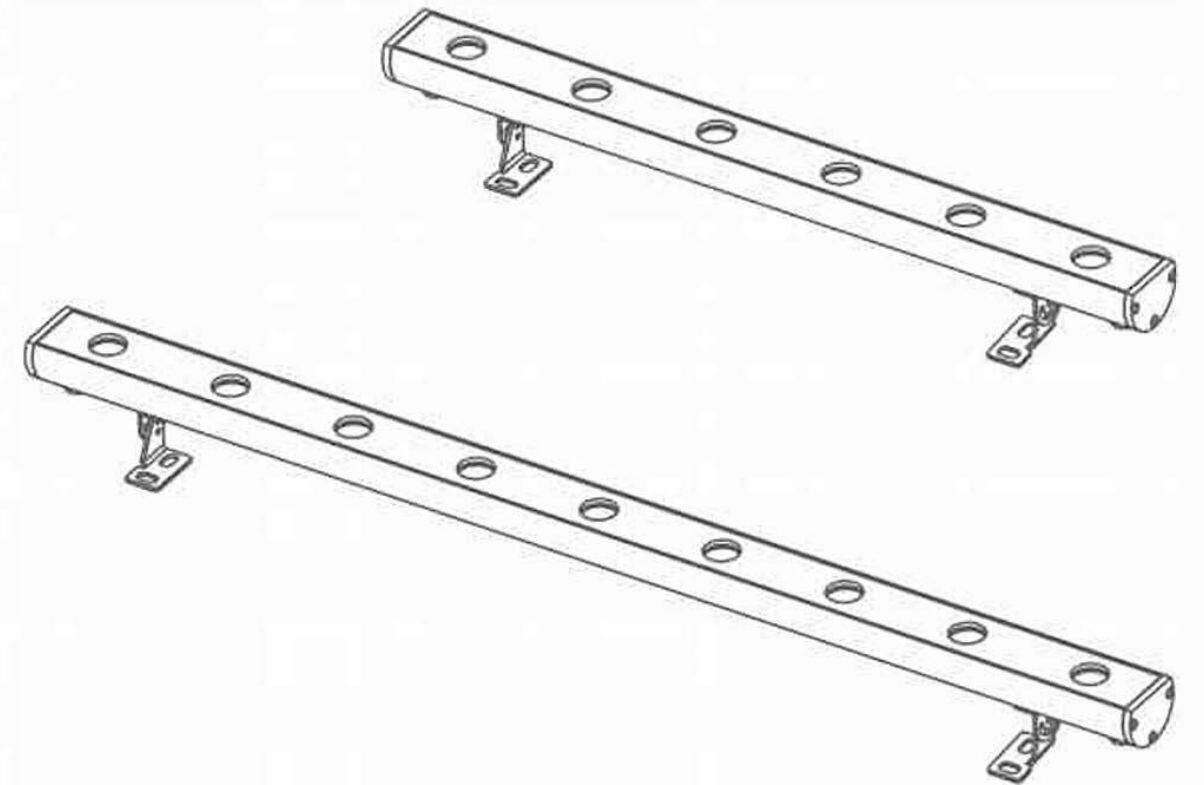

PERFORM YOUR LIGHT

OCEAN

OCEAN linear series is a modern and highly efficient solution for architectural and decorative lighting.

The fixture provides uniform indirect lighting and is ideal for decorative lighting of buildings, plazas, historic and cultural sites, monuments, parks.

The luminaire is available in three standard lengths, 500 mm, 1000 mm, 1500 mm.



1181



OCEAN

LINEAR LAMP



S 11 / S DC 11

1182

100-240VAC 81711MA
 LED: LUMILEDS CRI 90
 POWER: 12W
 OPTIC: 22°
 OUTPUT: 880lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 500*40*34mm
 HOLE SIZE:



24VDC 81721R
 LED: LUMILEDS CRI 90
 POWER: 12W
 OPTIC: 22°
 OUTPUT: 880lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 500*40*34mm
 HOLE SIZE:



COLOR FINISHINGS:





M.1.1 / M DC1.1



L.1.1 / L DC1.1 / L DC2.1

100-240VAC 817318A

LED: LUMILEDS CRI 90
 POWER: 24W
 OPTIC: 22°
 OUTPUT: 1419Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 1000*40*74mm
 HOLE SIZE: 7

24VDC 817418

LED: LUMILEDS CRI 90
 POWER: 24W
 OPTIC: 22°
 OUTPUT: 1419Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 1000*40*74mm
 HOLE SIZE: 7



COLOR FINISHINGS:



100-240VAC 817516A

LED: LUMILEDS CRI 90
 POWER: 32W
 OPTIC: 22°
 OUTPUT: 1714Lm
 CABLE CLASS: H05RN-F 3*0.75mm²
 DIMENSION: 1500*40*74mm
 HOLE SIZE: 7



Dc1 24VDC 817616

LED: LUMILEDS CRI 90
 POWER: 36W
 OPTIC: 22°
 OUTPUT: 1803Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 1500*40*74mm
 HOLE SIZE: 7



Dc2 24VDC 817716

LED: LUMILEDS CRI 90
 POWER: 36.1W
 OPTIC: 22°
 OUTPUT: 1803Lm
 CABLE CLASS: H05RN-F 2*0.75mm²
 DOUBLE OUTLET
 DIMENSION: 1500*40*74mm
 HOLE SIZE: 7



COLOR FINISHINGS:





1185



LINEALAMP

1186



1187



S RGB 2.0

1188

RIBBON

RIBBON 2.0 has already become classical wall washer of FLUA outdoor range. Extra slim low voltage RIBBON 2.0 is the best choice for facade illumination. Accurate aluminum body is equipped with stainless steel brackets. 3 sizes are available for choice: 6, 12 or 18 LED. All versions can be with RGB 3IN1. Different optic solutions, including asymmetrical & oval beam lens, can answer all project requirements.



24VDC RGB 3IN1 810014

LED: EDISON RGB 3IN1
 POWER: 18.3W
 OPTIC: 36°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: 450*42*50mm
 HOLE SIZE: 1



COLOR FINISHINGS:





M RGB 2.0



L RGB 2.0

1189

1190

24VDC RGB 3IN1 816814

LED: EDISON RGB 3IN1
 POWER: 33.1W
 OPTIC: 30°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: 512*42*58mm
 HOLE SIZE: 1




COLOR FINISHINGS:

■ W50

24VDC RGB 3IN1 817014

LED: EDISON RGB 3IN1
 POWER: 51W
 OPTIC: 30°
 CABLE CLASS: H05RN-F 4*0.75mm²
 DIMENSION: 1368*42*58mm
 HOLE SIZE: 1

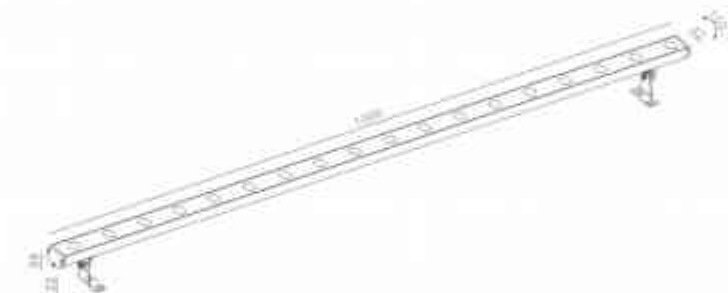

COLOR FINISHINGS:

■ W50



1191



LINEA LAMP

1192



WALKA

In-ground strip with frosted cover glass offers soft and comfortable illuminance. Satisfy different design frames by making up different shape with the available three sizes of the luminaires.

© CE IP65 IP67 24VDC



ON DC

ON S DC 24V

LED: EDISON CRI 80
 POWER: 3W
 OPTIC: F
 OUTPUT: 88Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 300*30*100mm
 HOLE SIZE: 1



ON M DC 24V

LED: EDISON CRI 80
 POWER: 6W
 OPTIC: F
 OUTPUT: 148Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 600*30*100mm
 HOLE SIZE: 1



ON L DC 24V

LED: EDISON CRI 80
 POWER: 13.2W
 OPTIC: F
 OUTPUT: 300Lm
 CABLE/CLASS: H05RN-F 2*0.75mm²
 DIMENSION: 1000*30*100mm
 HOLE SIZE: 1



COLOR FINISHINGS:





1195



LINEA LAMP



1196



LINEAR LIGHTING



PROFILE IN IP
1202



PROFILE INNER
1204



PROFILE ON IP
1206


PROFILE

1199

PROFILE IP, as an extension of IP LED linear design,
Including normal recessed and anchoring recessed version. IN IP is suitable
for basic lighting on exterior wall, ARC IP is suitable for anchoring ambient
lights on the exterior walls of buildings.




1200

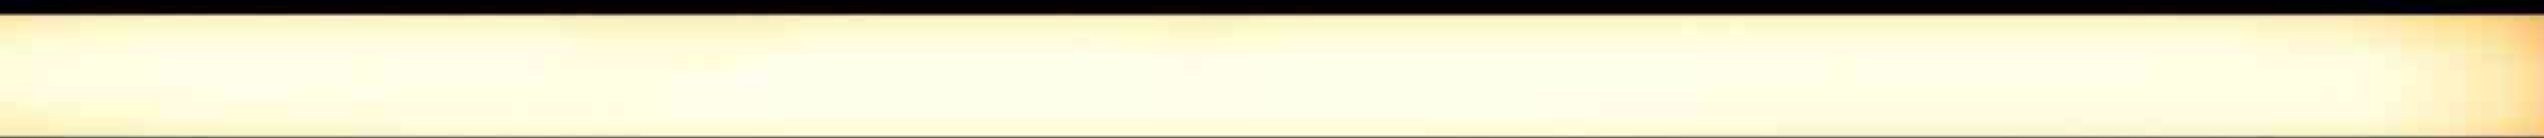




PROFILE_{IP}

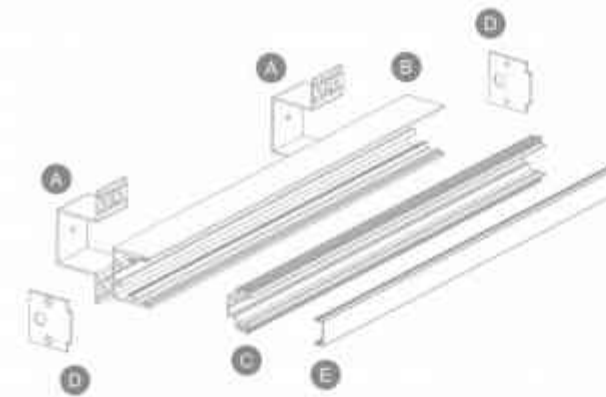

A
IN IP TRIMLESS
002696



B
IN IP BASE
002693



C
IN IP BODY
002694



D
IN IP SIDE
002695



E
PC
002692






1203



PROFILE ON IP

1204

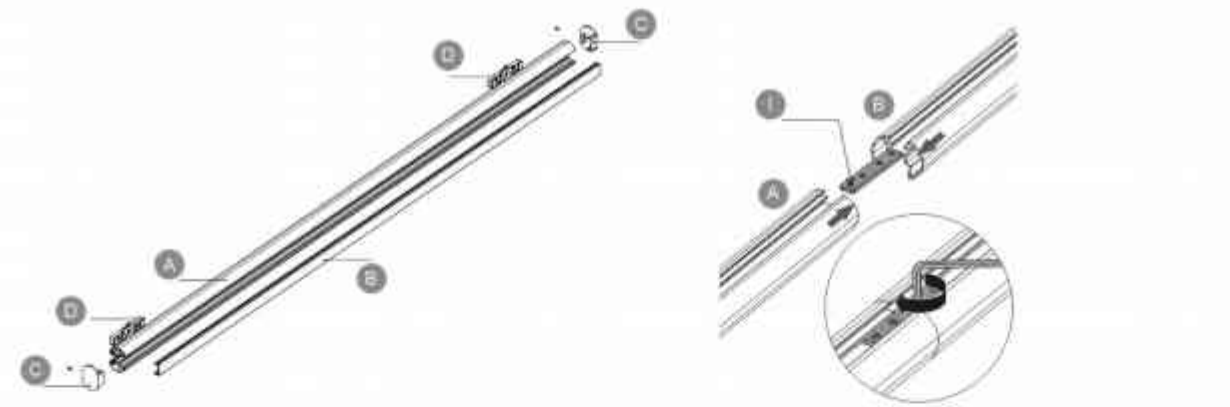

A
IN IP TRIMLESS
002696

B
IN IP BASE
002693


C
IN IP BODY
002694

D
IN IP SIDE
002695


A
ON IP
002743/002755




B
PC
002562/002627




C
ON IP SIDE COVER
002743



D
ON
001588



I
001894




PROFILE




1205

PROFILE



LINEA LAMP

PROFILE INNER ARC IP

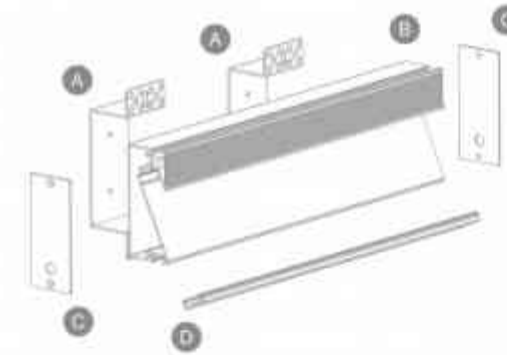

1206

A
INNER ARC IP TRIMLESS
002699



B
INNER ARC IP
002697



C
INNER ARC IP SIDE
002698



D
PC
002682



PROFILE INSTALLATION GUIDE

1A INSTALLATION INSTRUCTIONS
PROFILE IN IP

You can choose not to buy

1B INSTALLATION INSTRUCTIONS
PROFILE INNER ARC IP

You can choose not to buy

2 PLASTERBOARD

3 INSTALLATION INSTRUCTIONS

1207

1208

LED STRIP



002933
FLUA-CV1-120



MW LRS SERIES

(On Request)

Model No.	Power	Output	FLUA-CV1-120
LRS-50-24	50W	24Vdc 2.2A	max. 3 meter
LRS-100-24	100W	24Vdc 4.5A	max. 6.5 meter
LRS-200-24	200W	24Vdc 8.8A	max. 13.5meter

LED STRIP FLUA-CV1-120 002933

LEDs/meter	120 x SMD LED 5m
Size / Cutting unit	6000 x 11.3mm / DI/CABLE PER 30mm
Power (5m)	48W
Lumen output (5m)	4800Lm
Voltage input	24Vdc
Color temperature	
Color Rendering Index	80
Ingress protection	IP67



LINEA LAMP

LED STRIP



C1
1211-1212




CV1
1211-1212



CV10-COB
1-1212



V5
1211-1212

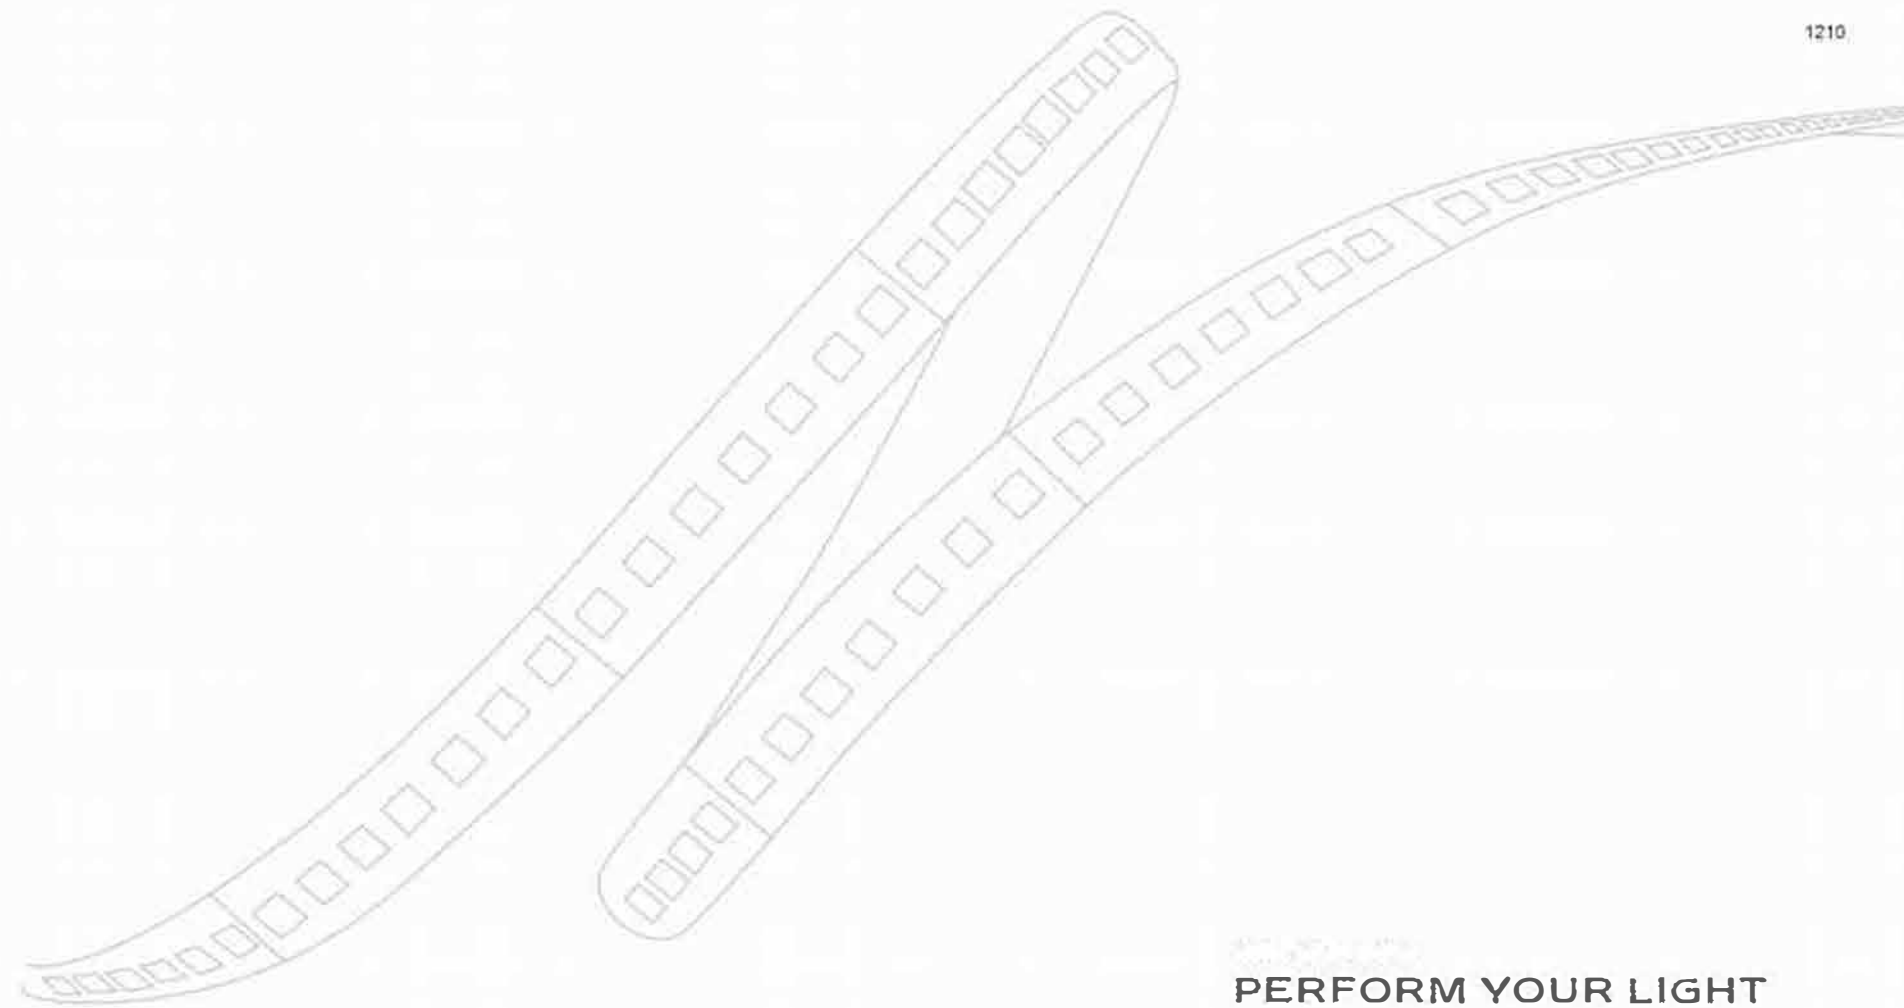

CC1-120



LEDs/meter: 120 x SMD LED/m
 Size / Cutting unit: 10000*10*1.5mm / DIVIDABLE PER 50mm
 Power(10m): 36W
 Lumen output(10m): 3600Lm/m
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: >80
 Ingress protection: IP33

CV1-120



LEDs/meter: 120 x SMD LED/m
 Size / Cutting unit: 10000*10*1.5mm / DIVIDABLE PER 100mm
 Power(10m): 2*24W
 Lumen output(10m): 4800Lm/m
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: >80, >90
 Ingress protection: IP33/IP55/IP67

FLCV1-240



LEDs/meter: 240 x SMD LED/m
 Size / Cutting unit: 5000*10*1.5mm / DIVIDABLE PER 50mm
 Power(10m): 48W
 Lumen output(10m): 4800Lm/m
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: >80
 Ingress protection: IP33

CV5-60(RGBWS)



LEDs/meter: 60 x SMD LED/m
 Size / Cutting unit: 5000*10*2mm / DIVIDABLE PER 100mm
 Power(10m): 3*23.3W
 Lumen output(10m): —
 Voltage input: 24Vdc
 Color temperature: —
 Color:
 Color Rendering Index: —
 Ingress protection: IP33 / IP55 / IP67

CV10-COB



LEDs/meter: COB
 Size / Cutting unit: 5000*8mm / DIVIDABLE PER 50mm
 Power(8m): 50W
 Lumen output/meter: /
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: /
 Ingress protection: IP20

CV10-COB



LEDs/meter: COB
 Size / Cutting unit: 5000*8mm / DIVIDABLE PER 50mm
 Power(8m): 75W
 Lumen output/meter: /
 Voltage input: 24Vdc
 Color temperature:
 Color Rendering Index: /
 Ingress protection: IP20/IP67

IP33

Nois shield



Applicable to the environment

IP55

Get cooling



Applicable to the environment

IP65

Silicone tube



Applicable to water environment

IP67

Silicone filling



Applicable to short time flooded environment



ACCESSORIES

1215-1223 ELECTRICAL SYSTEM

1224-1228 EXTERIOR ACCESSORIES


ACCESSORIES

ELECTRICAL SYSTEM

1157-1189

1215

1216

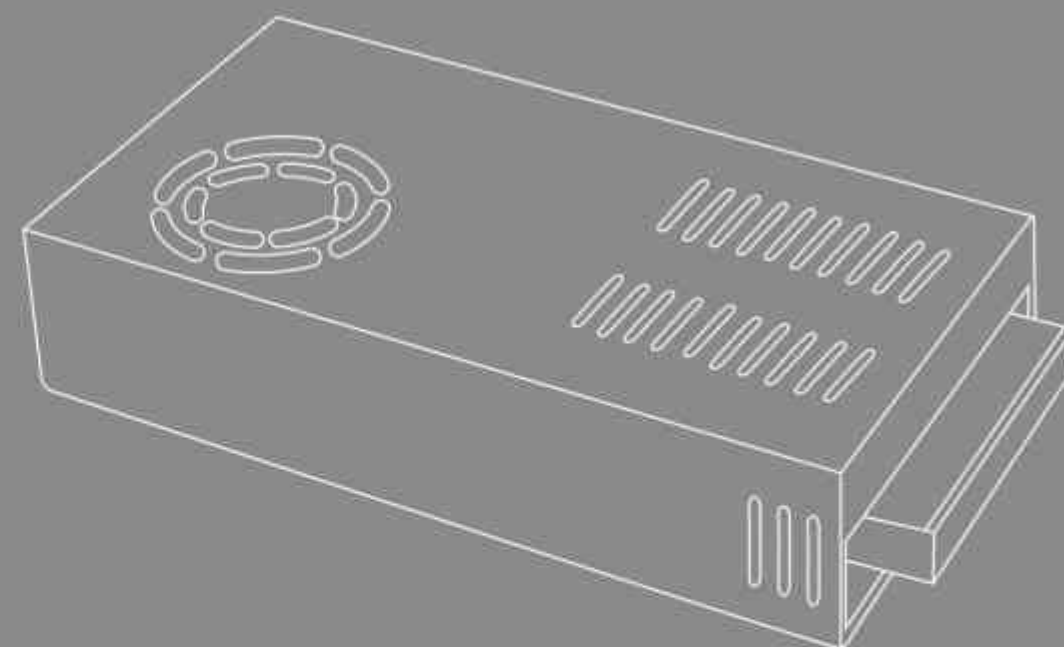




MOTION SENSOR RQ

002750

Operating voltage: 220-240 VAC 50/60Hz
 Switching capacity: Max. 100W
 Standby power: < 0.5W
 Detection area: 50%/100%
 Hold-time: 5s/60s/3min/10min
 Daylight threshold: 30Lux/Disable
 Operating temperature: -25°C ~ +60°C
 IP rating: IP20
 Certificate: TUV / CAA / RED




MOTION SENSOR SQ

002751


Operating voltage: 220-240 VAC 50/60Hz
 Switching capacity: Max. 100W
 Standby power: < 0.5W
 Detection area: 50%/100%
 Hold-time: 5s/60s/3min/10min
 Daylight threshold: 30Lux/Disable
 Operating temperature: -25°C ~ +60°C
 IP rating: IP20
 Certificate: TUV / CAA / RED



Microwave induction, set the induction distance at 100% to about 8m radius.
 At 50%, the microwave induction radius is about 4 meters.

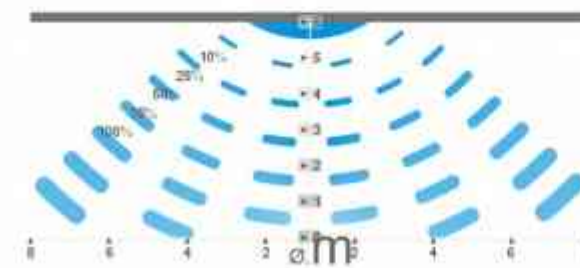

Ceiling Mounted

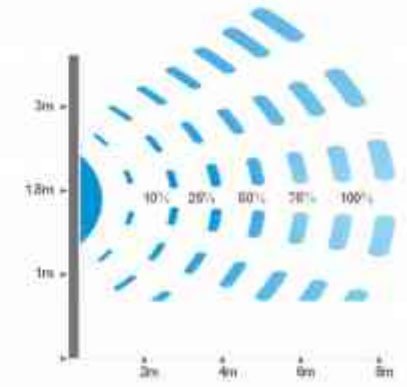

Wall Mounted



Maintenance time setting

The maintenance time settings are 6 seconds, 60 seconds, 3 minutes and 10 minutes respectively.



Detection area
 Detection area means detection coverage. It can be adjusted by combining DIP switches for specific application.



Hold-time
 Hold-time means the time period the light will be ON after the last detection.



Daylight threshold
 Daylight sensor probe to motion sensor. Set threshold for specific needs. If Disable, only motion sensor works.

POWER SUPPLY

CE RoHS



LRS

RoHS (On Request)

Product Name	Power	Input	Output	IP	Mode No.
LRS-50-48	50W	85-264VAC	48VDC 1.1A	20	002030
LRS-75-48	75W	85-264VAC	48VDC 1.6A	20	002031
LRS-100-48	100W	85-264VAC	48VDC 2.3A	20	002032
LRS-200-48	200W	90-132VAC/180-264VAC	48VDC 4.4A	20	002034
LRS-350-48	350W	90-132VAC/180-264VAC	48VDC 7.3A	20	002035

Product Name	Power	Input	Output	IP	Mode No.
LRS-50-24	50W	90-130VAC/180-264VAC	24VDC 2.2A	20	001017
LRS-75-24	75W	90-130VAC/180-264VAC	24VDC 3.2A	20	001660
LRS-100-24	100W	90-130VAC/180-264VAC	24VDC 4.5A	20	001623
LRS-200-24	200W	90-130VAC/180-264VAC	24VDC 8.8A	20	001624
LRS-350-24	350W	90-130VAC/180-264VAC	24VDC 14.8A	20	002538

Product Name	Power	Input	Output	IP	Mode No.
HLG-100H-24	100W	90-264VAC	24VDC 4.0A	65	001025
HLG-150H-24	150W	90-264VAC	24VDC 6.3A	65	001026
HLG-240H-24	240W	90-264VAC	24VDC 10.0A	65	001027
HLG-320H-24	320W	90-264VAC	24VDC 13.3A	65	001028



HLG SERIES

RoHS (On Request)

Product Name	Power	Input	Output	IP	Mode No.
LPV-20-24	20W	90-264VAC	24VDC 0.84A	67	001029
LPV-35-24	35W	90-264VAC	24VDC 1.5A	67	001030
LPV-60-24	60W	90-264VAC	24VDC 2.5A	67	001031
LPV-100-24	100W	90-264VAC	24VDC 4.2A	67	001032



LPV SERIES

RoHS (On Request)

DALI CONTROLLER



EDA2 / EDA4

EDA2 / EDA4		002665 / 002666	RoHS
Dimming mode:	DALI		
Standard protocol:	IEC62386		
Dimming key:	2CH / 4CH		
Input Voltage:	16Vdc(DALI Power)		
Control Mode:	Scene / Group / Unicast / Broadcast		
Working Temperature:	-30°C~55°C		
Package Size:	L113xW112xH50(mm)		
Weight(G.W):	200g		




DALI-PS-DIN


DALI-PS-DIN		002667	RoHS
DALI Bus Power Supply			
Dimming mode:	DALI		
Input Voltage:	100-240Vac		
Working Temperature:	-30°C~55°C		
DIN-Rail mounting size:	TG-35/7.5 or TG-35/15		
Package Size:	L114xW37xH70(mm)		
Weight(G.W):	115g		

CONNECTION


NORMAL CONNECTION

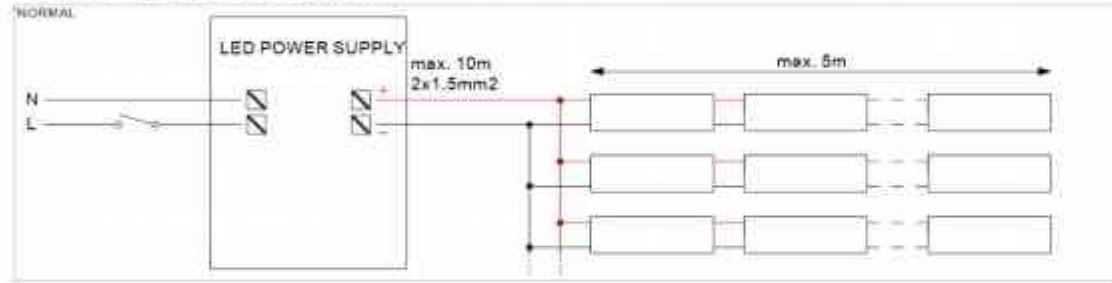


TRIAC DIMMING CONNECTION

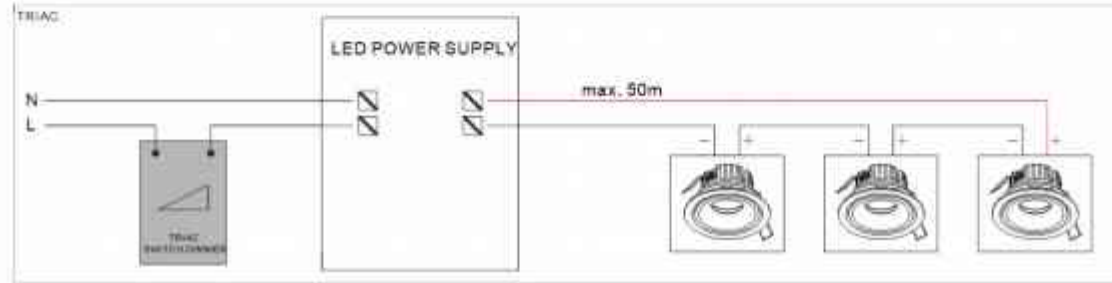


1-10V DIMMING CONNECTION

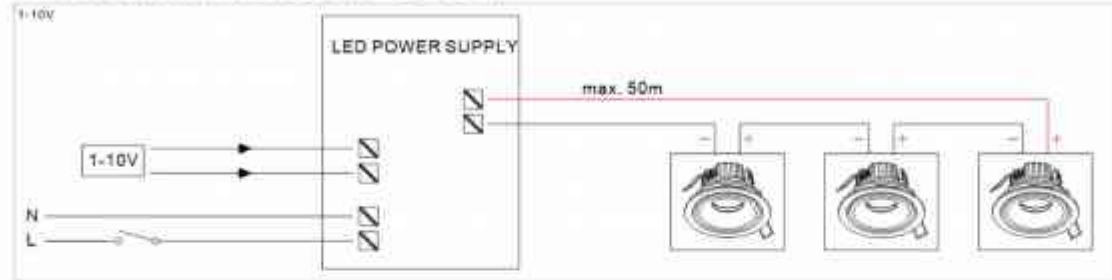


DALI DIMMING CONNECTION

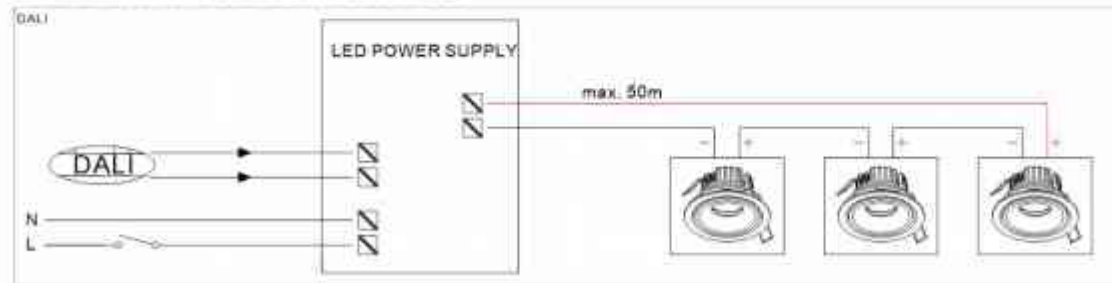


PUSH DIMMING CONNECTION

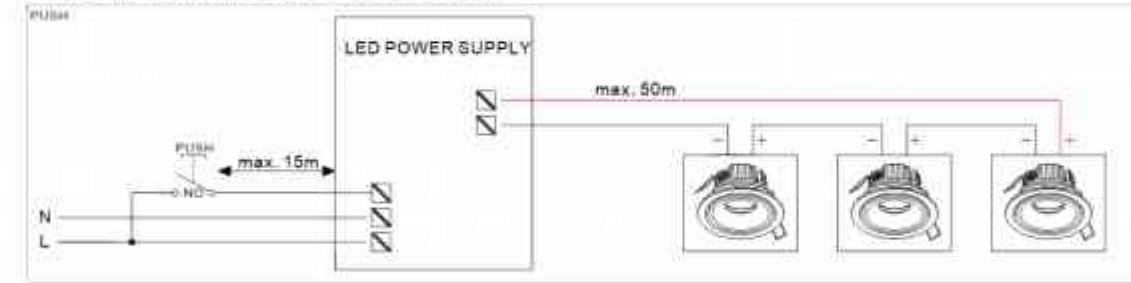


PWM DIMMING CONNECTION

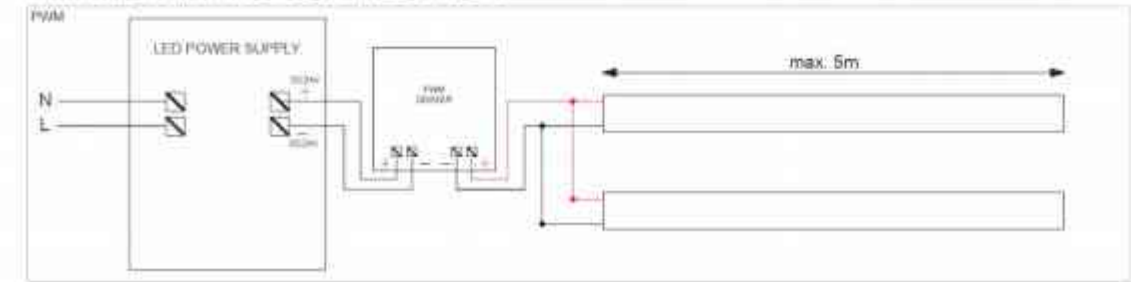

NORMAL RGB CONNECTION

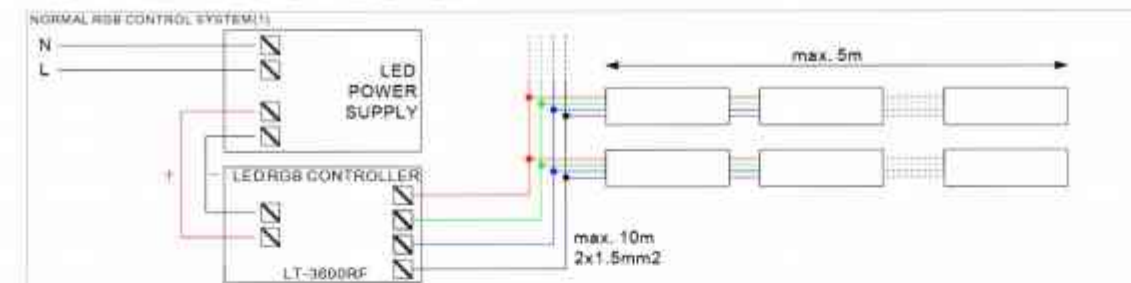


NORMAL RGB CONNECTION

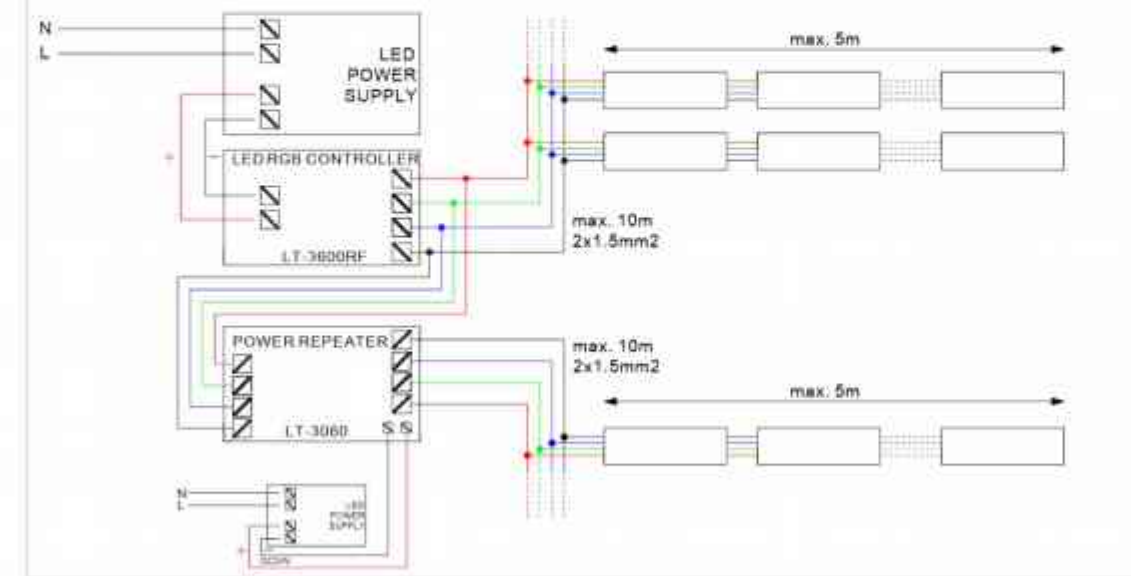

CONNECTION

DMX CONNECTION

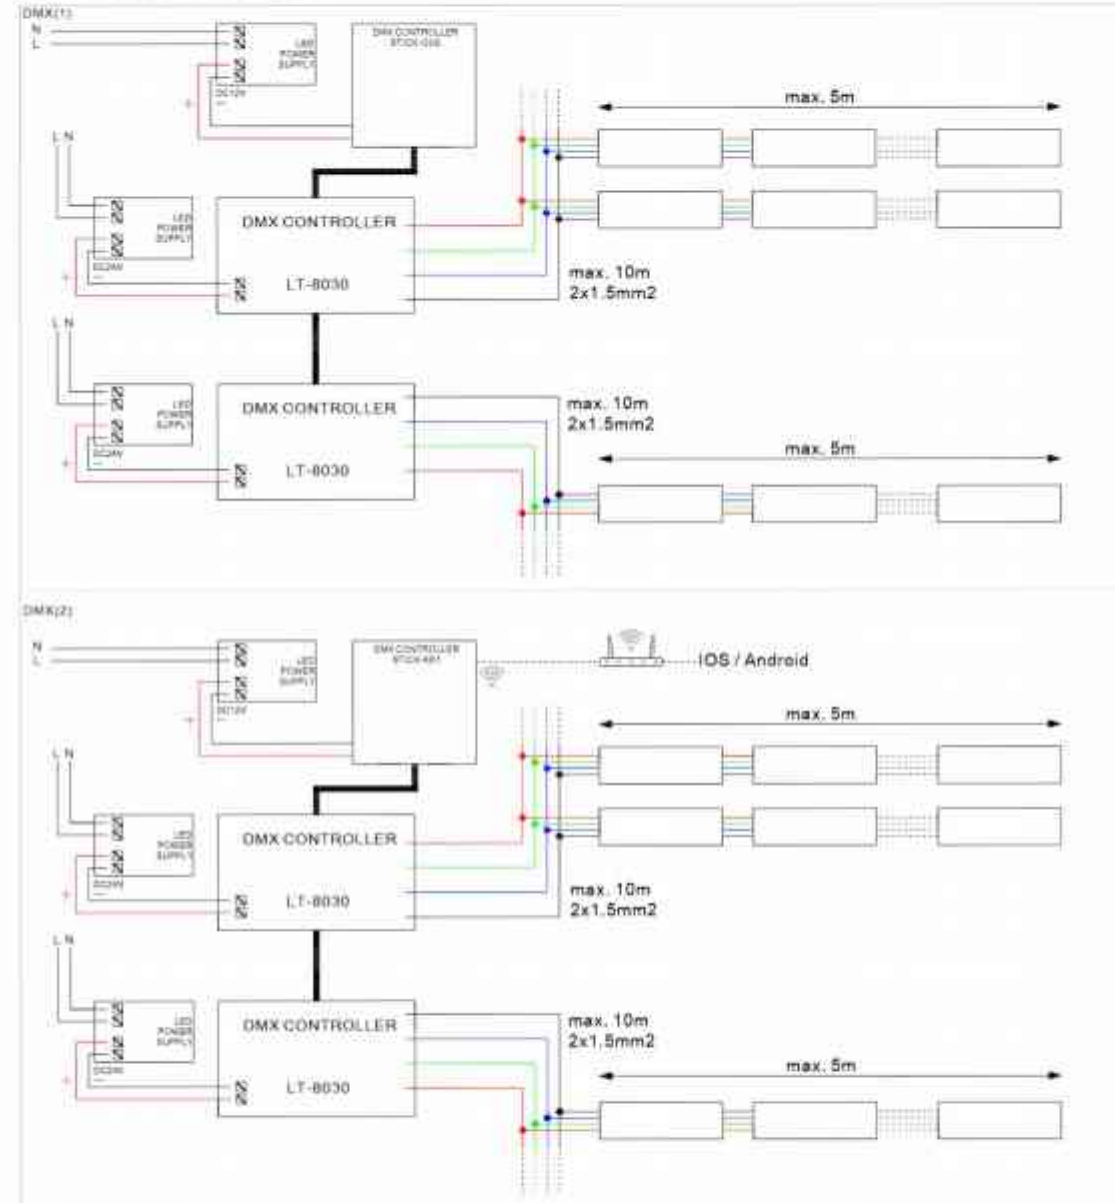




1223

1224


ACCESSORIES
EXTERIOR ACCESSORIES

1170-11174

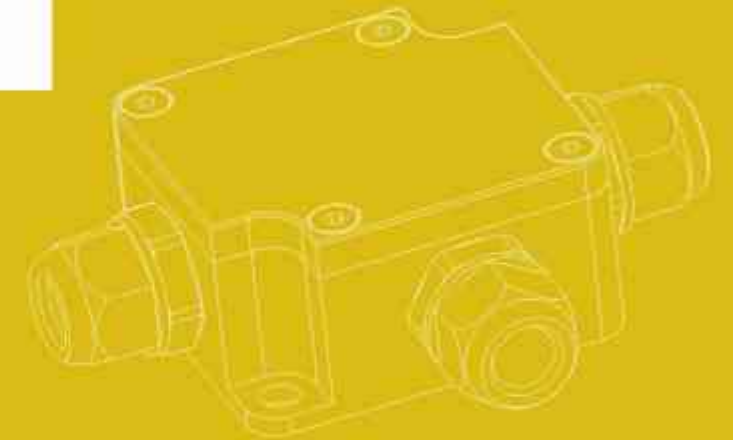





Step 1:
Dig hole according to instructed dimension and arrange the wiring.




Step 2:
Cover the bottom with gravel and sand or other permeable material.





Step 3:
Put the installation box in the hole and make it level to the ground; pour concrete around to fix the box.

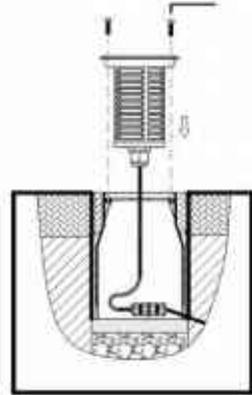


Step 4:
Wire up the fixture to cable; screw the fixture to the installation box.




Step 5:
Turn on the light for testing.




Step 1:
Dig hole according to instructed dimension and arrange the wiring.




Step 2:
Cover the bottom with gravel and sand or other permeable material.



Step 3:
Cover Accessories-C on top of the installation box to prevent concrete or debris from getting in; ensure the installation box is level with ground.

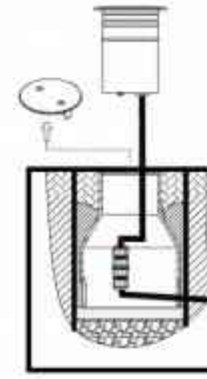


Step 4:
Take away the box cover Accessories-C; Wire up the lighting fixture; Put the fixture in the installation box.




Step 5:
Turn on the light for testing.



Step 1:
Dig hole according to instructed dimension and arrange the wiring.



Step 2:
Connect the lamp with wire then put into the hole.



Step 3:
Turn on the light for testing.

Plugs (welding IP67)



CP 2

CP 3

CP 4

Plugs (screwed IP68)

1227




TH 391


TH 391R
Anti-condensation barrier

TH 399

TH 392R
Anti-condensation barrier

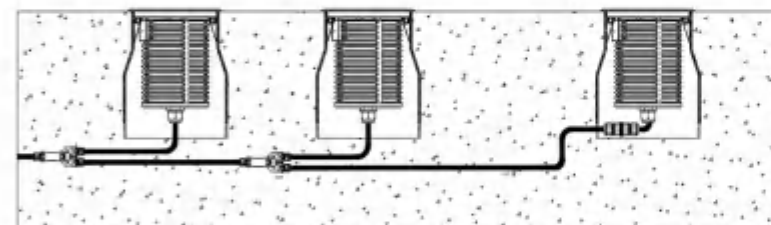

Boxes (IP67)

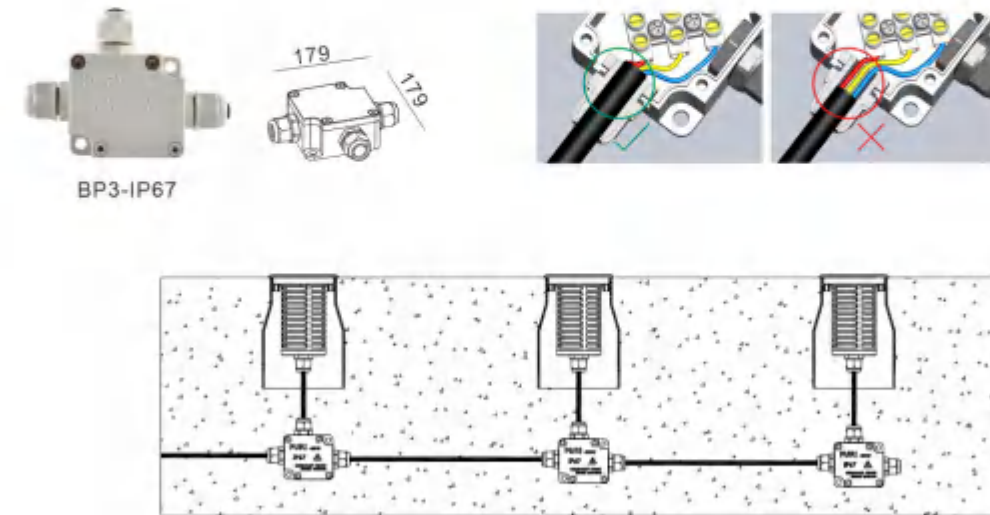

BP3-IP67

Boxes (IP68)

1228

