

Building You A Better Image!

# **Flex Series<sup>™</sup> Cushion-Plate Mounting Tapes**

#### **Double-Sided Poly Foam, Standard Thickness**

Adheso's multi-density, high-recovery, PE foam tapes feature the latest adhesive systems technology. Developed for wide web, flexible packaging print reproduction, and photopolymer or rubber printing plates of all thicknesses and types. Achieve maximum ink coverage on screen areas, minimize occurrences of dot gain or slur. Achieve optimal results when using proper impression settings on press. Multi-layer reinforcement films for consistent thickness and lay-flat, easy-to-apply usage. Each tape has its own application range, depending upon graphics or material printed. Excellent, long-life reproduction, balanced compression, consistent thickness. EZ mount adhesion system simplifies plate mounting, improves reliability. Secure hold-down, easy-release cushions, virtually no adhesive transfer to the backside of the plate.

Prod	uct	Widths	Nominal Thickness	Backing	Liner	Features / Applications	
Flex ML20T High Adhe		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam Pink	T-Pattern Film	MEDIUM LOW DENSITY	
Flex ML20 I Medium Ad		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam Pink	T-Pattern Film	For use with primary image high line screen, in combination with fine dot and solid type	
Flex ML15T High Adhe		18″ (457mm) 54″ (1372mm)	0.015" (0.38mm)	PE Foam Pink	T-Pattern Film	flexographic printing.	
Flex MD201 High Adhe		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam White	T-Pattern Film	MEDIUM DENSITY	
FlexMD20 FlexMD20 FlexMD20 FlexMD20 FlexMD20 FlexAddium Addium Ad		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam White	T-Pattern Film	Recommended for use in combination type printing, where process and solid ink	
Flex MD20 Ultra-High	Adhesion	18" (457mm) 54" (1372mm)	0.020″ (0.51mm)	PE Foam White	Clear Pebbled OPP	coverage are reproduced as one image.	
Flex MD151 High Adhe		18" (457mm) 54" (1372mm)	0.015" (0.38mm)	PE Foam Orange	T-Pattern Film		
Flex MH201 High Adhe		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam Green	T-Pattern Film	MEDIUM HIGH DENSITY	
FlexMH20 Fle		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam Green	T-Pattern Film	Recommended for solid tone coverage, where primary image graphics are reproduced	
Flex MH20 Ultra-High	Adhesion	18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam Green	Clear Pebbled OPP	as solid coverage with minimal process enhancement.	
Flex HD20T High Adhe		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam Blue	T-Pattern Film	HIGH DENSITY	
FlexHD20 P Medium Ad		18" (457mm) 54" (1372mm)	0.020" (0.51mm)	PE Foam Blue	T-Pattern Film	For use in dense tonal reproduction of solid image area, where absorbent	
Flex HD15T High Adhe		18" (457mm) 54" (1372mm)	0.015" (0.38mm)	PE Foam Lilac	T-Pattern Film	substrates or maximum block ink coverage is required.	

Roll Length: Adhesive Type: Release Liner: Tape Tolerance: Recommended Use:

Cylinder Compatibility:

Mounting Method:

#### 25 yards (22.86m).

NT differential adhesive. Stable polymer acrylic. 0.004" OPP plastic. Smooth release construction. Typical + or - 0.0015" (0.038mm).

0.045", 0.067" and 0.107" photopolymer type plates. Flat mounting systems for polymer attachment to film carriers. Steel cylinders, polyester, fiberglass and fiber composite sleeve types, cylinder build vinyl tapes, aluminum type cylinders. Exposed side to cylinder surface, liner side to printing plate.

### adheso-graphics.com





### **FlexSoft**<sup>®</sup> **Elastomeric Cushion Tapes**

#### Double-Sided, High-Performance, Medium-To-High Density Plate Mounting

AGI's FlexSoft foam materials are for photopolymer and rubber printing plates of all thickness ranges or types. Unique microcellular cushions allow maximum ink coverage on solid or reverse type, and minimize dot gain in combination printing.

FlexSoft elastomeric cushion tapes feature durable, long-life elastomer foam material for low compression set with excellent print reproduction. High performance urethane foam, differential acrylic and rubber adhesive systems, long life and excellent tonal balance. Recommended for combination screen solid graphics. Achieve optimal results when using proper impression settings on press.

Adheso's EZ mount adhesion system provides an easy-to-mount adhesive package, secure hold-down, solvent resistance in press, clean removal in the demount process, and virtually no adhesive transfer to the backside of the plate.



Product	Product #	Thickness	Backing	Liner	Features / Applications
FlexSoft UR High-Adhesion Cushion	UR40	0.040″ (1.02mm)	UR Foam	Brown Paper	Wide web flexible packaging plate mount. Best application
For wide web flexible packaging. Thin plate or undercut build	UR60	0.060″ (1.52mm)	Elastomeric	Brown Paper	where long-run durable backing cushion tape is required. For use with thin plate
applications.	UR80	0.080″ (2.03mm)	Color Gray	Brown Paper	technology or long life, high resolution print reproduction.
FlexSoft AMG Medium-Adhesion Cushion	AM40G	0.040″ (1.02mm)	UR Foam	White Polycoated	Wide web, cushion plate mount for large diameter plate
For wide web flexible packaging. Thin plate or undercut build	AM60G	0.060" (1.52mm)	Elastomeric	White Polycoated	attachment. Medium tack adhesion system allows for multiple repositioning of plates
applications.	AM80G	0.080″ (2.03mm)	Color Gray	White Polycoated	and clean final removal after print run.
FlexSoft AMT Low-Adhesion Cushion	AM40MT	0.040" (1.02mm)	Color Blue	White Polycoated	Compressible cushion for use as layer foam under
For wide web flexible packaging. Underpacking base for in the round sleeve technology.	AM60MT	0.060″ (1.52mm)	Color Blue	White Polycoated	various ITR polymer systems and cushion sleeve applications. Also used as blanket cushion for offset printing blanket manufacture.
FlexSoft AF One-Sided Coated Cushion	AF-60	0.060″ (1.52mm)	PUR Foam Color Green	White Polycoated	For use as cylinder build or cushion build up on sleeve.

### adheso-graphics.com





# FlexStik<sup>®</sup> Hard Vinyl "Stickyback" Tapes

#### Double-Sided, Hard-Carrier Film For Standard Thickness Plate Mounting

Adheso's FlexStik hard vinyl mounting tapes are an industry standard plate mount product, suitable for mounting both rubber and polymer printing plates. They feature a high-adhesion, soft rubber adhesive system coated on a hard film carrier. FlexStik hard tapes find application in harsh printing environments, where temperature or long-run durability are required. They are ideal for printing solid or fine-line graphics, and for extreme high-bond plate attachment. FlexStik tapes provide maximum ink coverage in block solid replication. Best suited for printing poly type films or simple graphic reproduction.

Product	Roll Length	Thickness	Backing	Liner	Features / Applications
2R2 Series	25' (7.62m)	0.022" (0.56mm) 0.020" (0.51mm) 0.015" (0.38mm) 0.010" (0.25mm)	High Durometer Film Carrier Color: Black	Brown Paper	Wide web flexible mounting tape for photopolymer or rubber plate types. High initial and final adhesion. Line and solid printing. Also used for thick tape, re-use, core start tape.
2R4 Series	25' (7.62m)	0.020" (0.51mm) 0.015" (0.38mm) 0.010" (0.25mm)	High Durometer Film Carrier Color: Black	Brown Paper	Wide web plate mount tape. Higher performance adhesive for elevated temperature and solvent resistance. Excellent for use in lamination, and attachment to printing blanket substrates.
2R5L Series Dual Liner	25′ (7.62m)	0.020" (0.51mm) 0.015" (0.38mm)	High Durometer Film Carrier Color: Gray	Brown Paper & Poly Film Combination	Dual liner construction. Wide or narrow web plate mount tape. For use with rubber or photopolymer plates. Smooth, defect-free adhesive finish for improved bond. Used for rubber stamp, offset blanket and general flexo plate attachment.
2R5LP Series Dual Liner X- Pattern	25′ (7.62m)	0.015″ (0.38mm)	High Durometer Film Carrier Color: Gray	Brown Paper X-Poly Film	X-pattern dual liner construction. Wide web permanent plate attachment. Features a unique pattern liner to reduce air entrapment during the mounting process. Acrylic adhesive provides high final bond for thick plate attachment in corrugated and general flexographic printing.
2R4A Series	25′ (7.62m)	0.010" (0.25mm)	High Durometer Film Carrier Color: Black	Brown Paper	D-type hard tape is used in difficult blanket substrate lamination. Features a differential adhesive system for the correct balance of bond between PUR and cloth-backed print blankets, as per multi-surface permanent/removable performance requirements.



### dheso-graphics.com



# FlexStik<sup>®</sup> CB Hard Vinyl Cylinder Diameter Build-Up Tapes

### For Flexographic Printing

High-performance vinyl mounting tapes, compatible with most hard and cushion tapes. Reliable adhesion to flexo printing cylinders. Unique thickness color differentiation enables easy cylinder identification. Flexible construction and drape for easy-to-cut, simple-to-apply mounting. Coated with the latest in acrylic adhesive technology.

Caliper-consistent, cylinder diameter build-up tapes replace common sleeve systems and eliminate cylinder retro-fitting. Unique acrylic adhesive system is one side coated for cylinder surface adhesion. Non-adhesive side facilitates selection of proper plate mounting tapes. For optimum results, use in conjunction with our flex cushion, vinyl or thin type tapes.

Manufactured to strict standards, maintaining an even coating profile for consistent roll-toroll thickness. Accurate caliper control, minimal variation in the overall mounting tape, strong internal cohesive strength, clean removal from cylinder surface.

High-performance, acrylic-based pressure sensitive.

Adhesive side (liner) to cylinder surface. Non-adhesive side exposed for mounting tape & printing plate application.

All metal cylinder types/hard sleeve types.

Engineered to be removed from cylinder

Product	Roll Length	Widths	Color	Thickness	Backing	Liner	Applications
CB10	75' (22.86m)	18" (457mm) 27" (686mm) 36" (914mm) 54" (1,372mm)	Black	0.010" (0.25mm)	Flexible Vinyl Film	Brown Paper Liner 0.004" (0.10mm)	Cylinder-build tapes increase the cylinder diameter necessary to facilitate correct
CB20	75' (22.86m)	18" (457mm) 27" (686mm) 36" (914mm) 54" (1,372mm)	Black	0.020" (0.51mm)	Flexible Vinyl Film	Brown Paper Liner 0.004" (0.10mm)	impression settings when utilizing thin, photopolymer plate technology, or by general cylinder diameter/undercut increase.
CB25	75' (22.86m)	18" (457mm) 27" (686mm) 36" (914mm) 54" (1,372mm)	Lt Green	0.025" (0.63mm)	Flexible Vinyl Film	Brown Paper Liner 0.004" (0.10mm)	
CB40	50' (15.24m)	18" (457mm) 36" (914mm)	Lt Blue	0.040" (1.02mm)	Flexible Vinyl Film	Brown Paper Liner 0.004" (0.10mm)	
CB50	50' (15.24m)	18" (457mm) 36" (914mm)	Red	0.050" (1.27mm)	Flexible Vinyl Film	Brown Paper Liner 0.004" (0.10mm)	
CB60	35′ (10.66m)	18" (457mm) 36" (914mm)	Green	0.060″ (1.52mm)	Flexible Vinyl Film	White Paper Liner 0.004″(0.10mm)	

Adhesive Type:

Tape Tolerance:

**Recommended Use:** 


Mounting Method:

Peel Value:

Typical +/- .0015" (0.038mm).

or sleeve surface after use.

Flexographic Printing Plates -

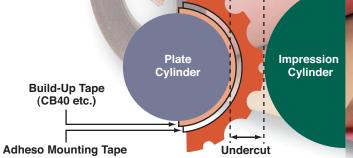

### adheso-graphics.com





# **Adheso-Mount<sup>™</sup> Specialty Thin Tapes**

#### For Flexographic Plate Mounting

Adheso-Mount specialty thin tapes are ideal for mounting corrugated printing plates onto PVC and polyester, carrier-base films of various thickness. These tapes feature rubber or acrylic adhesive systems usage depends on the level of bond required in the final application—and are available in a wide variety of thicknesses, widths and liner types.

Plates are typically flat mounted to these tapes. After lamination, the liner is removed and the plate is ready for attachment to the carrier film. Adheso thin tapes are also suitable for use in plate build-up or press-low spot correction. Critical use applications include compressible print sleeve plate mount, and offset blanket adhesive lamination.



		Casodi.				
Product	Thickness	Adhesion	Carrier	Adhesive	Liner	Features / Applications
FS-23	0.0045" (0.11mm)	High Adhesion, Permanent Final Bond	Clear Polyester Film	D/C Acrylic	White Lay-flat Paper	Thick plate, corrugated flexo mount for polymer plates. Attachment to PVC or polyester base carrier films.
AM-23T	0.005" (0.12mm)	Reposition Modified, Secure Final Bond	Clear Polyester Film	D/C Acrylic	T-pattern Film	Air reduction pattern liner for elimination of air pockets in thick plate flexographic plate mounting.
FS-25	0.003″ (0.07mm)	Medium Adhesion, Permanent Final Bond	Clear Polyester Film	D/C Acrylic	White Lay-flat Paper	Thick plate, corrugated flexo mount for polymer plates. Attachment to PVC or polyester base carrier films. Date code and letterpress plate mounting.
FS-49	0.005" (0.12mm)	High Adhesion, Permanent Final Bond	Clear Polyester Film	D/C Rubber	White Lay-flat Paper	Thick plate, corrugated flexo mount for rubber and polymer plates. Ultra-high adhesion. Also for rubber stamp plate attachment.
FS-50	0.005" (0.12mm)	High Adhesion, Removable Bond	Clear Polyester Film	D/C Rubber	White Lay-flat Paper	Adhesion to PP-based LSE carrier films.
FS-59	0.003" (0.07mm)	High Adhesion/ Adhesive Bond	Fiber Supported Adhesive Transfer	Fiber Supported Acrylic Adhesive	Brown Polycoated Paper	Multi-plate thickness, flexible adhesive transfer film for corrugated and standard flexo plate attachment. Plate build-up and spot build applications.
FS-70	0.003" (0.07mm)	Medium Adhesion/ Adhesive Bond	Fiber Supported Adhesive Transfer	Fiber Supported Acrylic Adhesive	Manila Polycoated Paper	Multi-plate thickness, flexible adhesive transfer film for corrugated and standard flexo plate attachment.
FS-90	0.005″ (0.12mm)	Ultra-High Adhesion/ Adhesive Bond	Fiber Supported Adhesive Transfer	Fiber Supported Acrylic Adhesive	Brown Polycoated Paper	Multi-plate thickness, flexible adhesive transfer film for corrugated and standard flexo plate attachment. Plate build-up and spot build applications.
RLT-4-EP	0.004″ (0.10mm)	Medium Adhesion, Medium Final Bond	Clear UPVC Film	Differential Rubber	Light Blue Fluted Film	Versatile plate mount tape system for corrugated, sleeve mount and cushion sleeve plate attachment. Air reduction fluted liner. Reusable adhesive system. Decorative card water wash plate and rotary letterpress plate mount.
FS-5A	0.005" (0.12mm)	Medium Adhesion, Re-mount, Repositionable Adhesive Bond	Clear UPVC Film	Acrylic Open Side, Rubber Liner Side	White Lay-flat Paper	Cushion sleeve mounting tape. Mounting thin polymer plates on compressible cushion sleeve systems.
FS-2015	0.005" (0.12mm)	High Adhesion, Permanent Final Bond	Clear Polyester Film	D/C Acrylic	White Lay-flat Paper	Quick adhesion tape. Ultimate adhesion to PVC carrier films.
FS-219	0.009" (0.23mm)	Ultra Adhesion	Clear Polyester Film	D/C Acrylic	White Lay-flat Paper	Rubber stamp mounting affixing tape.



### adheso-graphics.com



# Adheso-Mount<sup>™</sup> Flexible Carrier Tapes

#### For Plate Mounting

Adheso-Mount flexible, woven-fiber carrier mounting tapes are designed for plate attachment in post-print corrugated applications. The soft flexible carrier provides for conformable, minimal air entrapment use. The adhesive system allows for demount from the plate or carrier base without residue or damage to substrates. These extremely flexible tapes also reduce buckling or creases under plates and on sleeves during use.

Product	Thickness	Backing	Color	Adhesive	Liner	Features / Applications
FS-45 Cloth Tape For Envelope Printing & Offset Blanket	0.015″ (0.38mm)	Polyester Fiber	White	HP Rubber Liner Side DP Rubber Open Side	Kraft Manila Liner	Soft, conformable PF fabric with versatile rubber adhesive. High-adhesion tape for flat mounting. Excellent thickness control tolerance.
FS Flex 400 Cloth Tape For Mounting Corrugated Plate	0.015″ (0.38mm)	Polyester Fiber	White	HP Rubber Liner Side DP Rubber Open Side	Creped Paper Air Bubble Reduction	Soft, conformable PF fabric with versatile rubber adhesive. High-adhesion tape with unique air reduction liner. Reuseable adhesive system. Secure hold adhesive formula.

# **Photo-Mount**<sup>™</sup> **Tapes**

#### For Graphic Print Mounting

AdMount<sup>®</sup> D/C adhesive films are designed for mounting various types of digitally printed graphic imagery onto foam board, Sintra, and other base mount backings. AdMount offers a wide range of products for permanent and removable applications.



Product	Thickness	Carrier	Color	Adhesive	Features / Applications
FS-8311m	0.0025" (0.06mm)	Pet Film	Clear	Permanent/ Removable	Temporary mounting of graphic print.
FS-8387	0.0032" (0.08mm)	Pet Film	Clear	Permanent/ Permanent	Photomount grade acrylic adhesive for backlit display production.
FS-8391	0.0034" (0.09mm)	PP Film	White	Permanent/ Permanent	Photomount grade acrylic carrier for print brightening and block out.

### adheso-graphics.com





# FlexStik<sup>®</sup> Accessory Tape Products

#### For Flexographic Printers

Adheso accessory tape products provide a variety of problem-solving solutions for roller wrapping, difficult web splicing, plate edge seal and splice detection. Many products have additional variations that can be provided to meet specific application requirements.

and the second s	THE REAL PROPERTY OF THE PROPERTY OF THE REAL PROPE	DEDEEDEDEDEDEDEDEDEDEDEDEDEDEDEDEDEDED		
Product	Color	Description	Applications	
FS-100	Red, Blue, Green, Black	Polypropylene Color-Coding Tape	End tabbing and color coding.	
FS-4703R	Red	Double-Coated High Tack Tape	Low energy film splicing and core start.	
FS-4150	Yellow	Single-Coated Silicone Surface Splicing	Splicing of silicone-coated release paper.	
FS-7158	Blue	Single-Coated Silicone Surface Splicing	Splicing of silicone-coated release paper.	
FS-116	Red	Single-Coated Red Lithographers Tape	Photo mask, nega <mark>tive stripping.</mark>	
FS-96	Yellow, Red, Green, Blue, White	Single-Coated Vinyl Tape	Plate edge sealing tape.	
FS-97	Silver Aluminum	Aluminum Foil Tape	Plate edge sealing tape.	
FS-5350B	Black	Double-Coated High Tack Tape	High slip web splicing.	
FS-503T	White Opaque	Double-Coated High Tack Tape	High slip web splicing.	
FS-7052	White Opaque	Double-Coated High Tack Tape	Corrugated web splicing tape, high temperature.	
FS-4305	Silver, Red, Black	Metallized Single-Coated Tape	Web splice detection tape (metallized).	
FS-98C	Orange	Single-Coated UPVC Tape	Indirect food contact, single-coated splice tape.	
FS-59	Clear Opaque	Adhesive Transfer Tape	Envelope web, offset web, heat resistant splice.	
FS-S599	Red	Single-Coated Silicone Release Tape	Adhesive web splice tape, silicone release.	
FS-2530	Black	Single-Coated Foam Tape	Chamber seal foam anti-leak tape.	
FS-82N	Black	Single-Coated Foam Tape	Liquid polymer damming foam barrier.	
FS-218	Tan	General Purpose Masking Tape	All purpose industrial masking tape.	
FS-99	Fluorescent Orange	Single-Coated Paper Tape	High visibility splice detection tape.	
FS-277	Orange	Single-Coated Textile Fiber Tape	High performance textile web splicing.	
FS-2265-2	Orange	Smooth Cloth Backing	Roll wrapping anti-stick.	
FS-322	Clear	Bi-Directional Scrim	Edge reinforcement lead and trail.	
FS-2265	Rust	Film PTFE	Lamination lay up and end tabs.	
FS-2503R	Natural	Glass PTFE	Underwrapping cylinder tape.	
FS-2420	Black	Anti-Stick Roller Wrap	Cylinder roll cover wrap.	
FS-4565	Natural	Economy Roller Wrap	Cylinder roll cover wrap.	

### adheso-graphics.com

1 Selina Drive, Albany, NY 12205 USA Tel: 518-869-6929 • Fax: 518-869-0226



All information, recommendations and descriptive material about AGI products are based upon research and are believed to be reliable, but do not constitute a warrant. All AGI materials are sold with the understanding that purchasers will independently determine the suitability of the materials for their purpose.

